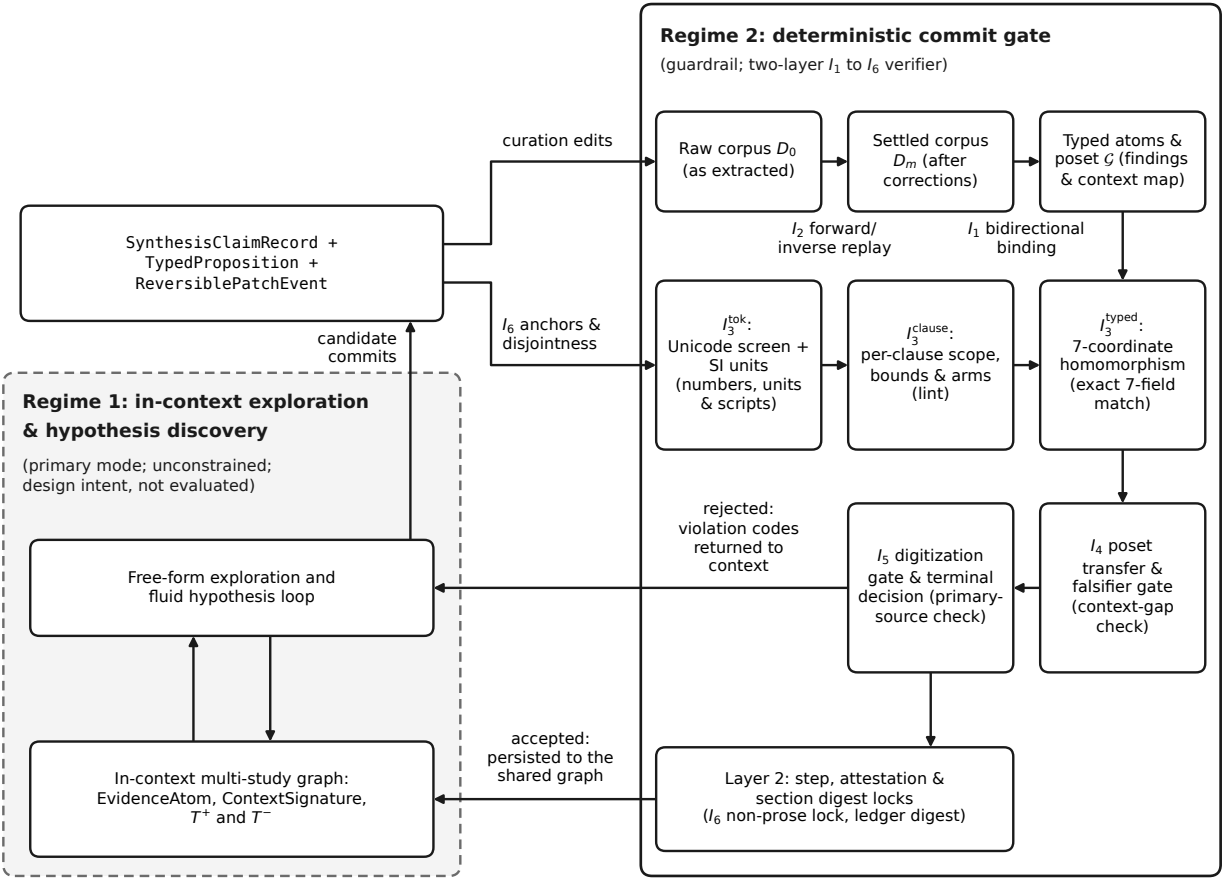
Regime 2: deterministic commit gate
(guardrail; two-layer I_1 to I_6 verifier)
curation edits
Raw corpus D_0 (as extracted)
Settled corpus D_m (after corrections)
Typed atoms & poset $\mathcal{G}$ (findings & context map)
I_2 forward/ inverse replay
I_1 bidirectional binding
SynthesisClaimRecord + TypedProposition + ReversiblePatchEvent
candidate commits
I_6 anchors & disjointness
I_3^{tok}: Unicode screen + SI units (numbers, units & scripts)
I_3^{clause}: per-clause scope, bounds & arms (lint)
I_3^{typed}: 7-coordinate homomorphism (exact 7-field match)
Regime 1: in-context exploration & hypothesis discovery
(primary mode; unconstrained; design intent, not evaluated)
rejected: violation codes returned to context
I_5 digitization gate & terminal decision (primary-source check)
I_4 poset transfer & falsifier gate (context-gap check)
Free-form exploration and fluid hypothesis loop
accepted: persisted to the shared graph
In-context multi-study graph: EvidenceAtom, ContextSignature, T^+ and T^-
Layer 2: step, attestation & section digest locks (I_6 non-prose lock, ledger digest)