

**Version:** 2.0 Public Draft 5a (07 April 2004)  
**Date:** April 2004



## **The OpenMath Standard**

The OpenMath Society

Editors

S.Buswell, O.Caprotti, D.P.Carlisle, M.C.Dewar, M.Gaetano  
and M.Kohlhase



## Abstract

This document proposes *OpenMath* as a standard for the communication of semantically rich mathematical objects. This draft of the *OpenMath* standard comprises the following: a description of *OpenMath* objects, the grammar of XML and of the binary encoding of objects, a description of Content Dictionaries and an XML document type definition for validating Content Dictionaries. The non-normative Chapter 1 of this document briefly overviews the history of *OpenMath*.

This document describes version 2 of *OpenMath*: a standard for the representation and communication of mathematical objects. *OpenMath* allows the *meaning* of an object to be encoded rather than just a visual representation. It is designed to allow the free exchange of mathematical objects between software systems and human beings. On the worldwide web it is designed to allow mathematical expressions embedded in web pages to be manipulated and computed with in a meaningful and correct way. It is designed to be machine-generatable and machine-readable, rather than written by hand.

The *OpenMath* Standard is the official reference for the *OpenMath* language and has been approved by the *OpenMath* Society. It is not intended as an introductory document or a user's guide, for the latest available material of this nature please consult the *OpenMath* web-site at <http://www.openmath.org>.

This document includes an overview of the *OpenMath* architecture, an abstract description of *OpenMath* objects and two mechanisms for producing concrete encodings of such objects. The first, in XML, is designed primarily for use on the web, in documents, and for applications which want to mix *OpenMath* as a content representation with MathML as a presentation format. The second, a binary format, is designed for applications which wish to exchange very large objects, or a lot of data as efficiently as possible. This document also includes a description of Content Dictionaries - the mechanism by which the meaning of a symbol in the *OpenMath* language is encoded, as well as an XML encoding for them. Finally it includes guidelines for the development of *OpenMath*-compliant applications.



## Change-marked edition notes

This edition contains colour coded change markings relative to the OpenMath 1.0 document. . .

- New text is marked in green.
- Deleted text is marked in red.

## Sections with modified text

- 1.1 History
- 1.2 *OpenMath* Society
- 2.1 *OpenMath* Architecture
- 2.2 *OpenMath* Objects and Encodings
  - 3.1.1 Basic *OpenMath* objects
  - 3.1.2 Derived *OpenMath* Objects
  - 3.1.3 **Compound***OpenMath* Objects
  - 3.1.4 *OpenMath* Symbol Roles
- 3.2 Further Description of *OpenMath* Objects
- 3.3 Names
- 3.4 Summary
  - 4.1.1 A **Grammar**Schema for the XML Encoding
  - 4.1.2 **Informal** description of the **GrammarXML Encoding**
  - 4.1.3 Some Notes on References
    - 4.1.3.1 An Acyclicity Constraint
    - 4.1.3.2 Sharing and Bound Variables
  - 4.1.4 Embedding *OpenMath* in XML Documents
  - 4.2.1 A Grammar for the Binary Encoding
  - 4.2.2 Description of the Grammar
  - 4.2.3 Example of Binary Encoding
  - 4.2.4 Sharing
    - 4.2.4.1 Sharing in **Objects beginning with the identifier [24]**
    - 4.2.4.2 Sharing with References (beginning with [24+64])
  - 4.2.5 Implementation Note
  - 4.2.6 Relation to the *OpenMath* 1 binary encoding
- 5.1 Introduction
- 5.2 Abstract Content Dictionaries
  - 5.2.1 Content Dictionary Status
  - 5.2.2 Content Dictionary Version Numbers
- 5.3 The **XMLReference** Encoding for Content Dictionaries
  - 5.3.1 The Relax NG Schema for Content Dictionaries
  - 5.3.2 Further **Requirements of an *OpenMath* Content Dictionary**Description of the CD Schema
- 5.4 Additional Information
  - 5.4.1 Signature **Files**Dictionaries

- 5.4.1.1 Further RequirementsAbstract Specification of a Signature Dictionary
- 5.4.1.2 A Relax NG Schema for a Signature File
- 5.4.2.1 The Specification of CDGroups
- 5.4.2.2 Further Requirements of a CDGroup
- 6.1.1 The XML Encoding
- 6.3 Content Dictionaries

# Contents

<b>1</b>	<b><i>OpenMath</i> Movement</b>	<b>7</b>
1.1	History . . . . .	7
1.2	<i>OpenMath</i> Society . . . . .	8
<b>2</b>	<b>Introduction to <i>OpenMath</i></b>	<b>9</b>
2.1	<i>OpenMath</i> Architecture . . . . .	9
2.2	<i>OpenMath</i> Objects and Encodings . . . . .	9
2.3	Content Dictionaries . . . . .	11
2.4	Additional Files . . . . .	11
2.5	Phrasebooks . . . . .	11
<b>3</b>	<b><i>OpenMath</i> Objects</b>	<b>12</b>
3.1	Formal Definition of <i>OpenMath</i> Objects . . . . .	12
3.1.1	Basic <i>OpenMath</i> objects . . . . .	12
3.1.2	Derived <i>OpenMath</i> Objects . . . . .	13
3.1.3	Compound <i>OpenMath</i> Objects . . . . .	13
3.1.4	<i>OpenMath</i> Symbol Roles . . . . .	14
3.2	Further Description of <i>OpenMath</i> Objects . . . . .	15
3.3	Names . . . . .	18
3.4	Summary . . . . .	20
<b>4</b>	<b><i>OpenMath</i> Encodings</b>	<b>21</b>
4.1	The XML Encoding . . . . .	21
4.1.1	A Grammar Schema for the XML Encoding . . . . .	22
4.1.2	Informal description of the GrammarXML Encoding . . . . .	28
4.1.3	Some Notes on References . . . . .	33
4.1.4	Embedding <i>OpenMath</i> in XML Documents . . . . .	36
4.2	The Binary Encoding . . . . .	37
4.2.1	A Grammar for the Binary Encoding . . . . .	37
4.2.2	Description of the Grammar . . . . .	37
4.2.3	Example of Binary Encoding . . . . .	42
4.2.4	Sharing . . . . .	44
4.2.5	Implementation Note . . . . .	45

4.2.6	Relation to the <i>OpenMath</i> 1 binary encoding . . . . .	47
4.3	Summary . . . . .	47
<b>5</b>	<b>Content Dictionaries</b>	<b>48</b>
5.1	Introduction . . . . .	48
5.2	Abstract Content Dictionaries . . . . .	49
5.2.1	Content Dictionary Status . . . . .	51
5.2.2	Content Dictionary Version Numbers . . . . .	52
5.3	The <b>XMLReference</b> Encoding for Content Dictionaries . . . . .	52
5.3.1	The Relax NG Schema for Content Dictionaries . . . . .	52
5.3.2	Further <b>Requirements of an OpenMath Content Dictionary</b> Description of the CD Schema . . . . .	54
5.4	Additional Information . . . . .	57
5.4.1	Signature <b>FilesDictionaries</b> . . . . .	57
5.4.2	CDGroups . . . . .	61
5.5	Content Dictionaries Reviewing Process . . . . .	63
<b>6</b>	<b>OpenMath Compliance</b>	<b>64</b>
6.1	Encodings . . . . .	64
6.1.1	The XML Encoding . . . . .	64
6.2	<i>OpenMath</i> Foreign Objects . . . . .	65
6.3	Content Dictionaries . . . . .	67
6.4	Lexical Errors . . . . .	68
6.5	<i>OpenMath</i> 1 Objects . . . . .	68
<b>7</b>	<b>Conclusion</b>	<b>69</b>
<b>A</b>	<b>CD Files</b>	<b>70</b>
A.1	The <b>meta</b> Content Dictionary . . . . .	71
A.2	The <b>arith1</b> Content Dictionary File . . . . .	78
A.3	The <b>arith1</b> STS Signature File . . . . .	100
A.4	The <b>MathML</b> CDGroup . . . . .	105
A.5	The <b>error</b> Content Dictionary . . . . .	110
<b>B</b>	<b><i>OpenMath</i> Schema in Relax NG XML Syntax (Normative)</b>	<b>114</b>
<b>C</b>	<b>Restricting the <i>OpenMath</i> Schema (Non-Normative)</b>	<b>121</b>
<b>D</b>	<b><i>OpenMath</i> Schema in XSD Syntax (Non-Normative)</b>	<b>124</b>
<b>E</b>	<b><i>OpenMath</i> DTD (Non-Normative)</b>	<b>131</b>
<b>F</b>	<b>Changes between <i>OpenMath</i> 1.1 and <i>OpenMath</i> 2 (Non-Normative)</b>	<b>135</b>
F.1	Changes to the Formal Definition of Objects . . . . .	136
F.2	Changes to the encodings . . . . .	137



F.3	Changes to Content Dictionaries . . . . .	138
-----	---	-----

# List of Figures

2.1	The <i>OpenMath</i> Architecture . . . . .	10
3.1	The <i>OpenMath</i> application and binding objects for $\sin(x)$ and $\lambda x.x + 2$ in tree-like notation. . . . .	16
4.1	Shared vs. unshared representations . . . . .	34
4.2	Sharing between <i>OpenMath</i> objects (A cycle of order 2. . . . .	35
4.3	Grammar of the binary encoding of <i>OpenMath</i> objects. . . . .	38
4.4	Streaming a large Integer in the Binary Encoding. . . . .	40
4.5	A Simple example of the <i>OpenMath</i> binary encoding. . . . .	43
4.6	A binary encoding of the <i>OpenMath</i> object from Figure 4.1. . . . .	46
5.1	DTD Specification of Content Dictionaries . . . . .	55
5.2	DTD Specification of Signature Files . . . . .	59
5.3	<b>DTDRelaxNG</b> Specification of CDGroups . . . . .	62

# Chapter 1

## *OpenMath* Movement

This chapter is a historical account of *OpenMath* and should be regarded as non-normative.

*OpenMath* is a standard for representing mathematical objects, allowing them to be exchanged between computer programs, stored in databases, or published on the worldwide web. While the original designers were mainly developers of computer algebra systems, it **is now attracting** **has since attracted** interest from other areas of scientific computation and from many publishers of electronic documents with a significant mathematical content. There is a strong relationship to the MathML recommendation [15] from the Worldwide Web Consortium, and a large overlap between the two developer communities. MathML deals principally with the *presentation* of mathematical objects, while *OpenMath* is solely concerned with their semantic meaning or *content*. While MathML does have some limited facilities for dealing with content, it also allows semantic information encoded in *OpenMath* to be embedded inside a MathML structure. Thus the two technologies may be seen as highly complementary.

### 1.1 History

*OpenMath* was originally developed through a series of workshops held in Zurich (1993 and 1996), Oxford (1994), Amsterdam (1995), Copenhagen (1995), Bath (1996), Dublin (1996), Nice (1997), Yorktown Heights (1997), Berlin (1998), and Tallahassee (1998). The participants in these workshops formed a global *OpenMath* community which was coordinated by a Steering Committee and operated through electronic mailing groups and ad-hoc working parties. This loose arrangement has been formalised through the establishment of an *OpenMath* Society. Up until the end of 1996 much of the work of the community was funded through a grant from the Human Capital and Mobility program of the European Union, **and by** the contributions of several institutions and individuals. A document outlining the objectives and basic design of *OpenMath* was produced (later published as [?]). By the end of 1996 a simplified specification had been agreed upon and some prototype implementations had come about [?].

In 1996 a group of European participants in *OpenMath* decided to bid for funding under the European Union's Fourth Framework Programme for strategic research in information technology. This bid was successful and the project started in late 1997. The principal aims of the project were to formalise *OpenMath* as a standard and to develop it further through industrial applications; this process led to the OpenMath 1.0 and 1.1 standards which were endorsed at workshops in Tallahassee (November 1998) and Eindhoven (June 1999).

In November 1998 the *OpenMath* Society was established to coordinate all *OpenMath* activities. The society is based in Helsinki, Finland and is coordinated by the executive committee whose members are elected by the society. The official web page of the society is <http://www.openmath.org>.

In 2001 the European Union agreed to fund a Thematic Network under its Fifth Framework programme to coordinate further work on *OpenMath* and MathML, and in particular to support a further series of workshops. This document is one outcome of that project, and seeks to update *OpenMath* in the light of recent developments in XML and of the *OpenMath* community's collective experience working with the old standard.

## **1.2 *OpenMath* Society**

In November 1998 the *OpenMath* Society has been established to coordinate all *OpenMath* activities. The society is based in Helsinki, Finland and is steered by the executive committee whose members are elected by the society. The official web page of the society is <http://www.openmath.org>.

The *OpenMath* Society continues to provide long-term coordination of *OpenMath* activities. Membership is open to anybody who is active in *OpenMath*; for further details see the web-site at <http://www.openmath.org/society/index.html>.

## Chapter 2

# Introduction to *OpenMath*

This chapter briefly introduces *OpenMath* concepts and notions that are referred to in the rest of this document.

### 2.1 *OpenMath* Architecture

The architecture of *OpenMath* is described in Figure 2.1 and summarizes the interactions among the different *OpenMath* components. There are three layers of representation of a mathematical object [?]. The first is a private layer that is the internal representation used by an application. The second is an abstract layer that is the representation as an *OpenMath* object. *Note that these two layers may, in some cases, be the same.* The third is a communication layer that translates the *OpenMath* object representation into a stream of bytes. An application dependent program manipulates the mathematical objects using its internal representation, it can convert them to *OpenMath* objects and communicate them by using the byte stream representation of *OpenMath* objects.

### 2.2 *OpenMath* Objects and Encodings

*OpenMath* objects are representations of mathematical entities that can be communicated among various software applications in a meaningful way, that is, preserving their “semantics”.

*OpenMath* objects and encodings are described in detail in Chapter 3 and Chapter 4.

The standard endorses two encodings in XML and binary formats. *At the time of writing, these are the encodings supported by most existing *OpenMath* tools and applications, These are the encodings supported by the official *OpenMath* libraries* however they are not the only possible encodings of *OpenMath* objects. Users who wish to define their own encoding *using some other specific language (e.g. Lisp) may, are free to do so provided that there is an effective translation from this encoding to an official one* a well-defined correspondence between the new encoding and the abstract model

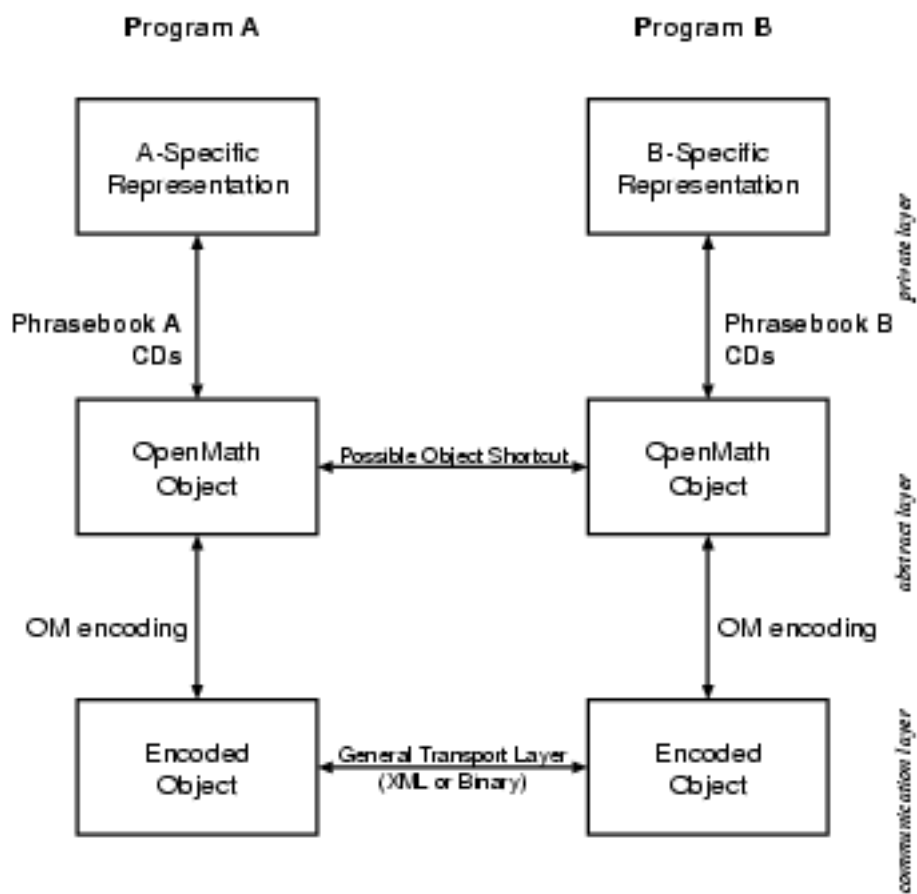


Figure 2.1: The *OpenMath* Architecture

defined in Chapter 3.

## 2.3 Content Dictionaries

Content Dictionaries (CDs) are used to assign informal and formal semantics to all symbols used in the *OpenMath* objects. They define the symbols used to represent concepts arising in a particular area of mathematics.

The Content Dictionaries are public, they represent the actual common knowledge among *OpenMath* applications. Content Dictionaries fix the “meaning” of objects independently of the application. The application receiving the object may then recognize whether or not, according to the semantics of the symbols defined in the Content Dictionaries, the object can be transformed to the corresponding internal representation used by the application.

## 2.4 Additional Files

Several additional files are related to Content Dictionaries. Signature files contain the signatures of symbols defined in some *OpenMath* Content Dictionary and their format is endorsed by this standard.

Furthermore, the standard fixes how to define a specific set of Content Dictionaries as a CDGroup.

Auxiliary files that define presentation and rendering or that are used for manipulating and processing Content Dictionaries are not discussed by the standard.

## 2.5 Phrasebooks

The conversion of an *OpenMath* object to/from the internal representation in a software application is performed by an interface program called a *Phrasebook*. The translation is governed by the Content Dictionaries and the specifics of the application. It is envisioned that a software application dealing with a specific area of mathematics declares which Content Dictionaries it understands. As a consequence, it is expected that the Phrasebook of the application is able to translate *OpenMath* objects built using symbols from these Content Dictionaries to/from the internal mathematical objects of the application.

*OpenMath* objects do not specify any computational behaviour, they merely represent mathematical expressions. Part of the *OpenMath* philosophy is to leave it to the application to decide what it does with an object once it has received it. *OpenMath* is not a query or programming language. Because of this, *OpenMath* does not prescribe a way of forcing “evaluation” or “simplification” of objects like  $2 + 3$  or  $\sin(\pi)$ . Thus, the same object  $2 + 3$  could be transformed to 5 by a computer algebra system, or displayed as  $2 + 3$  by a typesetting tool.

## Chapter 3

# *OpenMath* Objects

In this chapter we provide a self-contained description of *OpenMath* objects. We first do so by means of an abstract grammar description (Section 3.1) and then give a more informal description (Section 3.2).

### 3.1 Formal Definition of *OpenMath* Objects

*OpenMath* represents mathematical objects as terms or as labelled trees that are called *OpenMath* objects or *OpenMath* expressions. The definition of an abstract *OpenMath* object is then the following.

#### 3.1.1 Basic *OpenMath* objects

The Basic *OpenMath* Objects form the leaves of the *OpenMath* Object tree. A Basic *OpenMath* Object is of one of the following.

- (i) Integer.  
Integers in the mathematical sense, with no predefined range. They are “infinite precision” integers (also called “bignums” in computer algebra).
- (ii) IEEE floating point number.  
Double precision floating-point numbers following the IEEE 754-1985 standard [6].
- (iii) Character string.  
A Unicode Character string. This also corresponds to ‘characters’ in XML.
- (iv) Bytearray.  
A sequence of bytes.



- (v) Symbol.

A Symbol encodes two fields of information, a *name* and a *Content Dictionary*. Each is a sequence of characters matching a regular expression, as described below.

A Symbol encodes three fields of information, a *name*, a *Content Dictionary*, and (optionally) a role. The name of a symbol is a sequence of characters matching the regular expression described in Section 3.3. The Content Dictionary is the location of the definition of the symbol, consisting of a name (a sequence of characters matching the regular expression described in Section 3.3) and, optionally, a unique prefix called a *cdbase* which is used to disambiguate multiple Content Dictionaries of the same name. The role is a restriction on where the symbol may appear in an *OpenMath* object. The possible roles are described in Section 3.1.4.

- (vi) Variable.

A Variable **consists of** must have a *name* which is a sequence of characters matching a regular expression, as described in Section 3.3.

### 3.1.2 Derived *OpenMath* Objects

Derived *OpenMath* objects are currently used as a way by which non-*OpenMath* data is embedded inside an *OpenMath* object. A derived *OpenMath* object is built as follows:

- (i) If  $A$  is *not* an *OpenMath* object, then **foreign**( $A$ ) is an *OpenMath* foreign object. An *OpenMath* foreign object may optionally have an *encoding* field which describes how its contents should be interpreted.

### 3.1.3 **Compound***OpenMath* Objects

*OpenMath* objects are built recursively as follows.

- (i) Basic *OpenMath* objects are *OpenMath* objects. (Note that derived *OpenMath* objects are *not* *OpenMath* objects, but are used to construct *OpenMath* objects as described below.)
- (ii) If  $A_1, \dots, A_n$  ( $n > 0$ ) are *OpenMath* objects, then

$$\mathbf{application}(A_1, \dots, A_n)$$

is an *OpenMath* application object.

- (iii) If  $S_1, \dots, S_n$  are *OpenMath* symbols, and  **$A, A_1, \dots, A_n$ , ( $n > 0$ ) are *OpenMath* objects,** **then**  $A$  is an *OpenMath* object, and  $A_1, \dots, A_n$  ( $n > 0$ ) are *OpenMath* objects or *OpenMath* derived objects, then

$$\mathbf{attribution}(A, S_1 A_1, \dots, S_n A_n)$$

is an *OpenMath* attribution object.

and  $A$  is the object *stripped of attributions*.  $S_1, \dots, S_n$  are referred to as *keys* and  $A_1, \dots, A_n$  as their associated *values*. The operation of recursively applying stripping to the stripped object is called *flattening of the attribution*.

When the stripped object after flattening is a variable, the attributed object is called *attributed variable*. If, after recursively applying stripping to remove attributions, the resulting un-attributed object is a variable, the original attributed object is called an *attributed variable*.

- (iv) If  $B$  and  $C$  are *OpenMath* objects, and  $v_1, \dots, v_n$  ( $n \geq 0$ ) are *OpenMath* variables or attributed variables, then

$$\mathbf{binding}(B, v_1, \dots, v_n, C)$$

is an *OpenMath binding object*.

- (v) If  $S$  is an *OpenMath* symbol and  $A_1, \dots, A_n$  ( $n \geq 0$ ) are *OpenMath* objects or *OpenMath* derived objects, then

$$\mathbf{error}(S, A_1, \dots, A_n)$$

is an *OpenMath error object*.

### 3.1.4 OpenMath Symbol Roles

We say that an *OpenMath* symbol is used to *construct* an *OpenMath* object if it is the first child of an *OpenMath* application, binding or error object, or an even-indexed child of an *OpenMath* attribution object (i.e. the *key* in a (*key*, *value*) pair). The *role* of an *OpenMath* symbol is a restriction on how it may be used to construct a compound *OpenMath* object and, in the case of the *key* in an attribution object, a clarification of how that attribution should be interpreted. Possible roles are:

- (i) *binder* The symbol may appear as the first child of an *OpenMath* binding object.
- (ii) *attribution* The symbol may be used as *key* in an *OpenMath* attribution object, i.e. as the first element of a (*key*, *value*) pair, or in an equivalent context (for example to refer to the value of an attribution). This form of attribution may be ignored by an application, so should be used for information which does not change the meaning of the attributed *OpenMath* object.
- (iii) *semantic-attribution* This is the same as *attribution* except that it modifies the meaning of the attributed *OpenMath* object and thus cannot be ignored by an application.
- (iv) *error* The symbol can appear as the first child of an *OpenMath* error object.
- (v) *application* The symbol can appear as the first child of an *OpenMath* application object.
- (vi) *constant* The symbol cannot be used to construct an *OpenMath* compound object.

A symbol cannot have more than one role and cannot be used to construct a compound *OpenMath* object in a way which requires a different role (using the definition of *construct* given earlier in this section). This means that one cannot use a symbol which binds some variables to construct, say, an application object. However it does not prevent the use of that symbol as an *argument* in an application object (where by *argument* we mean a child with index greater than 1).

If no role is indicated then the symbol can be used anywhere. Note that this is not the same as saying that the symbol's role is *constant*.

### 3.2 Further Description of *OpenMath* Objects

Informally, an *OpenMath* object can be viewed as a tree and is also referred to as a term. The objects at the leaves of *OpenMath* trees are called *basic objects*. The basic objects supported by *OpenMath* are:

**Integer** Arbitrary Precision integers.

**Float** *OpenMath* floats are IEEE 754 Double precision floating-point numbers. Other types of floating point number may be encoded in *OpenMath* by the use of suitable content dictionaries.

**Character strings** are sequences of characters. These characters come from the Unicode standard [10].

**Bytearrays** are sequences of bytes. There is no “byte” in *OpenMath* as an object of its own. However, a single byte can of course be represented by a bytearray of length 1. The difference between strings and bytearrays is the following: a character string is a sequence of bytes with a fixed interpretation (as characters, Unicode texts may require several bytes to code one character), whereas a bytearray is an uninterpreted sequence of bytes with no intrinsic meaning. Bytearrays could be used inside *OpenMath* errors to provide information to, for example, a debugger; they could also contain intermediate results of calculations, or ‘handles’ into computations or databases.

**Symbols** are uniquely defined by the Content Dictionary in which they occur and by a name. In definition in Section 3.1 we have left this information implicit. However, it should be kept in mind that all symbols appearing in an *OpenMath* object are defined in a Content Dictionary. The form of these definitions is explained in Chapter 5. Each symbol has no more than one definition in a Content Dictionary. Many Content Dictionaries may define differently a symbol with the same name (e.g. the symbol `union` is defined as associative-commutative set theoretic union in a Content Dictionary `set1` but another Content Dictionary, `multiset1` might define a symbol `union` as the union of multi-sets). The name of a symbol can only contain alphanumeric characters and underscores. More precisely, a symbol name matches the following regular expression:

$$[A-Za-z][A-Za-z0-9_]*$$

Notice that these symbol names are case sensitive. *OpenMath* recommends that symbol names should be no longer than 100 characters.

**Variables** are meant to denote parameters, variables or indeterminate (such as bound variables of function definitions, variables in summations and integrals, independent variables of derivatives). Plain variable names are restricted to use a subset of the printable ASCII characters. Formally the names must match the regular expression:

$$[A-Za-z0-9=+(),-./:?!#\$%*;\=@[]^{'|}]+$$

Derived *OpenMath* objects are constructed from non-*OpenMath* data. They differ from bytearrays in that they can have any structure. Currently there is only one way of making a derived *OpenMath* object.

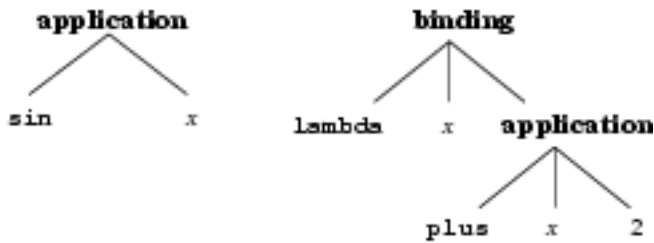


Figure 3.1: The *OpenMath* application and binding objects for  $\sin(x)$  and  $\lambda x.x + 2$  in tree-like notation.

**Foreign** is used to import a non-*OpenMath* object into an *OpenMath* attribution. Examples of its use could be to annotate a formula with a visual or aural rendering, an animation etc. They may also appear in *OpenMath* error objects, for example to allow an application to report an error in processing such an object.

The four following constructs can be used to make compound *OpenMath* objects out of basic or derived *OpenMath* objects.

**Application** constructs an *OpenMath* object from a sequence of one or more *OpenMath* objects. The first argument of an application is referred to as its “head” while the remaining objects are called its “arguments”. An *OpenMath* application object can be used to convey the mathematical notion of application of a function to a set of arguments. For instance, suppose that the *OpenMath* symbol *sin* is defined in a suitable Content Dictionary, for trigonometry then **application**(*sin*,*x*) is the abstract *OpenMath* object corresponding to  $\sin(x)$ . More generally, an *OpenMath* application object can be used as a constructor to convey a mathematical object built from other objects such as a polynomial constructed from a set of monomials. Constructors build inhabitants of some symbolic type, for instance the type of rational numbers or the type of polynomials. The rational number, usually denoted as  $1/2$ , is represented by the *OpenMath* application object **application**(*Rational*,1,2). The symbol *Rational* must be defined, by a Content Dictionary, as a constructor symbol for the rational numbers.

**Binding** objects are constructed from an *OpenMath* object, and from a sequence of zero or more variables followed by another *OpenMath* object. The first *OpenMath* object is the “binder” object. Arguments 2 to  $n - 1$  are always variables to be bound in the “body” which is the  $n^{th}$  argument object. It is allowed to have no bound variables, but the binder object and the body should be present. Binding can be used to express functions or logical statements. The function  $\lambda x.x + 2$ , in which the variable  $x$  is bound by  $\lambda$ , corresponds to a binding object having as binder the *OpenMath* symbol *lambda*:

$$\mathbf{binding}(\mathit{lambda},x,\mathbf{application}(\mathit{plus},x,2)).$$

Phrasebooks are allowed to use  $\alpha$  conversion in order to avoid clashes of variable names. Suppose an object  $\Omega$  contains an occurrence of the object **binding**( $B,v,C$ ). This object

$\mathbf{binding}(B, v, C)$  can be replaced in  $\Omega$  by  $\mathbf{binding}(B, z, C')$  where  $z$  is a variable not occurring free in  $C$  and  $C'$  is obtained from  $C$  by replacing each free (i.e., not bound by any intermediate **binding** construct) occurrence of  $v$  by  $z$ . This operation preserves the semantics of the object  $\Omega$ . In the above example, a phrasebook is thus allowed to transform the object to, e.g.

$$\mathbf{binding}(\mathit{lambda}, v, \mathbf{binding}(\mathit{lambda}, z, \mathbf{application}(\mathit{times}, z, z))).$$

$$\mathbf{binding}(\mathit{lambda}, z, \mathbf{application}(\mathit{plus}, z, 2)).$$

Repeated occurrences of the same variable in a binding operator are allowed. An *OpenMath* application should treat a binding with multiple occurrences of the same variable as equivalent to the binding in which all but the last occurrence of each variable is replaced by a new variable which does not occur free in the body of the binding.

$$\mathbf{binding}(\mathit{lambda}, v, v, \mathbf{application}(\mathit{times}, v, v))$$

is semantically equivalent to:

$$\mathbf{binding}(\mathit{lambda}, v', v, \mathbf{application}(\mathit{times}, v, v))$$

so that the resulting function is actually a constant in its first argument ( $v'$  does not occur free in the body  $\mathbf{application}(\mathit{times}, v, v)$ )).

**Attribution** decorates an object with a sequence of one or more pairs made up of an *OpenMath* symbol, the “attribute”, and an associated *OpenMath* object, the “value of the attribute”. The value of the attribute can be an *OpenMath* attribution object itself. As an example of this, consider the *OpenMath* objects representing groups, automorphism groups, and group dimensions. It is then possible to attribute an *OpenMath* object representing a group by its automorphism group, itself attributed by its dimension.

*OpenMath* objects can be attributed with *OpenMath* foreign objects, which are containers for non-*OpenMath* structures. For example a mathematical expression could be attributed with its spoken or visual rendering.

Composition of attributions, as in

$$\mathbf{attribution}(\mathbf{attribution}(A, S_1 A_1, \dots, S_h A_h), S_{h+1} A_{h+1}, \dots, S_n A_n)$$

is semantically equivalent to a single attribution, that is

$$\mathbf{attribution}(A, S_1 A_1, \dots, S_h A_h, S_{h+1} A_{h+1}, \dots, S_n A_n).$$

The operation that produces an object with a single layer of attribution is called *flattening*.

Multiple attributes with the same name are allowed. While the order of the given attributes does not imply any notion of priority, potentially it could be significant. For instance, consider the case in which  $S_h = S_n$  ( $h < n$ ) in the example above. Then, the object is to be interpreted as if the value  $A_n$  overwrites the value  $A_h$ . (*OpenMath* however does not mandate that an application preserves the attributes or their order.)

Attribution acts as either adornment annotation or as semantical annotation. When the key has role *attribution*, then replacement of the attributed object by the object itself is not harmful and preserves the semantics. When the key has role *semantic-attribution* then the attributed object is modified by the attribution and cannot be viewed as semantically equivalent to the stripped object. If the attribute lacks the role specification then attribution is acting as adornment annotation.

Objects can be decorated in a multitude of ways. In [3], typing of *OpenMath* objects is expressed by using an attribution. An example of the use of an adornment attribution would be to indicate the colour in which an *OpenMath* object should be displayed, for example **attribution**(*A*, *colour red*). Note that both *A* and *red* are *OpenMath* objects. An example of the use of a semantic attribution would be to indicate the type of an object. For example the object **attribution**(*A*, *type t*) represents the judgment stating that object *A* has type *t*. Note that both *A* and *t* are *OpenMath* objects.

Attribution can act as either annotation, in the sense of adornment, or as modifier. In the former case, replacement of the adorned object by the object itself is probably not harmful (preserves the semantics). In the latter case however, it may very well be. Therefore, attribution in general should by default be treated as a construct rather than as adornment. Only when the CD definitions of the attributes make it clear that they are adornments, can the attributed object be viewed as semantically equivalent to the stripped object.

**Error** is made up of an *OpenMath* symbol and a sequence of zero or more *OpenMath* objects. This object has no direct mathematical meaning. Errors occur as the result of some treatment on an *OpenMath* object and are thus of real interest only when some sort of communication is taking place. Errors may occur inside other objects and also inside other errors. Error objects might consist only of a symbol as in the object: **error**(*S*).

### 3.3 Names

The names of symbols, variables and content dictionaries must conform to the production *Name* specified in the following grammar (which is identical to that for XML names in XML 1.1, [14]). Informally speaking, a name is a sequence of Unicode [10] characters which begins with a letter and cannot contain certain punctuation and combining characters. The notation #x... represents the hexadecimal value of the encoding of a Unicode character. Some of the character values or *code points* in the following productions are currently unassigned, but this is likely to change in the future as Unicode evolves<sup>1</sup>.

---

<sup>1</sup>We note that in XML 1 the name production explicitly listed the characters that were allowed, so all the characters added in versions of Unicode after 2.0 (which amounted to tens of thousands of characters) were not allowed in names.

Name	→	NameStartChar (NameChar)*
NameStartChar	→	":"   [A-Z]   "_"   [a-z]   [#xC0-#xD6]   [#xD8-#xF6]   [#xF8-#x2FF]   [#x370-#x37D]   [#x37F-#x1FFF]   [#x200C-#x200D]   [#x2070-#x218F]   [#x2C00-#x2FEF]   [#x3001-#xD7FF]   [#xF900-#xFDCF]   [#xFDF0-#xFFFD]   [#x10000-#xEFFFF]
NameChar	→	NameStartChar   "-"   "."   [0-9]   #xB7   [#x0300-#x036F]   [#x203F-#x2040]

**CD Base** A cdbase must conform to the grammar for URIs described in [7]. Note that if non-ASCII characters are used in a CD or symbol name then when a URI for that symbol is constructed it will be necessary to map the non-ASCII characters to a sequence of octets. The precise mechanism for doing this depends on the URI scheme.

**Note on content dictionary names** It is a common convention to store a Content Dictionary in a file of the same name, which can cause difficulties on many file systems. If this convention is to be followed then *OpenMath recommends* that the name be restricted to the subset of the above grammar which is a legal POSIX [5] filename, namely:

Name	→	(PosixLetter   ' _ ') (Char)*
Char	→	PosixLetter   Digit   ' '   ' '   ' _ '
PosixLetter	→	'a'   'b'   ...   'z'   'A'   'B'   ...   'Z'

**Canonical URIs for Symbols** To facilitate the use of *OpenMath* within a URI-based framework (such as RDF [17] or OWL [16]), we provide the following scheme for constructing a canonical URI for an *OpenMath* Symbol:

URI = cdbase-value + '/' + cd-value + '#' + name-value

So for example the URI for the symbol with cdbase `http://www.openmath.org/cd`, cd `transcl` and name `sin` is:

`http://www.openmath.org/cd/transcl#sin`

In particular, this now allows us to refer uniquely to an *OpenMath* symbol from a MathML document [15]:

```
<mathml:csymbol xmlns:mathml="http://www.w3.org/1998/Math/MathML/"
  definitionURL="http://www.openmath.org/cd/transcl#sin">
  <mo> sin </mo>
</csymbol>
```

### 3.4 Summary

- *OpenMath* supports basic objects like integers, symbols, floating-point numbers, character strings, bytearrays, and variables.
- *OpenMath* compound objects are of four kinds: applications, bindings, errors, and attributions.
- *OpenMath* objects may be attributed with non-*OpenMath* objects via the use of foreign *OpenMath* objects.
- *OpenMath* objects have the expressive power to cover all areas of computational mathematics.

Observe that an *OpenMath* application object is viewed as a “tree” by software applications that do not understand Content Dictionaries, whereas a Phrasebook that understands the semantics of the symbols, as defined in the Content Dictionaries, should interpret the object as functional application, constructor, or binding accordingly. Thus, for example, for some applications, the *OpenMath* object corresponding to  $2 + 5$  may result in a command that writes 7.



## Chapter 4

# *OpenMath* Encodings

In this chapter, two encodings are defined that map between *OpenMath* objects and byte streams. These byte streams constitute a low level representation that can be easily exchanged between processes (via almost any communication method) or stored and retrieved from files.

The first encoding uses ISO 646:1983 characters [?] (also known as ASCII characters) and is an XML application. Although the XML markup of the encoding uses only ASCII characters, *OpenMath* strings may use arbitrary Unicode/ISO 10646:1988 characters [10]. It can be used, for example, to send *OpenMath* objects via e-mail, news, cut-and-paste, etc. The texts produced by this encoding can be part of XML documents.

The first encoding is a character-based encoding in XML format. In previous versions of the *OpenMath* Standard this encoding was a restricted subset of the full legal XML syntax. In this version, however, we have removed all these restrictions so that the earlier encoding is a strict subset of the existing one. The XML encoding can be used, for example, to send *OpenMath* objects via e-mail, cut-and-paste, etc. and to embed *OpenMath* objects in XML documents or to have *OpenMath* objects processed by XML-aware applications.

The second encoding is a binary encoding that is meant to be used when the compactness of the encoding is important (inter-process communications over a network is an example).

Note that these two encodings are sufficiently different for auto-detection to be effective: an application reading the bytes can very easily determine which encoding is used.

### 4.1 The XML Encoding

This encoding has been designed with two main goals in mind:

1. to provide an encoding that uses common character sets (so that it can easily be included in most documents and transport protocols) and that is both readable and writable by a human.

2. to provide an encoding that can be included (embedded) in XML documents or processed by XML-aware applications.

#### 4.1.1 A Grammar Schema for the XML Encoding

The XML encoding of an *OpenMath* object is defined by the Relax NG schema [8] given below. Relax NG has a number of advantages over the older XSD Schema format [11], in particular it allows for tighter control of attributes and has a modular, extensible structure. Although we have made the XML form, which is given in Appendix B, normative, it is generated from the compact syntax given below. It is also very easy to restrict the schema to allow a limited set of *OpenMath* symbols as described in Appendix C.

Standard tools exist for generating a DTD or an XSD schema from a Relax NG Schema. Examples of such documents are given in Appendix E and Appendix D respectively.

```
# RELAX NG Schema for OpenMath 2

default namespace om = "http://www.openmath.org/OpenMath"

start = OMOBJ

# OpenMath object constructor
OMOBJ = element OMOBJ { compound.attributes,
                        attribute version { xsd:float }?,
                        omel }

# Elements which can appear inside an OpenMath object
omel =
    OMS | OMV | OMI | OMB | OMSTR | OMF | OMA | OMBIND | OME | OMATTR | OMR

# things which can be variables
omvar = OMV | attvar

attvar = element OMATTR { common.attributes, (OMATP , (OMV | attvar))}

cibase = attribute cibase { xsd:anyURI}?

# attributes common to all elements
common.attributes = (attribute id { xsd:ID })?
```

```
# attributes common to all elements that construct compound OM objects.
compound.attributes = common.attributes, cdbase

# symbol
OMS = element OMS { common.attributes,
                    attribute name { xsd:NCName},
                    attribute cd { xsd:NCName},
                    cdbase }

# variable
OMV = element OMV { common.attributes,
                    attribute name { xsd:NCName} }

# integer
OMI = element OMI { common.attributes,
                    xsd:string {pattern = "\s*(-\s?)[0-9]+(\s[0-9]+)*\s*"}}

# byte array
OMB = element OMB { common.attributes, xsd:base64Binary }

# string
OMSTR = element OMSTR { common.attributes, text }

# IEEE floating point number
OMF = element OMF { common.attributes,
                    ( attribute dec { xsd:double } |
                      attribute hex { xsd:string {pattern = "[0-9A-F]+"}}) }

# apply constructor
OMA = element OMA { compound.attributes, omel+ }

# binding constructor
OMBIND = element OMBIND { compound.attributes, omel, OMBVAR, omel }

# variables used in binding constructor
OMBVAR = element OMBVAR { common.attributes, omvar+ }

# error constructor
OME = element OME { common.attributes, OMS, (omel|OMFOREIGN)* }

# attribution constructor and attribute pair constructor
OMATTR = element OMATTR { compound.attributes, OMATP, omel }

OMATP = element OMATP { compound.attributes, (OMS, (omel | OMFOREIGN) )+ }
```

```
# foreign constructor
OMFOREIGN = element OMFOREIGN {
    compound.attributes, attribute encoding {xsd:string}?,
    (omel|notom)* }

# Any elements not in the om namespace
# (valid om is allowed as a descendant)
notom =
    (element * - om:* {attribute * { text }*, (omel|notom)*}
    | text)

# reference constructor
OMR = element OMR { common.attributes,
    attribute href { xsd:anyURI }
    }
```

the XML encoding of an *OpenMath* object is defined by the dtd given in Figure 4.1 below with the following additional rules not implied by the XML DTD.

- Comments are permitted only between elements, not within element character data.
- Processing Instructions are only allowed before the OMOBJ element.
- The content of an OMB element, is a valid base64-encoded text.
- The character data forming element content and attribute values matches the regular expressions of para ??.

DTD for the *OpenMath* XML encoding of objects.

```
<!-- DTD for OM Objects - sb 29.10.98 -->
<!-- sb 3.2.99 -->

<!--
    general list of embeddable elements
    : excludes OMATP as this is only embeddable in OMATTR
    : excludes OMBVAR as this is only embeddable in OMBIND
-->

<!ENTITY % omel "OMS | OMV | OMI | OMB | OMSTR
                | OMF | OMA | OMBIND | OME
                | OMATTR | ">
```



```
<!ELEMENT OMBVAR (%omvar;)+ >

<!-- error -->
<!ELEMENT OME (OMS, (%omel;)* ) >

<!-- attribution constructor & attribute pair constructor -->
<!ELEMENT OMATTR (OMATP, (%omel;)) >

<!ELEMENT OMATP (OMS, (%omel;))+ >

<!-- OM object constructor -->
<!ELEMENT OMOBJ (%omel;) >
<ATTLIST OMOBJ
          xlmns:xlink CDATA #FIXED 'http://www.w3.org/1999/xlink'>
```

In addition, if the XML document encoding the *OpenMath* object is linearised into the XML concrete syntax, the following further constraints apply, which ensure that the encoding may be read by *OpenMath* applications that may not include a full XML parser.

- The document should use UTF-8 encoding.
- A `<!DOCTYPE` declaration should not be used.
- Character references should not be used. As `<!DOCTYPE` is not used, the only entity references that are allowed are the five predefined entity references: `&apos;` (`'`), `&quot;` (`"`), `&lt;` (`<`), `&gt;` (`>`), `&amp;` (`&`).
- The XML empty element form `<| #8230; />` should always be used to encode elements such as OMF which are specified in the DTD as being EMPTY. It should never be used for elements that may sometimes be empty, such as OMSTR.

Such a linearisation of an XML encoded *OpenMath* Object would match the match the character based grammar given in para ??.

The notation used in this section and in para ?? should be quite straightforward (+ meaning “one or more”, ? meaning zero or one, and | meaning “or”). The start symbol of the grammar is “start”, “space” stands for the space character, “cr” for the carriage return character, “nl” for the line feed character and “tab” for the horizontal tabulation character.

Grammar for the XML encoding of *OpenMath* objects.

	S	→	(space   tab   cr   nl)+
	integer	→	(- S)? [0-9]+ (S [0-9]+)*   (- S)? x S? [0-9A
	cdname	→	[a-z][a-z0-9_]*
	symbname	→	[A-Za-z][A-Za-z0-9_]*
Grammar for the XML encoding of <i>OpenMath</i> objects.	fpdec	→	(- ?)([0-9]+)?(.[0-9]+)?(e([+-]?)[0-9]+)?
	fphex	→	[0-9ABCDEF]+
	varname	→	([A-Za-z0-9+=(,)-./:?!#\$\$%*;@[ ]^_‘{ }])+
	base64	→	([A-Za-z0-9 +/=]   S)+
	char	→	XML Character Data
	symbnameatt	→	name S? = S? (" symbname "   ' symbname ')
cdnameatt	→	cd S? = S? (" cdname "   ' cdname ')	
varnameatt	→	name S? = S? (" varname "   ' varname ')	
fpdecatt	→	dec S? = S? (" fpdec "   ' fpdec ')	
fphexatt	→	hex S? = S? (" fphex "   ' fphex ')	
PI	→	<? char ?>	
comment	→	<!-- char -->	
SC	→	S+   (comment S)+	
start	→	(SC   PI)* <OMOBJ S?> S? object S? </OMOBJ S?>	
symbol	→	<OMS [(S symbnameatt) (S cdnameatt) ] S? />	
variable	→	<OMV varnameatt S? />	
		<OMATTRx S?> SC? omatp SC? variable SC? </OMATTR S?>	
omatp	→	<OMATP S?> SC? attrs SC? </#1 S?>	
object	→	symbol	
		variable	
		<OMI S > S? integer S? </OMI S?>	
		<OMF S fpdecatt S?/>	
		<OMF S fphexatt S?/>	
		<OMSTR S?> char </OMSTR S?>	
		<OMB S?> base64 </OMB S?>	
		<OMA S?> SC? object SC? objects SC? </OMA S?>	
		<OMBIND S?> SC? object SC?	
		<OMBVAR S?> SC? variables SC? </OMBVAR S?>	
		SC? object SC? </OMBIND S?>	
		<OME S?> SC? symbol SC? objects SC? </OME S?>	
		<OMATTR S?> SC? <OMATP S?> SC? attrs SC? </OMBVAR S?>	
		SC? object SC? </OMATTR S?>	
attrs	→	symbol S? object	
		symbol S? object S? attrs	
objects	→	SC?	
		object SC? objects	
variables	→	SC?	
		variable SC? variables	

**Note:** This schema specifies names as being of the `xsd:NCName` type. At the time of writing, W3C Schema types are defined in terms of XML 1 [13]. This limits the characters allowed in a name to a subset of the characters available in Unicode 2.0, which is far more restrictive than the definition for an *OpenMath* name given in Section 3.3. It is expected that W3C Schema types will be augmented to match the new XML 1.1 recommendation [14], but for portability reasons applications should avoid using the new XML 1.1 name characters unless they are absolutely required. The XML 1.1 specification has a useful appendix giving advice on good strategies to use when naming identifiers.

#### 4.1.2 Informal description of the GrammarXML Encoding

An encoded *OpenMath* object is placed inside an `OMOBJ` element. This element can contain the elements (and integers) described above. It can take an optional `version` (XML) attribute which indicates to which version of the *OpenMath* standard it conforms. In previous versions of this standard this attribute did not exist, so any *OpenMath* object without such an attribute must conform to version 1 (or equivalently 1.1) of the *OpenMath* standard. Objects which conform to the description given in this document should have `version="2.0"`.

We briefly discuss the XML encoding for each type of *OpenMath* object starting from the basic objects.

**Integers** are encoded using the `OMI` element around the sequence of their digits in base 10 or 16 (most significant digit first). White space may be inserted between the characters of the integer representation, this will be ignored. After ignoring white space, integers written in base 10 match the regular expression `-?[0-9]+`. Integers written in base 16 match `-?[xX][0-9A-F]+`. The integer 10 can be thus encoded as `<OMI> 10 </OMI>` or as `<OMI> xA </OMI>` but neither `<OMI> +10 </OMI>` nor `<OMI> +xA </OMI>` can be used.

The negative integer  $-120$  can be encoded as either as decimal `<OMI> -120 </OMI>` or as hexadecimal `<OMI> -x78 </OMI>`.

**Symbols** are encoded using the `OMS` element. This element has **two three** (XML) attributes `cd`, `name`, and `cdbase`. The value of `cd` is the name of the Content Dictionary in which the symbol is defined and the value of `name` is the name of the symbol. The optional `cdbase` attribute is a URI that can be used to disambiguate between two content dictionaries with the same name. If a symbol does not have an explicit `cdbase` attribute, then it inherits its `cdbase` from the first ancestor in the XML tree with one, should such an element exist. In this document we have tended to omit the `cdbase` for clarity. The name of the Content Dictionary is compulsory, but a future revision of the *OpenMath* standard might introduce a defaulting mechanism. For example:

```
<OMS cd="transc" name="sin"/>
```

```
<OMS cdbase="http://www.openmath.org/cd" cd="transc1" name="sin"/>
```



is the encoding of the symbol named `sin` in the Content Dictionary named `transcl`, which is part of the collection maintained by the *OpenMath Society*.

As described in Section 3.3, the three attributes of the OMS can be used to build a URI reference for the symbol, for use in contexts where URI-based referencing mechanisms are used. For example the URI for the above symbol is `http://www.openmath.org/cd/transcl#sin`.

Note that the role attribute described in Section 3.1.4 is contained in the Content Dictionary and is not part of the encoding of a symbol, also the `cdbase` attribute need not be explicit on each OMS as it is inherited from any ancestor element.

**Variables** are encoded using the OMV element, with only one (XML) attribute, `name`, whose value is the variable name. The variable name is a subset of the printable ASCII set of characters. In particular, neither spaces nor double-quote " are allowed in variable names. For instance, the encoding of the object representing the variable `x` is: `<OMV name="x"/>`

**Floating-point numbers** are encoded using the OMF element that has either the (XML) attribute `dec` or the (XML) attribute `hex`. The two (XML) attributes cannot be present simultaneously. The value of `dec` is the floating-point number expressed in base 10, using the common syntax:

`(-?) ([0-9]+) ? ( "." [0-9]+) ? ([eE] (-?) [0-9]+) ? .`  
or one of the special values: `INF`, `-INF` or `NaN`.

The value of `hex` is a base 16 representation of the 64 bits of the IEEE Double. Thus the number represents mantissa, exponent, and sign from lowest to highest bits using a least significant byte ordering. This consists of a string of 16 digits 0-9, A-F.

For example, both `<OMF dec="1.0e-10"/>` and `<OMF hex="3DDB7CDFD9D7BDBB"/>` are valid representations of the floating point number  $1 \times 10^{-10}$ .

The symbols `INF`, `-INF` and `NaN` represent positive and negative infinity, and *not a number* as defined in [6]. Note that while infinities have a unique representation, it is possible for NaNs to contain extra information about how they were generated and if this information is to be preserved then the hexadecimal representation must be used. For example `<OMF hex="FFF8000000000000"/>` and `<OMF hex="FFF8000000000001"/>` are both hexadecimal representations of NaNs.

**Character strings** are encoded using the OMSTR element. Its content is a Unicode text (The default encoding is UTF-8[?], although XML encoded *OpenMath* may be embedded in a containing XML document that specifies alternative encoding in the XML declaration. Note that as always in XML the characters `<` and `&` need to be represented by the entity references `&lt;` and `&amp;` respectively.

**Bytearrays** are encoded using the OMB element. Its content is a sequence of characters that is a base64 encoding of the data. The base64 encoding is defined in RFC 1521 [?] 2045 [1]. Basically, it represents an arbitrary sequence of octets using 64 “digits” (A through Z, a through z, 0 through 9, + and /, in order of increasing value). Three octets are represented as four digits (the = character is used for padding at the end of the data). All line breaks and carriage return, space, form feed and horizontal tabulation characters are ignored. The reader is referred to [?] [1] for more detailed information.

In detail the encoding of an *OpenMath* object is described below.

**Applications** are encoded using the OMA element. The application whose head is the *OpenMath* object  $e_0$  and whose arguments are the *OpenMath* objects  $e_1, \dots, e_n$  is encoded as  $\langle \text{OMA} \rangle C_0 C_1 \dots C_n \langle / \text{OMA} \rangle$  where  $C_i$  is the encoding of  $e_i$ .

For example, **application**(*sin*, *x*) is encoded as:

```
<OMA>
  <OMS cd="transcl" name="sin"/>
  <OMV name="x"/>
</OMA>
```

provided that the symbol *sin* is defined to be a function symbol in a Content Dictionary named *transcl*.

**Binding** is encoded using the OMBIND element. The binding by the *OpenMath* object  $b$  of the *OpenMath* variables  $x_1, x_2, \dots, x_n$  in the object  $c$  is encoded as  $\langle \text{OMBIND} \rangle B \langle \text{OMBVAR} \rangle X_1 \dots X_n \langle / \text{OMBVAR} \rangle C \langle / \text{OMBIND} \rangle$  where  $B, C$ , and  $X_i$  are the encodings of  $b, c$  and  $x_i$ , respectively.

For instance the encoding of **binding**(*lambda*, *x*, **application**(*sin*, *x*)) is:

```
<OMBIND>
  <OMS cd="fns1" name="lambda"/>
  <OMBVAR><OMV name="x"/></OMBVAR>
  <OMA>
    <OMS cd="transcl" name="sin"/>
    <OMV name="x"/>
  </OMA>
</OMBIND>
```

Binders are defined in Content Dictionaries, in particular, the symbol *lambda* is defined in the Content Dictionary *fns1* for functions over functions.

**Attributions** are encoded using the OMATTR element. If the *OpenMath* object  $e$  is attributed with  $(s_1, e_1), \dots, (s_n, e_n)$  pairs (where  $s_i$  are the attributes), it is encoded as  $\langle \text{OMATTR} \rangle \langle \text{OMATP} \rangle S_1 C_1 \dots S_n C_n \langle / \text{OMATP} \rangle E \langle / \text{OMATTR} \rangle$  where  $S_i$  is the encoding of the symbol  $s_i$ ,  $C_i$  of the object  $e_i$  and  $E$  is the encoding of  $e$ .

Examples are the use of attribution to decorate a group by its automorphism group:

```
<OMATTR>
  <OMATP>
    <OMS cd="groups" name="automorphism_group" />
    [...group-encoding...]
  </OMATP>
  [...group-encoding...]
</OMATTR>
```

or to express the type of a variable:

```
<OMATTR>
  <OMATP>
    <OMS cd="ecc" name="type" />
    <OMS cd="ecc" name="real" />
  </OMATP>
  <OMV name="x" />
</OMATTR>
```

A special use of attributions is to associate non-*OpenMath* data with an *OpenMath* object. This is done using the `OMFOREIGN` element. The children of this element must be well-formed XML. For example the attribution of the *OpenMath* object  $\sin(x)$  with its representation in Presentation MathML is:

```
<OMATTR>
  <OMATP>
    <OMS cd="annotations1" name="presentation-form"/>
    <OMFOREIGN encoding="MathML-Presentation">
      <math xmlns="http://www.w3.org/1998/Math/MathML">
        <mi>sin</mi><mfenced><mi>x</mi></mfenced>
      </math>
    </OMFOREIGN>
  </OMATP>
  <OMA>
    <OMS cd="transcl" name="sin"/>
    <OMV name="x"/>
  </OMA>
</OMATTR>
```

Of course not everything has a natural XML encoding in this way and often the contents of a `OMFOREIGN` will just be data or some kind of encoded string. For example the attribution of the previous object with its LaTeX representation could be achieved as follows:

```
<OMATTR>
  <OMATP>
    <OMS cd="annotations1" name="presentation-form"/>
    <OMFOREIGN encoding="text/x-latex">\sin(x)</OMFOREIGN>
  </OMATP>
  <OMA>
    <OMS cd="transcl" name="sin"/>
    <OMV name="x"/>
  </OMA>
</OMATTR>
```

For a discussion on the use of the encoding attribute see Section 6.2.

**Errors** are encoded using the OME element. The error whose symbol is  $s$  and whose arguments are the *OpenMath* objects or *OpenMath* derived objects  $e_1, \dots, e_n$  is encoded as  $\langle \text{OME} \rangle C_s C_1 \dots C_n \langle / \text{OME} \rangle$  where  $C_s$  is the encoding of  $s$  and  $C_i$  the encoding of  $e_i$ .

If an aritherror Content Dictionary contained a DivisionByZero symbol, then the object **error**(*DivisionByZero*, **application**(*divide*,  $x, 0$ )) would be encoded as follows:

```
<OME>
  <OMS cd="aritherror" name="DivisionByZero"/>
  <OMA>
    <OMS cd="arith1" name="divide" />
    <OMV name="x"/>
    <OMI> 0 </OMI>
  </OMA>
</OME>
```

If a mathml Content Dictionary contained an unhandled\_csymbol symbol, then an *OpenMath* to MathML translator might return an error such as:

```
<OME>
  <OMS cd="mathml" name="unhandled_csymbol"/>
  <OMFOREIGN encoding="MathML-Content">
    <mathml:csymbol xmlns:mathml="http://www.w3.org/1998/Math/MathML/"
      definitionURL="http://www.nag.co.uk/Airy#A">
      <mathml:mo>Ai</mathml:mo>
    </mathml:csymbol>
  </OMFOREIGN>
</OME>
```

Note that it is possible to embed fragments of valid *OpenMath* inside an OMFOREIGN element but that it cannot contain invalid *OpenMath*. In addition, the arguments to an OMERROR must be well-formed XML. If an application wishes to signal that the *OpenMath* it has received is invalid or is not well-formed then the offending data must be encoded as a string. For example:

```
<OME>
  <OMS cd="parser" name="invalid_XML"/>
  <OMSTR>
    &lt;OMA&gt; &lt;OMS name="cos" cd="transc1"&gt;
      &lt;OMV name="v"&gt; &lt;/OMA&gt;
  </OMSTR>
</OME>
```

Note that the ‘<’ and ‘>’ characters have been escaped as is usual in an XML document.

**References** *OpenMath* integers, floating point numbers, character strings, bytearrays, applications, binding, attributions can also be encoded as an empty OMR element with an href attribute whose value is the value of a URI referencing an id attribute of an *OpenMath* object of that type. The *OpenMath* element represented by this OMR reference is a copy of the *OpenMath* element referenced href attribute. Note that this copy is *structurally equal*, but not identical to the element referenced.

For instance, the *OpenMath* object

**application**(*f*, **application**(*f*, **application**(*f*, *a*, *a*), **application**(*f*, *a*, *a*)), **application**(*f*, **application**(*f*, *a*, *a*), **application**(*f*, *a*, *a*)))

can be encoded in the XML encoding as either one of the XML encodings given in Figure 4.1 (and some intermediate versions as well).

### 4.1.3 Some Notes on References

We say that an *OpenMath* element dominates all its children and all elements they dominate. An OMR element dominates its target, i.e. the element that carries the id attribute pointed to by the xref attribute. For instance in the representation in Figure 4.1, the OMA element with id="t1" and also the second OMR dominate the OMA element with id="t11".

#### 4.1.3.1 An Acyclicity Constraint

The occurrences of the OMR element must obey the following global *acyclicity constraint*: An *OpenMath* element may not dominate itself.

Consider for instance the following (illegal) XML representation

```
<OMOBJ version="2.0">
  <OMA id="foo">
    <OMS cd="arith1" name="divide"/>
    <OMI>1</OMI>
    <OMA>
      <OMS cd="arith1" name="plus"/>
      <OMI>1</OMI>
      <OMR xref="foo"/>
    </OMA>
  </OMA>
</OMOBJ>
```

Here, the OMA element with id="foo" dominates its third child, which dominates the OMR element, which dominates its target: the element with id="foo". So by transitivity, this element dominates



<pre> &lt;OMOBJ version="2.0"&gt;   &lt;OMA id="bar"&gt;     &lt;OMS cd="arith1" name="plus"/&gt;     &lt;OMI&gt;1&lt;/OMI&gt;     &lt;OMR xref="baz"/&gt;   &lt;/OMA&gt; &lt;/OMOBJ&gt; </pre>	<pre> &lt;OMOBJ version="2.0"&gt;   &lt;OMA id="baz"&gt;     &lt;OMS cd="arith1" name="plus"/&gt;     &lt;OMI&gt;1&lt;/OMI&gt;     &lt;OMR xref="bar"/&gt;   &lt;/OMA&gt; &lt;/OMOBJ&gt; </pre>
---	---

Figure 4.2: Sharing between *OpenMath* objects (A cycle of order 2.

itself, and by the acyclicity constraint, it is not the XML representation of an *OpenMath* element. Even though it could be given the interpretation of the continued fraction

$$1 + \frac{1}{1 + \frac{1}{\dots}}$$

this would correspond to an infinite tree of applications, which is not admitted by the structure of *OpenMath* objects described in Chapter 3.

Note that the acyclicity constraints is not restricted to such simple cases, as the example in Figure 4.2 shows.

Here, the OMA with id="bar" dominates its third child, the OMR with xref="baz", which dominates its target OMA with id="baz", which in turn dominates its third child, the OMR with xref="bar", this finally dominates its target, the original OMA element with id="bar". So this pair of *OpenMath* objects violates the acyclicity constraint and is not the XML representation of an *OpenMath* object.

#### 4.1.3.2 Sharing and Bound Variables

Note that the OMR element is a *syntactic* referencing mechanism: an OMR element stands for the exact XML element it points to. In particular, referencing does not interact with binding in a semantically intuitive way, since it allows for variable capture. Consider for instance the following XML representation:

```

<OMBIND id="outer">
  <OMS cd="fns1" name="lambda"/>
  <OMBVAR><OMV name="X"/></OMBVAR>
  <OMA>
    <OMV name="f"/>
    <OMBIND id="inner">
      <OMS cd="fns1" name="lambda"/>
      <OMBVAR><OMV name="X"/></OMBVAR>
      <OMR id="copy" href="#orig"/>
    </OMBIND>
  </OMA>
</OMBIND>

```

```
<OMA id="orig"><OMV name="g"/><OMV name="X"/></OMA>
</OMA>
</OMBIND>
```

it represents the *OpenMath* object

$$\text{binding}(\lambda, X, \text{application}(f, \text{binding}(\lambda, X, \text{application}(g, X)), \text{application}(g, X)))$$

which has two sub-terms of the form **application**(*g*, *X*), one with *id*="orig" (the one explicitly represented) and one with *id*="copy", represented by the OMR element. In the original, the variable *X* is bound by the *outer* OMBIND element, and in the copy, the variable *X* is bound by the *inner* OMBIND element. We say that the inner OMBIND has captured the variable *X*.

It is well-known that variable capture does not conserve semantics. For instance, we could use  $\alpha$ -conversion to rename the inner occurrence of *X* into, say, *Y* arriving at the (same) object

$$\text{binding}(\lambda, X, \text{application}(f, \text{binding}(\lambda, Y, \text{application}(g, Y)), \text{application}(g, X)))$$

Using references that capture variables in this way can easily lead to representation errors, and is not recommended.

#### 4.1.4 Embedding *OpenMath* in XML Documents

The above encoding of XML encoded *OpenMath* specifies the grammar to be used in files that encode a single *OpenMath* object, and specifies the character streams that a conforming *OpenMath* application should be able to accept or produce.

When embedding XML encoded *OpenMath* objects into a larger XML document one may wish, or need, to use other XML features. For example use of extra XML attributes to specify XML Namespaces [12] or `xml:lang` attributes to specify the language used in strings [14]. Also, the encoding used in the larger document may not be UTF-8.

In particular, if *OpenMath* is used with applications that use the XML Namespace Recommendation [12] then they should ensure that *OpenMath* elements are in the namespace <http://www.openmath.org/OpenMath>. This is most conveniently achieved by adding the namespace declaration

```
xmlns="http://www.openmath.org/OpenMath"
```

as an attribute to each OMOBJ element in the document.

If such XML features are used then the XML application controlling the document must, if passing the *OpenMath* fragment to an *OpenMath* application, remove any such extra attributes and must ensure that the fragment is encoded according to the grammar specified above.



## 4.2 The Binary Encoding

The binary encoding was essentially designed to be more compact than the XML encodings, so that it can be more efficient if large amounts of data are involved. For the current encoding, we tried to keep the right balance between compactness, speed of encoding and decoding and simplicity (to allow a simple specification and easy implementations).

### 4.2.1 A Grammar for the Binary Encoding

Figure 4.3 gives a grammar for the binary encoding (“start” is the start symbol)..

The following conventions are used in this section:  $[n]$  denotes a byte whose value is the integer  $n$  ( $n$  can range from 0 to 255),  $\{m\}$  denotes four bytes representing the (unsigned) integer  $m$  in network byte order,  $[_]$  denotes an arbitrary byte,  $\{_\}$  denotes an arbitrary sequence of four bytes. *name:n* denotes a sequence of  $n$  bytes named *name*. *name:2n* denotes a sequence of  $2n$  bytes. “start” is the start symbol of the grammar.

*xxxx:n*, where *xxxx* is one of *symbname*, *cdname*, *varname*, *uri*, *id*, *digits*, or *bytes* denotes a sequence of  $n$  bytes that conforms to the constraints on *xxxx* strings. For instance, for *symbname*, *varname*, or *cdname* this is the regular expression described in Section 3.3, for *uri* it is the grammar for URIs in [7].

### 4.2.2 Description of the Grammar

An *OpenMath* object is encoded as a sequence of bytes starting with the begin object tag (value 24 values 24 and 88) and ending with the end object tag (value 25). These are similar to the `<OMOBJ>` and `</OMOBJ>` tags of the XML encoding. Objects with start token [88] have two additional bytes  $m$  and  $n$  that characterize the version ( $m.n$ ) of the encoding directly after the start token. This is similar to `<OMOBJ version="m.n">`

The encoding of each kind of *OpenMath* object begins with a tag that is a single byte, holding a *token identifier* that describes the kind of object and two flags, the *long* flag and the *shared* flag. The identifier is stored in the first 6 bits (1 to 6). The long flag is the eighth bit and the shared flag is the seventh bit. If the long flag is set, this signifies that the names, strings, and data fields in the encoded *OpenMath* object are longer than 255 bytes or characters. The sharing flag indicates that the encoded object may be shared in another (part of an) object somewhere else (see Section 4.2.4.2). Note that if the sharing flag is set (in the right column of the grammar in Figure 4.3, then the encoding includes a representation of an identifier that serves as the target of a reference (internal with token identifier 30 or external with token identifier 31).

The concept of structure sharing in *OpenMath* encodings and in particular the sharing bit in the binary encoding has been introduced in *OpenMath 2* (see section Section 4.2.4.2 for details). The binary encoding in *OpenMath 2* leaves the tokens with sharing flag 0 unchanged to ensure *OpenMath 1* compatibility. To make use of functionality like the version attribute on the *OpenMath*

start	→	[24] object [25]		[24+64] [m] [n] object [25]
object	→	integer		
		float		
		variable		
		symbol		
		cdbase		
		string		
		bytearray		
		foreign		
		construct		
		internal_reference		
		external_reference		
integer	→	[1] [ ]		[1+64] [n] id:n [ ]
		[1+32] [ ]		
		[1+128] [ ]		[1+64+128] {n} id:n [ ]
		[1+32+128] [ ]		
		[2] [n] [ ] digits:n		[2+64] [n] [m] [ ] digits:n id:m
		[2+32] [n] [ ] digits:n		
		[2+128] {n} [ ] digits:n		[2+64+128] {n} {n} [ ] digits:n id:n
		[2+32+128] {n} [ ] digits:n		
float	→	[3] [ ] [ ]		[3+64] [n] id:n { } [ ]
variable	→	[5] [n] varname:n		[5+64] [n] [m] varname:n id:m
		[5+128] {n} varname:n		[5+64+128] {n} {m} varname:n id:m
symbol	→	[8] [n] [m] cdname:n symbname:m		[8+64] [n] [m] [k] cdname:n symbname:m id:k
		[8+128] {n} {m} cdname:n symbname:m		[8+64+128] {n} {m} {k} cdname:n symbname:m id:k
string	→	[6] [n] chars bytes:n		[6+64] [n] chars bytes:n
		[6+32] [n] bytes:n		
		[6+128] {n} chars bytes:n		[6+64+128] {n} {m} chars bytes:n id:m
		[6+32+128] {n} bytes:n		
		[7] [n] chars bytes:2n		[7+64] [n] [m] chars bytes:n id:m
		[7+32] [n] bytes:2n		
		[7+128] {n} chars bytes:2n		[7+64+128] {n} {m} chars bytes:2n id:m
		[7+32+128] {n} bytes:2n		
bytearray	→	[4] [n] bytes:n		[4+64] [n] [m] bytes:n id:m
		[4+32] [n] bytes:n		
		[4+128] {n} bytes:n		[4+64+128] {n} {m} bytes:n id:m
		[4+32+128] {n} bytes:n		
cdbase	→	[9] [n] uri:n object		
		[9+128] {n} uri:n object		
foreign	→	[12] [n] [m] bytes:n bytes:m		[12+64] [n] [m] [k] bytes:n bytes:m id:k
		[12+32] [n] [m] bytes:n bytes:m		
		[12+128] {n} {m} bytes:n bytes:m		[12+64+128] {n} {m} {k} bytes:n bytes:m id:k
		[12+32+128] {n} {m} bytes:n bytes:m		
construct	→	[16] object objects [17]		[16+64] {m} id:m object objects [17]
		[22] symbol objects [23]		[22+64] {m} id:m symbol objects [23]
		[18] attrpairs object [19]		[18+64] {m} id:m attrpairs object [19]
		[26] object bvars object [27]		[26+64] {m} id:m object bvars object [27]
attrpairs	→	[20] pairs [21]		[20+64] {m} id:m pairs [21]
pairs	→	symbol object		
		symbol object pairs		
bvars	→	[28] vars [29]		[28+64] {m} id:m vars [29]
vars	→	attrvar		
		attrvar vars		
attrvar	→	variable		
		[18] attrpairs attrvar [19]		[18+64] {m} id:m attrpairs attrvar [19]
objects	→	object objects		
internal_reference	→	[30] [ ]		
		[30+128] [ ]		
external_reference	→	[31] [n] uri:n		
		[31+128] {n} uri:n		



Hex	Meaning
22	begin streamed big integer tag
FF	255 digits in packet
2B	sign +
...	the 255 digits as characters
22	begin streamed big integer tag
FF	255 digits in packet
2B	sign + (disregarded)
...	the 255 digits as characters
2	begin final big integer tag
42	68 digits in packet
2B	sign + (disregarded)
...	the 68 digits as characters

Figure 4.4: Streaming a large Integer in the Binary Encoding.

length in bytes in the UTF-8 encoding of the Content Dictionary name, the symbol name, and the `id` (if the shared bit was set) as a byte (if the long flag was not set) or a four byte integer (in network byte order). These are followed by the bytes of the UTF-8 encoding of the Content Dictionary name, the symbol name, and the `id`.

**Variables** are encoded using the variable tags (`token identifiers 5`) with the long flag set if the number of bytes in the UTF-8 encoding of the variable name is greater than or equal to 256. Then, there is the number of characters as a byte (if the long flag was not set) or a four byte integer (in network byte order), followed by the characters of the name of the variable. For example, the variable `x` is encoded as `0x05 0x01 0x78`.

**Floating-point number** are encoded using the floating-point number tags (`token identifier 3`) followed by eight bytes that are the IEEE 754 representation [6], most significant bytes first. For example, `0.1` is encoded as `0x03 0x000000000000f03f`.

**Character string** are encoded in two ways depending on whether **the string contains UTF-16 characters or not**. **If the string contains only 8 bit characters**, the string is encoded in UTF-16 or ISO-8859-1 (LATIN-1). In the case of LATIN-1 it is encoded as the one byte character string tags (`token identifier 6`) with the long flag set if the number of bytes (characters) in the string is greater than or equal to 256. Then, there is the number of characters as a byte (if the length flag was not set) or a four byte integer (in network byte order), followed by the characters in the string. **If the string contains two byte characters, it is encoded as the two byte**is encoded in UTF-16, it is encoded as the UTF-16 character string tags (`token identifier 7`) with the long flag set if the number of characters in the string is greater or equal to 256. Then, there is the number of **characters**UTF-16 units, which will be the number of characters unless characters in the higher planes of Unicode are used, as a byte (if the long flag was not set) or a four byte integer (in network byte order), followed by the characters (UTF-16 encoded Unicode).

Sequences of string packets are assumed to have the same encoding for every packet. They are assembled into strings by concatenating the strings in the packets in sequence order.

**Bytearrays** are encoded using the bytearray tags (token identifier 4) with the long flag set if the number of bytes in the number of elements is greater than or equal to 256. Then, there is the number of elements, as a byte (if the long flag was not set) or a four byte integer (in network byte order), followed by the elements of the arrays in their normal order.

Sequences of bytearray packets are assembled into byte arrays by concatenating the bytearrays in the packets in sequence order.

### Foreign Objects

are encoded using the foreign object tags (token identifier 12) with the long flag set if the number of bytes is greater than or equal to 256 and the streaming bit set for dividing it up into packets. Then, there is the number  $n$  of bytes used to encode the encoding attribute, and the number  $m$  of bytes used to encode the foreign object.  $n$  and  $m$  are represented as a byte (if the long flag was not set) or a four byte integer (in network byte order). These numbers are followed by an  $n$ -byte representation of the encoding attribute and an  $m$  byte sequence of bytes encoding the foreign object in their normal order (we call these the payload bytes). The encoding attribute is encoded in UTF-8.

Sequences of foreign object packets are assembled into foreign objects by concatenating the payload bytes in the packets in sequence order.

Note that the foreign object is encoded as a stream of bytes, not a stream of characters. Character based formats (including XML based formats) should be encoded in UTF-8 to produce a stream of bytes to use as the payload of the foreign object.

### cdbase scopes

are encoded using the token identifier 9. The purpose of these scoping devices is to associate a cdbase with an object. The start token [9] (or [137] if the long flag is set) is followed by a single-byte (or 4-byte- if the long flag is set) number  $n$  and then by a sequence of  $n$  bytes that represent the value of the cdbase attribute (a URI) in UTF-8 encoding. This is then followed by the binary encoding of a single object: the object over which this cdbase attribute has scope.

**Applications** are encoded using the application tags (token identifiers 16 and 17). More precisely, the application of  $E_0$  to  $E_1 \dots E_n$  is encoded using the application tags (token identifier 16), the sequence of the encodings of  $E_0$  to  $E_n$  and the end application tags (token identifier 17).

**Bindings** are encoded using the binding tags (token identifiers 26 and 27). More precisely, the binding by  $B$  of variables  $V_1 \dots V_n$  in  $C$  is encoded as the binding tag (token identifier 26), followed by the encoding of  $B$ , followed by the binding variables tags (token identifier 28), followed by the encodings of the variables  $V_1 \dots V_n$ , followed by the end binding variables tags (token identifier 29), followed by the encoding of  $C$ , followed by the end binding tags (token identifier 27).

**Attributions** are encoded using the attribution tags (token identifiers 18 and 19). More precisely, attribution of the object  $E$  with  $(S_1, E_1), \dots (S_n, E_n)$  pairs (where  $S_i$  are the attributes) is encoded as the attributed object tag (token identifier 18), followed by the encoding of the attribute pairs as the attribute pairs tags (token identifier 20), followed by the encoding of each symbol and value, followed by the end attribute pairs tag (token identifier 21), followed by the encoding of  $E$ , followed by the end attributed object tag (token identifier 19).

**Errors** are encoded using the error tags (token identifiers 22 and 23). More precisely,  $S_0$  applied to  $E_1 \dots E_n$  is encoded as the error tag (token identifier 22), the encoding of  $S_0$ , the sequence of the encodings of  $E_0$  to  $E_n$  and the end error tag (token identifier 23).

#### Internal References

are encoded using the internal reference tags [30] and [30+128] (the sharing flag cannot be set on this tag, since chains of references are not allowed in the *OpenMath* binary encoding) with long flag set if the number of *OpenMath* sub-objects in the encoded *OpenMath* is greater than or equal to 256. Then, there is the ordinal number of the referenced *OpenMath* object as a byte (if the long flag was not set) or a four byte integer (in network byte order).

#### External References

are encoded using the external reference tags [31] and [31+128] (the sharing flag cannot be set on this tag, since chains of references are not allowed in the *OpenMath* binary encoding) with the long flag set if the number of bytes in the reference URI is greater than or equal to 256. Then, there is the number of bytes in the URI used for the external reference as a byte (if the long flag was not set) or a four byte integer (in network byte order), followed by the URI.

### 4.2.3 Example of Binary Encoding

As an example of the binary encoding, we can consider the *OpenMath* object

$$\text{application}(\text{times}, \text{application}(\text{plus}, x, y), \text{application}(\text{plus}, x, z))$$

whose XML encoding is

```
<OMOBJ version="2.0" cdbase="http://www.openmath.org/cd">
  <OMA>
    <OMS name="times" cd="arith1"/>
    <OMA>
      <OMS name="plus" cd="arith1"/>
      <OMV name="x"/>
      <OMV name="y"/>
    </OMA>
    <OMA>
      <OMS name="plus" cd="arith1"/>
      <OMV name="x"/>
      <OMV name="z"/>
    </OMA>
  </OMA>
</OMOBJ>
```

It is binary encoded as the sequence of bytes given in Figure 4.5.

Hex	Meaning	Hex	Meaning
58	begin object tag	10	begin application tag
2	version 2.0 (major)	48	symbol tag (with share bit on)
0	version 2.0 (minor)	01	reference to second symbol seen (arith1:plus)
10	begin application tag	45	variable tag (with share bit on)
08	symbol tag	00	reference to first variable seen (x)
06	cd length	05	variable tag
05	name length	01	name length
61	a (cd name begin	7a	z (variable name)
72	r .	11	end application tag
69	i .	11	end application tag
74	t .	19	end object tag
68	h .		
31	l .)		
74	t (symbol name begin		
69	i .		
6d	m .		
65	e .		
73	s .)		
10	begin application tag		
08	symbol tag		
06	cd length		
04	name length		
61	a (cd name begin		
72	r .		
69	i .		
74	t .		
68	h .		
31	l .)		
70	p (symbol name begin		
6c	l .		
75	u .		
73	s .)		
05	variable tag		
01	name length		
78	x (name)		
05	variable tag		
01	name length		
79	y (variable name)		
11	end application tag		

Figure 4.5: A Simple example of the *OpenMath* binary encoding.

#### 4.2.4 Sharing

*OpenMath 2* introduced a new sharing mechanism, described below. First however we describe the original *OpenMath 1* mechanism.

##### 4.2.4.1 Sharing in Objects beginning with the identifier [24]

This form of sharing is deprecated but included for backwards compatibility with *OpenMath 1*. It **binary encoding** supports the sharing of symbols, variables and strings (up to a certain length for strings) within one object. That is, sharing between objects is not supported. A reference to a shared symbol, variable or string is encoded as the corresponding tag with the long flag not set and the shared flag set, followed by a positive integer  $n$  encoded as one byte (0 to 255). This integer references the  $n + 1$ -th such sharable sub-object (symbol, variable or string up to 255 characters) in the current *OpenMath* object (counted in the order they are generated by the encoding). For example, `0x48 0x01` references a symbol that is identical to the second symbol that was found in the current object. Strings with 8 bit characters and strings with 16 bit characters are two different kinds of objects for this sharing. Only strings containing less than 256 characters can be shared (i.e. only strings up to 255 characters).

##### 4.2.4.2 Sharing with References (beginning with [24+64])

In the binary encoding specified in the last section (which we keep for compatibility reasons, but deprecate in favor of the more efficient binary encoding specified in this section) only symbols, variables, and short strings could be shared. In this section, we will present a second binary encoding, which shares most of the identifiers with the one in the last one, but handles sharing differently. This encoding is signaled by the shared object tag [88].

The main difference is the interpretation of the sharing flag (bit 7), which can be set on all objects that allow it. Instead of encoding a reference to a previous occurrence of an object of the same type, it indicates whether an object will be referenced later in the encoding. This corresponds to the information, whether an `id` attribute is set in the XML encoding. On the object identifier (where sharing does not make sense), the shared flag signifies the encoding described here ([88]=[24+64]).

Otherwise integers, floats, variables, symbols, strings, bytearrays, and constructs are treated exactly as in the binary encoding described in the last section.

The binary encoding with references uses the additional reference tags [30] for (short) internal references, [30+128] for long internal references, [31] for (short) external references, [31+128] for long external references. Internal references are used to share sub-objects in the encoded object (see Figure 4.6 for an example) by referencing their position; external references allow to reference *OpenMath* objects in other documents by a URI.

Identifiers [30+64] and [30+64+128] are not used, since they would encode references that are shared themselves. Chains of references are redundant, and decrease both space and time efficiency,



therefore they are not allowed in the *OpenMath* binary encoding.

References consist of the identifier [30] ([30+128] for long references) followed by a positive integer  $n$  coded on one byte (4 bytes for long references). This integer references the  $n + 1$ th shared sub-object (one where the shared flag is set) in the current object (counted in the order they are generated in the encoding). For example 0x7E 0x01 references the second shared sub-object. Figure 4.6 shows the binary encoding of the object in Figure 4.1 above.

It is easy to see that in this binary encoding, the size of the encoding is  $13 + 7(d - 1)$  bytes, where  $d$  is the depth of the tree, while a totally unshared encoding is  $8 * 2^d - 8$  bytes (sharing variables saves up to 256 bytes for trees up to depth 8 and wastes space for greater depths). The shared XML encoding only uses  $32d + 29$  bytes, which is more space efficient starting at depth 9.

Note that in the conversion from the XML to the binary encoding the identifiers on the objects are not preserved. Moreover, even though the XML encoding allows references across objects, as in Figure 4.2, the binary encoding does not (the binary encoding has no notion of a multi-object collection, while in the XML encoding this would naturally correspond to e.g. the embedding of multiple *OpenMath* objects into a single XML document).

Note that objects need not be fully shared (or shared at all) in the binary encoding with sharing.

#### 4.2.5 Implementation Note

A typical implementation of the binary encoding comes in two parts. The first part deals with the unshared encodings, i.e. objects starting with the identifier [24].

This part uses four tables, each of 256 entries, for symbol, variables, 8 bit character strings whose lengths are less than 256 characters and 16 bit character strings whose lengths are less than 256 characters. When an object is read, all the tables are first flushed. Each time a sharable sub-object is read, it is entered in the corresponding table if it is not full. When a reference to the shared  $i$ -th object of a given type is read, it stands for the  $i$ -th entry in the corresponding table. It is an encoding error if the  $i$ -th position in the table has not already been assigned (i.e. forward references are not allowed). Sharing is not mandatory, there may be duplicate entries in the tables (if the application that wrote the object chose not to share optimally).

The part for the shared representations of *OpenMath* objects uses an unbounded array for storing shared sub-objects. Whenever an object has the shared flag set, then it is read and a pointer to the generated data structure is stored at the next position of the array. Whenever a reference of the form [30] [ ] is encountered, the array is queried for the value at [ ] and analogously for [30+128] { }. Note that the application can decide to copy the value or share it among sub-terms as long as it respects the identity conditions given by the tree-nature of the *OpenMath* objects. The implementation must take care to ensure that no variables are captured during this process (see section Section 4.1.3.2), and possibly have methods for recovering from cyclic dependency relations (this can be done by standard loop-checking methods).

Hex	Meaning
58	begin object tag
2	version 2.0 (major)
0	version 2.0 (minor)
10	begin application tag
05	variable tag
01	variable length
66	f (variable name)
50	begin application tag (shared)
05	variable tag
01	variable length
66	f (variable name)
50	begin application tag (shared)
05	variable tag
01	variable length
66	f (variable name)
19	end object tag
05	variable tag
01	variable length
61	a (variable name)
05	variable tag
01	variable length
61	a (variable name)
11	end application tag
1E	short reference
00	to the first shared object
11	end application tag
1E	short reference
00	to the second shared object
11	end application tag

Figure 4.6: A binary encoding of the *OpenMath* object from Figure 4.1.

Writing an object is simple. The tables are first flushed. Each time a sharable sub-object is encountered (in the natural order of output given by the encoding), it is either entered in the corresponding table (if it is not full) and output in the normal way or replaced by the right reference if it is already present in the table.

#### 4.2.6 Relation to the *OpenMath* 1 binary encoding

The *OpenMath* 2 binary encoding significantly extends the *OpenMath* 1 binary encoding to accommodate the new features and in particular sharing of sub-objects. The tags and structure of the *OpenMath* 1 binary encoding are still present in the current *OpenMath* binary encoding, so that binary encoded *OpenMath* 1 objects are still valid in the *OpenMath* 2 binary encoding and correspond to the same abstract *OpenMath* objects. In some cases, the binary encoding tags without the shared flag can still be used as more compact representations of the objects (which are not shared, and do not have an identifier).

As the binary encoding is geared towards compactness, *OpenMath* objects should be constructed so as to maximise internal sharing (if computationally feasible). Note that since sharing is done only at the encoding level, this does not alter the meaning of an *OpenMath* object, only allows it to be represented more compactly.

### 4.3 Summary

The key points of this chapter are:

- The XML encoding for *OpenMath* objects uses most common character sets.
- The XML encoding is readable, writable and can be embedded in most documents and transport protocols.
- The binary encoding for *OpenMath* objects should be used when efficiency is a key issue. It is compact yet simple enough to allow fast encoding and decoding of objects.

## Chapter 5

# Content Dictionaries

In this chapter we give a brief overview of Content Dictionaries before explicitly stating their functionality and encoding.

### 5.1 Introduction

Content Dictionaries (CDs) are central to the *OpenMath* philosophy of transmitting mathematical information. It is the *OpenMath* Content Dictionaries which actually hold the meanings of the objects being transmitted.

For example if application  $A$  is talking to application  $B$ , and sends, say, an equation involving multiplication of matrices, then  $A$  and  $B$  must agree on what a matrix is, and on what matrix multiplication is, and even on what constitutes an equation. All this information is held within some Content Dictionaries which both applications agree upon.

A *Content Dictionary* holds the meanings of (various) mathematical “words”. These words are *OpenMath* basic objects referred to as *symbols* in Section 3.1.

With a set of symbol definitions (perhaps from several Content Dictionaries),  $A$  and  $B$  can now talk in a common “language”.

It is important to stress that it is not Content Dictionaries themselves which are being transmitted, but some “mathematics” whose definitions are held within the Content Dictionaries. This means that the applications must have already agreed on a set of Content Dictionaries which they “understand” (i.e., can cope with to some degree).

In many cases, the Content Dictionaries that an application understands will be constant, and be intrinsic to the application’s mathematical use. However the above approach can also be used for applications which can handle every Content Dictionary (such as an *OpenMath* parser, or perhaps a typesetting system), or alternatively for applications which understand a changeable number of Content Dictionaries (perhaps after being sent Content Dictionaries in some way).

The primary use of Content Dictionaries is thought to be for designers of Phrasebooks, the programs which translate between the *OpenMath* mathematical object and the corresponding (often internal) structure of the particular application in question. For such a use the Content Dictionaries have themselves been designed to be as readable and precise as possible.

Another possible use for *OpenMath* Content Dictionaries could rely on their automatic comprehension by a machine (e.g., when given definitions of objects defined in terms of previously understood ones), in which case Content Dictionaries may have to be passed as data. Towards this end, a Content Dictionary has been written which contains a set of symbols sufficient to represent any other Content Dictionary. This means that Content Dictionaries may be passed in the same way as other (*OpenMath*) mathematical data.

Finally, the syntax of the reference encoding for Content Dictionaries has been designed to be relatively easy to learn and to write, and also free from the need for any specialist software. This is because it is acknowledged that there is an enormous amount of mathematical information to represent, and so most of the Content Dictionaries will be written by “ordinary” mathematicians, encoding their particular fields of expertise. A further reason is that the mathematics conveyed by a specific Content Dictionary should be understandable independently of any application.

The key points from this section are:

- Content Dictionaries should be readable and precise to help Phrasebook designers,
- Content Dictionaries should be readily write-able to encourage widespread use,
- It ought to be possible for a machine to understand a Content Dictionary to some degree.

## 5.2 Abstract Content Dictionaries

In this section we define the overall abstract structure of Content Dictionaries.

Other than Content Dictionary comments (which have no real semantics), Content Dictionaries have been designed to hold two types of information: that which is pertinent to the whole Content Dictionary, and that which is restricted to a particular symbol definition. Specific information pertaining to the symbols like the signature and the defining mathematical properties is conveyed in additional files associated to Content Dictionaries.

Information that is pertinent to the whole Content Dictionary includes:

- The name of the Content Dictionary.
- A description of the Content Dictionary.
- A date when the Content Dictionary is next planned to be reviewed.
- A date on which the Content Dictionary was last edited.
- The current version and revision numbers of the Content Dictionary.
- The status of the Content Dictionary.

- An optional URL for this Content Dictionary.
- An optional list of Content Dictionaries on which this Content Dictionary depends. That is, those named in Examples and FMPs in this Content Dictionary.
- An optional comment, possibly containing the author's name.

Information that is restricted to a particular symbol includes:

- The name of the symbol.
- A description of this symbol.
- An optional comment.
- Optional properties that this symbol should obey.
- Optional examples of the use of this symbol.

A Content Dictionary consists of the following mandatory pieces of information:

1. A *name* corresponding to the rules described in Section 3.3.
2. A *description* of the Content Dictionary.
3. A *revision date*, the date of the last change to the Content Dictionary. Dates should be stored in the ISO-compliant format YYYY-MM-DD, e.g. 1966-02-03.
4. A *review date*, a date until which the content dictionary is guaranteed to remain unchanged.
5. A *version number* which consists of a major and minor part (see Section 5.2.2).
6. A *status*, as described in Section 5.2.1.
7. A *CD base* which, when combined with the CD name, forms a unique identifier for the Content Dictionary. It may or may not refer to an actual location from which it can be retrieved.
8. A series of one or more *symbol definitions* as described below.

A symbol definition consists of the following pieces of information:

1. A mandatory *name* corresponding to the rules described in Section 3.3.
2. A mandatory *description* of the symbol, which can be as formal or informal as the author likes.
3. An optional *role* as described in Section 3.1.4.
4. Zero or more *commented mathematical properties* which are mathematical properties of the symbol expressed in a mechanism other than *OpenMath*.

5. Zero or more *formal mathematical properties* which are mathematical properties of the symbol expressed in *OpenMath*. Note that it is common for commented and formal mathematical properties to be introduced in pairs, with the former describing the latter.

A Formal Mathematical Property may be given an optional *kind* attribute. An author of a Content Dictionary may use this to indicate whether, for example, the property provides an algorithm for evaluation of the concept it is associated with. At present no fixed scheme is mandated for how this information should be encoded or used by an application.

6. Zero or more *examples* which are intended to demonstrate the use of the symbol within an *OpenMath* object.

As mentioned earlier, certain kinds of data pertaining to symbols may be conveyed in files other than a Content Dictionary. In particular, information on signatures according to a type system may be described in *Signature Files* whose format is given in Section 5.4.1. Other information such as presentation forms, extra defining mathematical properties may be associated with Content Dictionaries using files whose format is not specified by this standard. It is expected that a common method of defining the presentation for *OpenMath* symbols is via XSL [?] stylesheets giving transformations to MathML.

Some pieces of information which might logically be thought to be part of a Content Dictionary, such as the types or signatures of symbols, are better represented externally. This allows for new variants to be associated with Content Dictionaries without the Dictionaries themselves being changed. A model for signatures is given in Section 5.4.1.

Content Dictionaries may be grouped into *CD Groups*. These groups allow applications to easily refer to collections of Content Dictionaries. One particular CDGroup of interest is the “MathML CDGroup”. This group consists of the collection of core Content Dictionaries that is designed to have the same semantic scope as the content elements of MathML 2 [15]. *OpenMath* objects built from symbols that come from Content Dictionaries in this CDGroup may be expected to be easily transformed between *OpenMath* and MathML encodings. The detailed structure of a CDGroup is described in Section 5.4.2 below.

### 5.2.1 Content Dictionary Status

The status of a Content Dictionary can be either

- **official**: approved by the *OpenMath* Society according to the procedure outlined in Section 5.5;
- **experimental**: under development and thus liable to change;
- **private**: used by a private group of *OpenMath* users;
- **obsolete**: an obsolete Content Dictionary kept only for archival purposes.

## 5.2.2 Content Dictionary Version Numbers

A version number must consist of two parts, a major version and a revision, both of which should be non-negative integers. In CDs that do not have status *experimental*, the version number should be a positive integer.

Unless a CD has status *experimental*, no changes should ever be introduced that invalidate objects built with previous versions. Any change that influences phrasebook compliance, like adding a new symbol to a Content Dictionary, is considered a major change and should be reflected by an increase in the major version number. Other changes, like adding an example or correcting a description, are considered minor changes. For minor changes the version number is not changed, but an increase should be made to the revision number. Note that a change such as removing a symbol should not be made unless the CD has status *experimental*. Should this be required then a new CD with a different name should be produced so as not to invalidate existing objects.

When the major version number is increased, the revision number is normally reset to zero.

As detailed in Chapter 6, *OpenMath* compliant applications state which versions of which CDs they support.

## 5.3 The XML Reference Encoding for Content Dictionaries

The reference encoding of Content Dictionaries are as XML documents. A valid Content Dictionary document should

- be valid according to the DTD given in Figure 5.1,
- adhere to the extra conditions on the content of the elements given in Section 5.3.2.

conform to the Relax NG Schema for Content Dictionaries given in Section 5.3.1.

An example of a complete Content Dictionary is given in Appendix Appendix A.1, which is the Meta Content Dictionary for describing Content Dictionaries themselves. A more typical Content Dictionary is given in Appendix A.2, the *arith1* Content Dictionary for basic arithmetic functions.

### 5.3.1 The Relax NG Schema for Content Dictionaries

```
# *****  
#  
# Relax NG Schema for OpenMath CD  
#  
# *****
```

```
default namespace = "http://www.openmath.org/OpenMathCD"
```



```
include "openmath2.rnc" {start = CD}

CDComment = element CDComment { text }
CDName = element CDName { xsd:NCName }
CDUses = element CDUses { CDName* }
CDURL = element CDURL { xsd:anyURI }
CDBase = element CDBase { xsd:anyURI }
text-or-om = (text | OMOBJ)*
CDReviewDate = element CDReviewDate { xsd:date }
CDDate = element CDDate { xsd:date }
CDVersion = element CDVersion { xsd:nonNegativeInteger }
CDRevision = element CDRevision { xsd:nonNegativeInteger }
CDStatus = element CDStatus {
  "official" |
  "experimental" |
  "private" |
  "obsolete"}
Description = element Description { text }
Name = element Name { xsd:NCName }
Role = element Role {
  "binder" |
  "attribution" |
  "semantic-attribution" |
  "error" |
  "application" |
  "constant" }
CMP = element CMP { text }
FMP = element FMP {
  attribute kind {xsd:string}?,
  OMOBJ
}
# allow embedded OM
Example = element Example { text-or-om }
CDDefinition =
  element CDDefinition {
    CDComment*,
    (Name & Role? & Description),
    (CDComment | Example | FMP | CMP)*
  }
CD =
  element CD {
    (CDComment* & Description? &
    CDName & CDURL? & CDBase? &
```

```
    CDReviewDate? & CDDate & CDStatus &
    CDUses? &
    CDVersion & CDRevision),
  ( CDDefinition, CDComment* )+
}
```

## The DTD Specification of Content Dictionaries

The XML DTD for Content Dictionaries is given in Figure 5.1. The allowed elements are further described in the following section.

### 5.3.2 Further Requirements of an OpenMath Content Dictionary Description of the CD Schema

The notion of being a valid Content Dictionary is stronger than merely being successfully parsed by the DTD. This is because the content of the elements, referred to in Figure 5.1 as PCDATA and CDATA, must actually make sense to, say, a Phrasebook designer. In this section we define exactly the format of the elements used in Content Dictionaries.

We now describe the elements used in the above schema in terms of the abstract description of CDs in Section 5.2. Unless stated otherwise information is encoded as the content of the relevant element.

**CDName** The text occurring in the CDName element corresponds to the name of the Content Dictionary.

**Description** The text occurring in the Description element is used to give a description of the enclosing element, which could be a symbol or the entire Content Dictionary. The content of this element can be any XML text.

**CDReviewDate** The text occurring in the CDReviewDate element corresponds to the earliest possible review date of the Content Dictionary. The date formats should be ISO-compliant in the form YYYY-MM-DD, e.g. 1953-09-26.

**CDDate** The text occurring in the CDDate element corresponds to the revision date of this version of the Content Dictionary. The date formats should be ISO-compliant in the form YYYY-MM-DD, e.g. 1953-09-26.

**CDVersion** The major version number of the CD.

The text occurring in the CDVersion element corresponds to the version number of the current version of a Content Dictionary. It should be a non negative integer.

```

<!-- omcd.dtd -->
<!-- ***** -->
<!--
-->
<!-- DTD for OpenMath CD
-->
<!-- (c) EP24969 the ESPRIT OpenMath Consortium
-->
<!-- date = 28.aug.1998
-->
<!-- author = s.buswell sb@stilo.demon.co.uk
-->
<!--
-->
<!-- edited by n.howgrave-graham 30.aug.98
-->
<!-- edited by sb 4.sep.98
-->
<!-- edited by nh-g 4.sep.98
-->
<!-- edited by sb 1.nov.98
-->
<!-- edited by sb 1.nov.98
-->
<!-- edited by dpc 1999-04-13
-->
<!--
-->
<!--
-->
<!-- ***** -->
<ELEMENT CDComment      (#PCDATA) >
<ELEMENT CDName          (#PCDATA) >
<ELEMENT CDURL           (#PCDATA) >
<ELEMENT CDUses          (CDName)* >
<ENTITY % inhel          "(#PCDATA)" >
<ENTITY % inhel2         "(#PCDATA | OMOBJ)*" >
<ELEMENT CDReviewDate    %inhel; >
<ELEMENT CDStatus        %inhel; >
<ELEMENT Description     %inhel; >
<ELEMENT Name            %inhel; >
<ELEMENT Signature       %inhel; >
<ELEMENT Presentation    %inhel; >
<ELEMENT CMP             %inhel; >
<!-- include dtd for OM objects -->
<ENTITY % omobjectdtd SYSTEM "omobj.dtd" >
%omobjectdtd;
<ELEMENT FMP             %inhel2; >          <!-- allow embedded OM -->
<ELEMENT Example         %inhel2; >
<ELEMENT CDDefinition    (CDComment | Name | Description | PartOf |
                          FunctorClass | Signature | Example | FMP |
                          CMP | Presentation)* >
<ELEMENT CD              (CDComment | CDName | Description | CDReviewDate |
                          CDStatus | CDURL | CDUses | CDDefinition |
                          Example)* >
<!-- end of DTD for OM CD -->

```

Figure 5.1: DTD Specification of Content Dictionaries

In CDs that do not have status *experimental*, CD version numbering should adhere to the following. The version number should be a positive integer.

No changes can be introduced that invalidate objects built with previous versions. Any change that influences phrasebook compliance, like adding a new symbol to a Content Dictionary, is considered a major change. and should be reflected by an increase in this version number. Other changes, like adding an example or correcting a description, are considered minor changes. For minor changes the version number is not changed, but an increase should be made to the revision number, as described below. A change such as removing a symbol should not be made, instead a new CD, with a different name should be produced, so as not to invalidate existing objects.

As detailed in chapter Chapter 6, *OpenMath* compliant applications state which versions of which CDs they support. *Experimental* CDs may expect to have changes such as adding or removing symbols as they are developed, without requiring the name of the CD to be changed.

**CDRevision** The text occurring in the `CDRevision` element corresponds to the revision, or ‘minor version number’ of the current version of a Content Dictionary. It should be a non negative integer.

Minor changes to a CD that do not warrant the release of a CD with an increased version number should be marked by increasing the revision number specified in this field. When the Cd Version number is increased, the Revision number is normally reset to zero.

The minor version number of the CD.

**CDStatus** The text occurring in the `CDStatus` element corresponds to the status of the Content Dictionary. , and can be either *official* (approved by the *OpenMath* Society according to the procedure outlined in Section 5.5), *experimental* (currently being tested), *private* (used by a private group of *OpenMath* users) or *obsolete* (an obsolete Content Dictionary kept only for archival purposes).

**CDBase** The CD base of the CD.

**CDURL** The text occurring in the `CDURL` element should be a valid URL where the source file for the Content Dictionary encoding can be found (if it exists). The filename should conform to ISO 9660 [9].

**CDUses** The content of this element should be a series of `CDName` elements, each naming a Content Dictionary used in the `Example` and `FMPs` of the current Content Dictionary. This element is optional and deprecated since the information can easily be extracted automatically.

**CDComment** The content of this element should be text that does not convey any crucial information concerning the current Content Dictionary. It can be used in the Content Dictionary header to report the author of the Content Dictionary and to log change information. In the body of the Content Dictionary, it can be used to attach extra remarks to certain symbols.

**CDDefinition** The element which contains the definition of an individual symbol.

**Name** The text occurring in the `Name` element corresponds to the name of a symbol. , and is specified as in Chapter 4.

**Role** The role of a symbol: it must be one of *binder*, *attribution*, *semantic-attribution*, *error*, *application*, or *constant*.

**Example** The text occurring in the `Example` element is used to give examples of the enclosing symbol, and can be any XML text. In addition to text the element may contain examples as XML encoded *OpenMath*, inside `OMOBJ` elements. Note that `Examples` must be with respect to some symbol and cannot be “loose” in the Content Dictionary.

**CMP** The text occurring in the `CMP` element corresponds to a property of the symbol. An application which says it understands a Content Dictionary symbol need not understand a commented property of the symbol. A Commented Mathematical Property.

**FMP** The content of the `FMP` element also corresponds to a property<sup>1</sup> of the symbol, however the content of this element must be a valid *OpenMath* object in the XML encoding. An application which says it understands a Content Dictionary symbol need not understand a formal property of the symbol. A Formal Mathematical Property. It may take an optional `kind` attribute.

## 5.4 Additional Information

Content Dictionaries contain just one part of the information that can be associated to a symbol in order to *stepwise* define its meaning and its functionality. *OpenMath* Signature *filesdictionaries*, *CDGroups*, and possibly *filescollections* of extra mathematical properties, are used to convey the different aspects that as a whole make up a mathematical definition.

### 5.4.1 Signature *FilesDictionaries*

*OpenMath* may be used with any type system. One just needs to produce a Content Dictionary which gives the constructors of the type system, and then one may build *OpenMath* objects representing types in the given type system. These are typically associated with *OpenMath* objects via the *OpenMath* **attribution** constructor.

A Small Type System, called STS, has been designed to give semi-formal signatures to *OpenMath* symbols and is documented in [4]. The signature file given in Appendix A.3 is based on this formalism. Using the same mechanism, [3] shows how pure type systems can also be employed to assign types to *OpenMath* symbols.

### The DTD Specification of Signature Files

Signature Files are XML documents, hence a valid Signature File should

- be valid according to the DTD given in Figure 5.2,

---

<sup>1</sup>It corresponds to a theorem of a theory in some formal system.

- adhere to the extra conditions on the content of the elements given in Section 5.4.1.1.

Signature files have a header which specifies the Content Dictionary and determines the type system being used and the Content Dictionary which contains the symbols for which the signatures are being given. Each signature takes the form of an XML encoded *OpenMath* object.

#### 5.4.1.1 Further Requirements Abstract Specification of a Signature Dictionary

Signature dictionaries have a header which specifies the type system being used and the Content Dictionary containing the symbols for which signatures are being given. Each signature takes the form of an *OpenMath* object in an appropriate encoding.

The notion of being a valid Signature File is stronger than merely being successfully parsed by the DTD in Figure 5.2. In this section we define exactly the format of the elements used in Signature Files. Several of the requirements are the same as those on elements of Contents Dictionaries.

**CDSignatures** The outermost element of the Signature is characterized by two required attributes that identify the type system and the Content Dictionary whose signatures are defined. The value of the XML attribute `type` is the name of the Content Dictionary or of the CDGroup (see Section 5.4.2) that represents the type system. The value of the XML attribute `cd` is the name of the Content Dictionary whose symbols are assigned signatures in this Signature File. Both values are of the form specified in Chapter 4.

**CDSComment** See `CDComment` in Section 5.3.2.

**CDSreviewDate** The text occurring in the `CDSreviewDate` element corresponds to the earliest possible revision date of the Signature File. The date formats should be ISO-compliant in the form YYYY-MM-DD, e.g. 2000-02-29.

**CDSStatus** The text occurring in the `CDSStatus` element corresponds to the status of the Signature File, and can be either *official* (approved by the *OpenMath* Society according to the procedure outlined in Section 5.5), *experimental* (currently being tested), *private* (used by a private group of *OpenMath* users) or *obsolete* (an obsolete Signature File kept only for archival purposes).

**Signature** The content of the `Signature` element has to be a valid *OpenMath* object in XML encoding as specified in Chapter 4. Additionally, the object must represent a valid type in the type system identified by the XML attribute `type` of the `CDSignatures` element. See Section 5.4.1.3 for examples.

1. A *type definition*: the name of the Content Dictionary or of the CDGroup (cf. Section 5.4.2) that represents the type system being used.
2. A *CD name*: the name of the CD for which signatures are being defined.
3. A *review date* as defined in Section 5.2.
4. A *status*: as defined in Section 5.2.

```

<!-- omcdsig.dtd -->
<!-- ***** -->
<!-- -->
<!-- DTD for OpenMath CD Signatures -->
<!-- (c) EP24969 the ESPRIT OpenMath Consortium -->
<!-- David Carlisle 1999-04-13 -->
<!-- David Carlisle 1999-05-21 -->
<!-- David Carlisle 1999-06-22 -->
<!-- -->
<!-- -->
<!-- ***** -->

<!-- include dtd for OM objects -->
<!ENTITY % omobjectdtd SYSTEM "omobj.dtd" >
%omobjectdtd;

<!ELEMENT CDSComent      (#PCDATA) >
<!ELEMENT CDSReviewDate  (#PCDATA) >
<!ELEMENT CDSStatus      (#PCDATA) >

<!ELEMENT CDSignatures   (CDComment | CDSComent | CDSReviewDate |
                          CDSStatus | Signature )* >

<!ATTLIST CDSignatures   cd CDATA #REQUIRED
                          type CDATA #REQUIRED >

<!ELEMENT Signature      (OMOBJ?) >

<!ATTLIST Signature      name CDATA #REQUIRED >

<!-- end of DTD for OM CD Signatures -->

```

**Figure 5.2: DTD Specification of Signature Files**

5. A series of *signatures* which are *OpenMath* objects in some encoding. The objects must represent types as defined by the type definition.

#### 5.4.1.2 A Relax NG Schema for a Signature File

The following is a reference encoding of a signature dictionary, designed to be used with Content Dictionaries in the XML encoding.

```
# *****
#
# Relax NG Schema for OpenMath CD Signatures
#
# *****

default namespace = "http://www.openmath.org/OpenMathCDS"

include "openmath2.rnc" { start = CDSignatures }

CDSComent = element CDSComent { text }
CDSReviewDate = element CDSReviewDate { text }
CDSStatus = element CDSStatus {
  "official" |
  "experimental" |
  "private" |
  "obsolete"}
CDSignatures =
  element CDSignatures {
    attlist.CDSignatures,
    (CDSComent)*,
    (CDSReviewDate? & CDSStatus),
    (CDSComent | Signature)*
  }
attlist.CDSignatures =
  attribute cd { xsd:NCName },
  attribute type { xsd:NCName }
Signature = element Signature { attlist.Signature, OMOBJ? }
attlist.Signature = attribute name { text }
```



### 5.4.1.3 Examples

An example of a signature file for the type system STS and the `arith1` Content Dictionary is given in Appendix A.3. Each signature entry is similar to the following one for the *OpenMath* symbol `<OMS cd="arith1" name="plus"/>`:

```
<Signature name="plus">
<OMOBJ version="2.0">
  <OMA>
    <OMS name="mapsto" cd="sts"/>
    <OMA>
      <OMS name="nassoc" cd="sts"/>
      <OMV name="AbelianSemiGroup"/>
    </OMA>
    <OMV name="AbelianSemiGroup"/>
  </OMA>
</OMOBJ>
</Signature>
```

## 5.4.2 CDGroups

The CD Group mechanism is a convenience mechanism for identifying collections of CDs. A CD Group file is an XML document used in the (static or dynamic) negotiation phase where communicating applications declare and agree on the Content Dictionaries which they process. It is a complement, or an alternative, to the individual declaration of Content Dictionaries understood by an application. Note that CD Groups do *not* affect the *OpenMath* objects themselves. Symbols in an object always refer to content dictionaries, not groups.

For an application to declare that it “understands CDGroup G” is exactly equivalent to, and interchangeable with, the declaration that it “understands Content Dictionaries  $x_1, x_2, \dots, x_n$ ”, where  $x_1, \dots, x_n$  are the members of CDGroup G.

### 5.4.2.1 The Specification of CDGroups

CDGroups are XML documents, hence a valid CDGroup should

- be valid according to the **DTD** schema given in Figure 5.3,
- adhere to the extra conditions on the content of the elements given in Section 5.4.2.2.

Apart from some header information such as `CDGroupName` and `CDGroup version`, a CDGroup is simply an unordered list of CDs, identified by name and optionally version number and URL.

```
# Schema for OpenMath CD groups

# info on the CD group itself

default namespace = "http://www.openmath.org/OpenMathCDG"

CDGroupName = element CDGroupName { xsd:NCName }
CDGroupVersion = element CDGroupVersion { xsd:nonNegativeInteger }
CDGroupRevision = element CDGroupRevision { xsd:nonNegativeInteger }
CDGroupURL = element CDGroupURL { text }
CDGroupDescription = element CDGroupDescription { text }
# info on the CDs in the group
CDComment = element CDComment { text }
CDGroupMember =
  element CDGroupMember {
    CDComment?, CDName, CDVersion?, CDURL?
  }
CDName = element CDName { xsd:NCName }
CDVersion = element CDVersion { xsd:nonNegativeInteger }
CDURL = element CDURL { text }
# structure of the group
CDGroup =
  element CDGroup {
    CDGroupName,
    CDGroupVersion,
    CDGroupRevision?,
    CDGroupURL,
    CDGroupDescription,
    (CDGroupMember | CDComment)*
  }
start = CDGroup
```

Figure 5.3: **DTD**Relax NG Specification of CDGroups

### 5.4.2.2 Further Requirements of a CDGroup

The notion of being a valid CDGroup implies that the following requirements on the content of the elements described by the **DTDschema** given in Section 5.4.1.2 are also met.

**CDGroup** The XML element CDGroup is the outermost element in a CDGroup document.

**CDGroupName** The text occurring in the CDGroupName element corresponds to the name of the CDGroup. For the syntactical requirements, see CDName in Section 5.3.2.

**CDGroupVersion**

**CDGroupRevision**

The text occurring in these elements contains the major and minor version numbers of the CDGroup.

**CDGroupURL** The text occurring in the CDGroupURL element identifies the location of the CD-Group file, not necessarily of the member Content Dictionaries. For the syntactical requirements, see CDURL in Section 5.3.2.

**CDGroupDescription** The text occurring in the CDGroupDescription element describes the mathematical area of the CDGroup.

**CDGroupMember** The XML element CDGroupMember encloses the data identifying each member of the CDGroup.

**CDName** The text occurring in the CDName element corresponds to the name of a Content Dictionary in the CDGroup. For the syntactical requirements, see CDName in Section 5.3.2.

**CDVersion** The text occurring in the CDVersion element identifies which version of the Content Dictionary is to be taken as member of the CDGroup. This element is optional. In case it is missing, the latest version is the one included in the CDGroup. For the syntactical requirements, see CDVersion in Section 5.3.2.

**CDURL** The text occurring in the CDURL element identifies the location of the Content Dictionary to be taken as member of the CDGroup. This element is optional. In case it is missing, the location of the CDGroup identified by the element CDGroupURL is assumed. For the syntactical requirements, see CDURL in Section 5.3.2.

**CDComment** See CDComment in Section 5.3.2.

## 5.5 Content Dictionaries Reviewing Process

The *OpenMath* Society is responsible for implementing a review and referee process to assess the accuracy of the mathematical content of Content Dictionaries. The status (see CDStatus) and/or the version number (see CDVersion) of a Content Dictionary may change as a result of this review process.

## Chapter 6

# *OpenMath* Compliance

Applications that meet the requirements specified in this chapter may label themselves as *OpenMath* compliant. *OpenMath* compliance is defined so as to maximize the potential for interoperability amongst *OpenMath* applications.

### 6.1 Encodings

This standard defines two reference encodings for *OpenMath*, the binary encoding and XML encoding, defined in Chapter 4.

As a minimum, an *OpenMath* compliant application, which accepts or generates *OpenMath* objects, *must* be capable of doing so using the XML encoding. The ability to use other encodings is optional.

#### 6.1.1 The XML Encoding

##### 6.1.1.1 Generating Valid XML

All *OpenMath* objects generated by a compliant *OpenMath* application must validate against the Relax NG Schema given in Appendix B.

##### 6.1.1.2 Decimal versus Hexadecimal Float Representation

In the XML encoding, floating-point numbers may be defined using either decimal or hexadecimal notation. For numerical values, plus the two infinities, the two representations may be used interchangeably since there is a one-to-one correspondence between them. The exceptional case is that of *not a number* (NaN) which is defined in the IEEE standard [6] to be any number whose exponent has the maximum possible value (in this case the exponent is 11 bits so the maximum value is 2047) and whose mantissa is non-zero. The standard explicitly notes the use of the 52 bits in the mantissa

(and also the sign bit) to store information about how the NaN was generated in a system-specific way. Thus in some cases the exact representation of the NaN is significant.

The semantics of the *OpenMath* object `<OMF dec="NaN"/>` is that it represents *any* NaN, and a phrasebook may substitute any specific NaN value when processing it. The semantics of a NaN in hexadecimal notation however, such as `<OMF hex="FFF8000000000001"/>`, is that this is a specific NaN, as distinct from all others. If a phrasebook author substitutes another value for the NaN or maps all NaNs to a single object then he or she must recognise that this process is not an identity transformation.

## 6.2 *OpenMath* Foreign Objects

An *OpenMath* Foreign Object may be attributed with a string indicating the format of its contents. Although this information is optional, an *OpenMath*-compliant application which generates *OpenMath* Foreign Objects should always include it where possible (see the discussion of MathML conversion below for an example of a situation where it is not always possible). It is recommended that, where the contents of the Foreign Object are in an XML dialect, the namespace [12] of the XML dialect is used as the value of the encoding. For example (using the XML encoding):

```
<OMATTR>
  <OMATP>
    <OMS cd="annotations1" name="description"/>
    <OMFOREIGN encoding="http://www.w3.org/1999/xhtml">
      <html xmlns="http://www.w3.org/1999/xhtml">
        <head><title>E</title></head>
        <body>
          <p>
            The base of the natural logarithms, approximately 2.71828.
          </p>
        </body>
      </html>
    </OMFOREIGN>
  </OMATP>
  <OMS cd="nums1" name="e"/>
</OMATTR>
```

Where the contents of the Foreign Object is a format other than XML, it is recommended that its MIME type [2] is used as the value of the encoding. For example (again using the XML encoding):

```
<OMATTR>
  <OMATP>
    <OMS cd="annotations1" name="description"/>
    <OMFOREIGN encoding="text/latex">
```

```
\documentclass{article}
\begin{document}
\title{E}
\maketitle
The base of the natural logarithms, approximately 2.71828.
\end{document}
</OMFOREIGN>
</OMATP>
<OMS cd="numsl" name="e"/>
</OMATTR>
```

An exception to the above guidelines occurs when a MathML object is converted to *OpenMath*. MathML also has an `encoding` attribute which can appear in various places and whose format is a string. Only two values are predefined, `MathML-Content` and `MathML-Presentation`, and these may appear in the resulting *OpenMath* object despite the fact that they are not namespaces as recommended above. For example the following MathML expression:

```
<semantics xmlns="xmlns="http://www.w3.org/1998/Math/MathML">
  <apply>
    <sin/>
    <ci>x</ci>
  </apply>
  <annotation encoding="MathML-Presentation">
    <math>
      <mi>sin</mi><mfenced><mi>x</mi></mfenced>
    </math>
  </annotation>
</semantics>
```

is equivalent to the *OpenMath* expression:

```
<OMATTR>
  <OMATP>
    <OMS cd="altenc" name="MathML_encoding"/>
    <OMFOREIGN encoding="MathML-Presentation">
      <math xmlns="http://www.w3.org/1998/Math/MathML">
        <mi>sin</mi><mfenced><mi>x</mi></mfenced>
      </math>
    </OMFOREIGN>
  </OMATP>
<OMA>
  <OMS cd="transcl" name="sin"/>
  <OMV name="x"/>
```

```
</OMA>  
</OMATTR>
```

Since in MathML the `encoding` attribute is in effect optional (its default value is the empty string), a convertor program may not in fact be able to provide a value for the *OpenMath* `encoding` attribute. This is unfortunate but unavoidable.

## 6.3 Content Dictionaries

An *OpenMath* compliant application *must* be able to support the error Content Dictionary defined in Appendix A.5.

A compliant application must declare the names and version numbers of the Content Dictionaries that it supports. Equivalently it may declare the Content Dictionary Group (or groups) and major version number (not revision number), rather than listing individual Content Dictionaries. Applications that support all Content Dictionaries (e.g. renderers) should refer to the implicit CD Group `all`.

If a compliant application supports a Content Dictionary then it must explicitly declare any symbols in the Content Dictionaries that are not supported. Phrasebooks are encouraged to support every symbol in the Content Dictionaries.

Symbols which are not listed as unsupported are *supported* by the application. The meaning of *supported* will depend on the application domain. For example an *OpenMath* renderer should provide a default display for any *OpenMath* object that only references supported symbols, whereas a Computer Algebra System will be expected to map such an object to a suitable internal representation, in this system, of this mathematical object. It is expected that the application's *phrasebooks* for supported Content Dictionaries will be constructed such that properties of the symbol expressed in the Content Dictionary are respected as far as possible for the given application domain. However *OpenMath* compliance does *not* imply any guarantee by the *OpenMath* Society on the accuracy of these representations.

Content Dictionaries available from the official *OpenMath* repository at [www.openmath.org](http://www.openmath.org) need only be referenced by name, other Content Dictionaries *should* be referenced **by the URL declared in the `CDURL` field of the Dictionary. This URL may be used to retrieve the Content Dictionary.** using the `CDBase` and the `CDName`.

When receiving an *OpenMath* symbol, e.g. *s*, that is not **supported from defined in** a supported Content Dictionary, a compliant application will act as if it had received the *OpenMath* object

$$\mathbf{error}(\mathit{Unhandled\_Symbol}, s)$$

where `Unhandled_Symbol` is the symbol from the error Content Dictionary.

Similarly if it receives a symbol, e.g. *s*, from an unsupported Content Dictionary, it will act as if it

had received the *OpenMath* object

**error**(*Unsupported\_CD,s*)

Finally if the compliant application receives a symbol from a supported Content Dictionary but with an unknown name, then this must either be an incorrect object, or possibly the object has been built using a later version of the Content Dictionary. In either case, the application will act as if it had received the *OpenMath* object

**error**(*Unexpected\_Symbol,s*)

## 6.4 Lexical Errors

The previous section defines the behaviour of a compliant application upon receiving well formed *OpenMath* objects containing unexpected symbols. This standard does not specify any behaviour for an application upon receiving ill-formed objects.

## 6.5 *OpenMath* 1 Objects

Compliant *OpenMath* 2 documents and Content Dictionary files using the reference XML encodings must be valid according to the specified schema, and so will use the namespaces <http://www.openmath.org/OpenMath> and <http://www.openmath.org/OpenMathCD> respectively. Similarly CD Group and Signature files will use <http://www.openmath.org/OpenMathCDG> and <http://www.openmath.org/OpenMathCDS>.

Applications may also support *OpenMath* 1. XML-encoded *OpenMath* 1 documents may be in either the <http://www.openmath.org/OpenMath> namespace or in no-namespace (i.e., do not have any `xmlns` declarations). An application may accept either of these forms. Note however that *OpenMath* documents that have a version attribute should validate against the schema for *OpenMath* 2 (or later versions) and so should always use the *OpenMath* namespace. XML-encoded *OpenMath* 1 CD files, CD Group files and CD Signature files must be in no-namespace. An *OpenMath* 2 application may support these files by implicitly converting the documents to their respective namespace. Apart from this change of namespace (and the addition of a version attribute on `OMOBJ`) the *OpenMath* 1 documents should conform to the schema specified in this standard.

The use of documents in no-namespace should be restricted to reading existing *OpenMath* 1 files. No *OpenMath* 2 application should generate documents in this form.



## Chapter 7

# Conclusion

The goal of this document is to define the *OpenMath* 2 standard. The issues addressed by the *OpenMath* 2 standard are:

- Informal and formal definition of the *OpenMath* objects.
- Informal and formal definition of the notion of Content Dictionaries.

To do this, *OpenMath* objects are precisely defined and two encodings are described to represent these objects using XML and binary code. Furthermore, the Document Type Definition for validating Content Dictionaries and *OpenMath* objects is given.

## **Appendix A**

### **CD Files**

## A.1 The meta Content Dictionary

```
<CD
  xmlns="http://www.openmath.org/OpenMathCD">
```

```
<CDComment>
```

This document is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

The copyright holder grants you permission to redistribute this document freely as a verbatim copy. Furthermore, the copyright holder permits you to develop any derived work from this document provided that the following conditions are met.

- a) The derived work acknowledges the fact that it is derived from this document, and maintains a prominent reference in the work to the original source.
- b) The fact that the derived work is not the original OpenMath document is stated prominently in the derived work. Moreover if both this document and the derived work are Content Dictionaries then the derived work must include a different CDName element, chosen so that it cannot be confused with any works adopted by the OpenMath Society. In particular, if there is a Content Dictionary Group whose name is, for example, 'math' containing Content Dictionaries named 'math1', 'math2' etc., then you should not name a derived Content Dictionary 'mathN' where N is an integer. However you are free to name it 'private\_mathN' or some such. This is because the names 'mathN' may be used by the OpenMath Society for future extensions.
- c) The derived work is distributed under terms that allow the compilation of derived works, but keep paragraphs a) and b) intact. The simplest way to do this is to distribute the derived work under the OpenMath license, but this is not a requirement.

If you have questions about this license please contact the OpenMath society at <http://www.openmath.org>.

```
</CDComment>
```

```
<CDName> meta </CDName>
<CDReviewDate>2006-03-30</CDReviewDate>
<CDDate>2004-03-30</CDDate>
<CDVersion>3</CDVersion>
```

```
<CDRevision>0</CDRevision>
<CDStatus> official </CDStatus>
<CDURL> http://www.openmath.org/cd/meta.ocd </CDURL>
<CDBase>http://www.openmath.org/cd</CDBase>
```

```
<Description>
This is a content dictionary to represent content dictionaries, so
that they may be passed between OpenMath compliant application in a
similar way to mathematical objects.
```

The information written here is taken from chapter 4 of the current draft of the "OpenMath Standard".

```
</Description>
```

```
<CDDefinition>
<Name> CD </Name>
<Role>application</Role>
<Description>
The top level element for the Content Dictionary. It just acts
as a container for the elements described below.
</Description>
</CDDefinition>
```

```
<CDComment>
For those that do not have access to the DTD, the elements
allowed in a Content Dictionary are the following
(in no particular order):
```

```
&lt;CD xmlns='http://www.openmath.org/OpenMathCD' &gt;
```

```
&lt;CDComment&gt;
```

This document is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

The copyright holder grants you permission to redistribute this document freely as a verbatim copy. Furthermore, the copyright holder permits you to develop any derived work from this document provided that the following conditions are met.

- a) The derived work acknowledges the fact that it is derived from this document, and maintains a prominent reference in the work to the original source.

- b) The fact that the derived work is not the original OpenMath document is stated prominently in the derived work. Moreover if both this document and the derived work are Content Dictionaries then the derived work must include a different CDName element, chosen so that it cannot be confused with any works adopted by the OpenMath Society. In particular, if there is a Content Dictionary Group whose name is, for example, 'math' containing Content Dictionaries named 'math1', 'math2' etc., then you should not name a derived Content Dictionary 'mathN' where N is an integer. However you are free to name it 'private\_mathN' or some such. This is because the names 'mathN' may be used by the OpenMath Society for future extensions.
- c) The derived work is distributed under terms that allow the compilation of derived works, but keep paragraphs a) and b) intact. The simplest way to do this is to distribute the derived work under the OpenMath license, but this is not a requirement.

If you have questions about this license please contact the OpenMath society at <http://www.openmath.org>.

<CDComment>

<CDName> </CDName>  
<Description> </Description>  
<CDReviewDate> </CDReviewDate>  
<CDDate> </CDDate>  
<CDVersion> </CDVersion>  
<CDRevision> </CDRevision>  
<CDStatus> </CDStatus>  
<CDURL>? </CDURL>  
<CDDefinition>\*  
<Name> </Name>  
<Description> </Description>  
<Example>\* </Example>  
<FMP>\* </FMP>  
<CMP>\* </CMP>  
</CDDefinition>

where a question mark (?) denotes it can be repeated 0 or 1 times, and a star (\*) denotes 0 or more times. <CDComment> </CDComment>  
can also occur in most places - see the DTD for the precise rules.  
</CDComment>

<CDDefinition>  
<Name> CDDefinition </Name>

```
<Role>application</Role>
<Description>
This symbol is used to represent the element which contains the
definition of each symbol in a content dictionary. That is: it must
contain a 'Name' element and a 'Description' element, and it may contain
an arbitrary number of 'Example', 'FMP' or 'CMP' elements.
</Description>
</CDDefinition>
```

```
<CDDefinition>
<Name> CDName </Name>
<Role>application</Role>
<Description>
An element which contains the string corresponding to the name of the CD.
The string must match the syntax for CD names given in the OpenMath
Standard. Here and elsewhere white space occurring at the beginning or
end of the string will be ignored.
</Description>
</CDDefinition>
```

```
<CDDefinition>
<Name> CDURL </Name>
<Role>application</Role>
<Description>
An optional element.
If it is used it contains a string representing the URL where the
canonical reference copy of this CD is stored.
</Description>
</CDDefinition>
```

```
<CDDefinition>
<Name> Example </Name>
<Role>application</Role>
<Description>
An element which contains an arbitrary number of children,
each of which is either a string or an OpenMath Object.
```

```
These children give examples in natural language, or in OpenMath, of the
enclosing symbol definition.
</Description>
</CDDefinition>
```

```
<CDDefinition>
<Name> CDDate </Name>
```

```
<Role>application</Role>
<Description>
An element which contains a date as a string in the ISO-8601
YYYY-MM-DD format. This gives the date at which the Content Dictionary
was last edited.
</Description>
</CDDefinition>
```

```
<CDDefinition>
<Name> CDVersion </Name>
<Role>application</Role>
<Description>
An element which contains a version number for the CD.
This should be a non negative integer. Any change to the CD
that affects existing OpenMath applications that support this CD
should result in an increase in the version number.
</Description>
</CDDefinition>
```

```
<CDDefinition>
<Name> CDRevision </Name>
<Role>application</Role>
<Description>
An element which contains a revision number (or minor version number)
This should be a non-negative integer starting from zero for each
new version. Additional examples would be typical changes
to a CD requiring a new revision number.
</Description>
</CDDefinition>
```

```
<CDDefinition>
<Name> CDReviewDate </Name>
<Role>application</Role>
<Description>
An element which contains a date as a string in the ISO-8601
YYYY-MM-DD format. This gives the date at which the Content Dictionary
is next scheduled for review. It should be expected to be stable
until at least this date.
</Description>
</CDDefinition>
```

```
<CDDefinition>
<Name> CDStatus </Name>
```

```
<Role>application</Role>
```

```
<Description>
```

An element giving information on the status of the CD.

The content of the element must be one of the following strings.

official (approved by the OpenMath Society),

experimental (currently being tested),

private (used by a private group of OpenMath users), or

obsolete (an obsolete CD kept only for archival purposes).

```
</Description>
```

```
</CDDefinition>
```

```
<CDDefinition>
```

```
<Name> CDComment </Name>
```

```
<Role>application</Role>
```

```
<Description>
```

This symbol is used to represent the element of a content dictionary which explains some aspect of that content dictionary. It should have one string argument which makes that explanation.

```
</Description>
```

```
</CDDefinition>
```

```
<CDDefinition>
```

```
<Name> CDUses </Name>
```

```
<Role>application</Role>
```

```
<Description>
```

An element which contains zero or more CDNames which correspond to the CDs that this CD depends on, i.e. uses in examples and FMPs. If the CD is dependent on any other CDs they may be present here.

```
</Description>
```

```
</CDDefinition>
```

```
<CDDefinition>
```

```
<Name> Description </Name>
```

```
<Role>application</Role>
```

```
<Description>
```

An element which contains a string corresponding to the description of either the CD or the symbol (depending on which is the enclosing element).



```
</Description>
</CDDefinition>
```

```
<CDDefinition>
<Name> Name </Name>
<Role>application</Role>
<Description>
An element containing the string corresponding to the name of
the symbol being defined. This must match the syntax for
symbol names given in the OpenMath Standard. Here and elsewhere white
space occurring at the begining or end of the string will be ignored.
</Description>
</CDDefinition>
```

```
<CDDefinition>
<Name> CMP </Name>
<Role>application</Role>
<Description>
An optional element (which may be repeated many times) which contains
a string corresponding to a property of the symbol being
defined.
</Description>
</CDDefinition>
```

```
<CDDefinition>
<Name> FMP </Name>
<Role>application</Role>
<Description>
An optional element which contains an OpenMath Object.
This corresponds to a property of the symbol being defined.
</Description>
</CDDefinition>
```

```
</CD>
```

## **A.2 The arith1 Content Dictionary File**

```
<CD
  xmlns="http://www.openmath.org/OpenMathCD">
```

```
<CDComment>
```

This document is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

The copyright holder grants you permission to redistribute this document freely as a verbatim copy. Furthermore, the copyright holder permits you to develop any derived work from this document provided that the following conditions are met.

- a) The derived work acknowledges the fact that it is derived from this document, and maintains a prominent reference in the work to the original source.
- b) The fact that the derived work is not the original OpenMath document is stated prominently in the derived work. Moreover if both this document and the derived work are Content Dictionaries then the derived work must include a different CDName element, chosen so that it cannot be confused with any works adopted by the OpenMath Society. In particular, if there is a Content Dictionary Group whose name is, for example, 'math' containing Content Dictionaries named 'math1', 'math2' etc., then you should not name a derived Content Dictionary 'mathN' where N is an integer. However you are free to name it 'private\_mathN' or some such. This is because the names 'mathN' may be used by the OpenMath Society for future extensions.
- c) The derived work is distributed under terms that allow the compilation of derived works, but keep paragraphs a) and b) intact. The simplest way to do this is to distribute the derived work under the OpenMath license, but this is not a requirement.

If you have questions about this license please contact the OpenMath society at <http://www.openmath.org>.

```
</CDComment>
```

```
<CDName> arith1 </CDName>
<CDBase>http://www.openmath.org/cd</CDBase>
<CDURL> http://www.openmath.org/cd/arith1.ocd </CDURL>
<CDReviewDate>2006-03-30</CDReviewDate>
<CDStatus> official </CDStatus>
```

<CDDate>2004-03-30</CDDate>

<CDVersion>3</CDVersion>

<CDRevision>0</CDRevision>

<Description>

This CD defines symbols for common arithmetic functions.

</Description>

<CDDefinition>

<Name> lcm </Name>

<Role>application</Role>

<Description>

The symbol to represent the n-ary function to return the least common multiple of its arguments.

</Description>

<CMP> lcm(a,b) = a\*b/gcd(a,b) </CMP>

<FMP>

<OMOBJ

xmlns="http://www.openmath.org/OpenMath"

version="2.0"

cdbase="http://www.openmath.org/cd">

<OMA>

<OMS cd="relation1" name="eq"/>

<OMA>

<OMS cd="arith1" name="lcm"/>

<OMV name="a"/>

<OMV name="b"/>

</OMA>

<OMA>

<OMS cd="arith1" name="divide"/>

<OMA>

<OMS cd="arith1" name="times"/>

<OMV name="a"/>

<OMV name="b"/>

</OMA>

<OMA>

<OMS cd="arith1" name="gcd"/>

<OMV name="a"/>

<OMV name="b"/>

</OMA>

</OMA>

</OMA>

```
</OMOBJ>
</FMP>
<CMP>
for all integers a,b |
There does not exist a c>0 such that c/a is an Integer and c/b is an
Integer and lcm(a,b) > c.
</CMP>

<FMP>
<OMOBJ
  xmlns="http://www.openmath.org/OpenMath"
  version="2.0"
  cdbase="http://www.openmath.org/cd">
<OMBIND>
  <OMS cd="quant1" name="forall"/>
  <OMBVAR>
    <OMV name="a"/>
    <OMV name="b"/>
  </OMBVAR>
  <OMA>
    <OMS cd="logic1" name="implies"/>
    <OMA>
      <OMS cd="logic1" name="and"/>
      <OMA>
        <OMS cd="set1" name="in"/>
<OMV name="a"/>
<OMS cd="setname1" name="Z"/>
      </OMA>
      <OMA>
        <OMS cd="set1" name="in"/>
<OMV name="b"/>
<OMS cd="setname1" name="Z"/>
      </OMA>
      </OMA>
      <OMA>
        <OMS cd="logic1" name="not"/>
      <OMBIND>
        <OMS cd="quant1" name="exists"/>
        <OMBVAR>
          <OMV name="c"/>
        </OMBVAR>
        <OMA>
          <OMS cd="logic1" name="and"/>
          <OMA>
```

```

    <OMS cd="relation1" name="gt"/>
    <OMV name="c"/>
    <OMI>0</OMI>
  </OMA>
  <OMA>
    <OMS cd="integer1" name="factorof"/>
    <OMV name="a"/>
    <OMV name="c"/>
  </OMA>
  <OMA>
    <OMS cd="integer1" name="factorof"/>
    <OMV name="b"/>
    <OMV name="c"/>
  </OMA>
  <OMA>
    <OMS cd="relation1" name="lt"/>
    <OMV name="c"/>
  </OMA>
    <OMS cd="arith1" name="lcm"/>
    <OMV name="a"/>
    <OMV name="b"/>
  </OMA>
</OMA>
</OMA>
</OMBIND>
</OMA>
</OMA>
</OMBIND>
</OMOBJ>
</FMP>
</CDDefinition>

<CDDefinition>
<Name> gcd </Name>
<Role>application</Role>
<Description>
The symbol to represent the n-ary function to return the gcd (greatest
common divisor) of its arguments.
</Description>

<CMP>
for all integers a,b |
There does not exist a c such that a/c is an Integer and b/c is an
Integer and c > gcd(a,b).

```

Note that this implies that  $\gcd(a,b) > 0$

</CMP>

<FMP>

<OMOBJ

xmlns="http://www.openmath.org/OpenMath"

version="2.0"

cdbase="http://www.openmath.org/cd">

<OMBIND>

<OMS cd="quant1" name="forall"/>

<OMBVAR>

<OMV name="a"/>

<OMV name="b"/>

</OMBVAR>

<OMA>

<OMS cd="logic1" name="implies"/>

<OMA>

<OMS cd="logic1" name="and"/>

<OMA>

<OMS cd="set1" name="in"/>

<OMV name="a"/>

<OMS cd="setname1" name="Z"/>

</OMA>

<OMA>

<OMS cd="set1" name="in"/>

<OMV name="b"/>

<OMS cd="setname1" name="Z"/>

</OMA>

</OMA>

<OMA>

<OMS cd="logic1" name="not"/>

<OMBIND>

<OMS cd="quant1" name="exists"/>

<OMBVAR>

<OMV name="c"/>

</OMBVAR>

<OMA>

<OMS cd="logic1" name="and"/>

<OMA>

<OMS cd="set1" name="in"/>

<OMA>

<OMS cd="arith1" name="divide"/>

<OMV name="a"/>

```

        <OMV name="c"/>
    </OMA>
    <OMS cd="setname1" name="Z"/>
</OMA>
<OMA>
    <OMS cd="set1" name="in"/>
    <OMA>
        <OMS cd="arith1" name="divide"/>
        <OMV name="b"/>
        <OMV name="c"/>
    </OMA>
    <OMS cd="setname1" name="Z"/>
</OMA>
<OMA>
    <OMS cd="relation1" name="gt"/>
    <OMV name="c"/>
    <OMA>
        <OMS cd="arith1" name="gcd"/>
        <OMV name="a"/>
        <OMV name="b"/>
    </OMA>
</OMA>
</OMA>
</OMBIND>
</OMA>
</OMA>
</OMBIND>
</OMOBJ>
</FMP>

```

```

<Example>
gcd(6,9) = 3
<OMOBJ>
  xmlns="http://www.openmath.org/OpenMath"
  version="2.0"
  cdbase="http://www.openmath.org/cd">
    <OMA>
      <OMS cd="relation1" name="eq"/>
      <OMA>
        <OMS cd="arith1" name="gcd"/>
        <OMI> 6 </OMI>
        <OMI> 9 </OMI>
      </OMA>
      <OMI> 3 </OMI>
    </OMA>
  </OMOBJ>

```

```
</OMA>
</OMOBJ>
</Example>
</CDDefinition>

<CDDefinition>
<Name> plus </Name>
<Role>application</Role>
<Description>
The symbol representing an n-ary commutative function plus.
</Description>
<CMP> for all a,b | a + b = b + a </CMP>
<FMP>
<OMOBJ
  xmlns="http://www.openmath.org/OpenMath"
  version="2.0"
  cdbase="http://www.openmath.org/cd">
    <OMBIND>
      <OMS cd="quant1" name="forall"/>
      <OMBVAR>
        <OMV name="a"/>
        <OMV name="b"/>
      </OMBVAR>
      <OMA>
        <OMS cd="relation1" name="eq"/>
        <OMA>
          <OMS cd="arith1" name="plus"/>
          <OMV name="a"/>
          <OMV name="b"/>
        </OMA>
        <OMA>
          <OMS cd="arith1" name="plus"/>
          <OMV name="b"/>
          <OMV name="a"/>
        </OMA>
      </OMA>
    </OMBIND>
  </OMOBJ>
</FMP>
</CDDefinition>

<CDDefinition>
<Name> unary_minus </Name>
<Role>application</Role>
```



```

<Description>
This symbol denotes unary minus, i.e. the additive inverse.
</Description>
<CMP> for all a | a + (-a) = 0 </CMP>
<FMP>
<OMOBJ
  xmlns="http://www.openmath.org/OpenMath"
  version="2.0"
  cdbase="http://www.openmath.org/cd">
    <OMBIND>
      <OMS cd="quant1" name="forall"/>
      <OMBVAR>
        <OMV name="a"/>
      </OMBVAR>
      <OMA>
        <OMS cd="relation1" name="eq"/>
        <OMA>
          <OMS cd="arith1" name="plus"/>
          <OMV name="a"/>
          <OMA>
            <OMS
cd="arith1"
name="unary_minus"/>
            <OMV name="a"/>
          </OMA>
        </OMA>
        <OMS cd="alg1" name="zero"/>
      </OMA>
    </OMBIND>
  </OMOBJ>
</FMP>
</CDDefinition>

<CDDefinition>
<Name> minus </Name>
<Role>application</Role>
<Description>
The symbol representing a binary minus function. This is equivalent to
adding the additive inverse.
</Description>
<CMP> for all a,b | a - b = a + (-b) </CMP>
<FMP>
<OMOBJ
  xmlns="http://www.openmath.org/OpenMath"

```

```
version="2.0"
cbase="http://www.openmath.org/cd">
  <OMBIND>
    <OMS cd="quant1" name="forall"/>
    <OMBVAR>
      <OMV name="a"/>
      <OMV name="b"/>
    </OMBVAR>
    <OMA>
      <OMS cd="relation1" name="eq"/>
      <OMA>
        <OMS cd="arith1" name="minus"/>
        <OMV name="a"/>
        <OMV name="b"/>
      </OMA>
      <OMA>
        <OMS cd="arith1" name="plus"/>
        <OMV name="a"/>
      <OMA>
        <OMS
cd="arith1"
name="unary_minus"/>
        <OMV name="b"/>
      </OMA>
    </OMA>
  </OMBIND>
</OMOBJ>
</FMP>
</CDDefinition>

<CDDefinition>
<Name> times </Name>
<Role>application</Role>
<Description>
The symbol representing an n-ary multiplication function.
</Description>
<Example>
<OMOBJ
  xmlns="http://www.openmath.org/OpenMath"
  version="2.0"
  cbase="http://www.openmath.org/cd">
<OMA>
  <OMS cd="relation1" name="eq"/>
```

```

<OMA>
  <OMS cd="arith1" name="times"/>
  <OMA>
    <OMS cd="linalg2" name="matrix"/>
    <OMA>
      <OMS cd="linalg2" name="matrixrow"/>
      <OMI> 1 </OMI>
      <OMI> 2 </OMI>
    </OMA>
    <OMA>
      <OMS cd="linalg2" name="matrixrow"/>
      <OMI> 3 </OMI>
      <OMI> 4 </OMI>
    </OMA>
  </OMA>
  <OMA>
    <OMS cd="linalg2" name="matrix"/>
    <OMA>
      <OMS cd="linalg2" name="matrixrow"/>
      <OMI> 5 </OMI>
      <OMI> 6 </OMI>
    </OMA>
    <OMA>
      <OMS cd="linalg2" name="matrixrow"/>
      <OMI> 7 </OMI>
      <OMI> 8 </OMI>
    </OMA>
  </OMA>
  <OMA>
    <OMS cd="linalg2" name="matrix"/>
    <OMA>
      <OMS cd="linalg2" name="matrixrow"/>
      <OMI> 19 </OMI>
      <OMI> 22 </OMI>
    </OMA>
    <OMA>
      <OMS cd="linalg2" name="matrixrow"/>
      <OMI> 43 </OMI>
      <OMI> 50 </OMI>
    </OMA>
  </OMA>
</OMA>
</OMOBJ>

```

```
</Example>
<CMP> for all a,b | a * 0 = 0 and a * b = a * (b - 1) + a </CMP>

<FMP><OMOBJ
  xmlns="http://www.openmath.org/OpenMath"
  version="2.0"
  cdbase="http://www.openmath.org/cd">
<OMBIND>
  <OMS cd="quant1" name="forall"/>
  <OMBVAR>
    <OMV name="a"/>
    <OMV name="b"/>
  </OMBVAR>
  <OMA>
    <OMS cd="logic1" name="and"/>
    <OMA>
      <OMS cd="relation1" name="eq"/>
      <OMA>
        <OMS cd="arith1" name="times"/>
        <OMV name="a"/>
        <OMS cd="alg1" name="zero"/>
      </OMA>
      <OMS cd="alg1" name="zero"/>
    </OMA>
    <OMA>
      <OMS cd="relation1" name="eq"/>
      <OMA>
        <OMS cd="arith1" name="times"/>
        <OMV name="a"/>
        <OMA>
          <OMS cd="arith1" name="plus"/>
          <OMV name="b"/>
          <OMS cd="alg1" name="one"/>
        </OMA>
      </OMA>
    </OMA>
  </OMA>
</OMOBJ>
```

```

    </OMA>
  </OMA>
</OMBIND>
</OMOBJ></FMP>

<CMP> for all a,b,c | a*(b+c) = a*b + a*c </CMP>
<FMP><OMOBJ
  xmlns="http://www.openmath.org/OpenMath"
  version="2.0"
  cdbase="http://www.openmath.org/cd">
<OMBIND>
  <OMS cd="quant1" name="forall"/>
  <OMBVAR>
    <OMV name="a"/>
    <OMV name="b"/>
    <OMV name="c"/>
  </OMBVAR>
  <OMA>
    <OMS cd="relation1" name="eq"/>
    <OMA>
      <OMS cd="arith1" name="times"/>
      <OMV name="a"/>
      <OMA>
        <OMS cd="arith1" name="plus"/>
<OMV name="b"/>
<OMV name="c"/>
      </OMA>
    </OMA>
    <OMA>
      <OMS cd="arith1" name="plus"/>
      <OMA>
        <OMS cd="arith1" name="times"/>
<OMV name="a"/>
<OMV name="b"/>
      </OMA>
    </OMA>
    <OMA>
      <OMS cd="arith1" name="times"/>
<OMV name="a"/>
<OMV name="c"/>
      </OMA>
    </OMA>
  </OMBIND>
</OMOBJ></FMP>

```

</CDDefinition>

<CDDefinition>

<Name> divide </Name>

<Role>application</Role>

<Description>

This symbol represents a (binary) division function denoting the first argument right-divided by the second, i.e.  $\text{divide}(a,b)=a*\text{inverse}(b)$ . It is the inverse of the multiplication function defined by the symbol times in this CD.

</Description>

<CMP> whenever not( $a=0$ ) then  $a/a = 1$  </CMP>

<FMP>

<OMOBJ

xmlns="http://www.openmath.org/OpenMath"

version="2.0"

cdbase="http://www.openmath.org/cd">

<OMBIND>

<OMS cd="quant1" name="forall"/>

<OMBVAR>

<OMV name="a"/>

</OMBVAR>

<OMA>

<OMS cd="logic1" name="implies"/>

<OMA>

<OMS cd="relation1" name="neq"/>

<OMV name="a"/>

<OMS cd="alg1" name="zero"/>

</OMA>

<OMA>

<OMS cd="relation1" name="eq"/>

<OMA>

<OMS cd="arith1" name="divide"/>

<OMV name="a"/>

<OMV name="a"/>

</OMA>

<OMS cd="alg1" name="one"/>

</OMA>

</OMA>

</OMBIND>

</OMOBJ>

</FMP>

</CDDefinition>

<CDDefinition>

```
<Name> power </Name>
<Role>application</Role>
<Description>
This symbol represents a power function. The first argument is raised
to the power of the second argument. When the second argument is not
an integer, powering is defined in terms of exponentials and
logarithms for the complex and real numbers.
This operator can represent general powering.
</Description>
```

```
<CMP>
 $x \in \mathbb{C} \text{ implies } x^a = \exp(a \ln x)$ 
</CMP>
```

```
<FMP>
<OMOBJ
  xmlns="http://www.openmath.org/OpenMath"
  version="2.0"
  cdbase="http://www.openmath.org/cd">
  <OMA>
    <OMS cd="logic1" name="implies"/>
    <OMA>
      <OMS cd="set1" name="in"/>
      <OMV name="x"/>
      <OMS cd="setname1" name="C"/>
    </OMA>
    <OMA>
      <OMS cd="relation1" name="eq"/>
      <OMA>
        <OMS name="power" cd="arith1"/>
        <OMV name="x"/>
        <OMV name="a"/>
      </OMA>
      <OMA>
        <OMS name="exp" cd="transc1"/>
        <OMA>
          <OMS name="times" cd="arith1"/>
          <OMV name="a"/>
          <OMA>
            <OMS name="ln" cd="transc1"/>
            <OMV name="x"/>
          </OMA>
        </OMA>
      </OMA>
    </OMA>
```

```
</OMA>
</OMA>
</OMOBJ>
</FMP>

<CMP>
  if n is an integer then
     $x^0 = 1,$ 
     $x^n = x * x^{(n-1)}$ 
</CMP>
<FMP>
<OMOBJ>
  xmlns="http://www.openmath.org/OpenMath"
  version="2.0"
  cdbase="http://www.openmath.org/cd">
    <OMA>
      <OMS cd="logic1" name="implies"/>
      <OMA>
        <OMS cd="set1" name="in"/>
        <OMV name="n"/>
        <OMS cd="setname1" name="Z"/>
      </OMA>
      <OMA>
        <OMS cd="logic1" name="and"/>
        <OMA>
          <OMS cd="relation1" name="eq"/>
          <OMA>
            <OMS cd="arith1" name="power"/>
            <OMV name="x"/>
            <OMI>0</OMI>
          </OMA>
          <OMS cd="alg1" name="one"/>
        </OMA>
      </OMA>
      <OMA>
        <OMS cd="relation1" name="eq"/>
        <OMA>
          <OMS cd="arith1" name="power"/>
          <OMV name="x"/>
          <OMV name="n"/>
        </OMA>
        <OMA>
          <OMS cd="arith1" name="times"/>
          <OMV name="x"/>
        </OMA>
      </OMA>
    </OMA>
  </OMOBJ>
</FMP>
```



---

The OpenMath Standard
Page 93 of 140

```
</OMA>
<OMA>
  <OMS cd="linalg2" name="matrixrow"/>
  <OMI> 81 </OMI>
  <OMI> 118 </OMI>
</OMA>
</OMA>
</OMOBJ>
</Example>
<Example>
<OMOBJ
  xmlns="http://www.openmath.org/OpenMath"
  version="2.0"
  cdbase="http://www.openmath.org/cd">
<OMA>
  <OMS cd="relation1" name="eq"/>
  <OMA>
    <OMS cd="arith1" name="power"/>
    <OMS cd="numsl" name="e"/>
    <OMA>
      <OMS cd="arith1" name="times"/>
      <OMS cd="numsl" name="i"/>
      <OMS cd="numsl" name="pi"/>
    </OMA>
  </OMA>
</OMA>
<OMA>
  <OMS
    cd="arith1"
    name="unary_minus"/>
    <OMS cd="alg1" name="one"/>
  </OMA>
</OMA>
</OMOBJ>
</Example>
</CDDefinition>

<CDDefinition>
<Name> abs </Name>
<Role>application</Role>
<Description>
A unary operator which represents the absolute value of its
argument. The argument should be numerically valued.
In the complex case this is often referred to as the modulus.
```

```

</Description>
<CMP> for all x,y | abs(x) + abs(y) >= abs(x+y) </CMP>
<FMP>
<OMOBJ
  xmlns="http://www.openmath.org/OpenMath"
  version="2.0"
  cdbase="http://www.openmath.org/cd">
    <OMBIND>
      <OMS cd="quant1" name="forall"/>
      <OMBVAR>
        <OMV name="x"/>
        <OMV name="y"/>
      </OMBVAR>
      <OMA>
        <OMS cd="relation1" name="geq"/>
        <OMA>
          <OMS cd="arith1" name="plus"/>
          <OMA>
            <OMS cd="arith1" name="abs"/>
            <OMV name="x"/>
          </OMA>
          <OMA>
            <OMS cd="arith1" name="abs"/>
            <OMV name="y"/>
          </OMA>
        </OMA>
      </OMA>
    </OMBIND>
  </OMOBJ>
</FMP>
</CDDefinition>

```

```

<CDDefinition>
<Name> root </Name>
<Role>application</Role>
<Description>

```

A binary operator which represents its first argument "lowered" to its  $n$ 'th root where  $n$  is the second argument. This is the inverse of the operation represented by the power symbol defined in this CD.

Care should be taken as to the precise meaning of this operator, in particular which root is represented, however it is here to represent the general notion of taking  $n$ 'th roots. As inferred by the signature relevant to this symbol, the function represented by this symbol is the single valued function, the specific root returned is the one indicated by the first CMP. Note also that the converse of the second CMP is not valid in general.

</Description>

<CMP>  $x \in C$  implies  $\text{root}(x,n) = \exp(\ln(x)/n)$  </CMP>

<FMP>

<OMOBJ

xmlns="http://www.openmath.org/OpenMath"

version="2.0"

cdbase="http://www.openmath.org/cd">

<OMA>

<OMS cd="logic1" name="implies"/>

<OMA>

<OMS cd="set1" name="in"/>

<OMV name="x"/>

<OMS cd="setname1" name="C"/>

</OMA>

<OMA>

<OMS cd="relation1" name="eq"/>

<OMA>

<OMS cd="arith1" name="root"/>

<OMV name="x"/>

<OMV name="n"/>

</OMA>

<OMA>

<OMS name="exp" cd="transc1"/>

<OMA>

<OMS name="divide" cd="arith1"/>

<OMA>

<OMS name="ln" cd="transc1"/>

<OMV name="x"/>

</OMA>

<OMV name="n"/>

</OMA>

</OMA>

```

    </OMA>
  </OMA>
</OMOBJ>
</FMP>

<CMP> for all a,n | power(root(a,n),n) = a (if the root exists!) </CMP>
<FMP>
  <OMOBJ>
    xmlns="http://www.openmath.org/OpenMath"
    version="2.0"
    cdbase="http://www.openmath.org/cd">
      <OMBIND>
        <OMS cd="quant1" name="forall"/>
        <OMBVAR>
          <OMV name="a"/>
          <OMV name="n"/>
        </OMBVAR>
        <OMA>
          <OMS cd="relation1" name="eq"/>
          <OMA>
            <OMS cd="arith1" name="power"/>
            <OMA>
              <OMS cd="arith1" name="root"/>
              <OMV name="a"/>
              <OMV name="n"/>
            </OMA>
            <OMV name="n"/>
          </OMA>
          <OMV name="a"/>
        </OMA>
      </OMBIND>
    </OMOBJ>
  </FMP>
</CDDefinition>

```

```

<CDDefinition>
<Name> sum </Name>
<Role>application</Role>
<Description>
An operator taking two arguments, the first being the range of summation,
e.g. an integral interval, the second being the function to be

```

summed. Note that the sum may be over an infinite interval.

</Description>

<Example>

This represents the summation of the reciprocals of all the integers between 1 and 10 inclusive.

<OMOBJ

xmlns="http://www.openmath.org/OpenMath"

version="2.0"

cdbase="http://www.openmath.org/cd">

<OMA>

<OMS cd="arith1" name="sum"/>

<OMA>

<OMS

cd="interval1"

name="integer\_interval"/>

<OMI> 1 </OMI>

<OMI> 10 </OMI>

</OMA>

<OMBIND>

<OMS cd="fns1" name="lambda"/>

<OMBVAR>

<OMV name="x"/>

</OMBVAR>

<OMA>

<OMS cd="arith1" name="divide"/>

<OMI> 1 </OMI>

<OMV name="x"/>

</OMA>

</OMBIND>

</OMA>

</OMOBJ>

</Example>

</CDDefinition>

<CDDefinition>

<Name> product </Name>

<Role>application</Role>

<Description>

An operator taking two arguments, the first being the range of multiplication e.g. an integral interval, the second being the function to be multiplied. Note that the product may be over an infinite interval.

</Description>

<Example>

This represents the statement that the factorial of n is equal to the product

of all the integers between 1 and  $n$  inclusive.

```
<OMOBJ
  xmlns="http://www.openmath.org/OpenMath"
  version="2.0"
  cdbase="http://www.openmath.org/cd">
  <OMA>
    <OMS cd="relation1" name="eq"/>
    <OMA>
      <OMS cd="integer1" name="factorial"/>
      <OMV name="n"/>
    </OMA>
    <OMA>
      <OMS cd="arith1" name="product"/>
      <OMA>
        <OMS
cd="interval1"
name="integer_interval"/>
        <OMI> 1 </OMI>
        <OMV name="n"/>
      </OMA>
      <OMBIND>
        <OMS cd="fns1" name="lambda"/>
        <OMBVAR>
          <OMV name="i"/>
        </OMBVAR>
        <OMV name="i"/>
      </OMBIND>
    </OMA>
  </OMA>
</OMOBJ>
</Example>
</CDDefinition>

</CD>
```

### A.3 The arith1 STS Signature File

```
<CDSignatures
  xmlns="http://www.openmath.org/OpenMathCDS" type="sts" cd="arith1">

  <CDSComent>
    Date: 1999-11-26
    Author: David Carlisle
  </CDSComent>

  <Signature name="lcm">
    <OMOBJ
      xmlns="http://www.openmath.org/OpenMath">
        <OMA>
          <OMS name="mapsto" cd="sts"/>
          <OMA>
            <OMS name="nassoc" cd="sts"/>
            <OMV name="SemiGroup"/>
          </OMA>
          <OMV name="SemiGroup"/>
        </OMA>
      </OMOBJ>
    </Signature>

    <Signature name="gcd">
      <OMOBJ
        xmlns="http://www.openmath.org/OpenMath">
          <OMA>
            <OMS name="mapsto" cd="sts"/>
            <OMA>
              <OMS name="nassoc" cd="sts"/>
              <OMV name="SemiGroup"/>
            </OMA>
            <OMV name="SemiGroup"/>
          </OMA>
        </OMOBJ>
      </Signature>

    <Signature name="plus">
      <OMOBJ
        xmlns="http://www.openmath.org/OpenMath">
          <OMA>
            <OMS name="mapsto" cd="sts"/>
```



```

    <OMA>
      <OMS name="nassoc" cd="sts"/>
      <OMV
name="AbelianSemiGroup"/>
    </OMA>
    <OMV
name="AbelianSemiGroup"/>
  </OMA>
</OMOBJ>
</Signature>

<Signature
name="unary_minus">
  <OMOBJ
xmlns="http://www.openmath.org/OpenMath">
    <OMA>
      <OMS name="mapsto" cd="sts"/>
      <OMV
name="AbelianGroup"/>
    <OMV
name="AbelianGroup"/>
  </OMA>
</OMOBJ>
</Signature>

<Signature name="minus">
  <OMOBJ
xmlns="http://www.openmath.org/OpenMath">
    <OMA>
      <OMS name="mapsto" cd="sts"/>
      <OMV
name="AbelianGroup"/>
    <OMV
name="AbelianGroup"/>
  <OMV
name="AbelianGroup"/>
  </OMA>
</OMOBJ>
</Signature>

<Signature name="times">
  <OMOBJ
xmlns="http://www.openmath.org/OpenMath">
    <OMA>

```

```
<OMS name="mapsto" cd="sts"/>
<OMA>
  <OMS name="nassoc" cd="sts"/>
  <OMV name="SemiGroup"/>
</OMA>
<OMV name="SemiGroup"/>
</OMA>
</OMOBJ>
</Signature>

<Signature name="divide">
  <OMOBJ
xmlns="http://www.openmath.org/OpenMath">
  <OMA>
    <OMS name="mapsto" cd="sts"/>
    <OMV
name="AbelianGroup"/>
    <OMV
name="AbelianGroup"/>
    <OMV
name="AbelianGroup"/>
  </OMA>
  </OMOBJ>
</Signature>

<Signature name="power">
  <OMOBJ
xmlns="http://www.openmath.org/OpenMath">
  <OMA>
    <OMS name="mapsto" cd="sts"/>
    <OMS
name="NumericalValue"
cd="sts"/>
    <OMS
name="NumericalValue"
cd="sts"/>
    <OMS
name="NumericalValue"
cd="sts"/>
  </OMA>
  </OMOBJ>
</Signature>

<Signature name="abs">
```

```

<OMOBJ
xmlns="http://www.openmath.org/OpenMath">
  <OMA>
    <OMS name="mapsto" cd="sts"/>
    <OMS name="C" cd="setname1"/>
    <OMS name="R" cd="setname1"/>
  </OMA>
</OMOBJ>
</Signature>

```

```

<Signature name="root">
  <OMOBJ
xmlns="http://www.openmath.org/OpenMath">
  <OMA>
    <OMS name="mapsto" cd="sts"/>
    <OMS
name="NumericalValue"
cd="sts"/>
    <OMS
name="NumericalValue"
cd="sts"/>
    <OMS
name="NumericalValue"
cd="sts"/>
  </OMA>
</OMOBJ>
</Signature>

```

```

<Signature name="sum">
  <OMOBJ
xmlns="http://www.openmath.org/OpenMath">
  <OMA>
    <OMS name="mapsto" cd="sts"/>
    <OMV
name="IntegerRange"/>
    <OMA>
      <OMS name="mapsto" cd="sts"/>
      <OMS name="Z" cd="setname1"/>
    <OMV
name="AbelianMonoid"/>
    </OMA>
    <OMV
name="AbelianMonoid"/>

```

```
</OMA>
</OMOBJ>
</Signature>

<Signature name="product">
  <OMOBJ
xmlns="http://www.openmath.org/OpenMath">
  <OMA>
    <OMS name="mapsto" cd="sts"/>
    <OMV
name="IntegerRange"/>
    <OMA>
      <OMS name="mapsto" cd="sts"/>
      <OMS name="Z" cd="setname1"/>
      <OMV
name="AbelianMonoid"/>
    </OMA>
    <OMV
name="AbelianMonoid"/>
  </OMA>
</OMOBJ>
</Signature>

</CDSignatures>
```

## A.4 The MathML CDGroup

```
<CDGroup
  xmlns="http://www.openmath.org/OpenMathCDG">
<CDGroupName>mathml</CDGroupName>
  <CDGroupVersion> 2 </CDGroupVersion>
  <CDGroupRevision> 0 </CDGroupRevision>
  <CDGroupURL>
    http://www.openmath.org/cdfiles/cdgroups/mathml.cdg</CDGroupURL>
  <CDGroupDescription> MathML compatibility CD Group </CDGroupDescription>
  <CDComment
xmlns="http://www.openmath.org/OpenMathCD">Algebra</CDComment>
  <CDGroupMember>
    <CDName
xmlns="http://www.openmath.org/OpenMathCD">alg1</CDName>
    <CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/alg1.ocd</CDURL></CDGroupM
    <CDComment
xmlns="http://www.openmath.org/OpenMathCD">Arithmetic</CDComment>
  <CDGroupMember>
    <CDName
xmlns="http://www.openmath.org/OpenMathCD">arith1</CDName>
    <CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/arith1.ocd</CDURL></CDGrou
    <CDComment
xmlns="http://www.openmath.org/OpenMathCD">Constructor for Floating Point Numbers</CDComment>
  <CDGroupMember>
    <CDName
xmlns="http://www.openmath.org/OpenMathCD">bigfloat1</CDName>
    <CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/bigfloat1.ocd</CDURL></CDG
    <CDComment
xmlns="http://www.openmath.org/OpenMathCD">Calculus</CDComment>
  <CDGroupMember>
    <CDName
xmlns="http://www.openmath.org/OpenMathCD">calculus1</CDName>
    <CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/calculus1.ocd</CDURL></CDG
    <CDComment
xmlns="http://www.openmath.org/OpenMathCD">Operations on and constructors for complex numbers</C
    <CDGroupMember>
    <CDName
xmlns="http://www.openmath.org/OpenMathCD">complex1</CDName>
```

```
<CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/complex1.ocd</CDURL>
<CDComment
xmlns="http://www.openmath.org/OpenMathCD">Functions on functions</CDComment>
<CDGroupMember>
  <CDName
xmlns="http://www.openmath.org/OpenMathCD">fns1</CDName>
  <CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/fns1.ocd</CDURL>
  <CDComment
xmlns="http://www.openmath.org/OpenMathCD">Integer arithmetic</CDComment>
  <CDGroupMember>
    <CDName
xmlns="http://www.openmath.org/OpenMathCD">integer1</CDName>
    <CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/integer1.ocd</CDURL>
    <CDComment
xmlns="http://www.openmath.org/OpenMathCD">Intervals</CDComment>
    <CDGroupMember>
      <CDName
xmlns="http://www.openmath.org/OpenMathCD">interval1</CDName>
      <CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/interval1.ocd</CDURL>
      <CDComment
xmlns="http://www.openmath.org/OpenMathCD">Linear Algebra - vector & matrix construction
      those symbols which are independent of orientation,
      but in MathML</CDComment>
    <CDGroupMember>
      <CDName
xmlns="http://www.openmath.org/OpenMathCD">linalg1</CDName>
      <CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/linalg1.ocd</CDURL>
      <CDComment
xmlns="http://www.openmath.org/OpenMathCD">Linear Algebra - vector & matrix construction
      those symbols which are dependent of orientation,
      and in MathML</CDComment>
    <CDGroupMember>
      <CDName
xmlns="http://www.openmath.org/OpenMathCD">linalg2</CDName>
      <CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/linalg2.ocd</CDURL>
      <CDComment
xmlns="http://www.openmath.org/OpenMathCD">Limits of unary functions</CDComment>
    <CDGroupMember>
```

```
<CDName
xmlns="http://www.openmath.org/OpenMathCD">limit1</CDName>
<CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/limit1.oed</CDURL></CDGroupMember>
<CDComment
xmlns="http://www.openmath.org/OpenMathCD">List constructors</CDComment>
<CDGroupMember>
<CDName
xmlns="http://www.openmath.org/OpenMathCD">list1</CDName>
<CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/list1.oed</CDURL></CDGroupMember>
<CDComment
xmlns="http://www.openmath.org/OpenMathCD">Basic logical operators</CDComment>
<CDGroupMember>
<CDName
xmlns="http://www.openmath.org/OpenMathCD">logic1</CDName>
<CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/logic1.oed</CDURL></CDGroupMember>
<CDComment
xmlns="http://www.openmath.org/OpenMathCD">
  MathML Numerical Types
</CDComment>
<CDGroupMember>
<CDName
xmlns="http://www.openmath.org/OpenMathCD">mathmltypes</CDName>
<CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/mathmltypes.oed</CDURL>
</CDGroupMember>
<CDComment
xmlns="http://www.openmath.org/OpenMathCD">Minima and maxima</CDComment>
<CDGroupMember>
<CDName
xmlns="http://www.openmath.org/OpenMathCD">minmax1</CDName>
<CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/minmax1.oed</CDURL></CDGroupMember>
<CDComment
xmlns="http://www.openmath.org/OpenMathCD">Multiset-theoretic operators and constructors</CDComment>
<CDGroupMember>
<CDName
xmlns="http://www.openmath.org/OpenMathCD">multiset1</CDName>
<CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/multiset1.oed</CDURL></CDGroupMember>
<CDComment
xmlns="http://www.openmath.org/OpenMathCD">Symbols for creating numbers, including some defined
```

```
(which can be seen as nullary constructors)</CDComment>
<CDGroupMember>
  <CDName
xmlns="http://www.openmath.org/OpenMathCD">numsl</CDName>
  <CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/numsl.ocd</CDURL>
  <CDComment
xmlns="http://www.openmath.org/OpenMathCD">Symbols for creating piecewise definitions</
  <CDGroupMember>
    <CDName
xmlns="http://www.openmath.org/OpenMathCD">piece1</CDName>
    <CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/piece1.ocd</CDURL>
    <CDComment
xmlns="http://www.openmath.org/OpenMathCD">The basic quantifiers forall and exists.</CD
  <CDGroupMember>
    <CDName
xmlns="http://www.openmath.org/OpenMathCD">quant1</CDName>
    <CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/quant1.ocd</CDURL>
    <CDComment
xmlns="http://www.openmath.org/OpenMathCD">Common arithmetic relations</CDComment>
  <CDGroupMember>
    <CDName
xmlns="http://www.openmath.org/OpenMathCD">relation1</CDName>
    <CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/relation1.ocd</CD
    <CDComment
xmlns="http://www.openmath.org/OpenMathCD">Number sets</CDComment>
  <CDGroupMember>
    <CDName
xmlns="http://www.openmath.org/OpenMathCD">setname1</CDName>
    <CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/setname1.ocd</CDU
    <CDComment
xmlns="http://www.openmath.org/OpenMathCD">Rounding</CDComment>
  <CDGroupMember>
    <CDName
xmlns="http://www.openmath.org/OpenMathCD">rounding1</CDName>
    <CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/rounding1.ocd</CD
    <CDComment
xmlns="http://www.openmath.org/OpenMathCD">Set-theoretic operators and constructors</CD
  <CDGroupMember>
```



```
<CDName
xmlns="http://www.openmath.org/OpenMathCD">set1</CDName>
  <CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/set1.ocd</CDURL></CDGroupMember>
  <CDComment
xmlns="http://www.openmath.org/OpenMathCD">Basic data orientated statistical operators</CDComment>
</CDGroupMember>
  <CDName
xmlns="http://www.openmath.org/OpenMathCD">s_data1</CDName>
  <CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/s_data1.ocd</CDURL></CDGroupMember>
  <CDComment
xmlns="http://www.openmath.org/OpenMathCD">Basic random variable orientated statistical operators</CDComment>
</CDGroupMember>
  <CDName
xmlns="http://www.openmath.org/OpenMathCD">s_dist1</CDName>
  <CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/s_dist1.ocd</CDURL></CDGroupMember>
  <CDComment
xmlns="http://www.openmath.org/OpenMathCD">Basic transcendental functions</CDComment>
</CDGroupMember>
  <CDName
xmlns="http://www.openmath.org/OpenMathCD">transc1</CDName>
  <CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/transc1.ocd</CDURL></CDGroupMember>
  <CDComment
xmlns="http://www.openmath.org/OpenMathCD">Vector calculus functions</CDComment>
</CDGroupMember>
  <CDName
xmlns="http://www.openmath.org/OpenMathCD">veccalc1</CDName>
  <CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/veccalc1.ocd</CDURL></CDGroupMember>
  <CDComment
xmlns="http://www.openmath.org/OpenMathCD">Alternative encoding symbols for compatibility with t
  Semantic mapping constructs.</CDComment>
</CDGroupMember>
  <CDName
xmlns="http://www.openmath.org/OpenMathCD">altenc</CDName>
  <CDURL
xmlns="http://www.openmath.org/OpenMathCD">http://www.openmath.org/cd/altenc.ocd</CDURL></CDGroupMember>
</CDGroup>
```

## **A.5 The error Content Dictionary**

```
<CD
  xmlns="http://www.openmath.org/OpenMathCD">
```

```
<CDComment>
```

This document is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

The copyright holder grants you permission to redistribute this document freely as a verbatim copy. Furthermore, the copyright holder permits you to develop any derived work from this document provided that the following conditions are met.

- a) The derived work acknowledges the fact that it is derived from this document, and maintains a prominent reference in the work to the original source.
- b) The fact that the derived work is not the original OpenMath document is stated prominently in the derived work. Moreover if both this document and the derived work are Content Dictionaries then the derived work must include a different CDName element, chosen so that it cannot be confused with any works adopted by the OpenMath Society. In particular, if there is a Content Dictionary Group whose name is, for example, 'math' containing Content Dictionaries named 'math1', 'math2' etc., then you should not name a derived Content Dictionary 'mathN' where N is an integer. However you are free to name it 'private\_mathN' or some such. This is because the names 'mathN' may be used by the OpenMath Society for future extensions.
- c) The derived work is distributed under terms that allow the compilation of derived works, but keep paragraphs a) and b) intact. The simplest way to do this is to distribute the derived work under the OpenMath license, but this is not a requirement.

If you have questions about this license please contact the OpenMath society at <http://www.openmath.org>.

```
</CDComment>
```

```
<CDName> error </CDName>
```

```
<CDBase>http://www.openmath.org/cd</CDBase>
```

```
<CDURL> http://www.openmath.org/cd/error.ocd </CDURL>
```

```
<CDReviewDate>2006-03-30</CDReviewDate>
```

```
<CDStatus> official </CDStatus>
```

```
<CDDate>2004-03-30</CDDate>
```

```
<CDVersion>3</CDVersion>
```

```
<CDRevision>0</CDRevision>
```

```
<CDDefinition>
```

```
<Name> unhandled_symbol </Name>
```

```
<Role>error</Role>
```

```
<Description>
```

This symbol represents the error which is raised when an application reads a symbol which is present in the mentioned content dictionary, but which it has not implemented.

When receiving such a symbol, the application should act as if it had received the OpenMath error object constructed from `unhandled_symbol` and the unhandled symbol as in the example below.

```
</Description>
```

```
<Example>
```

The application does not implement the Complex numbers:

```
<OMOBJ
```

```
  xmlns="http://www.openmath.org/OpenMath"
```

```
  version="2.0"
```

```
  cdbase="http://www.openmath.org/cd">
```

```
    <OME>
```

```
      <OMS
```

```
        cd="error"
```

```
        name="unhandled_symbol"/>
```

```
      <OMS cd="setname1" name="C"/>
```

```
    </OME>
```

```
</OMOBJ>
```

```
</Example>
```

```
</CDDefinition>
```

```
<CDDefinition>
```

```
<Name> unexpected_symbol </Name>
```

```
<Role>error</Role>
```

```
<Description>
```

This symbol represents the error which is raised when an application reads a symbol which is not present in the mentioned content dictionary.

When receiving such a symbol, the application should act as if it had received the OpenMath error object constructed from `unexpected_symbol` and the unexpected symbol as in the example below.

```
</Description>
```

```
<Example>
The application received a mistyped symbol
<OMOBJ
  xmlns="http://www.openmath.org/OpenMath"
  version="2.0"
  cdbase="http://www.openmath.org/cd">
  <OME>
    <OMS
      cd="error"
      name="unexpected_symbol"/>
    <OMS cd="arith1" name="plurse"/>
  </OME>
</OMOBJ>
</Example>
</CDDefinition>
```

```
<CDDefinition>
<Name> unsupported_CD </Name>
<Role>error</Role>
<Description>
This symbol represents the error which is raised when an application
reads a symbol where the mentioned content dictionary is not
present.
```

When receiving such a symbol, the application should act as if it had received the OpenMath error object constructed from unsupported\_CD and the symbol from the unsupported Content Dictionary as in the example below.

```
</Description>
<Example>
The application does not know about the CD specfun1
<OMOBJ
  xmlns="http://www.openmath.org/OpenMath"
  version="2.0"
  cdbase="http://www.openmath.org/cd">
  <OME>
    <OMS
      cd="error"
      name="unsupported_CD"/>
    <OMS cd="specfun1" name="BesselJ"/>
  </OME>
</OMOBJ>
</Example>
</CDDefinition>
```

</CD>

## Appendix B

# *OpenMath* Schema in Relax NG XML Syntax (Normative)

This is the Relax NG Schema described in Section 4.1 expressed according to the Relax NG XML Syntax.

```
<grammar
  xmlns="http://relaxng.org/ns/structure/1.0"
  ns="http://www.openmath.org/OpenMath"
  datatypeLibrary="http://www.w3.org/2001/XMLSchema-datatypes">
  <start>
    <ref name="OMOBJ"/>
  </start>
  <!-- OpenMath object constructor -->
  <define name="OMOBJ">
    <element name="OMOBJ">
      <ref
name="compound.attributes"/>
      <optional>
        <attribute name="version">
          <data type="float"/>
        </attribute>
      </optional>
      <ref name="omel"/>
    </element>
  </define>
  <!-- Elements which can appear inside an OpenMath object -->
  <define name="omel">
```

```

    <choice>
      <ref name="OMS"/>
      <ref name="OMV"/>
      <ref name="OMI"/>
      <ref name="OMB"/>
      <ref name="OMSTR"/>
      <ref name="OMF"/>
      <ref name="OMA"/>
      <ref name="OMBIND"/>
      <ref name="OME"/>
      <ref name="OMATTR"/>
      <ref name="OMR"/>
    </choice>
  </define>
  <!-- things which can be variables -->
  <define name="omvar">
    <choice>
      <ref name="OMV"/>
      <ref name="attvar"/>
    </choice>
  </define>
  <define name="attvar">
    <element name="OMATTR">
      <ref
name="common.attributes"/>
      <group>
        <ref name="OMATP"/>
        <choice>
          <ref name="OMV"/>
          <ref name="attvar"/>
        </choice>
      </group>
    </element>
  </define>
  <define name="cdbase">
    <optional>
      <attribute name="cdbase">
        <data type="anyURI"/>
      </attribute>
    </optional>
  </define>
  <!-- attributes common to all elements -->
  <define
name="common.attributes">

```

```
<optional>
  <attribute name="id">
    <data type="ID"/>
  </attribute>
</optional>
</define>
<!-- attributes common to all elements that construct compount OM objects. -->
<define
name="compound.attributes">
  <ref
name="common.attributes"/>
  <ref name="cdbase"/>
</define>
<!-- symbol -->
<define name="OMS">
  <element name="OMS">
    <ref
name="common.attributes"/>
    <attribute name="name">
      <data type="NCName"/>
    </attribute>
    <attribute name="cd">
      <data type="NCName"/>
    </attribute>
    <ref name="cdbase"/>
  </element>
</define>
<!-- variable -->
<define name="OMV">
  <element name="OMV">
    <ref
name="common.attributes"/>
    <attribute name="name">
      <data type="NCName"/>
    </attribute>
  </element>
</define>
<!-- integer -->
<define name="OMI">
  <element name="OMI">
    <ref
name="common.attributes"/>
    <data type="string">
      <param name="pattern">\s*(-\s?)?[0-9]+(\s[0-9]+)*\s*</param>
```



```
        </data>
      </element>
    </define>
    <!-- byte array -->
    <define name="OMB">
      <element name="OMB">
        <ref
name="common.attributes"/>
        <data
type="base64Binary"/>
      </element>
    </define>
    <!-- string -->
    <define name="OMSTR">
      <element name="OMSTR">
        <ref
name="common.attributes"/>
        <text/>
      </element>
    </define>
    <!-- IEEE floating point number -->
    <define name="OMF">
      <element name="OMF">
        <ref
name="common.attributes"/>
        <choice>
          <attribute name="dec">
            <data type="double"/>
          </attribute>
          <attribute name="hex">
            <data type="string">
              <param name="pattern">[0-9A-F]+</param>
            </data>
          </attribute>
        </choice>
      </element>
    </define>
    <!-- apply constructor -->
    <define name="OMA">
      <element name="OMA">
        <ref
name="compound.attributes"/>
        <oneOrMore>
          <ref name="omel"/>
        </oneOrMore>
      </element>
    </define>
```

```

    </oneOrMore>
  </element>
</define>
<!-- binding constructor -->
<define name="OMBIND">
  <element name="OMBIND">
    <ref
name="compound.attributes"/>
    <ref name="omel"/>
    <ref name="OMBVAR"/>
    <ref name="omel"/>
  </element>
</define>
<!-- variables used in binding constructor -->
<define name="OMBVAR">
  <element name="OMBVAR">
    <ref
name="common.attributes"/>
    <oneOrMore>
      <ref name="omvar"/>
    </oneOrMore>
  </element>
</define>
<!-- error constructor -->
<define name="OME">
  <element name="OME">
    <ref
name="common.attributes"/>
    <ref name="OMS"/>
    <zeroOrMore>
      <choice>
        <ref name="omel"/>
        <ref name="OMFOREIGN"/>
      </choice>
    </zeroOrMore>
  </element>
</define>
<!-- attribution constructor and attribute pair constructor -->
<define name="OMATTR">
  <element name="OMATTR">
    <ref
name="compound.attributes"/>
    <ref name="OMATP"/>
    <ref name="omel"/>
  </element>
</define>
```

```

    </element>
</define>
<define name="OMATP">
  <element name="OMATP">
    <ref
name="compound.attributes"/>
    <oneOrMore>
      <ref name="OMS"/>
      <choice>
        <ref name="omel"/>
        <ref name="OMFOREIGN"/>
      </choice>
    </oneOrMore>
  </element>
</define>
<!-- foreign constructor -->
<define name="OMFOREIGN">
  <element name="OMFOREIGN">
    <ref
name="compound.attributes"/>
    <optional>
      <attribute name="encoding">
        <data type="string"/>
      </attribute>
    </optional>
    <zeroOrMore>
      <choice>
        <ref name="omel"/>
        <ref name="notom"/>
      </choice>
    </zeroOrMore>
  </element>
</define>
<!--
  Any elements not in the om namespace
  (valid om is allowed as a descendant)
-->
<define name="notom">
  <choice>
    <element>
      <anyName>
        <except>
          <nsName/>
        </except>

```

```

    </anyName>
    <zeroOrMore>
      <attribute>
        <anyName/>
      </attribute>
    </zeroOrMore>
    <zeroOrMore>
      <choice>
        <ref name="omel"/>
        <ref name="notom"/>
      </choice>
    </zeroOrMore>
  </element>
  <text/>
</choice>
</define>
<!-- reference constructor -->
<define name="OMR">
  <element name="OMR">
    <ref
name="common.attributes"/>
    <attribute name="href">
      <data type="anyURI"/>
    </attribute>
  </element>
</define>
</grammar>
```

## Appendix C

# Restricting the *OpenMath* Schema (Non-Normative)

Relax NG allows one to state constraints such as *if the cd attribute of OMS is arith1 then the name attribute must be one of lcm, gcd, plus etc.* Thus it is easy to use a stylesheet to generate for any given CD, a Relax NG schema that expresses the constraint that an OMS naming that CD must only use symbols defined in the specified dictionary. Similarly it is possible to use the *role* information contained in the CD to restrict which symbols can be the first child of an OMBIND or the odd-numbered children of an OMATP.

The modularisation mechanisms of Relax NG then allow one to include these schema for all the CDs that you want to allow and, for example, to replace the regexp-based validation of the OMS attributes by explicit lists of allowed CD names, and for each CD Name, a list of allowed symbol names.

For example, a CD-specific Relax NG Schema for the arith1 CD shown in Appendix A.2 would look like:

```
<?xml version="1.0" encoding="UTF-8"?>
<grammar xmlns="http://relaxng.org/ns/structure/1.0" datatypeLibrary="">
  <define name="cd.attlist.OMS" combine="choice">
    <attribute name="cd">
      <value type="string">arith1</value>
    </attribute>
    <attribute name="name">
      <choice>
        <value type="string">lcm</value>
        <value type="string">gcd</value>
        <value type="string">plus</value>
        <value type="string">unary_minus</value>
        <value type="string">minus</value>
      </choice>
    </attribute>
  </define>
</grammar>
```

```
        <value type="string">times</value>
        <value type="string">divide</value>
        <value type="string">power</value>
        <value type="string">abs</value>
        <value type="string">root</value>
        <value type="string">sum</value>
        <value type="string">product</value>
    </choice>
</attribute>
</define>
</grammar>
```

or, using the Relax NG compact syntax:

```
cd.attlist.OMS |=
attribute cd {string "arith1" },
attribute name {
string "lcm" |
string "gcd" |
string "plus" |
string "unary_minus" |
string "minus" |
string "times" |
string "divide" |
string "power" |
string "abs" |
string "root" |
string "sum" |
string "product" }
```

To build a schema that allows only symbols from arith1 we just need to include the *OpenMath* schema described in Section 4.1.1, override the attribute declarations for OMS, and then include the schema for arith1. For example:

```
<?xml version="1.0" encoding="UTF-8"?>
<grammar xmlns="http://relaxng.org/ns/structure/1.0">
  <include href="openmath.rng">
    <define name="attlist.OMS">
      <ref name="cd.attlist.OMS"/>
    </define>
  </include>
  <include href="arith1.rng"/>
</grammar>
```

or, in the compact syntax:

```
include "openmath.rnc" {  
  attlist.OMS = cd.attlist.OMS}  
  
include "arith1.rnc"
```

Using this approach it is possible to include as many files as required.

## Appendix D

# *OpenMath* Schema in XSD Syntax (Non-Normative)

This is an XSD Schema generated from the Relax NG Schema described in Section 4.1.

```
<schema
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:om="http://www.openmath.org/OpenMath"
  elementFormDefault="qualified"
  targetNamespace="http://www.openmath.org/OpenMath">
  <!-- OpenMath object constructor -->
  <element name="OMOBJ">
    <complexType>
      <group ref="om:omel"/>
      <attributeGroup
ref="om:compound.attributes"/>
      <attribute name="version" type="xs:float"/>
    </complexType>
  </element>
  <!-- Elements which can appear inside an OpenMath object -->
  <group name="omel">
    <choice>
      <element ref="om:OMS"/>
      <element ref="om:OMV"/>
      <element ref="om:OMI"/>
      <element ref="om:OMB"/>
      <element ref="om:OMSTR"/>
      <element ref="om:OMF"/>
    </choice>
  </group>
</schema>
```



```

    <element ref="om:OMA"/>
    <element ref="om:OMBIND"/>
    <element ref="om:OME"/>
    <group ref="om:OMATTR"/>
    <element ref="om:OMR"/>
  </choice>
</group>
<!-- things which can be variables -->
<group name="omvar">
  <choice>
    <element ref="om:OMV"/>
    <group ref="om:attvar"/>
  </choice>
</group>
<group name="attvar">
  <sequence>
    <element name="OMATTR">
      <complexType>
        <sequence>
          <element ref="om:OMATP"/>
          <choice>
            <element ref="om:OMV"/>
            <group ref="om:attvar"/>
          </choice>
        </sequence>
        <attributeGroup
ref="om:common.attributes"/>
      </complexType>
    </element>
  </sequence>
</group>
<attributeGroup name="cdbase">
  <attribute name="cdbase" type="xs:anyURI"/>
</attributeGroup>
<!-- attributes common to all elements -->
<attributeGroup
name="common.attributes">
  <attribute name="id" type="xs:ID"/>
</attributeGroup>
<!-- attributes common to all elements that construct compound OM objects. -->
<attributeGroup
name="compound.attributes">
  <attributeGroup
ref="om:common.attributes"/>

```

```
<attributeGroup ref="om:cdbase"/>
</attributeGroup>
<!-- symbol -->
<element name="OMS">
  <complexType>
    <attributeGroup
ref="om:common.attributes"/>
    <attribute name="name" use="required" type="xs:NCName"/>
    <attribute name="cd" use="required" type="xs:NCName"/>
    <attributeGroup ref="om:cdbase"/>
  </complexType>
</element>
<!-- variable -->
<element name="OMV">
  <complexType>
    <attributeGroup
ref="om:common.attributes"/>
    <attribute name="name" use="required" type="xs:NCName"/>
  </complexType>
</element>
<!-- integer -->
<element name="OMI">
  <complexType>
    <simpleContent>
      <restriction base="xs:anyType">
        <simpleType>
          <restriction base="xs:string">
            <pattern
value="\s*(-\s?)?[0-9]+(\s[0-9]+)*\s"/>
            </restriction>
          </simpleType>
        <attributeGroup
ref="om:common.attributes"/>
      </restriction>
    </simpleContent>
  </complexType>
</element>
<!-- byte array -->
<element name="OMB">
  <complexType>
    <simpleContent>
      <extension
base="xs:base64Binary">
        <attributeGroup
```

```
ref="om:common.attributes"/>
  </extension>
  </simpleContent>
</complexType>
</element>
<!-- string -->
<element name="OMSTR">
  <complexType mixed="true">
    <attributeGroup
ref="om:common.attributes"/>
  </complexType>
</element>
<!-- IEEE floating point number -->
<element name="OMF">
  <complexType>
    <attributeGroup
ref="om:common.attributes"/>
    <attribute name="dec" type="xs:double"/>
    <attribute name="hex">
      <simpleType>
        <restriction base="xs:string">
          <pattern value="[0-9A-F]+"/>
        </restriction>
      </simpleType>
    </attribute>
  </complexType>
</element>
<!-- apply constructor -->
<element name="OMA">
  <complexType>
    <group maxOccurs="unbounded" ref="om:omel"/>
    <attributeGroup
ref="om:compound.attributes"/>
  </complexType>
</element>
<!-- binding constructor -->
<element name="OMBIND">
  <complexType>
    <sequence>
      <group ref="om:omel"/>
      <element ref="om:OMBVAR"/>
      <group ref="om:omel"/>
    </sequence>
    <attributeGroup
```

```
ref="om:compound.attributes"/>
  </complexType>
</element>
<!-- variables used in binding constructor -->
<element name="OMBVAR">
  <complexType>
    <group maxOccurs="unbounded" ref="om:omvar"/>
    <attributeGroup
ref="om:common.attributes"/>
  </complexType>
</element>
<!-- error constructor -->
<element name="OME">
  <complexType>
    <sequence>
      <element ref="om:OMS"/>
      <choice minOccurs="0" maxOccurs="unbounded">
        <group ref="om:omel"/>
        <element
ref="om:OMFOREIGN"/>
      </choice>
    </sequence>
    <attributeGroup
ref="om:common.attributes"/>
  </complexType>
</element>
<!-- attribution constructor and attribute pair constructor -->
<group name="OMATTR">
  <sequence>
    <element name="OMATTR">
      <complexType>
        <sequence>
          <element ref="om:OMATP"/>
          <group ref="om:omel"/>
        </sequence>
        <attributeGroup
ref="om:compound.attributes"/>
      </complexType>
    </element>
  </sequence>
</group>
<element name="OMATP">
  <complexType>
    <sequence maxOccurs="unbounded">
```

```

        <element ref="om:OMS"/>
        <choice>
            <group ref="om:omel"/>
            <element
ref="om:OMFOREIGN"/>
        </choice>
    </sequence>
    <attributeGroup
ref="om:compound.attributes"/>
</complexType>
</element>
<!-- foreign constructor -->
<element name="OMFOREIGN">
    <complexType mixed="true">
        <choice minOccurs="0" maxOccurs="unbounded">
            <group ref="om:omel"/>
            <group ref="om:notom"/>
        </choice>
        <attributeGroup
ref="om:compound.attributes"/>
        <attribute name="encoding" type="xs:string"/>
    </complexType>
</element>
<!--
    Any elements not in the om namespace
    (valid om is allowed as a descendant)
-->
<group name="notom">
    <sequence>
        <choice minOccurs="0">
            <any namespace="##other" processContents="skip"/>
            <any namespace="##local" processContents="skip"/>
        </choice>
    </sequence>
</group>
<!-- reference constructor -->
<element name="OMR">
    <complexType>
        <attributeGroup
ref="om:common.attributes"/>
        <attribute name="href" use="required" type="xs:anyURI"/>
    </complexType>
</element>
</schema>

```



## Appendix E

### *OpenMath* DTD (Non-Normative)

This is a DTD generated from the Relax NG Schema described in Section 4.1. Note that we cannot express the fact that the `OMFOREIGN` element can contain any well-formed XML, so we have simply restricted it to contain any XML defined in the DTD.

```
<?xml encoding="UTF-8"?>

<!-- RELAX NG Schema for OpenMath 2 -->

<!ENTITY % cdbase "
  cdbase CDATA #IMPLIED">

<!-- attributes common to all elements -->

<!ENTITY % common.attributes "
  id ID #IMPLIED">

<!-- attributes common to all elements that construct compound OM objects. -->

<!ENTITY % compound.attributes "
  %common.attributes;
  %cdbase;">

<!-- Elements which can appear inside an OpenMath object -->

<!ENTITY % omel "OMS|OMV|OMI|OMB|OMSTR|OMF|OMA|OMBIND|OME|OMATTR|OMR">

<!-- OpenMath object constructor -->

<!ELEMENT OMOBJ (%omel;)>
```

```
<!-- ATTLIST OMOBJ
  xmlns CDATA #FIXED 'http://www.openmath.org/OpenMath'
  %compound.attributes;
  version CDATA #IMPLIED>

<!-- ENTITY % attvar "OMATTR">

<!-- things which can be variables -->

<!-- ENTITY % omvar "OMV|%attvar;">

<!-- symbol -->

<!-- ELEMENT OMS EMPTY>
<!-- ATTLIST OMS
  xmlns CDATA #FIXED 'http://www.openmath.org/OpenMath'
  %common.attributes;
  name NMTOKEN #REQUIRED
  cd NMTOKEN #REQUIRED
  %cibase;>

<!-- variable -->

<!-- ELEMENT OMV EMPTY>
<!-- ATTLIST OMV
  xmlns CDATA #FIXED 'http://www.openmath.org/OpenMath'
  %common.attributes;
  name NMTOKEN #REQUIRED>

<!-- integer -->

<!-- ELEMENT OMI (#PCDATA)>
<!-- ATTLIST OMI
  xmlns CDATA #FIXED 'http://www.openmath.org/OpenMath'
  %common.attributes;>

<!-- byte array -->

<!-- ELEMENT OMB (#PCDATA)>
<!-- ATTLIST OMB
  xmlns CDATA #FIXED 'http://www.openmath.org/OpenMath'
  %common.attributes;>

<!-- string -->
```



```
<!ELEMENT OMSTR (#PCDATA)>
<!ATTLIST OMSTR
  xmlns CDATA #FIXED 'http://www.openmath.org/OpenMath'
  %common.attributes;>

<!-- IEEE floating point number -->

<!ELEMENT OMF EMPTY>
<!ATTLIST OMF
  xmlns CDATA #FIXED 'http://www.openmath.org/OpenMath'
  %common.attributes;
  dec CDATA #IMPLIED
  hex CDATA #IMPLIED>

<!-- apply constructor -->

<!ELEMENT OMA (%omel;)+>
<!ATTLIST OMA
  xmlns CDATA #FIXED 'http://www.openmath.org/OpenMath'
  %compound.attributes;>

<!-- binding constructor -->

<!ELEMENT OMBIND ((%omel;),OMBVAR,(%omel;))>
<!ATTLIST OMBIND
  xmlns CDATA #FIXED 'http://www.openmath.org/OpenMath'
  %compound.attributes;>

<!-- variables used in binding constructor -->

<!ELEMENT OMBVAR (%omvar;)+>
<!ATTLIST OMBVAR
  xmlns CDATA #FIXED 'http://www.openmath.org/OpenMath'
  %common.attributes;>

<!-- error constructor -->

<!ELEMENT OME (OMS, (%omel;|OMFOREIGN)*)>
<!ATTLIST OME
  xmlns CDATA #FIXED 'http://www.openmath.org/OpenMath'
  %common.attributes;>

<!-- attribution constructor and attribute pair constructor -->
```

```
<!-- ELEMENT OMATTR (OMATP, (%omel;)) -->
<!-- ATTLIST OMATTR
      xmlns CDATA #FIXED 'http://www.openmath.org/OpenMath'
      %compound.attributes; -->

<!-- ELEMENT OMATP (OMS, (%omel;|OMFOREIGN))+ -->
<!-- ATTLIST OMATP
      xmlns CDATA #FIXED 'http://www.openmath.org/OpenMath'
      %compound.attributes; -->

<!-- foreign constructor -->

<!-- ELEMENT OMFOREIGN ANY -->
<!-- ATTLIST OMFOREIGN
      xmlns CDATA #FIXED 'http://www.openmath.org/OpenMath'
      %compound.attributes;
      encoding CDATA #IMPLIED -->

<!--
Any elements not in the om namespace
(valid om is allowed as a descendant)
-->

<!-- reference constructor -->

<!-- ELEMENT OMR EMPTY -->
<!-- ATTLIST OMR
      xmlns CDATA #FIXED 'http://www.openmath.org/OpenMath'
      %common.attributes;
      href CDATA #REQUIRED -->
```

## Appendix F

# Changes between *OpenMath* 1.1 and *OpenMath* 2 (Non-Normative)

In this appendix we describe the major changes that occurred between version 1.1 and version 2 of the *OpenMath* standard. All changes to the encodings and content dictionaries have been designed to be backward compatible, in other words all existing *OpenMath* objects and Content Dictionaries are still valid in *OpenMath* 2. On the other hand an existing *OpenMath* 1.1 application may not be able to process *OpenMath* 2 objects.

## F.1 Changes to the Formal Definition of Objects

Additional features of abstract objects have been introduced:

- *OpenMath* symbols have an optional role qualifier which restricts the place where they may occur within compound objects. Although part of the abstract description of a symbol this information is intended to be stored in the CD. In the XML encoding it may be used to provide a more restricted schema leading to tighter validation.
- In addition to their *name* and *cd* properties, symbols now have an optional *cdbase* property. This can be used to disambiguate between two CDs which are produced independently but have the same name, and can also be used to produce a canonical URI for any *OpenMath* symbol for use in frameworks such as RDFS or MathML which need one.
- An *OpenMath* object may be attributed with a non-*OpenMath* object using the new *foreign* constructor. This allows an XML-encoded *OpenMath* object to be attributed with appropriate Presentation MathML, for example, or a base-64 encoded MPEG file of its aural rendering.
- In addition, an *OpenMath* error object may take as its arguments non-*OpenMath* objects wrapped in the new *foreign* constructor.
- The new role property can be used to indicate that a symbol is an *attribution*, in which case an application may ignore or remove it, or a *semantic attribution* in which case removing it is no longer guaranteed to produce an equivalent object.
- Restrictions on the names of symbols, variables and content dictionaries have been relaxed to be compatible with XML and to be less Anglo-Saxon.

## F.2 Changes to the encodings

The *OpenMath* version 2 standard still mandates two encodings: XML and binary. The XML encoding in particular has been updated to reflect the latest development of XML and is now a full XML application. Version 2 encodings are backward compatible with version 1.1 encodings.

- Both encodings have been updated to support the changes to the model of abstract objects described above.
- Encodings support internal and external sharing of objects
- An optional attribute defining the version of the encoding can be specified for the encoded object
- The XML encoding in version 2 is defined by a Relax NG schema and the mandated character-based grammar of version 1 has been removed, while the DTD has been relegated to an Appendix.
- The symbolic values `INF`, `-INF` and `NaN` have been added to the decimal attribute of an `OMF` in the XML encoding, and guidelines on the interpretation of NaNs added to the compliance section.

### F.3 Changes to Content Dictionaries

- In *OpenMath* version 2 Content Dictionaries are defined in terms of the abstract information content that needs to be specified for defining *OpenMath* symbols. The current implementation is thus just one possible encoding of this abstract model.
- The *CDUses* element is not part of this information model and has been made optional and deprecated in the reference encoding since it is trivial to extract its content automatically from the CD.
- A CD may now, optionally, define its cdbase.
- A CD symbol definition may now, optionally, define its role.
- An FMP may, optionally, have a `kind` attribute for use in classifying different kinds of definitions. The details of how this attribute is used are not mandated by the standard.

# Bibliography

- [1] N. Borenstein and N Freed *MIME (Multipurpose Internet Mail Extensions) Part One: Format of Internet Message Bodies* , November 1996.  
<http://www.mhonarc.org/~ehood/MIME/2045/rfc2045.html>
- [2] N. Borenstein and N Freed *MIME (Multipurpose Internet Mail Extensions) Part Two: Media Types* , November 1996.  
<http://www.mhonarc.org/~ehood/MIME/2046/rfc2046.html>
- [3] Olga Caprotti and Arjeh M. Cohen *A Type System for OpenMath 1.3.2b OpenMath Esprit Consortium*, February 1999.  
<http://www.nag.co.uk/projects/OpenMath.html>  
<http://www.openmath.org/standard/ecc.pdf>
- [4] J. Davenport *A Small OpenMath Type System* , April 1999.  
<http://www.nag.co.uk/projects/OpenMath/omstd/>  
<http://www.openmath.org/standard/sts.pdf>
- [5] IEEE and IEEE and The Open Group *Std 1003.1-2001 (Open Group Technical Standard, Issue 6), Standard for Information Technology-Portable Operating System Interface (POSIX)Std 1003.1, 2003 Edition, The Open Group Base Specifications Issue 6* , 20012003.  
[http://www.unix.org/version3/ieee\\_std.html](http://www.unix.org/version3/ieee_std.html)
- [6] *IEEE Standard for binary Floating-Point Arithmetic ANSI/IEEE Standard 754* , 1985.  
[http://standards.ieee.org/reading/ieee/std\\_public/description/busarch/754-1985\\_desc.html](http://standards.ieee.org/reading/ieee/std_public/description/busarch/754-1985_desc.html)
- [7] IETF *RFC 2396 - Uniform Resource Identifiers (URI): Generic Syntax* , August 1998.  
<http://www.ietf.org/rfc/rfc2396.txt>
- [8] OASIS Committee Specification *RELAX NG Specification* , December 2001.  
<http://www.oasis-open.org/committees/relax-ng/spec-20011203.html>
- [9] Technical committee / subcommittee: JTC 1 *ISO 9660:1988 Information processing –Volume and File Structure of CDROM for Information Interchange* , 1988.  
<http://www.iso.org/iso/en/CatalogueDetailPage.CatalogueDetail?CSNUMBER=17505>

- [10] Unicode Consortium *The Unicode Standard: Version 2.04.0.0* Addison-Wesley, 2003.  
Online edition available from <http://www.unicode.org/versions/Unicode4.0.0>
- [11] World Wide Web Consortium *XML Schema Part 1: Structures & Part 2: Datatypes* , May 2001.  
<http://www.w3.org/TR/xmlschema-1>  
<http://www.w3.org/TR/xmlschema-2>
- [12] World Wide Web Consortium *Namespaces in XML* , January 1999.  
<http://www.w3.org/TR/REC-xml-names>
- [13] World Wide Web Consortium *Extensible Markup Language (XML) 1.0* , February 1998.  
<http://www.w3.org/TR/1998/REC-xml-19980210>
- [14] World Wide Web Consortium *Extensible Markup Language (XML) 1.1. W3C Recommendation REC-xml11-20040204* , February 2004.  
<http://www.w3.org/TR/2004/REC-xml11-20040204/>
- [15] World Wide Web Consortium *Mathematical Markup Language (MathML) 2.0 Specification (Second Edition)* , October 2003.  
<http://www.w3.org/TR/MathML2/>
- [16] World Wide Web Consortium *OWL Web Ontology Language Overview* , February 2004.  
<http://www.w3.org/TR/2004/REC-owl-features-20040210/>
- [17] World Wide Web Consortium *Resource Description Framework (RDF): Concepts and Abstract Syntax* , February 2004.  
<http://www.w3.org/TR/2004/REC-rdf-concepts-20040210/>