
Building an app from an explicit behavior spec

One representative app flow: trace behavior, encode it, implement it, then check the resulting state.

1 Trace a core user flow

A designer traces one representative journey.

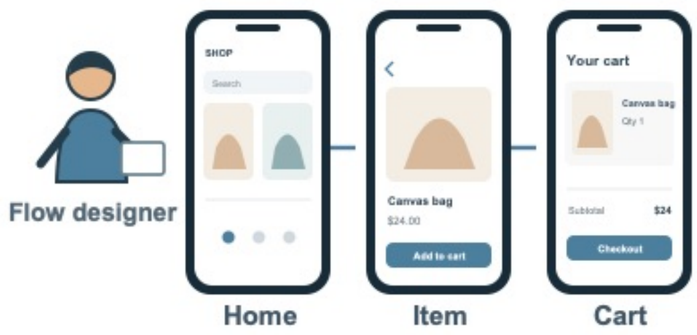

One journey inside one app

encode

2 Write and freeze the spec

Translate the flow into checkable behavior.

spec.json — one action entry


```
{
"page": "detail.skuPanel",
"actionId": "sku.addToCart",
"stateChange": "cart.items += item",
"stateCheck": "item and qty match"
}
```


Example fields for a state-changing action

build

3 Build around shared app state

GUI and native actions share one app state.

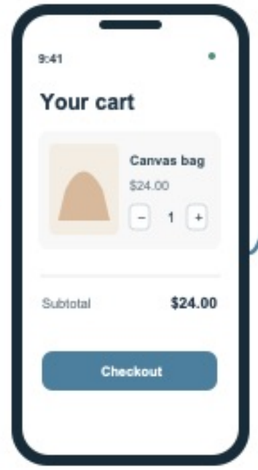

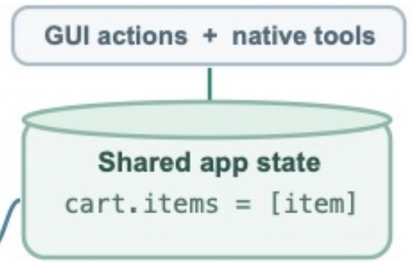

One state model for both paths

Revise spec → replay

Executable app

4 Walk through and check

Replay expected behavior in the running app.



Replay checks

- route and action resolve
- expected item and quantity are present in app state

deliver checked app

5 Deliver a reusable app

Executable and behavior contract are delivered together.



Reusable artifacts

UI routes + actions	State model + data
Replay checks	ready for tasks and evaluation

Illustrative single-app workflow; application counts are listed in the inventory table.