



SCALE 1:10 - VIEWS IN THIRD-ANGLE PROJECTION

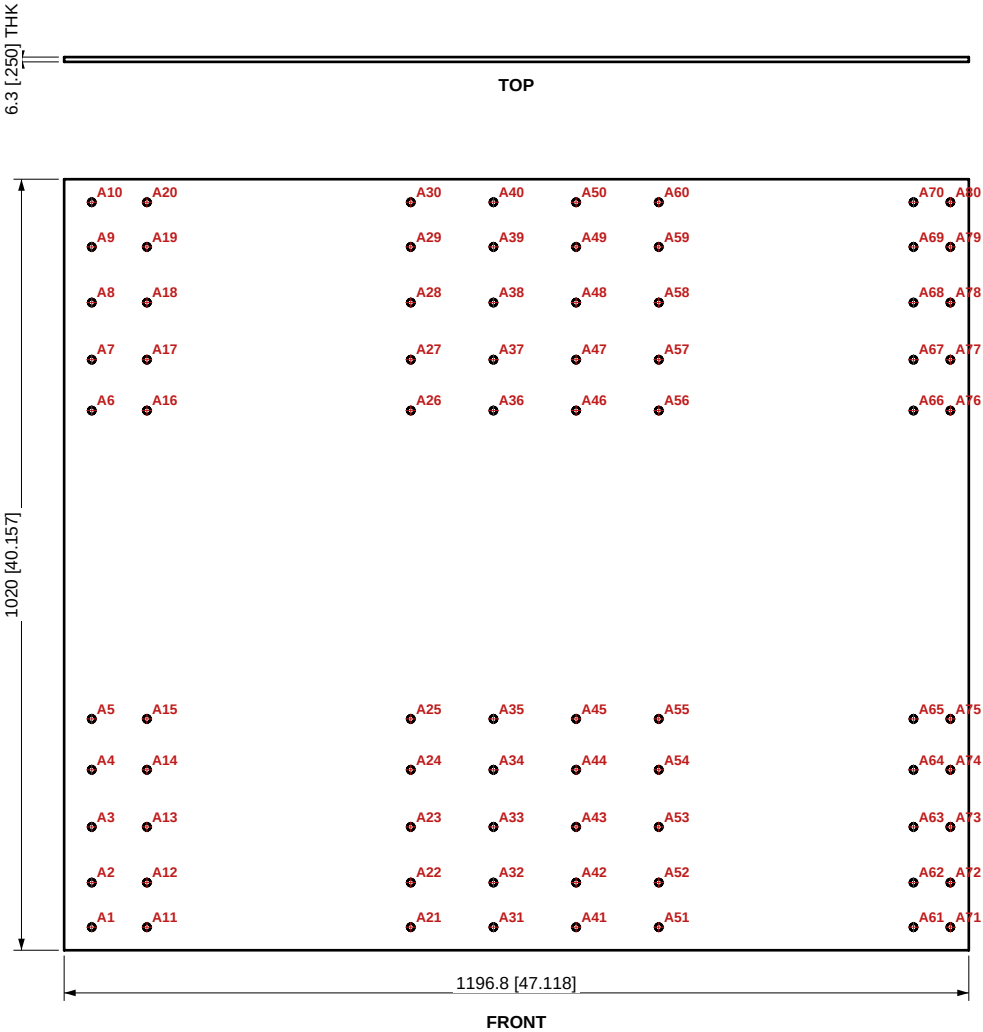

ISOMETRIC VIEW (REF, NOT TO SCALE)

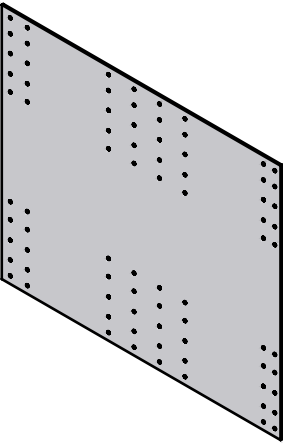

HOLE TABLE					X, Y FROM LOWER-LEFT CORNER OF EACH VIEW	
TAG	VIEW	X	Y	SIZE		
A1	FRONT	36.5 [1.437]	30.5 [1.200]	Ø9.5 [.375] THRU		
A2	FRONT	36.5 [1.437]	89.5 [3.524]	Ø9.5 [.375] THRU		
A3	FRONT	36.5 [1.437]	163.2 [6.424]	Ø9.5 [.375] THRU		
A4	FRONT	36.5 [1.437]	238.7 [9.399]	Ø9.5 [.375] THRU		
A5	FRONT	36.5 [1.437]	306.1 [12.049]	Ø9.5 [.375] THRU		
A6	FRONT	36.5 [1.437]	713.9 [28.108]	Ø9.5 [.375] THRU		
A7	FRONT	36.5 [1.437]	781.3 [30.758]	Ø9.5 [.375] THRU		
A8	FRONT	36.5 [1.437]	856.8 [33.733]	Ø9.5 [.375] THRU		
A9	FRONT	36.5 [1.437]	930.5 [36.633]	Ø9.5 [.375] THRU		
A10	FRONT	36.5 [1.437]	989.5 [38.957]	Ø9.5 [.375] THRU		
A11	FRONT	109.5 [4.311]	30.5 [1.200]	Ø9.5 [.375] THRU		
A12	FRONT	109.5 [4.311]	89.5 [3.524]	Ø9.5 [.375] THRU		
A13	FRONT	109.5 [4.311]	163.2 [6.424]	Ø9.5 [.375] THRU		
A14	FRONT	109.5 [4.311]	238.7 [9.399]	Ø9.5 [.375] THRU		
A15	FRONT	109.5 [4.311]	306.1 [12.049]	Ø9.5 [.375] THRU		
A16	FRONT	109.5 [4.311]	713.9 [28.108]	Ø9.5 [.375] THRU		
A17	FRONT	109.5 [4.311]	781.3 [30.758]	Ø9.5 [.375] THRU		
A18	FRONT	109.5 [4.311]	856.8 [33.733]	Ø9.5 [.375] THRU		
A19	FRONT	109.5 [4.311]	930.5 [36.633]	Ø9.5 [.375] THRU		
A20	FRONT	109.5 [4.311]	989.5 [38.957]	Ø9.5 [.375] THRU		
A21	FRONT	458.6 [18.054]	30.5 [1.200]	Ø9.5 [.375] THRU		
A22	FRONT	458.6 [18.054]	89.5 [3.524]	Ø9.5 [.375] THRU		
A23	FRONT	458.6 [18.054]	163.2 [6.424]	Ø9.5 [.375] THRU		
A24	FRONT	458.6 [18.054]	238.7 [9.399]	Ø9.5 [.375] THRU		
A25	FRONT	458.6 [18.054]	306.1 [12.049]	Ø9.5 [.375] THRU		
A26	FRONT	458.6 [18.054]	713.9 [28.108]	Ø9.5 [.375] THRU		
A27	FRONT	458.6 [18.054]	781.3 [30.758]	Ø9.5 [.375] THRU		
A28	FRONT	458.6 [18.054]	856.8 [33.733]	Ø9.5 [.375] THRU		

NOTES - UNLESS OTHERWISE SPECIFIED

- DIMENSIONS IN MILLIMETRES [INCHES]. DO NOT SCALE DRAWING.
- GENERATED FROM THE OPENS CAD MODEL. IF THIS SHEET AND THE MODEL DISAGREE, THE MODEL GOVERNS. THE GEOMETRY ID IDENTIFIES THE MODEL VERSION.
- CUT THE PROFILE FROM generated/dxf/P7_bottom-stiffener-plate.dxf AT 1:1. THIS SHEET IS FOR INSPECTION AND HOLE CHECKING.
- TOLERANCES: PROFILE AND HOLE POSITION ± 0.8 [$\pm .03$]; HOLE $\varnothing$ $+0.5/-0$ [$+.02/-0$].
- HOLES MARKED DRILL* ARE SMALLER THAN THE PLATE THICKNESS: PLASMA-MARK THE CENTRE ONLY, THEN DRILL TO SIZE.
- EDGES SQUARE UNLESS NOTED. BREAK SHARP EDGES. MARK THE PART NUMBER ON EACH PIECE.
- CHECK BEFORE MAKING: THE A6 ANGLE SEGMENTS THAT BOLT TO THIS PLATE ARE DRAWN 200 / 300 / 250 LONG (THEIR PART FILE CANNOT SEE ANGLE_SEGMENT_* IN lifetrac_v25.scad) BUT THIS PLATE'S HOLES ASSUME 146 / 546.8 / 97.6. MATCH-DRILL OR FIX THE MODEL FIRST.

PROJECT					PART NO.		
LIFETRAC v25 - OPEN SOURCE ECOLOGY					P7		
TITLE							
BOTTOM STIFFENER PLATE							
MATERIAL / STOCK					QTY PER MACHINE (COUNTED IN MODEL)		
PL 1/4 [6.35] ASTM A36					1		
PROCESS			FINISH		BLANK SIZE		MASS (CALC)
CNC PLASMA CUT			REMOVE DROSS, DEBURR; PRIME + PAINT		1196.8 x 1020		60.57 kg
SCALE	UNITS	3RD ANGLE	SHEET	REV	REV DATE	GEOMETRY ID SHEET SIZE	
1:10	mm [in]		1 OF 2	A	2026-09-25	d57bacba A (LETTER)	
SOURCE (OPENS CAD)						USED IN	
openscad/lifetrac_v25.scad : bottom_stiffener_plate(only="plate")						Base frame, floor	

HOLE TABLE (CONT.)

X, Y FROM LOWER-LEFT CORNER OF EACH VIEW

TAG	VIEW	X	Y	SIZE
A29	FRONT	458.6 [18.054]	930.5 [36.633]	Ø9.5 [.375] THRU
A30	FRONT	458.6 [18.054]	989.5 [38.957]	Ø9.5 [.375] THRU
A31	FRONT	567.9 [22.359]	30.5 [1.200]	Ø9.5 [.375] THRU
A32	FRONT	567.9 [22.359]	89.5 [3.524]	Ø9.5 [.375] THRU
A33	FRONT	567.9 [22.359]	163.2 [6.424]	Ø9.5 [.375] THRU
A34	FRONT	567.9 [22.359]	238.7 [9.399]	Ø9.5 [.375] THRU
A35	FRONT	567.9 [22.359]	306.1 [12.049]	Ø9.5 [.375] THRU
A36	FRONT	567.9 [22.359]	713.9 [28.108]	Ø9.5 [.375] THRU
A37	FRONT	567.9 [22.359]	781.3 [30.758]	Ø9.5 [.375] THRU
A38	FRONT	567.9 [22.359]	856.8 [33.733]	Ø9.5 [.375] THRU
A39	FRONT	567.9 [22.359]	930.5 [36.633]	Ø9.5 [.375] THRU
A40	FRONT	567.9 [22.359]	989.5 [38.957]	Ø9.5 [.375] THRU
A41	FRONT	677.3 [26.665]	30.5 [1.200]	Ø9.5 [.375] THRU
A42	FRONT	677.3 [26.665]	89.5 [3.524]	Ø9.5 [.375] THRU
A43	FRONT	677.3 [26.665]	163.2 [6.424]	Ø9.5 [.375] THRU
A44	FRONT	677.3 [26.665]	238.7 [9.399]	Ø9.5 [.375] THRU
A45	FRONT	677.3 [26.665]	306.1 [12.049]	Ø9.5 [.375] THRU
A46	FRONT	677.3 [26.665]	713.9 [28.108]	Ø9.5 [.375] THRU
A47	FRONT	677.3 [26.665]	781.3 [30.758]	Ø9.5 [.375] THRU
A48	FRONT	677.3 [26.665]	856.8 [33.733]	Ø9.5 [.375] THRU
A49	FRONT	677.3 [26.665]	930.5 [36.633]	Ø9.5 [.375] THRU
A50	FRONT	677.3 [26.665]	989.5 [38.957]	Ø9.5 [.375] THRU
A51	FRONT	786.6 [30.970]	30.5 [1.200]	Ø9.5 [.375] THRU
A52	FRONT	786.6 [30.970]	89.5 [3.524]	Ø9.5 [.375] THRU
A53	FRONT	786.6 [30.970]	163.2 [6.424]	Ø9.5 [.375] THRU
A54	FRONT	786.6 [30.970]	238.7 [9.399]	Ø9.5 [.375] THRU
A55	FRONT	786.6 [30.970]	306.1 [12.049]	Ø9.5 [.375] THRU
A56	FRONT	786.6 [30.970]	713.9 [28.108]	Ø9.5 [.375] THRU
A57	FRONT	786.6 [30.970]	781.3 [30.758]	Ø9.5 [.375] THRU
A58	FRONT	786.6 [30.970]	856.8 [33.733]	Ø9.5 [.375] THRU
A59	FRONT	786.6 [30.970]	930.5 [36.633]	Ø9.5 [.375] THRU
A60	FRONT	786.6 [30.970]	989.5 [38.957]	Ø9.5 [.375] THRU
A61	FRONT	1123.6 [44.236]	30.5 [1.200]	Ø9.5 [.375] THRU
A62	FRONT	1123.6 [44.236]	89.5 [3.524]	Ø9.5 [.375] THRU
A63	FRONT	1123.6 [44.236]	163.2 [6.424]	Ø9.5 [.375] THRU
A64	FRONT	1123.6 [44.236]	238.7 [9.399]	Ø9.5 [.375] THRU
A65	FRONT	1123.6 [44.236]	306.1 [12.049]	Ø9.5 [.375] THRU
A66	FRONT	1123.6 [44.236]	713.9 [28.108]	Ø9.5 [.375] THRU
A67	FRONT	1123.6 [44.236]	781.3 [30.758]	Ø9.5 [.375] THRU
A68	FRONT	1123.6 [44.236]	856.8 [33.733]	Ø9.5 [.375] THRU
A69	FRONT	1123.6 [44.236]	930.5 [36.633]	Ø9.5 [.375] THRU
A70	FRONT	1123.6 [44.236]	989.5 [38.957]	Ø9.5 [.375] THRU
A71	FRONT	1172.4 [46.157]	30.5 [1.200]	Ø9.5 [.375] THRU
A72	FRONT	1172.4 [46.157]	89.5 [3.524]	Ø9.5 [.375] THRU
A73	FRONT	1172.4 [46.157]	163.2 [6.424]	Ø9.5 [.375] THRU
A74	FRONT	1172.4 [46.157]	238.7 [9.399]	Ø9.5 [.375] THRU
A75	FRONT	1172.4 [46.157]	306.1 [12.049]	Ø9.5 [.375] THRU
A76	FRONT	1172.4 [46.157]	713.9 [28.108]	Ø9.5 [.375] THRU
A77	FRONT	1172.4 [46.157]	781.3 [30.758]	Ø9.5 [.375] THRU
A78	FRONT	1172.4 [46.157]	856.8 [33.733]	Ø9.5 [.375] THRU
A79	FRONT	1172.4 [46.157]	930.5 [36.633]	Ø9.5 [.375] THRU

HOLE TABLE (CONT.)

X, Y FROM LOWER-LEFT CORNER OF EACH VIEW

TAG	VIEW	X	Y	SIZE
A80	FRONT	1172.4 [46.157]	989.5 [38.957]	Ø9.5 [.375] THRU

NOTES - UNLESS OTHERWISE SPECIFIED

1. DIMENSIONS IN MILLIMETRES [INCHES]. DO NOT SCALE DRAWING.
2. GENERATED FROM THE OPENS CAD MODEL. IF THIS SHEET AND THE MODEL DISAGREE, THE MODEL GOVERNS. THE GEOMETRY ID IDENTIFIES THE MODEL VERSION.
3. CUT THE PROFILE FROM generated/dxf/P7_bottom-stiffener-plate.dxf AT 1:1. THIS SHEET IS FOR INSPECTION AND HOLE CHECKING.
4. TOLERANCES: PROFILE AND HOLE POSITION ±0.8 [±.03]; HOLE Ø +0.5/-0 [+ .02/-0].
5. HOLES MARKED DRILL* ARE SMALLER THAN THE PLATE THICKNESS: PLASMA-MARK THE CENTRE ONLY, THEN DRILL TO SIZE.
6. EDGES SQUARE UNLESS NOTED. BREAK SHARP EDGES. MARK THE PART NUMBER ON EACH PIECE.
7. CHECK BEFORE MAKING: THE A6 ANGLE SEGMENTS THAT BOLT TO THIS PLATE ARE DRAWN 200 / 300 / 250 LONG (THEIR PART FILE CANNOT SEE ANGLE_SEGMENT_* IN lifetrac_v25.scad) BUT THIS PLATE'S HOLES ASSUME 146 / 546.8 / 97.6. MATCH-DRILL OR FIX THE MODEL FIRST.

PROJECT LIFETRAC v25 - OPEN SOURCE ECOLOGY						PART NO. P7	
TITLE BOTTOM STIFFENER PLATE							
MATERIAL / STOCK PL 1/4 [6.35] ASTM A36					QTY PER MACHINE (COUNTED IN MODEL) 1		
PROCESS CNC PLASMA CUT			FINISH REMOVE DROSS, DEBURR; PRIME + PAINT		BLANK SIZE 1196.8 x 1020		MASS (CALC) 60.57 kg
SCALE -	UNITS mm [in]	3RD ANGLE 	SHEET 2 OF 2	REV A	REV DATE 2026-09-25	GEOMETRY ID SHEET SIZE d57bacba A (LETTER)	
SOURCE (OPENS CAD) openscad/lifetrac_v25.scad : bottom_stiffener_plate(only="plate")						USED IN Base frame, floor	