


Effective Programming Practices for Economists

Reproducible Research

What does pytask do?

Janoś Gabler and Hans-Martin von Gaudecker


A tiny example project

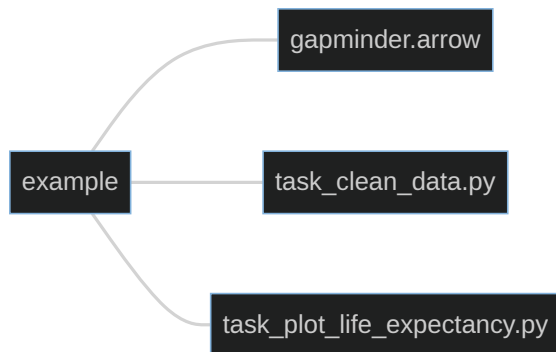

- `example/task_clean_data.py`
 - Contains the function `task_clean_data`
 - If called, the function reads in `example/gapminder.arrow` and produces `example/bld/data.pkl`
- `example/task_plot_life_expectancy.py`
 - Contains the function `task_plot_life_expectancy`
 - If called, the function reads in `example/bld/data.pkl` and produces `example/bld/life_expectancy.svg`

Step 1: collection


- Go through all folders in working directory
- Collect all files with name `task_XXX.py``
- Go through those files and collect all functions that start with `task_``
- Task functions and their (default) inputs will be used to construct the workflow

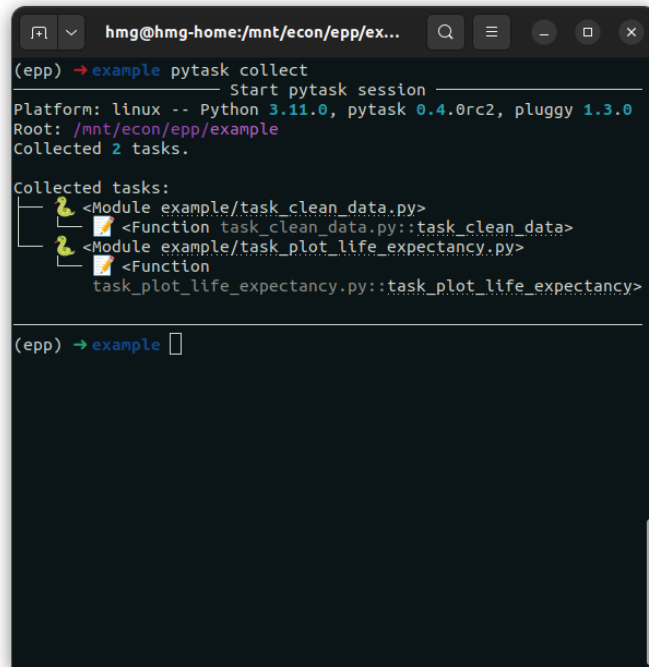

```
hmg@hmg-home:/mnt/econ/epp/ex...  
(epp) → example pytask collect  
Start pytask session  
Platform: linux -- Python 3.11.0, pytask 0.4.0rc2, pluggy 1.3.0  
Root: /mnt/econ/epp/example  
Collected 2 tasks.  
  
Collected tasks:  
└─ <Module example/task_clean_data.py>  
    └─ <Function task_clean_data.py::task_clean_data>  
└─ <Module example/task_plot_life_expectancy.py>  
    └─ <Function task_plot_life_expectancy.py::task_plot_life_expectancy>  
  
(epp) → example
```


Step 2: Dependency graph (DAG)

- Inspect function signatures to build a dependency graph
- ``produces`` describes function output
- Other arguments are function dependencies
- DAG structure enables to determine an order of execution that respects dependency structure (topological sort)

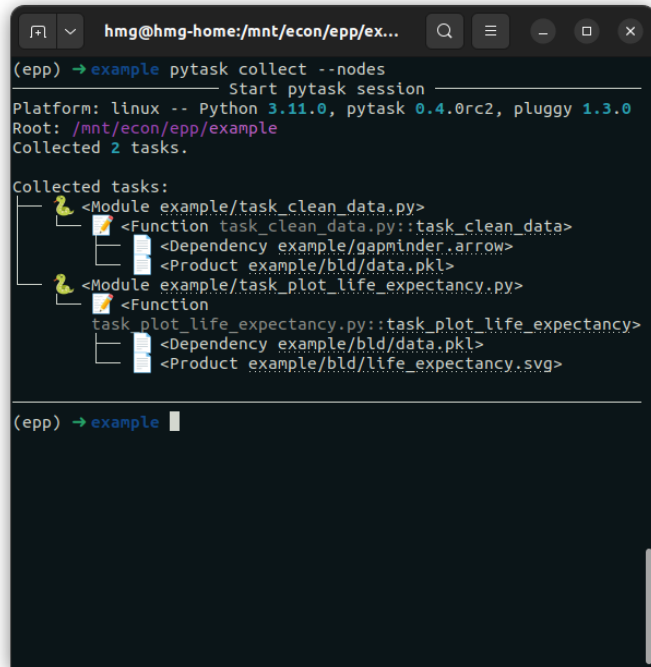A terminal window with a dark background and light-colored text. The title bar shows the user 'hmg' at 'hmg-home:/mnt/econ/epp/ex...'. The prompt is '(epp)'. The user has entered 'example pytask collect --nodes'. The output shows 'Start pytask session' followed by platform and root information. It then lists 'Collected 2 tasks.' and shows a tree structure of tasks and their dependencies. The first task is 'task_clean_data' which depends on 'example/gapminder.arrow' and produces 'example/bld/data.pkl'. The second task is 'task_plot_life_expectancy' which depends on 'example/bld/data.pkl' and produces 'example/bld/life_expectancy.svg'.

```
hmg@hmg-home:/mnt/econ/epp/ex...  
(epp) → example pytask collect --nodes  
Start pytask session  
Platform: linux -- Python 3.11.0, pytask 0.4.0rc2, pluggy 1.3.0  
Root: /mnt/econ/epp/example  
Collected 2 tasks.  
  
Collected tasks:  
├── <Module example/task_clean_data.py>  
│   ├── <Function task_clean_data.py::task_clean_data>  
│   │   ├── <Dependency example/gapminder.arrow>  
│   │   └── <Product example/bld/data.pkl>  
└── <Module example/task_plot_life_expectancy.py>  
    ├── <Function task_plot_life_expectancy.py::task_plot_life_expectancy>  
    │   ├── <Dependency example/bld/data.pkl>  
    │   └── <Product example/bld/life_expectancy.svg>  
  
(epp) → example
```

Can you see the DAG?

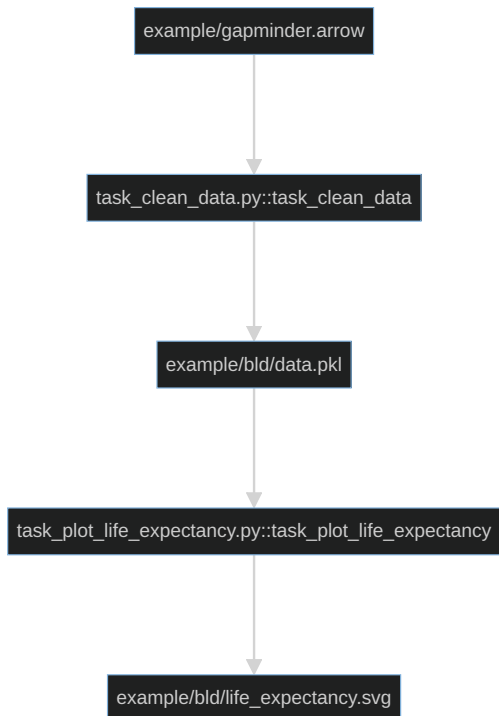


```
hmg@hmg-home:/mnt/econ/epp/ex...  
(epp) → example pytask collect --nodes  
Start pytask session  
Platform: linux -- Python 3.11.0, pytask 0.4.0rc2, pluggy 1.3.0  
Root: /mnt/econ/epp/example  
Collected 2 tasks.  
  
Collected tasks:  
├─ <Module example/task_clean_data.py>  
│   └─ <Function task_clean_data.py::task_clean_data>  
│       └─ <Dependency example/gapminder.arrow>  
│           └─ <Product example/bld/data.pkl>  
├─ <Module example/task_plot_life_expectancy.py>  
│   └─ <Function task_plot_life_expectancy.py::task_plot_life_expectancy>  
│       └─ <Dependency example/bld/data.pkl>  
│           └─ <Product example/bld/life_expectancy.svg>  
  
(epp) → example
```

Step 3: Track changes and execute

- Pytask knows which files should need to be generated
- Also keeps track on when code or products have changed
- Functions are only run if:
 - They have changed
 - A dependency has changed
- Huge time savings in large empirical projects!

Run for the first time

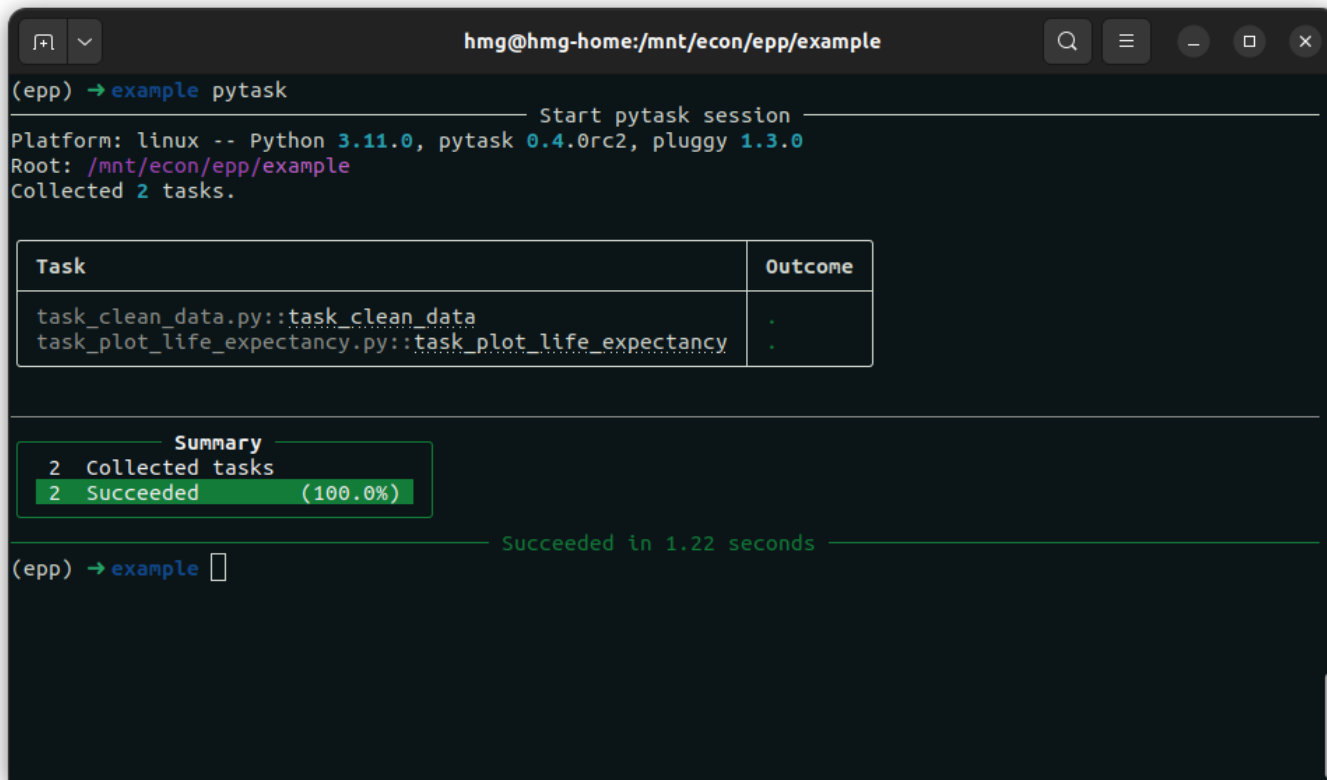

A terminal window titled 'hmg@hmg-home:/mnt/econ/epp/example' showing the execution of the 'example' task. The prompt is '(epp) → example pytask'. The output indicates a successful start of a pytask session on a Linux platform with Python 3.11.0, pytask 0.4.0rc2, and pluggy 1.3.0. The root directory is '/mnt/econ/epp/example' and 2 tasks were collected. A table shows the tasks and their outcomes, both of which succeeded. A summary box shows that 2 tasks were collected and 2 succeeded (100.0%). The session concluded with the message 'Succeeded in 1.22 seconds'.

```
(epp) → example pytask
```

Start pytask session

Platform: linux -- Python 3.11.0, pytask 0.4.0rc2, pluggy 1.3.0
Root: /mnt/econ/epp/example
Collected 2 tasks.

Task	Outcome
task_clean_data.py::task_clean_data	✓
task_plot_life_expectancy.py::task_plot_life_expectancy	✓

Summary

2 Collected tasks

2 Succeeded (100.0%)

Succeeded in 1.22 seconds

```
(epp) → example
```

Delete plot and run again



Delete cleaned data and run again

