

Effective Programming Practices for Economists

Basic Python


Running Python code via pytask

Janoš Gabler and Hans-Martin von Gaudecker

Preparation

- We assume you have installed anaconda and created the course environment
- Open a shell in the root directory of your project
 - On Windows, use the anaconda prompt or the powershell
 - If conda is not recognized in the powershell, check out this [stackoverflow post](#)
- Activate the environment using ``conda activate epp``
- Confirm the activation worked using ``conda info``

0: Activate and Info

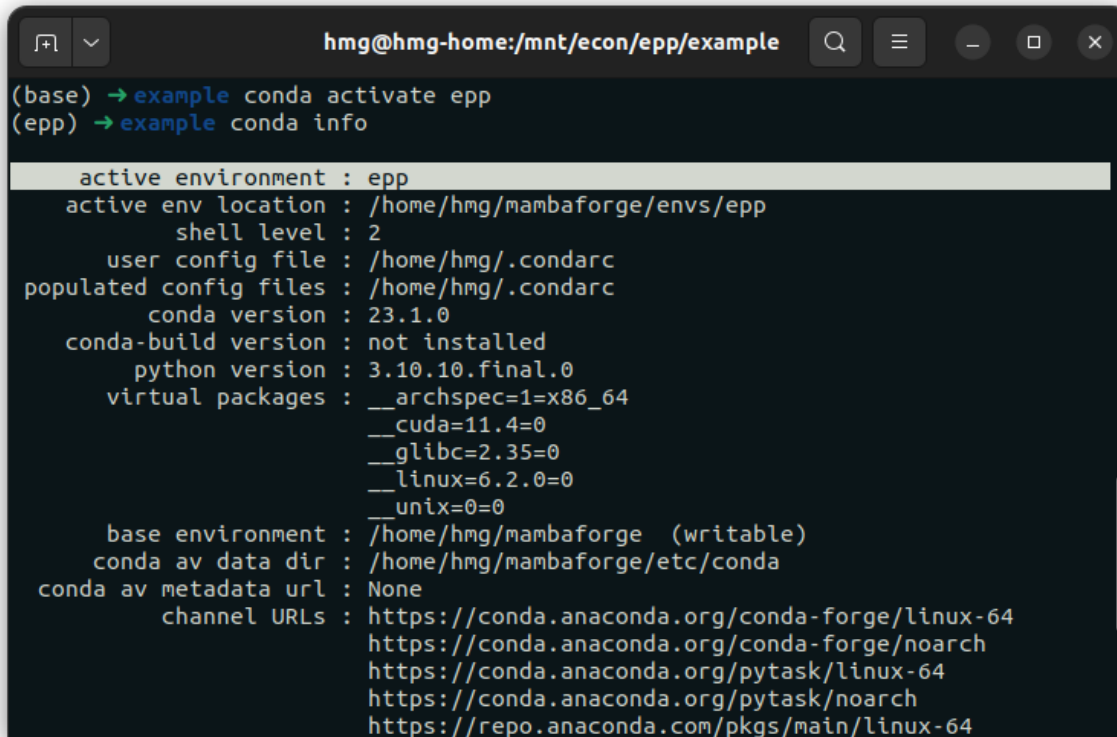

```
hmg@hmg-home:/mnt/econ/epp/example
(base) → example conda activate epp
(epp) → example conda info


active environment : epp
active env location : /home/hmg/mambaforge/envs/epp
shell level : 2
user config file : /home/hmg/.condarc
populated config files : /home/hmg/.condarc
conda version : 23.1.0
conda-build version : not installed
python version : 3.10.10.final.0
virtual packages : __archspec=1=x86_64
                  __cuda=11.4=0
                  __glibc=2.35=0
                  __linux=6.2.0=0
                  __unix=0=0
base environment : /home/hmg/mambaforge (writable)
conda av data dir : /home/hmg/mambaforge/etc/conda
conda av metadata url : None
channel URLs : https://conda.anaconda.org/conda-forge/linux-64
               https://conda.anaconda.org/conda-forge/noarch
               https://conda.anaconda.org/pytask/linux-64
               https://conda.anaconda.org/pytask/noarch
               https://repo.anaconda.com/pkg/main/linux-64
```

How does pytask execute code?

- Executing .py files: Run the entire file
- Executing notebooks: Run individual cells
- Pytask: Run individual functions in multiple .py files

Very useful for automating research pipelines

Example Project Structure

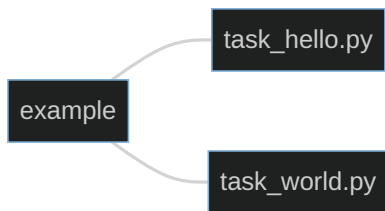


- Our shell is in the `example` directory
- We want to run all functions that start with `task_` in both `.py` files
- Command is `pytask`

1: Execute



1: Execute again

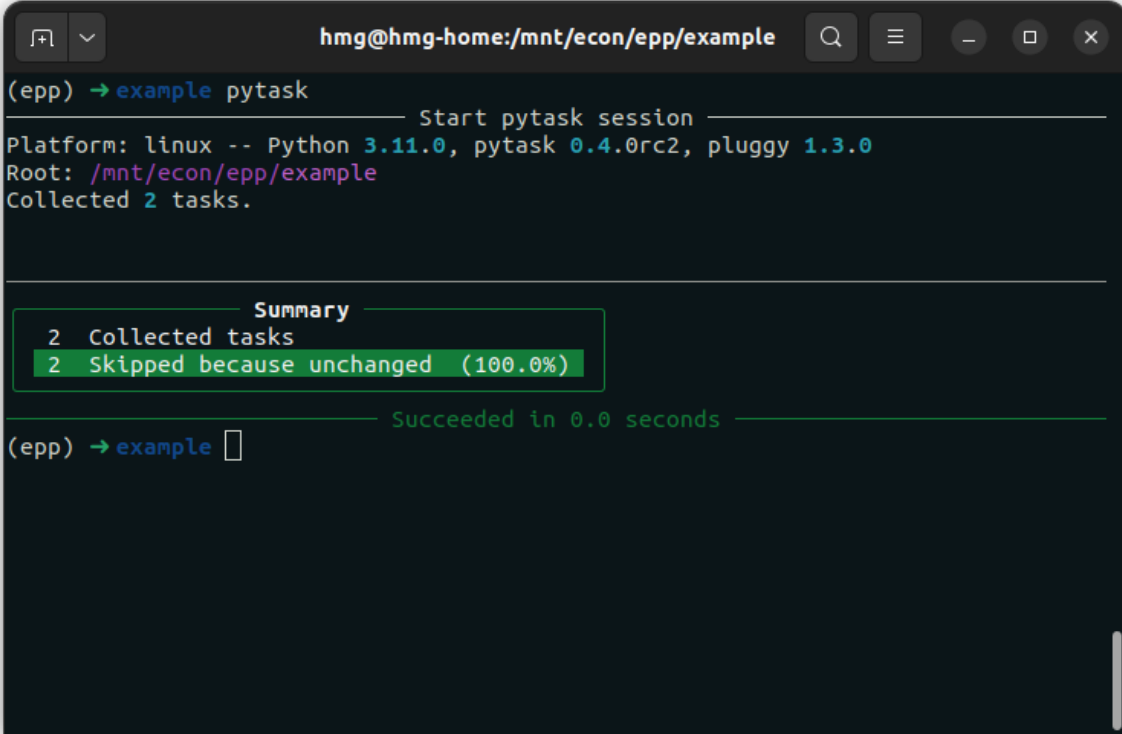

```
hmg@hmg-home:/mnt/econ/epp/example
(epp) → example pytask
----- Start pytask session -----
Platform: linux -- Python 3.11.0, pytask 0.4.0rc2, pluggy 1.3.0
Root: /mnt/econ/epp/example
Collected 2 tasks.

----- Summary -----
2 Collected tasks
2 Skipped because unchanged (100.0%)

----- Succeeded in 0.0 seconds -----
(epp) → example
```