

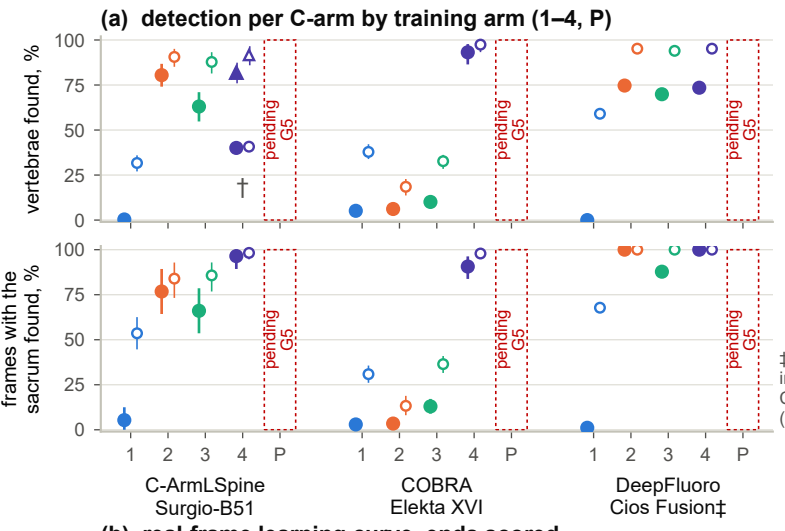



1 renders only, no real frame
2 real frames of the other two C-arms (the held-out detector)
3 styled renders + real frames of the other two C-arms
4 real frames of all three C-arms (device in training)
filled: confidence 0.74, pre-stated
open: confidence 0.25, software default
† arm learned body boxes; ▲ mutual-centre rule

‡ one specimen: no case interval
intervals: 95 % case-cluster percentile
C-ArmLSpine scored on whole-vertebra (outline) boxes, as in Table 3

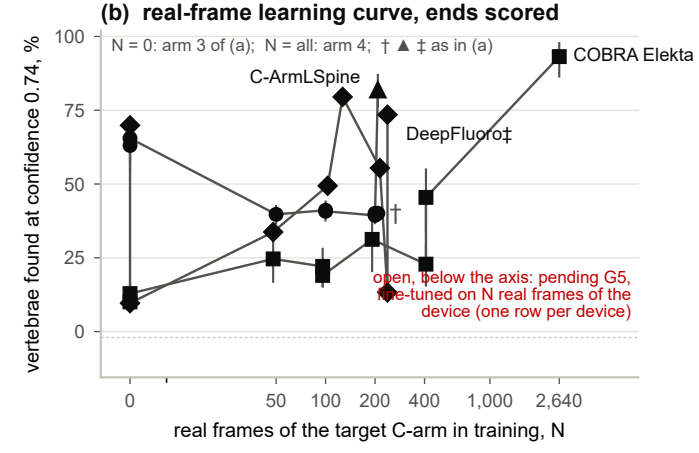

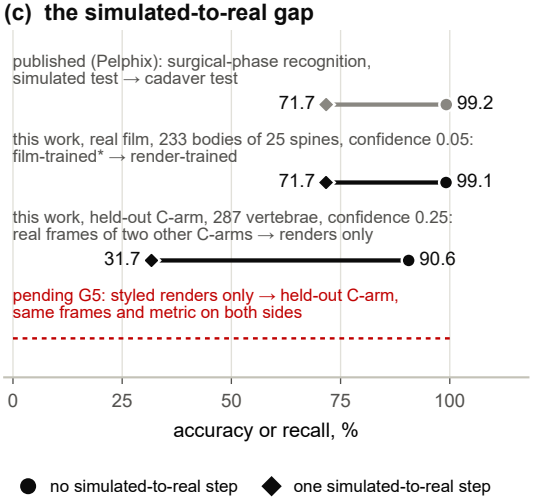

* in-sample: 196 of 233 bodies are from spines in the film-trained detector's training bank

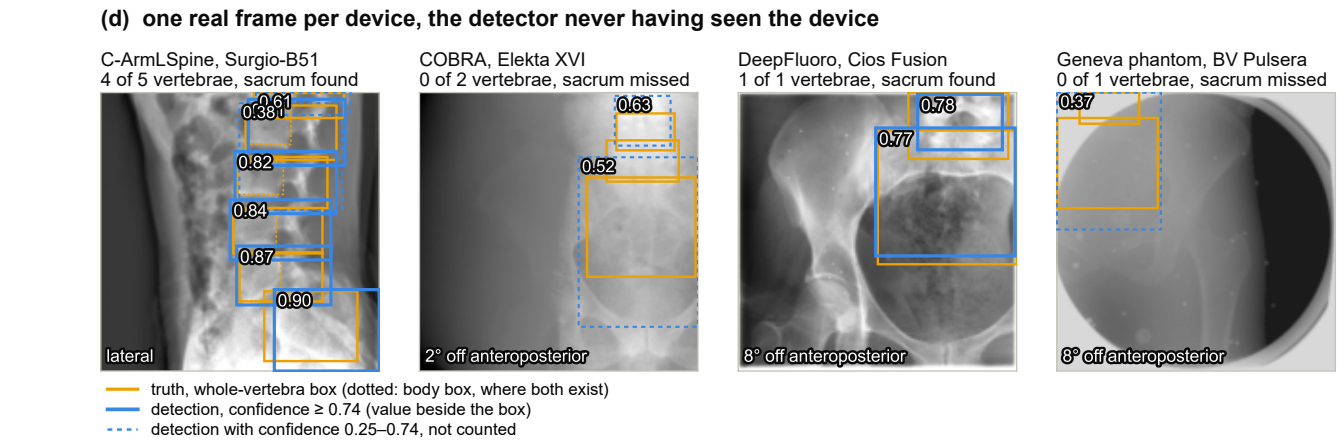

truth, whole-vertebra box (dotted: body box, where both exist)
detection, confidence ≥ 0.74 (value beside the box)
detection with confidence 0.25–0.74, not counted