



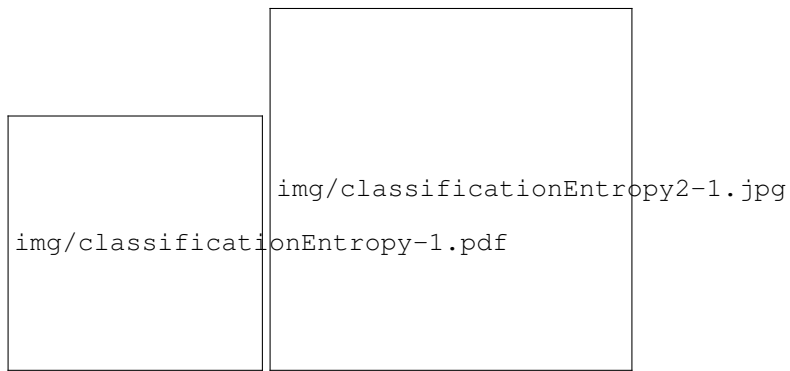


Figure 3: The decision regions of the current classifier F_θ are drawn in different color, and the three circles respectively represent different perturbation levels σ_i of the distributions $\mathcal{N}(\mathbf{x}, \sigma_i^2 I)$, where $\sigma_1 > \sigma_2 > \sigma_3$. The corresponding class distribution and the entropy are shown in the table, which indicates that a larger perturbation leads to a larger entropy.

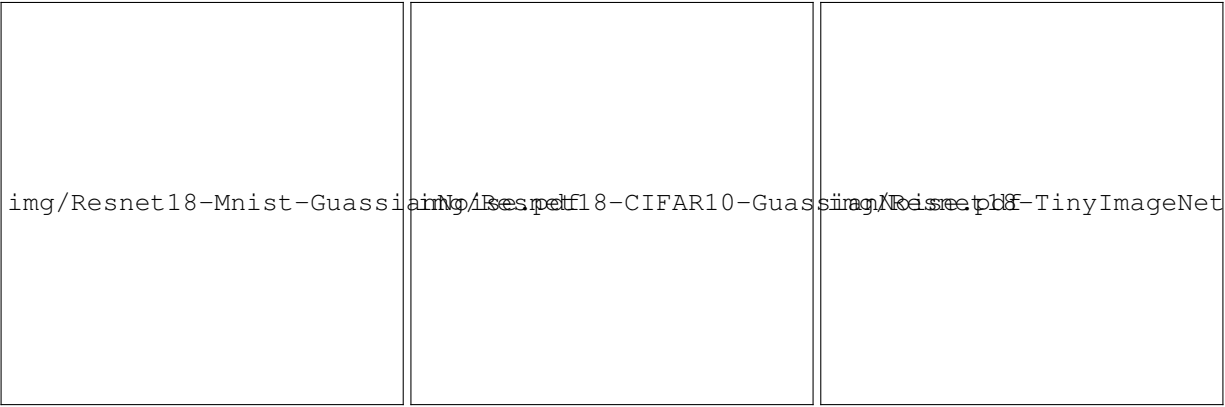

(a) MNIST-C (b) CIFAR10-C (c) Tiny-Imagenet-C

Figure 4: Performance comparison of different methods towards Gaussian noise in corruption datasets.

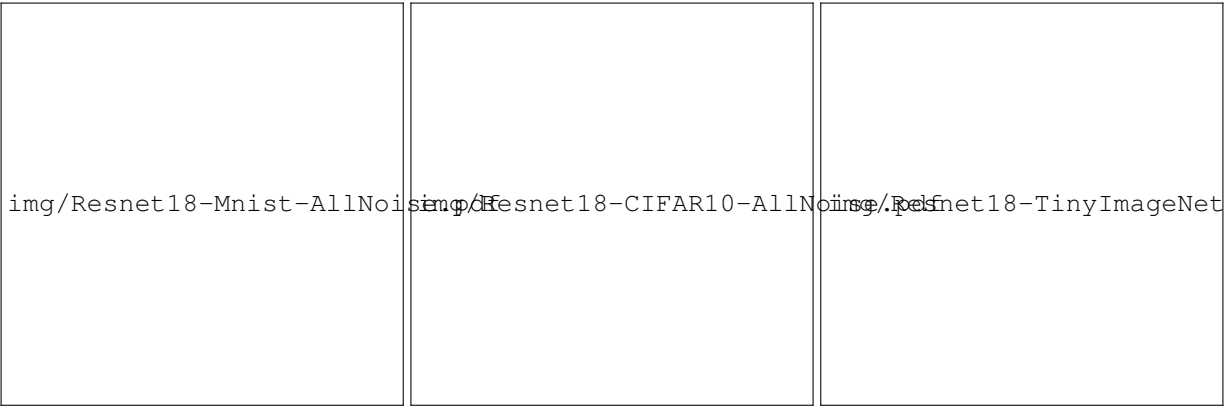

(a) MNIST-C (b) CIFAR10-C (c) Tiny-Imagenet-C

Figure 5: Average performance comparison of different methods towards 15 types of noise in corruption datasets.