



Financial Accounting Hub

Implementation Guide

Table of Contents

Table of Contents	1
1. What is Oracle Financial Accounting Hub (FAH)?	2
2. When do we use FAH?	2
3. Why use FAH instead of building a custom integration directly to GL?	2
3.1 FAH provides a full accounting engine — GL does not	2
3.2 Centralized governance & rule maintenance.....	3
3.3 Better auditability and traceability	3
3.4 Reduces dependency on system vendors	3
3.5 Supports parallel accounting (IFRS, Local GAAP, US GAAP)	3
3.6 Lower long-term cost and faster change management.....	4
📌 Summary.....	4
Implementation	5
Registering a Source System	5
1- Create Subledger Application Setups in Spreadsheet	6
2- Manage Subledger Application.....	13
3- Manage Sources	14
4- Manage Subledger Application Transaction Objects	15
5- Manage Accounting Attributes	17
Accounting Transformation	18
1- Manage User-Defined Formulas	20
2- Manage Mapping Sets	25
3- Manage Account Rules	28
4- Manage Description Rules	32
5- Manage Supporting References	33
6- Manage Journal Line Rules	36
7- Manage Subledger Journal Entry Rule Sets	38
8- Manage Accounting Methods.....	41
9- Activate Subledger Journal Entry Rule Set Assignments	43
Migrating the Accounting Transformation Configuration	44
Conclusion.....	47

Financial Accounting Hub overview

1. What is Oracle Financial Accounting Hub (FAH)?

Oracle FAH is a **centralized accounting engine inside Oracle Fusion** that standardizes and transforms financial transactions coming from **multiple source systems** (non-Oracle) into compliant, auditable accounting entries.

Your files define FAH as a tool that:

- **Transforms transactional data** from external systems into standardized accounting entries.
- **Applies flexible accounting rules** to meet IFRS, GAAP, and other regulatory requirements.
- **Acts as a bridge** between operational systems and the Oracle General Ledger.
- **Posts validated, consistent entries** into Oracle GL for reporting.

FAH provides a **single source of truth** and enables seamless integration across multiple ERPs or legacy systems.

2. When do we use FAH?

Use FAH when:

✓ You have multiple transactional or legacy systems

FAH unifies accounting from various platforms into one standardized structure.

✓ Accounting rules vary by business unit, region, product, or GAAP

It supports IFRS, local GAAP, and complex parallel accounting scenarios.

✓ You need strong auditability and compliance

FAH maintains detailed audit trails and consistent application of rules.

✓ You are integrating from external systems during migration to Fusion

When moving to Fusion but keeping some legacy systems, FAH handles accounting transformation until full replacement.

3. Why use FAH instead of building a custom integration directly to GL?

six strong reasons to use FAH instead of custom GL integrations.

3.1 FAH provides a full accounting engine — GL does not

GL only accepts **ready journal entries**.

FAH can **generate** the accounting, including:

- Event classification
- Debit/Credit derivation
- Account combinations (COA mapping)

- Description rules
- Supporting references

A custom GL integration would require rebuilding these capabilities manually in ETL/middleware—expensive and error-prone.

3.2 Centralized governance & rule maintenance

FAH stores accounting policies and rules in one place.

Custom integrations, on the other hand, spread rules across:

- ETL scripts
- Databricks
- Middleware mappings
- Source system hard-coding

3.3 Better auditability and traceability

FAH support:

- Supporting references for detailed drill-downs
- Subledger-level retention of attributes
- Consistent accounting treatment across systems

Your internal files emphasize FAH's enhanced financial reporting and auditability.

Custom integrations to GL lose transaction granularity unless they are heavily customized.

3.4 Reduces dependency on system vendors

Many systems (non-Oracle) generate **pre-accounted entries** with limited configurability.

Customizing them requires:

- Costly vendor changes
- Long lead times
- Rigid rule structures

FAH allows finance teams to take control of accounting rules **in Oracle**, reducing vendor constraints.

3.5 Supports parallel accounting (IFRS, Local GAAP, US GAAP)

FAH natively supports:

- Multiple ledgers
- Multiple accounting methods
- Multiple COA mappings

Your FAH decks highlight the value in regulatory environments that require parallel ledger reporting.

A custom GL integration would need to generate multiple entries for each GAAP—doubling or tripling development effort.

3.6 Lower long-term cost and faster change management

Your workshops might show issues with:

- Manual journals
- Inconsistent mappings
- Lack of transaction-level detail
- Hard-coded logic in middleware

FAH eliminates these by using Oracle's **standard framework**, reducing:

- Long-term maintenance
- Regression testing
- Manual work (e.g., repo netting, ECL, hedge accounting)

Summary


FAH is preferred over custom GL integrations because it:

- Generates standardized, compliant accounting (not just posting journals)
- Centralizes rule governance
- Provides complete auditability with supporting references
- Reduces reliance on vendors and IT for rule changes
- Supports multi-GAAP and multi-ledger accounting
- Minimizes manual journals and operational risk

FAH is the **strategic accounting engine**—GL alone is only a destination for journals.

Implementation

Registering a Source System

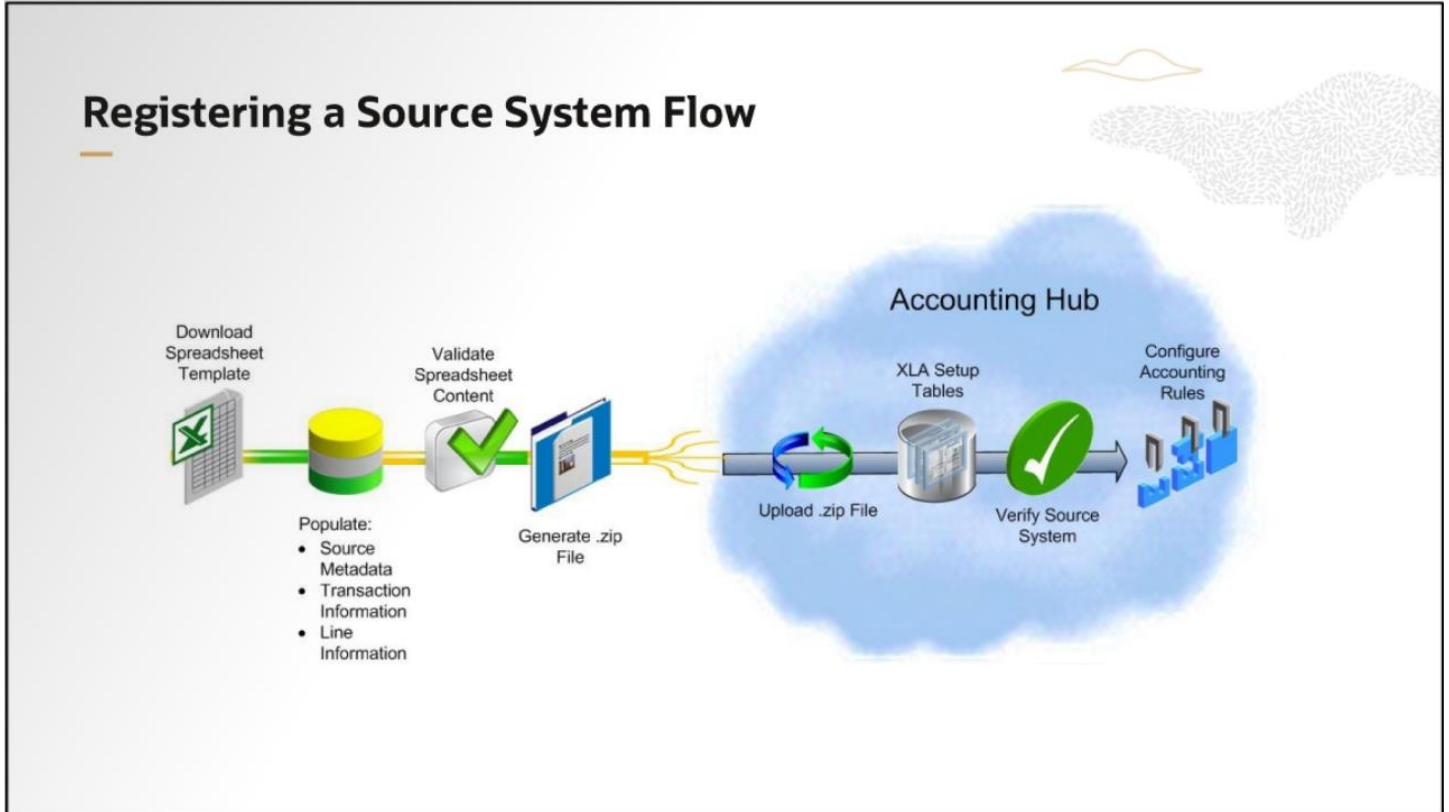

The graphic in the slide depicts the tasks to register a source system.

After completing the source system transaction flow analysis, you can use a spreadsheet to register your source systems in Accounting Hub. Spreadsheet registration accelerates the time from implementation and testing to production.

Complete the following tasks to register your source system:

- Download the Spreadsheet Template.
- Populate the Spreadsheet Template.
- Validate the Spreadsheet Content.
- Generate the .zip File.
- Upload the .zip File
- Verify the Source System.

1- Create Subledger Application Setups in Spreadsheet

Setup: Fusion Accounting Hub

Actions

Functional Areas

Change Feature Opt In

Search Tasks

Accounting Transformation

View Format Freeze Detach Wrap Show All Tasks

Task	Scope	Actions
Create Subledger Application Setups in Spreadsheet		
Manage Subledger Application	Receivables	
Update Subledger Application Options		
Manage Subledger Application Transaction Objects	Receivables	
Create and Assign Sources		
Manage Sources	Receivables	
Manage User-Defined Formulas	Receivables	
Manage Accounting Attributes	Receivables	
Configure Accounting Rules		
Manage Journal Line Rules	Receivables	
Columns Hidden 3		

Create Subledger Application Setups in Spreadsheet

Done

Download Setup Template Upload Setup File

Errors

View Freeze Detach

Worksheet Name	Row Position	Error Message
No data to display.		



XlaSourceSystemSet
up (3).xlsm

Source System Transactions	
*Name	*Short Name
Non Oracle Source	N_ORCL_SOURCE

Validate

Generate ZIP

Transaction Types

Overview
List the types of transactions from the source system that may need accounting. Examples: creating invoices, recording receiving or sending of payments, adjusting orders or customer balances.

Technical information

- Short names are used as column names for the objects in the Accounting Hub Cloud system, and are limited to alphanumeric characters and underscores.
- The source system name is used as the subledger application and event class names.

*Name	*Short Name
Commercial Insurance	COM_INSU
Individual Insurance	IND_INSU
Other Contracts	OTH_CONT

Instructions
Source System
Transaction Information
Line Information
+

ady Accessibility: Investigate

Navigate to:

My Enterprise > Setup and Maintenance > Tasks panel tab > Search > Enter Create Subledger Application > Search icon > Click on Create Subledger Application Setups in Spreadsheet > Download Setup Template > Open > Source System worksheet tab.

The Source System worksheet has two sections.

In the Source System Transactions section, enter:

- Name:**
The name of the source system. This name is used for the registered subledger application, event class, and journal source in Accounting Hub. It has a maximum length of 25 characters. An event class represents the transaction and is used to group event types.
- Short Name:**
This is used as the column name in the database.

In the Transaction Types section, enter:

- Name:**
The name of the transaction types. It has a maximum length of 30 characters. Each transaction type is used as an event type grouped under the event class and represents an event in the life cycle of a transaction that has accounting impact.

- **Short Name:**

This is used as the column name in the database.

Transaction Information:			
* Required			
List transaction information that can be used for accounting on this worksheet.			
Mandatory source information TRANSACTION_DATE provides the accounting date for booking the journal. TRANSACTION_NUMBER links the transaction and line information. LEDGER_NAME groups transactions belong to the same chart of accounts, business calendar, currency, and accounting rules.			
List of Sources			
*Name	*Short Name	*Type	Journal Display?
Transaction Date	TRANSACTION_DATE	Date	
Transaction Number	TRANSACTION_NUMBER	Text	
Ledger Name	LEDGER_NAME	Text	
TRANSACTION_STATUS_CODE	TRANSACTION_STATUS_COD	Text	Yes
ORIGIN_SOURCE_CODE	ORIGIN_SOURCE_CODE	Text	Yes
BATCH_REFERENCE	BATCH_REFERENCE		

<
>
Instructions
Source System
Transaction Information
Line Information
+

The Transaction Information worksheet lists transaction information as sources that are used for setting up accounting rules. These are header-level information sources.

The worksheet includes three predefined required sources:

- **Transaction Date:**

Provides the accounting date for booking a journal. You can add additional source attributes for the transaction date if multiple date options exist that are used as accounting date.

- **Transaction Number:**

Links the transaction and line information.

- **Ledger Name:**

Is the reporting entity for which journal entries are booked in the General Ledger.

To define more sources, enter:

- **Name:**

This name appears in a drop-down list for the accounting rules. Maximum length is 80 characters.

- **Short Name:**

This is used as the column header in the transaction data template. This template is used to upload source system transactions.

- **Type:**

This is used to describe the type of values from the source system. The available values are:

- **Text:** The length can be less than the alphanumeric source type of 100 CHAR values.
 - **Number:** This must be a valid numeric type.
 - **Date:** This must be a valid date value.
 - **Long Text:** This is a source type of VARCHAR2, where the length can be greater than the alphanumeric type of 100 CHAR values, but less than 1000 CHAR values.
-

- **Journal Display:**

Indicates whether this attribute is shown on a report and in inquiries along with the journal. Acceptable values are **Yes** and **No**.

- In the user interface, these are known as user transaction identifiers. Up to **10** rows can be used. User transaction identifiers constitute the user-oriented key of the underlying subledger transaction. These identifiers are primarily used in accounting events inquiry and on accounting event reports to uniquely identify transactions.
 - The transaction data that identifies the transaction varies by subledger application. Accounting event reports and inquiries display the transaction identifiers and their labels as appropriate for the corresponding event class.
 - The user transaction identifiers can be displayed for an event regardless of its status. This includes the case when an accounting event has not been processed. The user transaction identifier values are displayed at the time the accounting event reports and inquiries are run.
-

Note:

Up to **50 text**, **10 number**, **5 date**, and **5 long text** sources can be defined. This includes the three predefined required sources.

Transaction Line Information:

* Required

Instructions

List types of transaction information that can have more than one value per transaction, such as an order or invoice line item amount.

Mandatory source information

TRANSACTION_NUMBER links transaction and line information.

DEFAULT_AMOUNT and DEFAULT_CURRENCY hold transaction amount and currency values for use in accounting. When these two sources are removed and replaced with other similar sources to hold transaction amount and currency values, you must manually map the related accounting attributes with the sources from the user interface.

List of Sources

*Name	*Short Name	*Type	Chart of Accounts Value?
Transaction Number	TRANSACTION_NUMBER	Text	
Default Amount	DEFAULT_AMOUNT	Number	
Currency Code	CURRENCY_CODE	Text	
TRANSACTION_TYPE_CODE_L4	TRANSACTION_TYPE_CODE_L	Text	
TRANSACTION_TYPE_CODE_L4_DESC	TRANSACTION_TYPE_CODE_L	Text	

< > Instructions Source System Transaction Information **Line Information** +

adv  Accessibility: Investigate

The Line Information worksheet lists three types of transaction information that can have more than one value per transaction, for example, an order or invoice line item amount.

The worksheet includes three predefined required sources:

- **Transaction Number:**
Links the transaction header with the line information.
- **Default Amount:**
Holds transaction amount values for use in accounting.
- **Default Currency:**
Holds currency entered values for use in accounting.

Additional sources can be added if multiple different values need to use the same source attribute. In this case, you manually map the related accounting attributes used to generate additional sources from the user interface. To do so, enter the following:

- **Name:**
This name appears in a drop-down list for the accounting rules. Maximum length is 80 characters. Do **not** add Line Number as a source name because this name is reserved for an automatically created internal source.

- **Short Name:**

This is used as the column header in the transaction data template. This template is used to upload source system transactions.

- **Type:**

This is used to describe the type of values from the source system. The available values are:

- **Text:** The length can be less than the alphanumeric source type of 100 CHAR characters.
- **Number:** This must be a valid numeric type.
- **Date:** This must be a valid date value.
- **Long Text:** This is a source type of VARCHAR2, where the length can be greater than the alphanumeric type of 100 CHAR characters, but less than 1000 CHAR characters.

- **Chart of Accounts Value:**

Indicates that the source can be used to derive an account. Acceptable values are **Yes** and **No**.

Only text type sources can be used in segment rules. Examples of sources typically used to derive General Ledger accounts are:

- Account
- Cost Center
- Company

Validating the Spreadsheet Content and Generating the .zip file

A	B	C	D
Source System Transactions			
*Name	*Short Name		
Non Oracle Source	N_ORCL_SOURCE		
Transaction Types			
Overview			
List the types of transactions from the source system that may need accounting.			
Examples: creating invoices, recording receiving or sending of payments, adjusting orders or customer balances.			
Technical information			
1. Short names are used as column names for the objects in the Accounting Hub Cloud			

Validate

Generate ZIP

To verify the accuracy of the content in the spreadsheet template, use the **Validate** button on the Source System worksheet tab.

If an error is generated, you receive an error message:

- A **Validation Report** worksheet is created.
- Open the Validation Report worksheet to review the error.

- Correct the error and validate the content again.

Generate the **.zip file** by using the **Generate .zip** button in the Source System worksheet.

You receive a notification that the .zip file was created and saved in the same local folder as the downloaded spreadsheet template.



XlaSourceSystemSetup (3). 05-Nov-25 16-23-39.zip

Create Subledger Application Setups in Spreadsheet

Download Setup Template
Upload Setup File

Errors

View ▼
Freeze
Detach

Worksheet Name	Row Position	Error Message
No data to display.		

Navigate to:

My Enterprise > Setup and Maintenance > Tasks panel tab > Search > Enter Create Subledger Application > Search icon > Click on Create Subledger Application Setups in Spreadsheet > Download Setup Template.

Use the **Create Subledger Application Setups in Spreadsheet** task to upload the **.zip** file:

- Use the **Upload Setup File** button.
- Browse for your **.zip** file.
- Select **Import**.

If errors exist during the upload process, you are prompted with an error message. Correct the error in the spreadsheet in the fields noted in the error message.

The file upload creates subledger application setups in a single step, including:

- Journal source
- Journal category
- Event model
- Transaction objects
- Sources

- Accounting attribute assignments

If no errors exist:

- The source system is now registered in Accounting Hub
- One transaction object at the header and line levels is created

Note:

If you need to override the uploaded source system information, you can re-upload the spreadsheet template for the same source system if you have not created any accounting rules for the uploaded source system.

2- Manage Subledger Application

Verifying That the Source System Was created

Accounting Transformation

View ▼
Format ▼
Freeze
Detach
Wrap
Show
All Tasks ▼

Task	Scope	Action
Create Subledger Application Setups in Spreadsheet		▼
Manage Subledger Application	Non Oracle Source	▼
Update Subledger Application Options		▼

Manage Subledger Application: Non Oracle Source

Download Template
Save
Save and Close
Cancel

Last Saved 11/18/25 5:25 PM

Subledger Application: Non Oracle Source
Short Name: N_ORCL_SOURCE
Description: Non Oracle Source
Journal Source: Non Oracle Source
Control Account Type: None

☐ Support multiple valuation methods
☒ Calculate reporting currency amounts
☒ Support transaction reversal
☐ Automatically delete invalid transactions
☒ Maintain Supporting Reference Balances

Event Model

View ▼
+
-

- Non Oracle Source
 - Non Oracle Source
 - Commercial Insurance
 - Individual Insurance
 - Other Contracts

Edit Event Class: Non Oracle Source

General Information
User Transaction Identifiers

Name: Non Oracle Source
Short Name: N_ORCL_SOURCE
Description: Non Oracle Source
☒ Active
Default Journal Category: Non Oracle Source

Currency Conversion Options

☐ Calculate accounted amounts
☐ Calculate gain or loss amounts

3- Manage Sources

Accounting Transformation

View ▼ Format ▼ Freeze Detach Wrap Show All Tasks ▼

Task	Scope
Manage Subledger Application Transaction Objects	Non Oracle Source
Create and Assign Sources	
Manage Sources	Non Oracle Source
Manage User-Defined Formulas	Non Oracle Source
Manage Accounting Attributes	Non Oracle Source

Manage Sources: Non Oracle Source ?

* Object Column Name	* Name	* Level	* Data Type	Flexfield Segment Name ▲ ▼	Flexfield Application	Flexfield Title	Lookup Application
COST_CENTER	COST CENTER	Line	Alphanumeric	Cost Center Segment	General Ledger	Accounting Flexfield	
ACCOUNT	ACCOUNT	Line	Alphanumeric	Natural Account Segment	General Ledger	Accounting Flexfield	
COMPANY	COMPANY	Line	Alphanumeric	Primary Balancing Segment	General Ledger	Accounting Flexfield	
FUTURE1	FUTURE1	Line	Alphanumeric	Future Segment	General Ledger	Accounting Flexfield	
FUTURE2	FUTURE2	Line	Alphanumeric	HIAFutureUse1 Segment	General Ledger	Accounting Flexfield	
INTERCOMPANY	INTERCOMPANY	Line	Alphanumeric	Intercompany Segment	General Ledger	Accounting Flexfield	
LOB	LOB	Line	Alphanumeric	Line of Business Segment	General Ledger	Accounting Flexfield	
PRODUCT	PRODUCT	Line	Alphanumeric	Product Segment	General Ledger	Accounting Flexfield	
USER_REF_HEADER_16	USER_REF_HEADER_16	Header	Alphanumeric				
USER_REF_HEADER_12	USER_REF_HEADER_12	Header	Alphanumeric				

The transaction attributes created as part of upload can now be used to configure accounting rules through the Subledger Accounting user interface as usual.

Verify that the uploaded source system created the new subledger application and the transaction information. You can update the uploaded objects from the user interface. For example: Accounting Event Types. You can add new event types.

Sources:

- Assign and update value set and lookup type assignments. Whenever appropriate, sources can have lookup types or value sets assigned. Assigning a value set or lookup type enables you to predefine valid values for the source that is used to create accounting rules.
- You can revise:
 - The source names to be more business user-friendly so that they are easily understood when configuring accounting rules.
 - The sources that correspond to Accounting flexfield identifiers. Users can select Other or a named segment from the chart of accounts.

- You can add sources from the user interface. The download of a new transaction data template includes this newly added source.

4- Manage Subledger Application Transaction Objects

Transaction Objects

- Transaction objects hold transaction information that is used when creating journal entry rules for accounting. When registering a source system in Accounting Hub:



Transaction objects are automatically created based on the transaction information of the registered source system. One header-level object and one line-level transaction object are created.

Then sources are automatically generated based on the transaction objects, and are assigned to the corresponding accounting even class. Sources are used to create accounting rules.

The following are the transaction object types:

Header Transaction Object

- Header transaction objects store one row with header source values for each transaction.
- Each transaction is identified by its unique transaction number.
- Each transaction is also automatically assigned an event.
- Transaction details, whose values do not vary by transaction line or distribution, should normally be stored in header transaction objects.
 - Examples of sources normally stored in header transaction objects include the **Loan Number** for a loan or the **Contract Number** for a contract.

Line Transaction Object

- Line transaction objects store details of transactions that vary based on transaction attributes. For example, a mortgage transaction for loan origination may have multiple amounts, each related to different components of the loan. There may be a loan origination amount, closing cost amounts, and

escrow amounts. Each of these amounts could be captured as separate lines, along with an indication of the amount type.

- One row per distribution is linked to the associated transaction by transaction number. Each row is also automatically assigned a line number. Transaction details, whose values vary by transaction line or distribution, are normally stored in line transaction object columns, for example, the **Loan Number** for a loan payment.

Accounting Transformation

View ▼ Format ▼ Freeze Detach Wrap Show All Tasks ▼

Task	Scope
Create Subledger Application Setups in Spreadsheet	
Manage Subledger Application	Non Oracle Source
Update Subledger Application Options	
Manage Subledger Application Transaction Objects	Non Oracle Source
Create and Assign Sources	

Manage Subledger Application Transaction Objects: Non Oracle Source

View Source Assignments Done

Event Class Non Oracle Source ▼

Transaction Objects ⓘ

View ▼

* Object Name	* Object Type	Always Populated
ADXX_XLA_H_N_ORCL_SOURCE	Header	✓
ADXX_XLA_L_N_ORCL_SOURCE	Line	✓

ADXX_XLA_H_N_ORCL_SOURCE: Primary Reference Objects ⓘ

View ▼

* Subledger Application	* Object Name	* Join Condition	Always Populated
No primary reference object to display.			

Manage Source Assignments: Non Oracle Source

Event Class Non Oracle Source

Assignments

View ▾

 Export All



Source	* Assignment Level
ACCOUNT	Line
ACCOUNTED_AMOUNT	Line
ACCOUNTING_DATE	Header
ACTUAL_PAYMENT_DATE	Line
Accounting Event Identifier	Header
Application Identifier	Header
BATCH_REFERENCE	Header
BROKER_REFERENCE	Line

5- Manage Accounting Attributes

Accounting Transformation

View ▾

Format ▾



Freeze



Detach



Wrap

Show

All Tasks ▾

Task	Scope
Manage User-Defined Formulas	Non Oracle Source
Manage Accounting Attributes	Non Oracle Source
Configure Accounting Rules	

Manage Accounting Attributes: Non Oracle Source [?]

Validate Assignments

Save

Save and C

Map accounting attributes to an event class source and then validate the assignments.

* Event Class Non Oracle Source ▾

Accounting Attribute Assignments

View ▾




Freeze

Mandatory	* Accounting Attribute	* Source	Default
✓	Accounting Date	ACCOUNTING_DATE	✓
✓	Distribution Type	Accounting Event Type Code	✓
✓	Entered Amount	Default Amount	✓
✓	Entered Currency Code	Currency Code	✓
✓	First Distribution Identifier	Line Number	✓
—	Accounted Amount	ACCOUNTED_AMOUNT	—
—	Conversion Date	EXCHANGE_RATE_DATE	✓
—	Conversion Rate	MSA Exchange Rate	✓
—	Conversion Rate Type	MSA Exchange Rate Type	✓
—	Transaction Accounting Reversal Indicator	Transaction Reversal Flag	✓

Accounting Attribute Assignments:

An accounting attribute is a piece of a journal entry. The mapping of sources to accounting attributes specifies how the Create Accounting process gets the value for each piece of the journal entry. For example, the Entered Currency attribute is used to map source values to the entered currency field for subledger journal entry lines. You can add and update source assignments to accounting attributes. You can add and make updates to the source assignment to an accounting attribute if you have other sources available, for example, when you have multiple transaction date sources.

Accounting Transformation

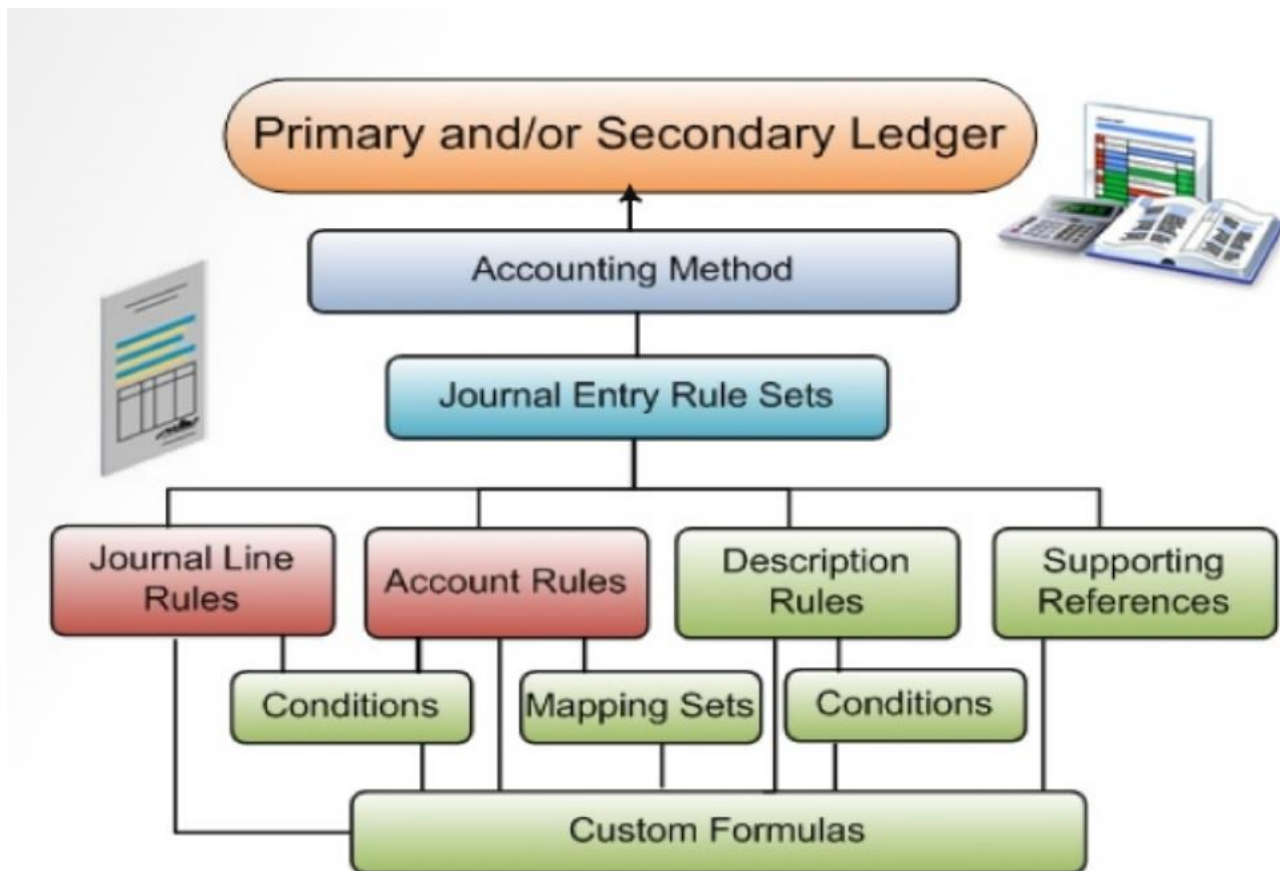

Accounting Methods group subledger journal entry rule sets together to define a consistent accounting across all accounting event classes and accounting event types for all source systems. An Accounting Method is attached to the primary and secondary ledgers and is the 4th C (called the Accounting Convention) in a ledger configuration. The other three C's are Chart of Accounts, Calendar, and Currency.

Accounting Methods include the following required elements:

- **Journal Entry Rule Sets:**
Each subledger application has a unique journal entry rule set that groups all the rules together for creating journals.
- **Journal Line Rules:**

This rule defines the debit and credit side of the journal. Journal line rules are assigned to journal entry rule sets.

- **Account Rules:**

This rule defines the GL account or segment for each debit and credit of a journal. Account rules are configured with journal line rules or journal entry rule sets.

Accounting Methods include the following optional elements:

- **Description Rules:**

This rule enables you to concatenate any source system values and constant values to generate a dynamic description at the journal header or line level. For example, it might include an invoice number, customer name, or supplier name. It can provide any information useful for drilldown details.

- **Supporting References:**


These are used to store additional source information about transactions and are useful for reconciliation of accounting to source systems, as well as reporting.

- **Mapping Sets:**

This element maps your source system transaction attributes to your Oracle Fusion chart of accounts. It is used on account rules to derive an account combination or segment.

- **User-Defined Formulas:**

You can use their results as sources and input values in many of the subledger accounting rule definitions.

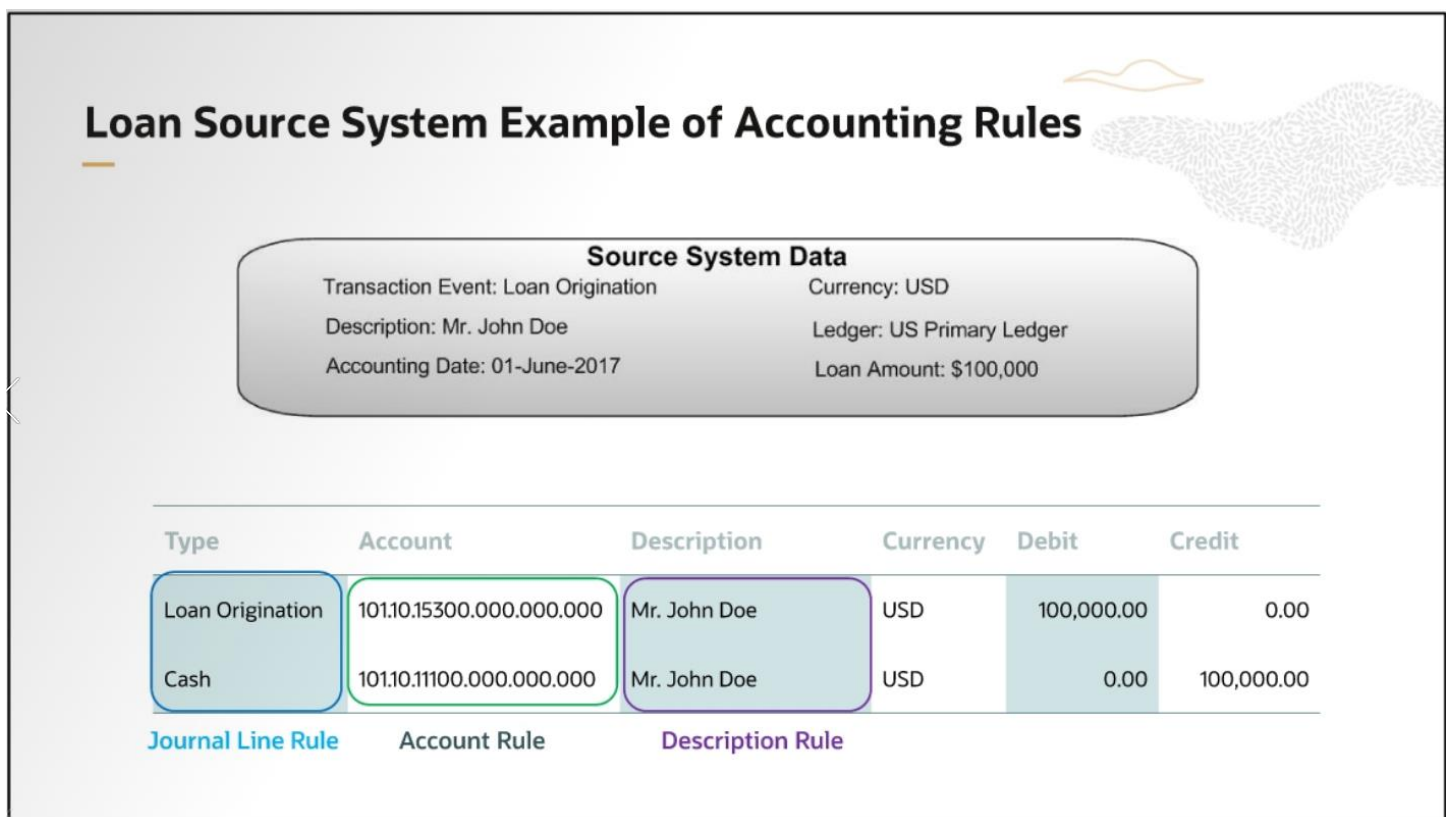

The graphic in the slide illustrates how the accounting rules create different parts of a journal entry.

With the analyzed transaction information and subledger model completed, evaluate the usage of accounts rules. Understand the functional usage for each rule component and the requirements for accounting and reporting.

Note: Configuring these accounting rules is covered in detail later in this lesson.

Accounting Transformation

View ▼
Format ▼
 Freeze
 Detach
 Wrap
Show

All Tasks ▼

Task	Scope
Create and Assign Sources	
Manage Sources	Non Oracle Source
Manage User-Defined Formulas	Non Oracle Source
Manage Accounting Attributes	Non Oracle Source
Configure Accounting Rules	
Manage Journal Line Rules	Non Oracle Source
Manage Description Rules	Non Oracle Source
Manage Mapping Sets	Non Oracle Source
Manage Account Rules	Non Oracle Source

1

2

3

4

5

6

7

8

9

Manage Subledg...

Accounting Methods

Journal Rule Sets

Journal Line Rules

Account Rules

Mapping Sets

Description Rules

User-Defined...

Supporting References

1- Manage User-Defined Formulas

Navigate to: **My Enterprise > Setup and Maintenance > Setup: Fusion Accounting Hub > Accounting Transformations > Manage User-Defined Formulas.**

You can now define user-defined formulas and use their results as sources and input values in many of the subledger accounting rule definitions.

This facilitates complex derivation logic for subledger journal entries such as amounts, accounts, and descriptions when values are not readily available in the source transaction systems.

A user-defined formula can be used to:

- Calculate a numeric value
- Derive an alphanumeric value
- Return a date value

It can be used in any of the following accounting rule definitions:

- Journal line rule: Use as a source on a condition or a source of amounts.
- Account rule: Use as a value type on the rule, condition, or both.
- Mapping set: Use as an input value.
- Description rule: Use as a value type on the rule, condition, or both.
- Supporting reference: Use as a source.

Formula Definition

- Define user-defined formulas by using sources for the selected event class.
- Predefined functions and conditions can also be used to derive the resulting value.

Enter

- Source enclosed in double quotation marks (").

Enter

- Constant values enclosed in single quotation marks (').

Enter

- Date values in the format YYYY-MON-DD.

Predefined Formula Functions

Type	Function	Description	Example
Alphanumeric	Concatenate	Concatenate two strings into a single string.	Concatenate('This is ', 'a test.') returns 'This is a test'.
Alphanumeric	Substring	Extract part of a string.	Substring('How are you?', 3,5) returns 'w are'.
Date	FirstDayOfYear	Return the first day of the calendar year based on the parameter.	FirstDayOfYear('2013-Jul-11') returns '01-Jan-2013' in date format.
Date	LastDayOfYear	Return the last day of the calendar year based on the parameter.	LastDayOfYear('2013-Jul-11') returns '31-Dec-2013' in date format.

The table in the slide lists the type, function, description, and example of the predefined formulas.

Within the formula expressions, you can use various operators such as addition, subtraction, multiplication, division, greater than, smaller than, and so on, to derive values from standard sources and constants. Calculations can be nested by using parenthesis.

You can also use three condition functions:

- IF THEN
- IF THEN ELSE
- IsPositiveInteger

Predefined Formula Functions

Type	Function	Description	Example
Date	FirstDayOfMonth	Return the first day of the month based on the parameter.	FirstDayOfMonth('2013-Jul-11') returns '01-Jul-2013' in date format.
Date	LastDayOfMonth	Return the last day of the month based on the parameter.	LastDayOfMonth('2013-Jul-11') returns '31-Jul-2013' in date format.
Date	AddMonth	Return the date a specified number of months after the date in the parameter.	AddMonth('2013-Jul-11',2) returns 11-Sep-2013 in date format.
Numeric	YearNum	Return the year of a date source in four-digit format.	YearNum('2012-Feb-28') returns the number 2012.

Predefined Formula Functions

Type	Function	Description	Example
Numeric	MonthNum	Return the month of a date source in numeric format.	MonthNum('2012-Feb-28') returns the number 2.
Numeric	DayNum	Return the day of a date source in numeric format.	DayNum('2012-Feb-28') returns the number 28.
Numeric	Round	Round a number to a specific decimal place.	Round(183.1123, 2) returns 183.11 Round(183.1123, -1) returns 180
Numeric	RoundUp	Round up a number to integer.	RoundUp(0.01) returns 1. RoundUp(1.50) returns 2.

Predefined Formula Functions

Type	Function	Description	Example
Numeric	RoundDown	Round down a number to integer.	RoundDown(0.01) returns 0. RoundDown(1.50) returns 1.
Numeric	Power	Return the power of a number.	Power(3,2) returns 9.
Numeric	NumberOfGLPeriod	Return the number of non-adjustment accounting periods between two dates. • If start date is not the first day of an accounting period, it is counted as one period. • If end date is not the last day of an accounting period, it is counted as one period.	If accounting calendar is defined as Monthly, NumberOfGLPeriod('2013-Jul-11', '2013-Oct-10') returns 4.

Predefined Formula Functions

Type	Function	Description	Example
Alphanumeric	ToText	Convert numeric source values to text.	If source value = 123, it returns text value '123.' If source value = 123.45, it returns text value '123.45.'
Numeric	ToInteger	Convert a text value to integer.	ToInteger("Cost Center Segment") returns the cost center segment value as a numeric value.

Manage User-Defined Formulas: Non Oracle Source

Save Save and Close Cancel

Actions View + - Detach

Name	Short Name	Description	Data Type	Event Class	Status	Created By
MSA Exchange Rate	MSA_EXCHANGE_RATE	Exchange Rate as per Input File	Number	Non Oracle Sou...	Active	karim.elmansou...
MSA Exchange Rate Type	MSA_EXCHANGE_RATE...	Rate Type for Foreign Currency Transactions	Alphanumeric	Non Oracle Sou...	Active	karim.elmansou...


MSA Exchange Rate : Expression

Insert - + / More Source Insert Function

```
IF ('EXCHANGE_RATE'(N_ORCL_SOURCE.S.S) IS NOT NULL)
THEN 'EXCHANGE_RATE'(N_ORCL_SOURCE.S.S)
```

Validate

2- Manage Mapping Sets

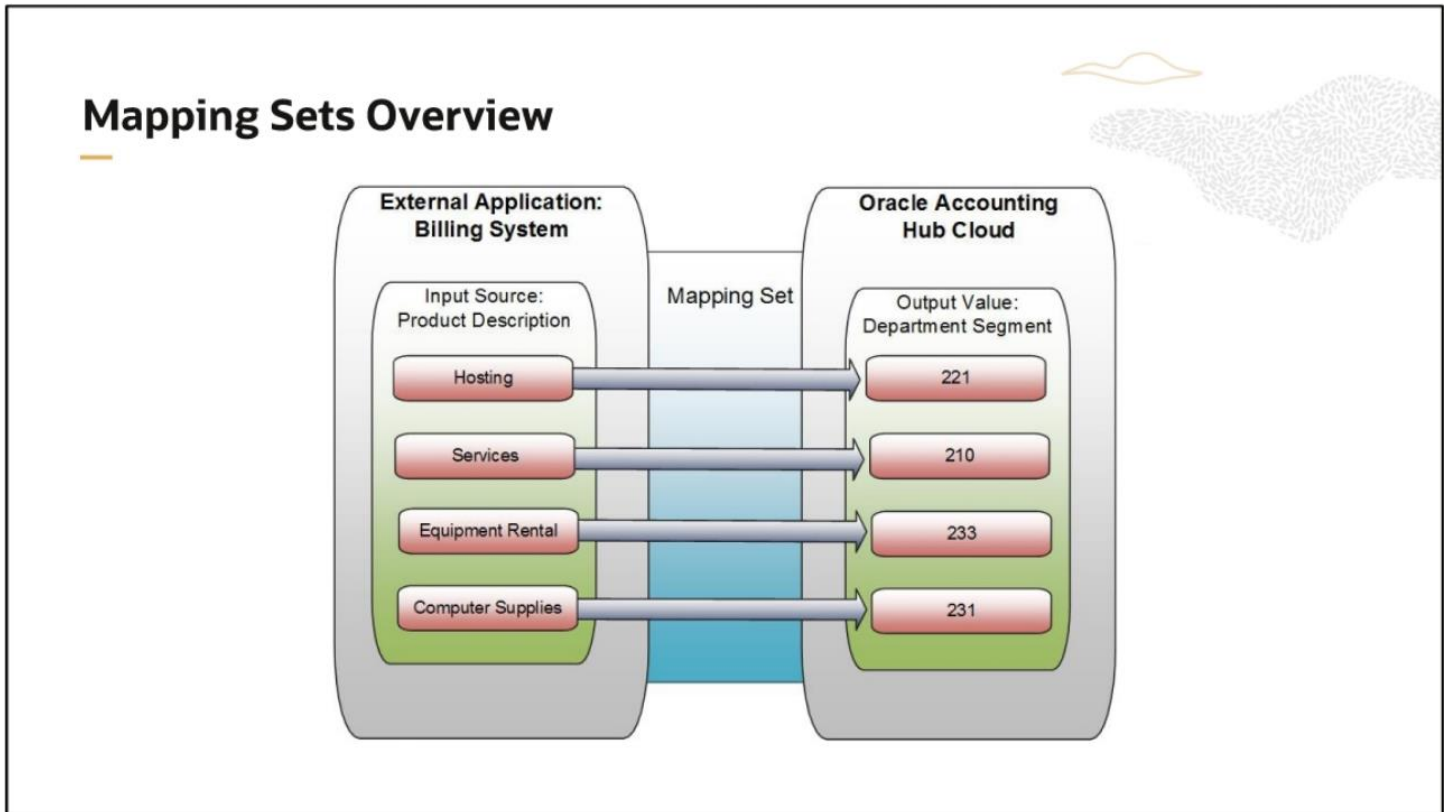

Mapping sets are used by account rules to provide an efficient way to derive segment values or account combination values (output) from one or more source transaction or reference attribute values (input). Using such input and output mappings is simpler than using complex conditions on account rules.

Mapping sets can use a segment, an account combination, or a value set as output. For example, a mapping set can derive values for a single segment, such as a cost center from the source system's product descriptions, or a full account combination, such as the Accounts Receivable account from the customer.

With mapping sets, you can:

- Use up to 10 transactions or reference attributes as inputs into a mapping
- Define a default output value to use when actual input values do not match the mappings
- Use wildcards for multiple input mapping sets to indicate that the value of a particular input should be ignored for certain mappings

- Enter the mappings directly in the user interface or use the spreadsheet available in the Export option and then Import. Export enables:
 - Exporting a template to create new mappings
 - Exporting all mappings already created to add or edit the current mappings
- Reuse on more than one account rule

Creating Mapping Sets

- Mapping sets require the following:



Name and Short Name



Input Sources



Output Type



Chart of Accounts or Value Sets



Subledger Application



Mapping Input and Output Values

When creating a mapping set, the following is required:

- **Name and Short Name:**
Give your mapping sets a meaningful name because it is available in a list of values in an account rule. Short Name is used as a code in the table, cannot have any space, and must be uppercase.
- **Output Type:**
You can choose Segment, Account Combination, or Value Set. The output type determines what other elements are required. For example, Segment requires a Chart of Accounts segment to be identified, such as Cost Center.
- **Subledger Application:**
Mapping sets are unique to each subledger application to know which input sources to make available. This is scoped at the start of the new mapping set.
- **Input Sources:**
You must choose, based on the subledger application and event class, the source for the values to be used in the input section. You can use up to 10 sources as inputs into a mapping.
- **Chart of Accounts or Value Set:**
The output type determines what is required.
 - **Segment Output Type:** Chart of Accounts name and segment are required.
 - **Account Combination:** Chart of Accounts name is required.
 - **Value Set:** Value set name is required.

- **Mapping Input and Output Values:**

You can enter the mappings directly into the user interface, use the spreadsheet available in the Export option and then Import, or use the FSM Import/Export web service. With input and output values, you can:

- Map the input source values (Note: No list of values is available) to the output values (Note: A list of values is available).
- Define a default output value to use when actual input values do not match the mappings.
- Use wildcards for multiple input mapping sets to indicate that the value of a particular input should be ignored for certain mappings.

Import Mappings of Mapping Sets

- Import high volume of mappings of mapping set rules using the subledger accounting file-based data import spreadsheet template.



Edit Mapping Set

Name
Natural Account MS

Short Name
NATURAL_ACCT_MS

Description

Output Type
Segment

Subledger Application
Non Oracle Source

Status
Active

Created By
karim.elmansouri@

Creation Date
11/5/25 3:52 PM

Last Updated By
karim.elmansouri@

Last Update Date
2/7/26 7:23 PM

Input Sources

View

Numbe	Input Source	Value Set	Lookup Type	Segment
1	TRANSACTION_TYPE_CODE_L4			

Chart of Accounts

View

Chart of Accounts	Segment
MS_GEN_COA_STRUCTURE	MS_GEN_GL_ACCOUNT

MS_GEN_COA_STRUCTURE: Mappings

When entering Input values, enter a value, an asterisk to represent any value, or leave blank for no value.

View

Export

Import

Detach

Input

Output

Effective Start Date

Effective End Date

Default
TRANSACTION_
MS_GEN_GL_ACCOUNT

FAH
23000


midyyy
midyyy

MSM
11400

3- Manage Account Rules

Account Rules Overview

- Account rules are ultimately used in journal entry rule sets to derive the accounts for the debits and credits of an event class.
- Account rules have three main elements:

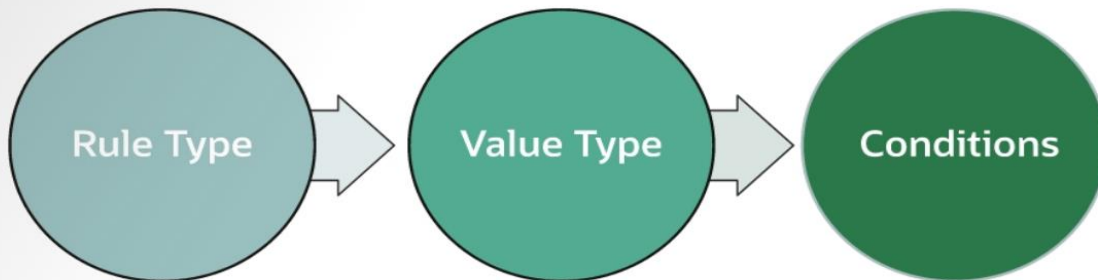

Account rules are the most critical elements of an Accounting Method because they derive the accounts for the debits and credits of an event class.


Multiple account rules are used in a journal entry rule set, at least one for debit and one for credit.

Similar to mapping sets, account rules require a name, short name, and subledger application.

The three elements of an account rule are detailed in subsequent slides.

Rule Types

- Account rules must be one of three types:
 - Account
 - Segment
 - Value Sets

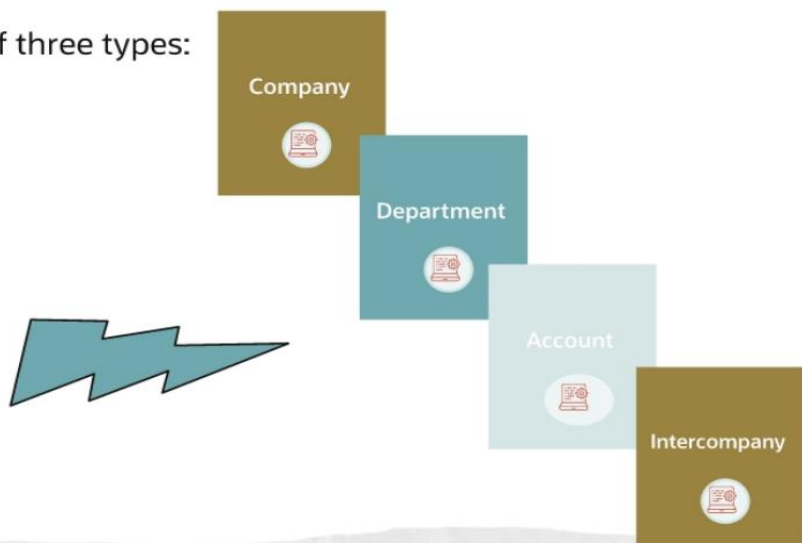

Rule types are similar to the mapping set output type:

- **Account Rules by Account:** Define account rules by account to determine the entire account combination. If using a mapping set in the account rule, the mapping set must be defined with the same Account Combination output type.
- **Account Rules by Segment:** Define segment rules to derive a specific segment of the account. If using a mapping set in the account rule, the mapping set must be defined with the same segment or with a value set that is assigned to the chart of accounts and segment of the account rule. If both an account combination rule and a segment rule are assigned to a journal line in the journal entry rule set, the segment rule takes precedence over the account rule in that particular segment.
- **Account Rules by Value Sets:** Define account rules based on value sets rather than chart of accounts. This enables you to share the same rule between more than one chart of accounts, if the segments in these charts of accounts share the same value set. If using a mapping set on the account rule, the mapping set must also be defined with the Value Set.

Value Types

- Account rules have five value types:



Cash Account					
101 – 10 – 11110 – 120 – 000 – 101					
Company	LoB	Account	Cost Center	Product	Intercompany


Value types determine where or how the system finds the account combination value, segment value, or value set value. The choices are:

- **Account Rules:** Use an existing account rule. This is useful if you are using a condition. If the condition is not met, you can use an existing account rule as the second priority.
- **Constant:** Use a specific value for the account combination value, segment value, or value set value. For example, you need to use a specific liability account for the Invoice event class. You can have the constant achievement of this.
- **Mapping Sets:** Use to associate specific source values with GL accounts or segment values.

- **Source:** Use a source where an account combination or a segment value exists in the source system. For example, an external billing system might have a revenue account on the invoice it creates. So the source could be the revenue account column of the staging table.
- **Formula:** Use a user-defined formula for more complex rules.

Account Rules Best Practices

- Define an account rule once and use it multiple times:

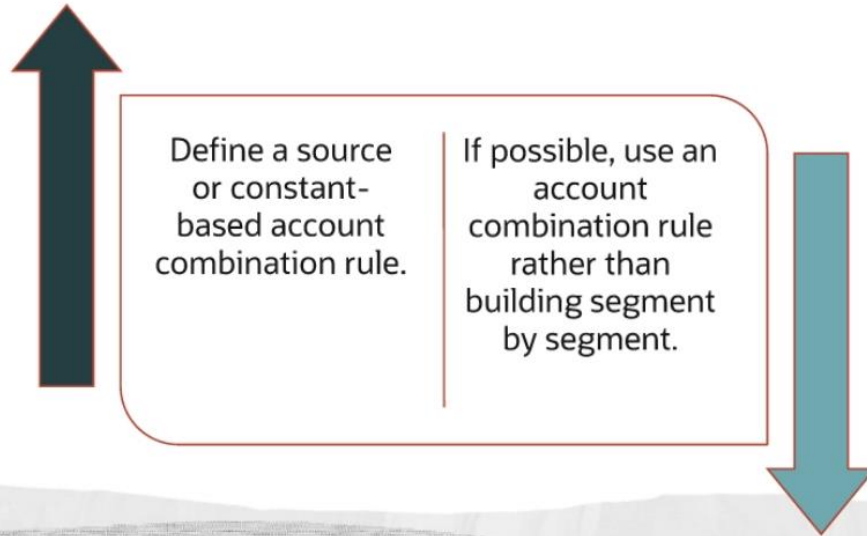

Conditions

- Conditions are used to refine the details of the results of the journal created by the Accounting Method.
- The Create Accounting process evaluates conditions based on the priority of the rule detail. When the condition is met, the rule is applied.

These accounting rules can have conditions.



Edit Account Rule

Actions

Save

Save and Close

Save and Create Another

Cancel

Name MSA Data Migration - Account Combination

Short Name MSA_DATA_MIG_CCID

Description

Chart of Accounts MS_GEN_COA_STRUCTU

Rule Type Account combination

Subledger Application Non Oracle Source

Status Active

Created By karim.elmansouri

Creation Date 11/5/25 4:13 PM

Last Updated By karim.elmansouri

Last Update Date 11/12/25 4:21 PM

Rules

Reorder rules to change priority.

View + - >>

Prio Value Type Value

1 Constant 01187.00000.000.71000.00000.00000.00

Rule 1: Conditions

Enter a constant value and source directly, or select a source.

Insert Source () AND OR Operator

No conditions found.

Validate

Edit Account Rule

Actions

Save

Save and Close

Save and Create Another

Cancel

Name MSA Data Migration - Account Segment

Short Name MSA_DATA_MIG_ACCT_SEG

Description

Chart of Accounts MS_GEN_COA_STRUCTU

Rule Type Segment

MS_GEN_GL_ACCOUNT

Subledger Application Non Oracle Source

Status Active

Created By karim.elmansouri

Creation Date 11/5/25 3:58 PM

Last Updated By karim.elmansouri

Last Update Date 11/12/25 5:59 PM

Rules

Reorder rules to change priority.

View + - >>

Prio Value Type Value

1 Mapping set Natural Account MS

2 Source ACCOUNT

Rule 1: Conditions

Enter a constant value and source directly, or select a source.

Insert Source () AND OR Operator

"TRANSACTION_TYPE_CODE_L4"(N_ORCL_SOURCE.S.S) Is not null

Validate

Creating Description Rules

- Use description rules to define the elements of a description that appear on the subledger journal entry at the header level, line level, or both.



The definition determines both the content and the sequence of the elements of the description.



Assign conditions to indicate that the description is selected for display only if the conditions are satisfied. Conditions are associated with priorities such as account rules.



Subledger journal line descriptions are transferred to the General Ledger only if the General Ledger Journal Entry Summarization option is set to either Group by General Ledger period.

A description rule can be defined with combinations of source and literal values. If sources are used in the rule, the accounting event class associated with the sources determines in which subledger journal entry rule set the description rule can be selected and used.

You can build descriptions by using any available source from the application or user-defined formula.

For example, you want to see Customer Name and Transaction Type on the header of the subledger journal. The following are the description details that are entered by using literals and sources:

- Literal = Customer:, Source = Customer Name
- Literal =, (Comma)
- Literal = Transaction:, Source = Transaction Type

The result in the journal would be, "Customer: Advantage Corp, Transaction: Invoice."

Line descriptions can be transferred to the General Ledger based on the General Ledger Journal Entry Summarization options.

- If the value is Group by GL Date or Group by Accounting Period, each line description for each journal entry transferred to the GL in the same group is displayed and visible.
- If the value is Summarize by GL Date or Summarize by Accounting Period and if all the lines can be summarized, each line description is not displayed on the General Ledger journal entries.
- In both cases, when drilling down to subledger, all descriptions are still available and displayed.

Manage Description Rules: Non Oracle Source

Search

Name

Description Details

Search Results

Actions ▾ View ▾ Format ▾ +     Freeze  Wrap

Name	Description Details
MSRE Data Migration - Header Description	Accounting Date: "ACCOUNTING_DATE(N_ORCL_SOURCE,Standard)"
MSRE Data Migration - Line Description	"BATCH_REFERENCE(N_ORCL_SOURCE,Standard)" , "RI_POLICY_TYPE(N_ORCL_SOURCE,Standard)" ,

Edit Description Rule

Actions ▾

* Name

Short Name

Description

Subledger Application Non Oracle Source

Status Active

Created By karim.elmansouri@

Creation Date 11/5/25 3:34 PM

Last Updated By karim.elmansouri@

Last Update Date 11/8/25 10:53 PM

Rules

Reorder rules to change priority.

Actions ▾ View ▾ +    

Priority: Description Details

1 Accounting Date: "ACCOUNTING_DATE(N_ORCL_SOURCE,Standard)"

Rule 1: Conditions

Enter a constant value and source directly, or select a source.

Insert ▾

No conditions found.

5- Manage Supporting References

Navigate to: **My Enterprise > Setup and Maintenance > Setup: Fusion Accounting Hub > Accounting Transformation > Manage Supporting References.**

Creating Supporting References

- Supporting References:



Are used to store additional source information about a subledger journal entry at the line level.



Can optionally calculate or maintain a balance based on a transactional data source transferred through Subledger Accounting.



Supporting references are not transferred to the General Ledger.

Revenue	Balance	Account Manager
01 - 400 - 4120 - 00	\$10,000	Casey Brown

Supporting references can be defined by using either of the following options (located on tabs):

- With Balances:**

- Facilitates reconciliation back to the subledgers and source systems by tagging the journal entries with transaction and reference attributes.
- Creates a report on balances by dimensions not captured in the chart of accounts.
- Enriches Oracle Transactional Business Intelligence applications reporting on subledger journals.
- Can be carried forward into the next fiscal year or start over each fiscal year. For example, you may maintain a balance of revenue each year by account manager.
- Supporting references with balances are limited to 30 definitions. You can consider adding more source assignments to predefined supporting references, rather than creating a new one.

- Without Balances:**

- Aids in slicing and dicing the data of a journal
- Supporting references without balances are unlimited in terms of the number of definitions.

Note: Supporting reference balances are not transferred to the General Ledger and are accessible only in Oracle Transactional Business Intelligence reports and analysis.

Manage Supporting References ?

Save Save and Close Cancel

Without Balances With Balances Assignments

Supporting References

Actions View + X Detach

Numbe	Name	Short Name	Description	Status
1	01FileName	01_FILE_NAME	01FileName	Active
2	02Source File Name	02_SOURCE_FILE_NAME	02Source File Name	Active
3	03Reconciliation Reference 1	03_RECON_REF_1	03Reconciliation Reference 1	Active
4	04Reconciliation Reference 2	04_RECON_REF_2	04Reconciliation Reference 2	Active
5	05Reconciliation Reference 3	05_RECON_REF_3	05Reconciliation Reference 3	Active
6	06Reconciliation Reference 4	06_RECON_REF_4	06Reconciliation Reference 4	Active
7	07Reconciliation Reference 5	07_RECON_REF_5	07Reconciliation Reference 5	Active
8	08Reconciliation Reference 6	08_RECON_REF_6	08Reconciliation Reference 6	Active
9	09Reconciliation Reference 7	09_RECON_REF_7	09Reconciliation Reference 7	Active
10	Animal Type	ANIMAL_TYPE		Active

01FileName: Sources

View X Detach

Subledger Application	Event Class	Source
EVOKE	EVOKE	File Name
CARDTRONNYC	CARDTRONNYC	File Name
EVOKESG	EVOKESG	File Name
ATM TNS	ATM TNS	File Name

Manage Supporting References ?

Save Save and Close Cancel

Without Balances With Balances Assignments

Supporting References

Actions View + X Detach

Numbe	Name	Short Name	Description	Status
1	AFS_TEST	AFS_TEST	AFS_TEST	Active
2	AMB_SUPP_1110	AMB_SUPP_1110	AMB_SUPP_1110	Active
3	ASF_SUPP	REV_TYPE_1		Active
4	AWR_TEST_0109	AWR_TEST_0109	AWR_TEST_0109	Active
5	Accommodation Level	TEST_0209	Accommodation Level	Active
6	Billing Customer	BILLING_CUS		Active
7	Broker Reference	BROKER_REFERENCE		Active
8	Channel	TEST_SR	Channel	Active
9	Claim reference	CLAIM_REFERENCE		Active
10	Contract SOF ID	SOFID	Lease Contract Identification	Active

Creating Journal Line Rules

- The journal line rule determines how each debit and credit entry is created. It defines the following:



- Accounting class



- Side as debit, credit, gain, or loss.



- Sources that drive the values on the entry, such as amount. Accounting attributes link sources to specific journal entry line values such as the accounted amount.



- Advanced setup features, such as business flows, rounding options, and multiperiod accounting.

Note: Refer to the Oracle Fusion Cloud Financials: Implementing Subledger Accounting Guide for more information about journal line rule advanced options.

Following are the characteristics of journal line rules:

- Are defined within the context of accounting event classes
- Are used in subledger journal entry rule sets that have the same event class
- Can contain conditions that determine when they are used to create a line

To create a journal line rule, select values for options such as:

- **Side:** Debit, Credit, Gain, or Loss. For example, to create a journal line rule to capture revenue, you could create a credit line rule.
- **Merge Matching Lines:** To summarize or not to summarize subledger journal entry lines within each subledger entry. This setting does not affect the journal in the General Ledger. It affects the detail seen in Subledger Accounting from the drilldown. The choices are:
 - **No:** No summarization of lines
 - **All:** Lines merged only if they share the same account combination, description, supporting reference values, and accounting class. This merges debits and credits together.
 - **Debit or Credit:** Only the Debits merged together for the same account combination and only the Credits merged together.
- **Accounting Class:** To classify journal entry lines. For example, a line that is used to record the collection of cash would typically have an accounting class of Asset.

- **Conditions:** To restrict the use of a journal line rule by controlling when a particular journal line rule is used by the Create Accounting process. For example, generate a freight expense line if freight charges exist. Or generate a tax line if tax is associated with a transaction. The journal line is created only if the conditions evaluate to true.

Advanced Options

- **The Subledger Gain or Loss Option:** Applied only to amount calculations for the primary ledger. Gain or loss amounts are not converted to reporting currency or non-valuation method secondary ledgers. If the option is enabled, the journal line holds the gain or loss amounts calculated by the subledger. The gain or loss amount is calculated as the difference in applied amounts due to fluctuations in conversion rates, based on conversion to the ledger currency. Foreign exchange gain or loss occurs when two related transactions, such as an invoice and its payment, are entered in a currency other than the ledger currency, and the conversion rate fluctuates between the times that the two are accounted.
- **The Rounding Class Option:** Along with transaction rounding, grouping together of journal lines and calculation of the transaction rounding difference. Subledger transaction rounding differences can occur when a transaction has multiple, related, applied-to transactions, such as a Receivables receipt applied to multiple invoices.
- **The Link Journal Lines Option:** If using the business flow of the same entry, determination of whether the journal line rule is set up to establish a link between the accounting of transactions that are related both within the same application and across applications. The alternatives are:
 - **None:** No link is established.
 - **Copy from corresponding line:** Build an account for a journal line by using segments from the offsetting entry of the current journal line.
- **Multiperiod Accounting:** This feature enables you to create accounting entries across more than one accounting period, for a single accounting event. For example, allocate a prepaid expense across multiple accounting periods.

Accounting Attributes Assignments: When creating a journal line rule, accounting attribute assignments are automatically established based on the default accounting attribute assignments for that journal line rule's accounting event class. You can override this default mapping of standard sources to accounting attributes. The list of values for the source override includes all sources assigned to the accounting attribute for the event class associated with the journal line rule.

Manage Journal Line Rules: Non Oracle Source				Done
Search				Saved Search All Journal Line Rules
Search Results				
Actions View + - Freeze				
Name	Description	Status	Created By	
Gain/Loss		Active	karim.elmansouri...	
MSA Data Migration - Credit		Active	karim.elmansouri...	
MSA Data Migration - Debit		Active	karim.elmansouri...	

Edit Journal Line Rule ?

Actions ▼ Save Save and Close Save and Create Another Cancel

* Name * Accounting Class

Short Name ☒ Switch Debit and Credit

Description

Event Class * Merge Matching Lines

Side Subledger Application

Status

Conditions Advanced Options Accounting Attributes Assignments

Enter a constant value and source directly, or select a source.

Insert Source () AND OR Operator ▼

Validate


?

?

7- Manage Subledger Journal Entry Rule Sets

Journal Entry Rule Sets Overview

- Each subledger application typically has one journal entry rule set per transaction type that contains the rules for creating journals. It contains the following:

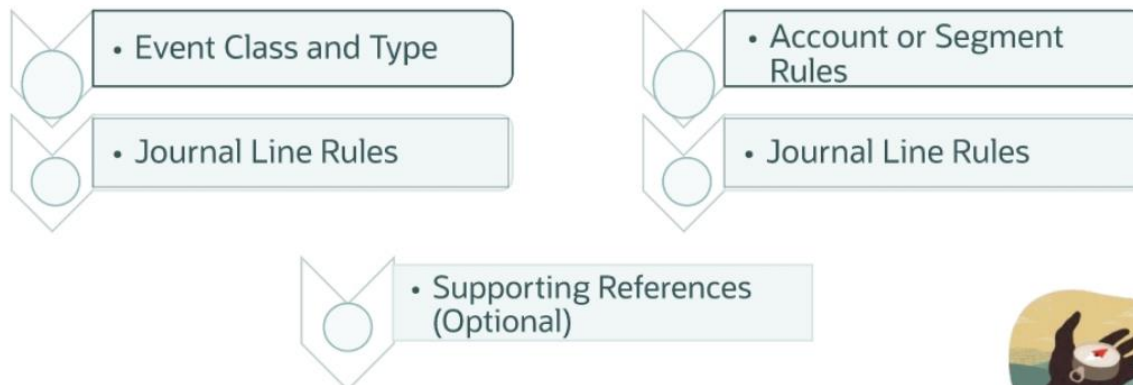

Each registered subledger application has its own journal entry rule set definition that joins all the other accounting rules together. At least one line must be defined for each event class and type combination.

Each line must contain the following:

- A journal line rule
- Account or segment rules or both


Each line can optionally contain:

- A description rule
- A supporting reference

After saving the journal entry rule set, the system automatically runs the Update Subledger Accounting Options process. This process activates the subledger accounting options for the new subledger application. The subledger accounting options include GL transfer summarization option, rounding option, reversal method, and so on.

Creating Journal Entry Rule Sets

- Journal entry rule sets define the following:

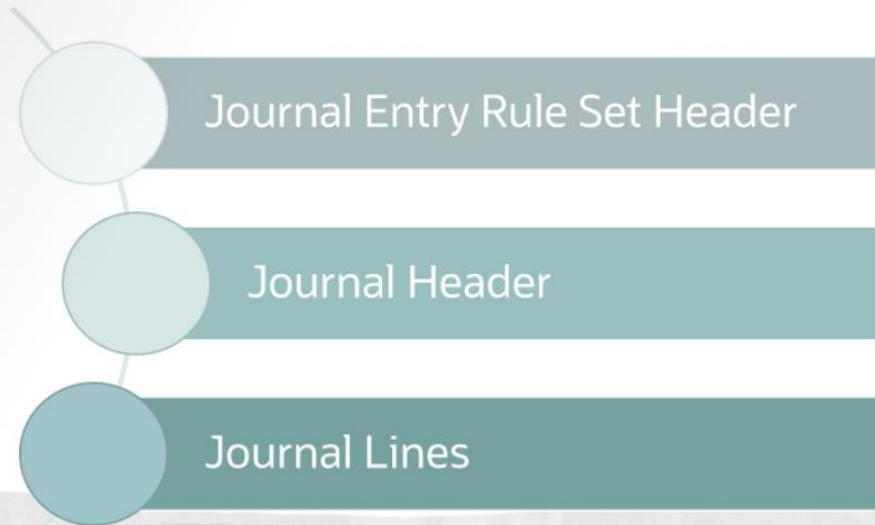

Before defining the journal header and lines, the journal entry rule set header must be defined. It contains the following:

- Name and Short Name
- Event Class:** For example, Billing System
- Event Type:** For example, Billing Created
- Chart of Accounts:** Required only if any account rules to be used in the journal entry rule set have been defined with a chart of accounts. The two chart of accounts must be the same.

The journal entry header contains:

- Accounting Date:** Determines in which accounting period and date the journal is posted. You can choose from three different sources:
 - Standard:** You can use Transaction Date, which is the date of the transaction in the external subledger application.
 - Application:** You can choose to use the Journal Entry Creation Date, which is the date the journal is created by the Create Accounting process or the Accounting Event Date, which is the date the journal is transferred to the Accounting Events table.
 - Formula:** You can use the formula rule to create your own rule.
- Description Rule (Optional):** If you defined a description rule, you may add it here or at the line Level

The journal entry lines contain the following:

- **Type:** This includes Debit, Credit, Gain or Loss, Gain, or Loss
- **Journal Line Rule:** The journal lines rules side must match the line type chosen.
- **Accounting Class:** This defaults from the journal line rule.
- **Account Combination Rule and Segment Rules:** You can include both types on the line. For example, you can put an account combination rule on the revenue or credit line to derive the complete combination. Then put a segment rule on cost center to override the combination rule's cost center value with a different value. If rules are defined with sources, all sources must have been assigned to the same event class associated to the journal entry rule set.
- **Line Description Rule (Optional)**

Supporting references (Optional): Each journal line can have a supporting reference or multiple supporting references. A supporting reference can be used in a journal entry rule set only if it is defined with a source from the event class of that journal entry rule set.

Manage Subledger Journal Entry Rule Sets: Non Oracle Source

Search

Search Results

Actions View + - X Print

Name	Event Class	Event Type	Created By	Chart of Accounts	Description
MSA Data Mig - Rule Set	Non Oracle Source	Commercial Insurance	karim.elmansou...	MS_GEN_COA_STRUC...	

Edit Subledger Journal Entry Rule Set

Actions Save Save and Close Save and Create Another Cancel

NameMSA Data Mig - Rule Set

Short NameMSA_DATA_MIG_RS

Description

Subledger ApplicationNon Oracle Source

Event ClassNon Oracle Source

Event TypeCommercial Insurance

Chart of AccountsMS_GEN_COA_STRUCTURE

StatusIncomplete

Details

Journal Entry

Accounting DateACCOUNTING_DATEDescription RuleMSRE Data Migration - Hec

Journal Lines

View + - X Print Freeze Detach

* Line Type	* Journal Line Rule	Accounting Class	Account Combination Rule	Segment Rules								Line Description Rule
				MS_GEN_GL_CO	MS_GEN_GL_CC	MS_GEN_GL_LO	MS_GEN_GL_AC	MS_GEN_GL_PR	MS_GEN_GL_IN	MS_GEN_GL_FU	MS_GEN_GL_FU	
Gain o...	Gain/Loss	Exchange rate v...	MSA Data Migrati...									
Debit	MSA Data Migration - Credit	FAH NON ORA...	MSA Data Migrati...				MSA Data					
Debit	MSA Data Migration - Debit	Expense	MSA Data Migrati...				MSA Data					MSRE Data Migration - Lr


Columns Hidden 23 Columns Frozen 4

Debit, MSA Data Migration - Credit: Supporting References

View + - X Detach

Supporting Reference

Policy Reference

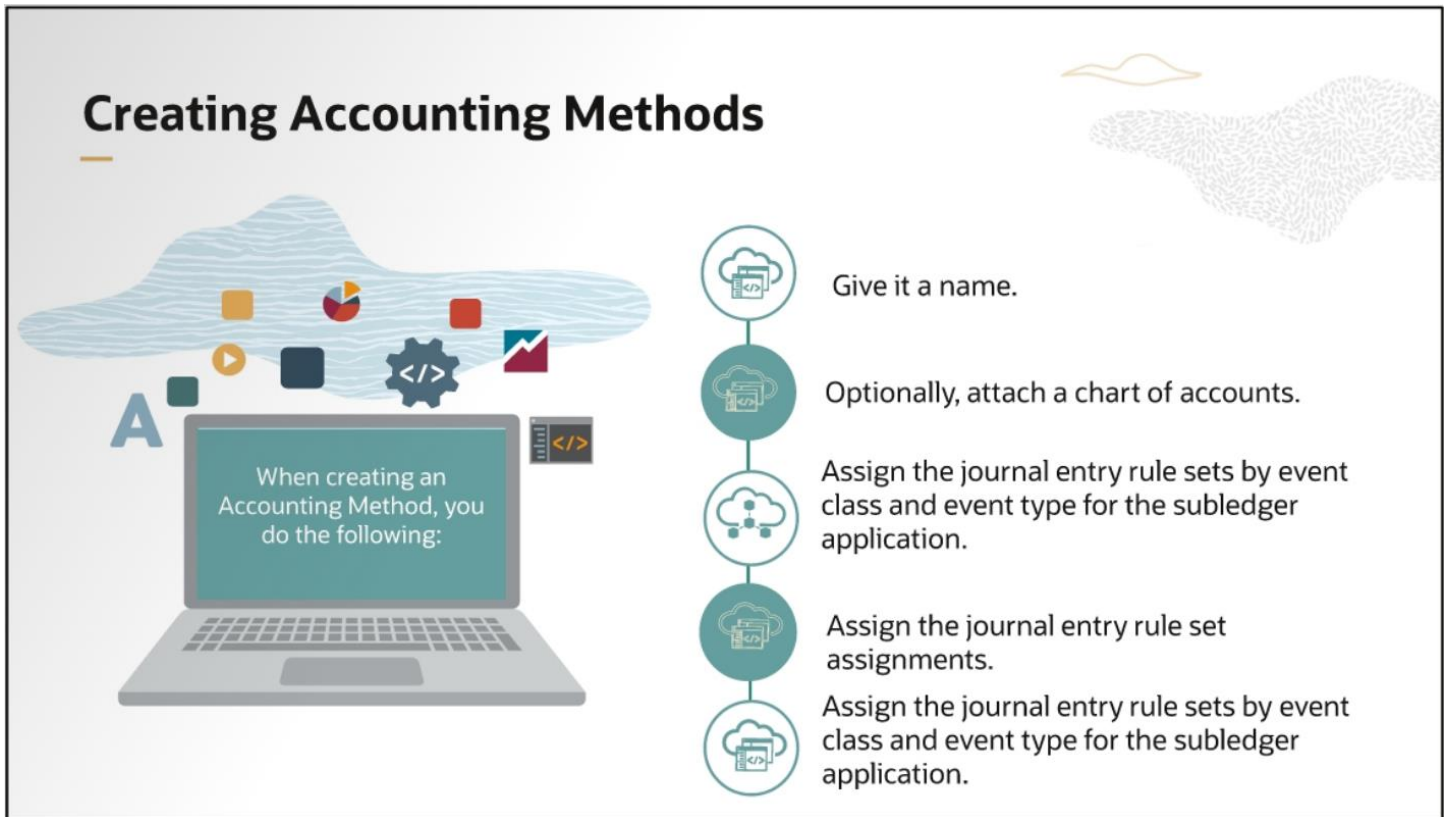

At the time of creation of an Accounting Method, you do the following:

- **Give it a name:** Naming conventions are important and should reflect the nature of the Accounting Method. For example, if you are creating an Accounting Method for a secondary ledger by using GAAP rules, you might name it: Standard Accrual SL US.
- **Optionally attach a chart of accounts:** If a Journal Entry Rule Set is defined with a chart of accounts, you must attach the same chart of accounts to the Accounting Method.
- **Assign Journal Entry Rule Sets:** For each event class-event type combination, assign a journal entry rule set. The Create Accounting process uses the rule set to create journals. You can assign multiple journal entry rule sets to an event class or type by using non-overlapping effective dates. This can be used to accommodate changes in Accounting Methods due to new regulations or corporate policies.
- **Activate the Journal Entry Rule Set Assignments:** Click the Activate button in the journal entry rule set assignments section. All the assigned journal entry rule sets must be Active for the Accounting Method to be used by the Create Accounting process. This validates the journal entry rule set and its subcomponents. It also generates compiled code for the accounting engine.
- **Assign the new Accounting Method to a ledger or ledgers:** When assigning an Accounting Method to a ledger, you must select an Accounting Method that uses the same chart of accounts, or an Accounting Method that does not have an assigned chart of accounts. Accounting Methods are required on both primary ledgers and subledger-level secondary ledgers.

Manage Accounting Methods: Non Oracle Source Done

Search Saved Search All Accounting Methods

Search Results

Actions View + Freeze

Name	Description	Chart of Accounts	Status	Created By
OK_Standard_Accrual		MS_GEN_COA_STRUCTURE	Active	karim.elmansour@...
ABZ Accounting Method			Active	Zeinab.Nabil
ABZ Standard Accrual with Encumbrance			Active	Zeinab.Nabil
AE_ACCOUNTING_METHOD	AE_ACCOUNTING_METHOD	PWC_US_DG_COA	Active	praveen

Edit Accounting Method ?

Actions Save Save and Create Another Save and Close Cancel

Last Saved 11/16/25 5:07 PM

Name OK_Standard_Accrual
Short Name OK_STD_ACCR
Description
Chart of Accounts MS_GEN_COA_STRUCTURE

Status Active
Created By karim.elmansour@...
Creation Date 11/1/25 6:08 PM
Last Updated By FAH User
Last Update Date 11/16/25 5:07 PM

Journal Entry Rule Set Assignments

Non Oracle Source Cost Management Assets Payables Receivables Cash Management Payroll Receipt Accounting Project Costing Lease Accounting Joint Ventures Channel Revenue Management Revenue Management Tax Dynamics POS Odoo POS 03Personal Loan Mortgage 1Lo

Status Incomplete **Activate**

View + Freeze Detach

Event Class	Event Type	Rule Set	Status	Effective Start Date	Effective End Date
Non Oracle Source	Commercial Insurance	MSA Data Mig - Rule Set	Incomplete	m/d/yy	m/d/yy

Valuation Methods for Accounting Hub Subledgers

Valuation Methods for Accounting Hub Subledgers



- Transfer directly to a Secondary Ledger.
- Meet management reporting and country-specific accounting requirements.
- Configure valuation method-enabled subledgers.

- Examples of when to use this feature:
 - Value financial instruments differently between international and local accounting standards.
 - Represent income and expense differently for management accounting purposes.

This feature:


- Enables transfers directly to a secondary ledger for a non-seeded subledger.
- Is available in the seeded subledgers such as fixed assets and cost accounting.
- Uses different bases of valuing transactions and accounts for the transactions in different ledgers to meet various management reporting and country-specific accounting requirements.

- Uses different amounts for accounting and creating materially different accounting representations.

Benefits: This feature can reduce:

- Accounting costs by ensuring that the process of generating variable financial statements is automated.
- Audit risks by using General Ledger reporting features plus the Fusion Accounting Hub accounting repository. Auditors are able to trace and track the bookings to both ledgers.

Valuation Methods Example

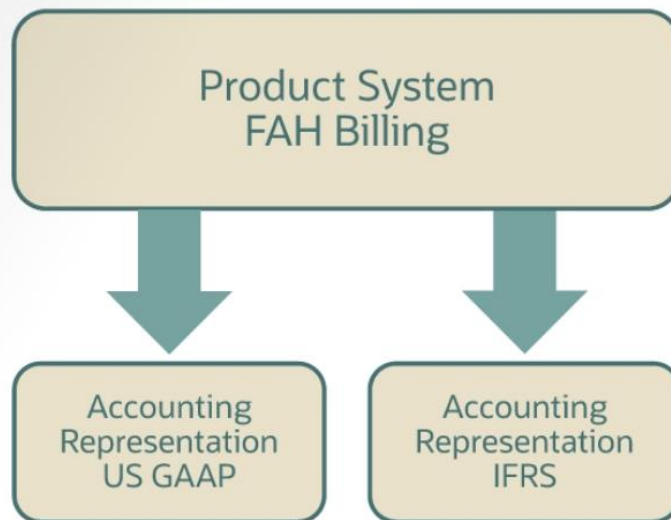

In this example, The Product System, for instance, a billing system, can simultaneously feed two different accounting representations or the ledgers in General Ledger.

- One of these representations is based upon US GAAP (Generally Accepted Accounting Principles) and another is based upon IFRS (International Financial Reporting Standards).
- There are material differences between US GAAP and IFRS.
- A primary ledger is used for corporate profit and loss statements, while a secondary ledger can carry alternate representations as well as a different level of granularity in General Ledger balances.

9- Activate Subledger Journal Entry Rule Set Assignments

Navigate to: **My Enterprise > Setup and Maintenance > Setup: Fusion Accounting Hub > Accounting Transformation > Activate Subledger entry Rule Set Assignments.**

ORACLE

This process will be queued up for submission at position 1
Activate Subledger Journal ...

Process Options Advanced Submit Cancel

Name Activate Subledger Journal Entry Rule Set Assign...

Description Validates and activates accounting setups for a subledger application and accounting method.

Schedule As soon as possible

Submission Notes

Basic Options

Parameters

* Accounting Method OK_Standard_Accrual

Subledger Application Non Oracle Source

Incomplete Status Only Yes

Migrating the Accounting Transformation Configuration

Migrating the Accounting Transformation Configuration

- Migrate setup task lists from one instance to another for specific subledger applications or all subledger applications.
- Use the export and import functionality in the Functional Setup Manager.




When migrating accounting rules from one instance to another, you must migrate task lists in their entirety. The migration requirements are as follows:

- The journal entry rule sets and Accounting Methods must be successfully activated. Invalid journal entry rule sets or Accounting Methods cause import failure.
- Your setup data migration must include all dependent business objects from other required setup tasks, such as Define Ledgers. The import sequencing of these dependent business objects must be before accounting rules business objects.

Enhanced Export and Import of Subledger Accounting Setup Data

- Allows you to export and import high volume Subledger Accounting setup data.
- Groups setup data in batches and generate multiple data files.
- Export and import in batches is enabled for the these services:
 - Journal Entry Rule Sets (JERS) Service
 - Mapping Sets Service
 - Account Rules Service
 - Description Rules Service

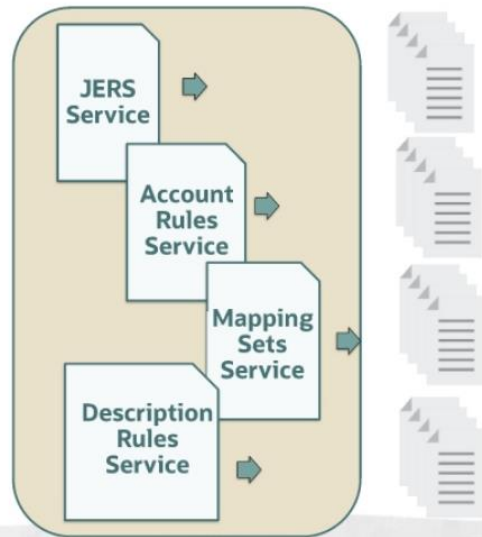

Enhancement allows you to export and import high volume Subledger Accounting setup data. With improved scalability and performance.

The setup export and import services automatically group setup data in batches and generate multiple data files to make it easier to migrate high volume setup data.

For exporting, a single zip file is generated to include all the setup data.

- You can download the zip file and import it into the target instance.
- If a Subledger Accounting Rule is in both the source and target instance, the rule in the target instance is replaced with the same rule exported from the source instance.
- When a mapping set is imported to a target instance, the mappings that are already in target instance but not in the source instance, remain in the target instance.

Accounting Transformation

View ▼ Format ▼ Freeze Detach Wrap Show All Tasks ▼

Task	Scope	Actions
Manage Mapping Sets	Non Oracle Source	Ready for download 11/8/25 11:09 PM Ready for download 6/6/22 8:10 PM Ready for download 6/6/22 7:15 PM Create New View All Export to CSV File Import from CSV File Compare Setup Data
Manage Account Rules	Non Oracle Source	
Manage Supporting References	Non Oracle Source	
Manage Subledger Journal Entry Rule Sets	Non Oracle Source	
Manage Accounting Methods	Non Oracle Source	
Activate Subledger Journal Entry Rule Set Assignments		

Enter Basic Information

TaskManage Mapping Sets

Process NameManage Mapping Sets_20260207_071727_386

DescriptionManage Mapping Sets_20260207_071727_386

☐ Export only template files

Business Objects

Search

ShowScope Enabled

Import Sequence

Name

Scope Enabled

0

Subledger Application Setup

Subledger Application Setup: Scope

AddRemoveReset

ApplicationShortName

Non Oracle Source

Summary

StatusIn progress

StageExporting setup data

Task

Process Date2/7/26 7:19 PM

Total Objects6

Total Objects Completed0

Completed Successfully0

Completed with Errors0

Business Objects

StatusAllExcludeProcessed with another object

Name

Status Details

Go to Task

Actions

Subledger Mapping Set Input Source

Export Setup Data to CSV File Results: Manage Mapping Sets_20260207_071727_386

ActionsDownload FileDone

Download and save the configuration file, and perform the post-export tasks to ensure all setup data is migrated. Use the file to import the configuration in another environment when applicable.

Summary

StatusCompleted successfully

StageReady for download

Task

Process Date2/7/26 7:20 PM

Total Objects6

Total Objects Completed6

Business Objects

Process Results Summary Report

Process Results Report

Log File

CSV Template Report

CSV File Package

Diagnostics Package

Cancel Process

Download

Accounting Transformation

ViewFormatFreezeDetachWrapShowAll Tasks

Task	Scope	Actions
Manage Mapping Sets	Non Oracle Source	Export to CSV File Import from CSV File Compare Setup Data
Manage Account Rules	Non Oracle Source	
Manage Supporting References	Non Oracle Source	
Manage Subledger Journal Entry Rule Sets	Non Oracle Source	
Manage Accounting Methods	Non Oracle Source	
Activate Subledger Journal Entry Rule Set Assignments		

Source

CSV File Package Manage Mapping Sets_20260207_071727_386.zipUpdate...

Details

NameManage Mapping Sets_20260207_071727_386

DescriptionManage Mapping Sets_20260207_071727_386

TaskManage Mapping Sets

Version Date2026-02-07 19:20:12.276

Import Setup Data from CSV File Results: Manage Mapping Sets_20260207_072249_128

Actions
Refresh
Done

Refresh the page to get updated results or return when the process has finished.

Summary

Status
In progress

Stage
Importing setup data

Task

Process Date
2/7/26 7:23 PM

Total Objects
6

Total Objects Completed
0

Completed Successfully
0

Completed with Errors
0

Business Objects

Status
All
Exclude
Processed with another object

Name	Status Details	Go to Task	Actions
Subledger Mapping Set Input Source			

Import Setup Data from CSV File Results: Manage Mapping Sets_20260207_072249_128

Actions
Done

Perform the additional tasks listed below to complete the setup data migration. Run the comparison report or use the tasks to ensure the setup data was migrated properly.

Summary

Status
Completed successfully

Stage
Ready for data validation

Task

Process Date
2/7/26 7:23 PM

Total Objects
6

Total Objects Completed
6

Completed Successfully
6

Completed with Errors
0

Business Objects

Status
All
Exclude
Processed with another object

Name	Status Details	Go to Task	Actions
Subledger Mapping Set Input Source			

Conclusion

This learning document has outlined the key concepts, processes, and configurations required to effectively manage source systems and accounting rules within Oracle Fusion Accounting Hub. By understanding how each component contributes to accurate financial reporting—ranging from mapping sets and accounting methods to transaction objects and source assignments—you are now better equipped to design, validate, and maintain robust accounting solutions.

As you apply these concepts in real scenarios, continue to explore the available tools, follow best practices, and leverage the system’s flexibility to meet your organization’s reporting needs.