


Set Default Date in parameter (BI Report)

Quick Tip for Setting Default Date in BI Publisher


Need to set a **default date** for your **Date Parameter (P_FROM_DATE)** in Oracle BI Publisher?

Follow these simple steps:

- 1 Click the **Edit** button to open the data model screen.

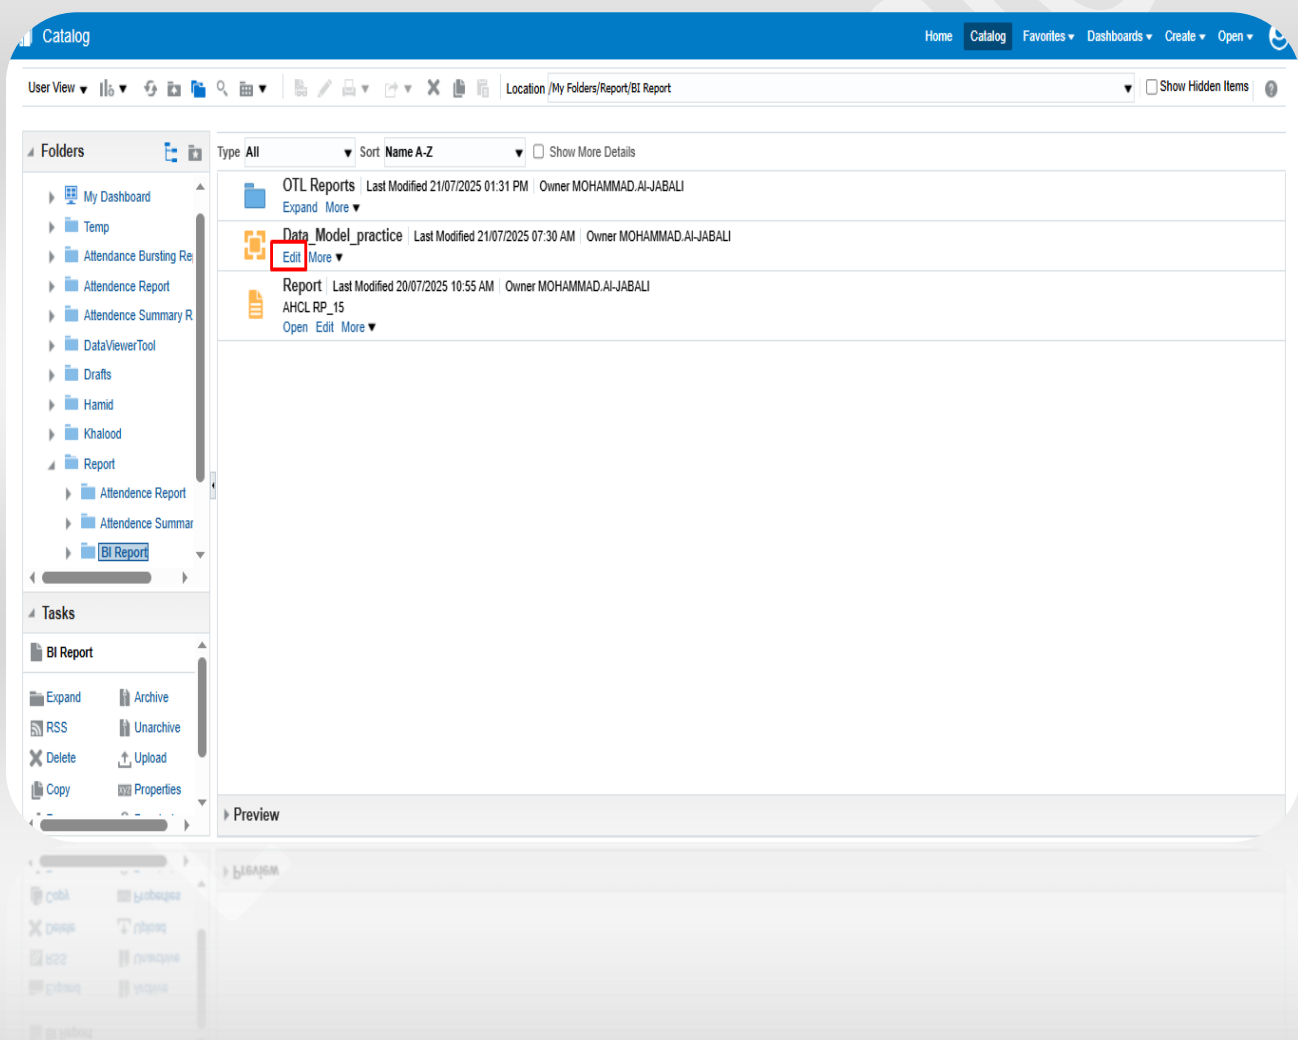

2 Select the **Date Parameter (P_FROM_DATE)**.

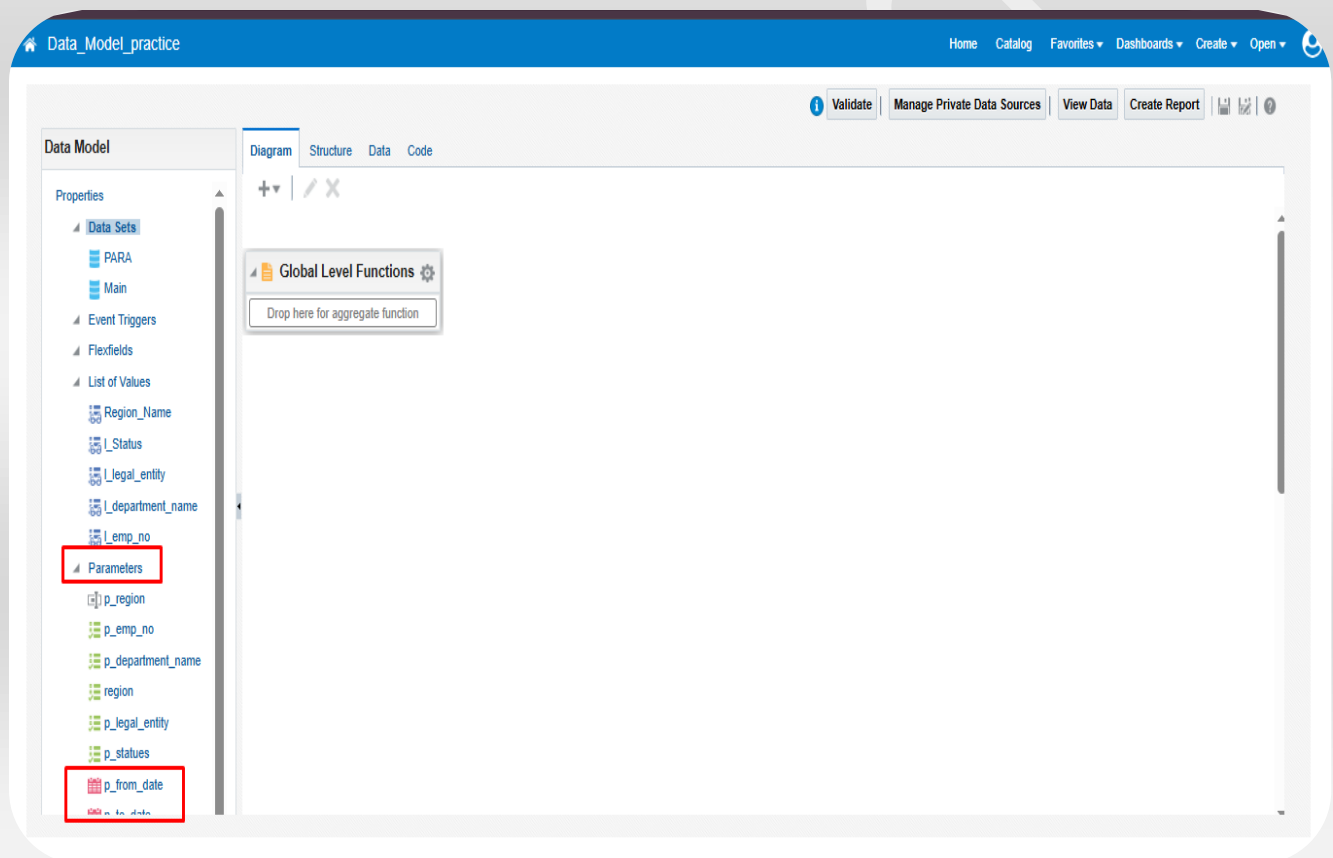

3 In the **Default Value** box:

✓ To use the **current system date**, paste: `{ $SYSDATE() $ }`

The screenshot shows the 'Data Model' interface with a table of parameters. The 'p_from_date' parameter is selected, and its 'Default Value' is set to `{ $SYSDATE() $ }`, which is highlighted with a red box. Below the table, the configuration for 'p_from_date' is shown, including 'Type: Date', 'Display Label', 'From Date', and 'Text Field Size'.

Name	Data Type	Default Value	Parameter Type	Mandatory	Row Placement	Reorder
p_region	String		Text	☐	1	▲▼
p_emp_no	String		Menu	☐	1	▲▼
p_department_name	String		Menu	☐	1	▲▼
region	String		Menu	☐	1	▲▼
p_legal_entity	String		Menu	☐	2	▲▼
p_status	String		Menu	☐	2	▲▼
p_from_date	Date	<code>{ \$SYSDATE() \$ }</code>	Date	☒	3	▲▼
p_to_date	Date		Date	☒	3	▲▼

p_from_date: Type: Date
Display Label: From Date
Text Field Size:

✓ To use a **specific date**, paste: `04-01-2025` (or any desired date)

Validate | Manage Private Data Sources | View Data | Create Report

Data Model

Properties

- Data Sets
 - PARA
 - Main
- Event Triggers
- Flexfields
- List of Values
 - Region_Name
 - L_Status
 - L_legal_entity
 - L_department_name
 - L_emp_no
- Parameters
 - p_region
 - p_emp_no
 - p_department_name
 - region
 - p_legal_entity
 - p_statuses
 - p_from_date

Name	Data Type	Default Value	Parameter Type	Mandatory	Row Placement	Reorder
p_region	String		Text	☐	1	▲▼
p_emp_no	String		Menu	☐	1	▲▼
p_department_name	String		Menu	☐	1	▲▼
region	String		Menu	☐	1	▲▼
p_legal_entity	String		Menu	☐	2	▲▼
p_statuses	String		Menu	☐	2	▲▼
p_from_date	Date	{SYSDATE()}S	Date	☒	3	▲▼
p_to_date	Date	04-01-2025	Date	☒	3	▲▼

p_to_date: Type: Date

Display Label: To Date

Text Field Size:

Once done, your default date will be set automatically for the parameter!

Set Current Date

Home | Catalog | Favorites | Dashboards | Create | Open

Validate | Manage Private Data Sources | View Data | Create Report

Data Model

Diagram | Structure | **Data** | Code

Properties

- Data Sets
 - PARA
 - Main
- Event Triggers
- Flexfields
- List of Values
 - Region_Name
 - L_Status
 - L_legal_entity
 - L_department_name
 - L_emp_no
- Parameters
 - p_region
 - p_emp_no
 - p_department_name
 - region
 - p_legal_entity
 - p_statuses
 - p_from_date

p_region: Employee: Department Name: region:

Location: * From Date: 07-26-2025 * To Date: 04-01-2025

Rows: 5 | View | Export | Save As Sample Data | View Engine Log | Generate SQL Monitor Report

Tree View | Table View

Set a Specific Date

The screenshot displays the 'Data Model practice' application interface. The top navigation bar includes links for Home, Catalog, Favorites, Dashboards, Create, and Open. The main interface is divided into a left sidebar and a central workspace.

Left Sidebar (Data Model):

- Properties
 - Data Sets
 - PARA
 - Main
 - Event Triggers
 - Flexfields
 - List of Values
 - Region_Name
 - l_Status
 - l_legal_entity
 - l_department_name
 - l_emp_no
 - Parameters
 - p_region
 - p_emp_no
 - p_department_name
 - region
 - p_legal_entity
 - p_status
 - p_from_date

Central Workspace (Data Tab):

The 'Data' tab is active, showing a query editor with the following filters:

- p_region: [Dropdown]
- Employee: All [Dropdown]
- Department Name: All [Dropdown]
- region: All [Dropdown]
- Location: All [Dropdown]
- Status: All [Dropdown]
- * From Date: 07-26-2025 [Calendar Icon]
- * To Date: 04-01-2025 [Calendar Icon]

Below the filters, there are buttons for 'View', 'Export', 'Save As Sample Data', 'View Engine Log', and 'Generate SQL Monitor Report'. The 'Rows' section shows '5' rows.

The bottom of the workspace has tabs for 'Tree View' and 'Table View'.