

In []:

Ir = 0.01

target: sigma=0.03

optimizer: Adamax()

scheduler: StepLR(step=100, gamma=0.999)


MaxBatch=1000(collapsed at 850)


OptimStep=20

```
In []: plot=plot_results(loss=forward_losses)
    plot.FwdLoss()
    plot.results()
    plot.qq_plot()
```

/var/folders/xb/rvrt2lnd1bs3y0fbz2c5wbwm0000gn/T/ipykernel_3221/205158394.py:143: RuntimeWarning: overflow encountered in exp x_sigmoid=1/(1+np.exp(self.x_path[:,-1]/sigma))



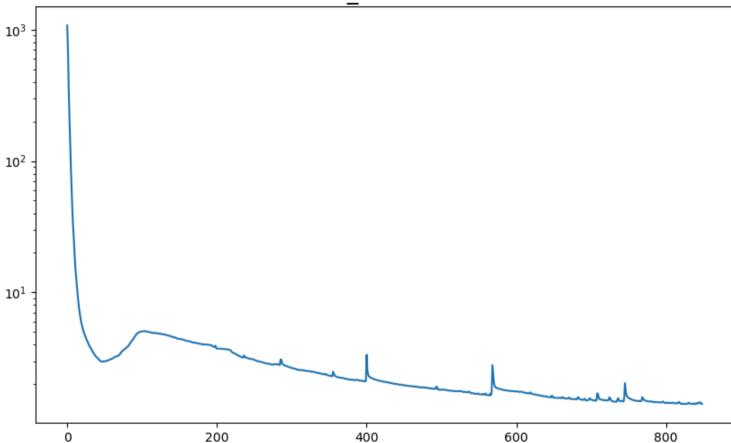

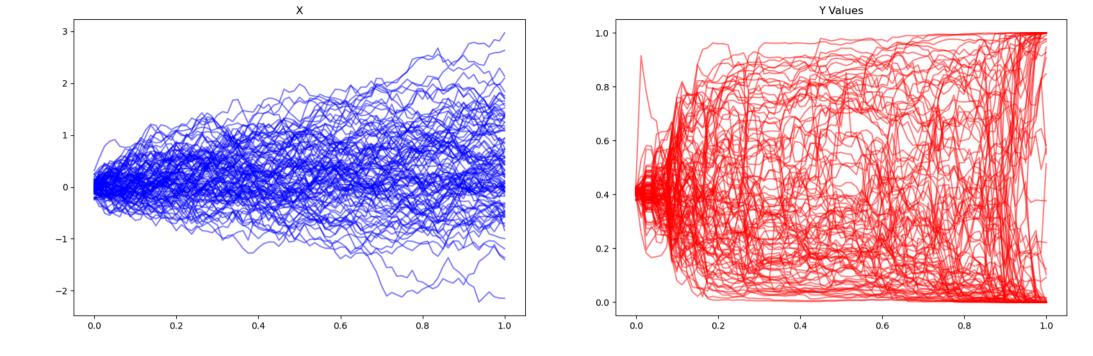

```
x = F.relu(self.fc2(x))
        output = self.fc3(x)
        return output
## Functions
def Sample Init(N,mean=0,sd=0.1):
    Generate N samples of x0
    xi = np.random.normal(mean,sd,size=N)
    return torch.FloatTensor(xi).view(-1,1)
def SampleBMIncr(T, Npaths, Nsteps):
    # Returns Matrix of Dimension Npaths x Nsteps With Sample Increments of of BM
    # Here an increment is of the form dB
    dt = T / Nsteps
    dB = np.sgrt(dt) * np.random.randn(Npaths, Nsteps)
    return torch.FloatTensor(dB)
def target(x,sigma=sigma):
    x=x.detach().numpy()
    return torch.FloatTensor(-x/sigma)
# Forward Loss
def get_foward_loss_coupled(dB, init_x,NT, target,y0_model, z_models):
    x = init x
    \# v = torch.rand like(x)
    v tilde=v0 model(x)
    y=torch.sigmoid(y tilde)
    for j in range(1, NT+1):
        z = z \text{ models}[j-1](x)
        x = x + y*dt + dB[:,j].view(-1,1)
        y_{tilde} = (y_{tilde} + (z**2)*(1-2/(1+torch.exp(y_{tilde})))/2*dt + z * dB[:,j].view(-1,1))#.clamp(min=-1,max=1)
        y=torch.sigmoid(y tilde)
    loss=torch.mean((y_tilde-target(x))**2)
    return loss
def get_target_path_coupled(dB, init_x,NumBM, NT,y0_model, z_models):
    x path = torch.ones(NumBM,NT+1)
    y_path = torch.ones(NumBM,NT+1)
    x = init x
    \# y = torch.rand like(x)
    y tilde=y0 model(x)
    y=torch.sigmoid(y_tilde)
    x path[:,0] = x.squeeze()
    y path[:,0] = y.squeeze()
    for j in range(1, NT+1):
```

```
z = z \mod els[j-1](x)
       x += y*dt+ dB[:,j].view(-1,1)
       y tilde = (y \text{ tilde } + (z**2)*(1-2/(1+\text{torch.exp}(y \text{ tilde})))/2 *dt + z * dB[:,j].view(-1,1))#.clamp(min=-1,max=1)
       v=torch.sigmoid(v tilde)
       x path[:,i] = x.squeeze()
       v path[:,i] = v.squeeze()
   return x path.detach(), y path.detach()
class plot results():
   def init (self.loss=forward losses.sigma=sigma.Npaths=100.NumTrain=NumTrain.NT=NT);
        self.loss=loss
        self.x path,self.y path=get target path coupled(dB, init x, y0 model=y0 model main, z models=z models main, NumBM=NumTrain, NT=NT)
        self.number of paths=np.minimum(Npaths,NumTrain)
        self.sigma=sigma
   def FwdLoss(self.log=True):
        plt.figure(figsize=(10,6))
        plt.title("Forward Loss vs Batch",fontsize=18)
        plt.plot(self.loss)
        if log==True:
            plt.vscale('log')
   def results(self,seed=0):
        random.seed(seed)
        idx list = np.random.choice(NumTrain, self.number of paths, replace = False)
        x plot = self.x path.detach().numpy()[idx list]
        v plot = self.v path.detach().numpy()[idx list]
        t = np.array([i for i in range(NT+1)]) * 1/(NT)
        plt.figure(figsize=(20,6))
        plt.subplot(121)
        for i in range(self.number_of_paths):
                plt.plot(t,x plot[i], color="blue", alpha=0.5)
        plt.title("X")
        plt.subplot(122)
        for i in range(self.number of paths):
                plt.plot(t,y_plot[i], color="red", alpha=0.5)
        plt.title("Y Values")
        ### Integrated Plots
        random.seed(seed)
        idx=random.randint(0,self.number of paths)
        plt.figure(figsize=(10,8))
        plt.subplot()
        plt.plot(t,x plot[idx], color="blue", alpha=0.5, label='X')
        plt.plot(t,y plot[idx], color="black", linestyle='--',alpha=0.5,label="Y Values")
        plt.hlines(y=[0,1],xmin=0,xmax=1,colors='firebrick',linestyles='-.')
        plt.title("Comparison of A Particular Path")
        plt.legend()
```

```
plt.title("00-Plot")
                x sigmoid=1/(1+np.exp(self.x path[:,-1]/sigma))
                plt.scatter(x sigmoid.self.y path[:,-1],s=3)
                plt.plot(np.linspace(0,1,5),np.linspace(0,1,5),linestyle='--',linewidth=1,color='r')
In [ ]: ## Train
        torch.autograd.set detect anomaly(True)
        dB = SampleBMIncr(1, Npaths=NumTrain, Nsteps=NT+1)
        init x = Sample Init(N=NumTrain)
        #Forward Loss
        forward losses = []
        #How many batches?
        MaxBatch= 1000
        #How many optimization steps per batch
        OptimSteps= 20
        #Set Learning rate
        learning rate = 0.01
        #Train on a single batch?
        single batch = True
        #Set up main models for y0 and z (z will be list of models)
        laver dim = 10
        y0 model main = Network(lr=learning rate, input dims=[1], fc1 dims=layer dim, fc2 dims=layer dim,
                             n outputs=1)
        z models main = [Network(lr=learning rate, input dims=[1], fc1 dims=layer dim, fc2 dims=layer dim,
                             n outputs=1) for i in range(NT)]
        #Define optimization parameters
        # params = list(y0 model main.parameters())
        params=[]
        for i in range(NT):
            params += list(z models main[i].parameters())
        #Set up optimizer and scheduler
        optimizer = optim.Adamax(params, lr=learning rate)
        scheduler = torch.optim.lr scheduler.StepLR(optimizer, step size=100, gamma=0.999)
        for k in range(0,MaxBatch):
            print("Batch Number: ", k+1)
            sloss=0
```

def qq_plot(self,sigma=sigma):

plt.figure()

```
#optimize main network wrt the foward loss
    for l in range(0,0ptimSteps):
        optimizer.zero grad()
        loss = get foward loss coupled(dB, init x,NT=NT, target=target, y0 model=y0 model main, z models=z models main)
        # print(loss)
        loss.backward()
        # print(params)
        # torch.nn.utils.clip grad norm (parameters=params,max norm=5,norm type=1)
        optimizer.step()
        scheduler.step()
        nloss = loss.detach().numpy()
        sloss += nloss
        # print('OptimStep: '+ str(l+1))
        # print('forward_loss: ' + str(nloss))
    avgloss = sloss/OptimSteps
    print("Average Error Est: ", avgloss)
    forward_losses.append(avgloss)
    #Generate a new batch if using multiple batches
    if(not single batch):
        dB = SampleBMIncr(1, Npaths=NumTrain, Nsteps=NT+1)
        init x = Sample Init(N=NumTrain)
plot=plot results(loss=forward losses)
plot.FwdLoss()
plot.results()
plot.qq plot()
```

Batch Number:	1	
Average Error	Est:	1074.308187866211
Batch Number:	2	
Average Error	Est:	701.6762634277344
Batch Number:	3	
Average Error	Est:	363.4532806396484
Batch Number:	4	
Average Error	Est:	211.8904914855957
Batch Number:	5	
Average Error		132.99925117492677
Batch Number:	6	
Average Error		86.39548149108887
Batch Number:	7	F7 00F2007F622FF0F
Average Error		57.895290756225585
Batch Number:	8	40 220720166250764
Average Error Batch Number:	Est: 9	40.228739166259764
Average Error		30.888910675048827
Batch Number:	10	30.000310073040027
Average Error		24.5773907661438
Batch Number:	11	2113773307001130
Average Error		18.75830841064453
Batch Number:	12	
Average Error	Est:	15.130566787719726
Batch Number:	13	
Average Error	Est:	12.832358884811402
Batch Number:	14	
Average Error	Est:	11.03341817855835
Batch Number:	15	
Average Error	Est:	9.515284156799316
Batch Number:	16	
Average Error	Est:	8.322553205490113
Batch Number:	17	7 427051040501027
Average Error	Est:	7.427051949501037
Batch Number: Average Error	18 Est:	6.76188280582428
Batch Number:	19	0./0100200302420
Average Error		6.222300481796265
Batch Number:	20	01222300401730203
Average Error		5.822371172904968
Batch Number:	21	01022072272000
Average Error	Est:	5.514983224868774
Batch Number:		
Average Error	Est:	5.240373206138611
Batch Number:	23	
Average Error	Est:	5.007095170021057
Batch Number:		
Average Error		4.814329767227173
Batch Number:	25	
Average Error		4.647697448730469
Batch Number:	26	

Comparison of A Particular Path

