

LocalChains: A Decentralized Ledger with a tiny global state

Orfeas Stefanos Thyfronitis Litos and Aggelos Kiayias

University of Edinburgh
o.thyfronitis@ed.ac.uk, akiayias@inf.ed.ac.uk

Abstract.

1 Introduction

2 Transaction DAGs

There exists a genesis transaction that contains all coins to ever exist. This transaction is hardcoded in the protocol and is by definition valid for all nodes.




Fig. 1: Coinbase transaction

All other transactions must have the following attributes to be valid:

- Inputs that correspond to valid unspent outputs (UTXOs) of previous transactions.
- Outputs that have a total value that is less than or equal to the total value of the inputs, with a public key corresponding to each output. Each public key can exist only once in the valid and trustworthy DAG of a node¹.
- One signature for each input, made with the private key that corresponds to the public key of the corresponding previous output.

At any point in time, *Alice* considers a DAG X of transactions as *valid* and *trustworthy*. She may be informed by Charlie about the existence another DAG of transactions, Y . To consider this DAG valid, *Alice* must verify that

¹ This is to ensure that a transaction input cannot be connected with two different transaction outputs. It is not entirely clear that this limitation is necessary though.

- all the transactions are valid and
- all root transactions of Y are connected to UTXOs in X .

We will later see what course of action she is expected to take in case the second requirement does not hold.

For example, let X be:

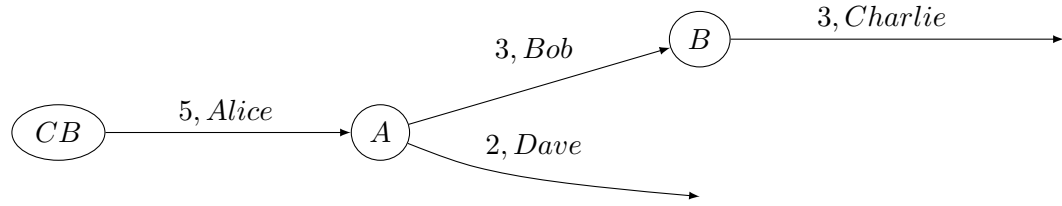


Fig. 2: Base DAG X

Then *Alice* would consider Y_1 valid, but Y_2 invalid:

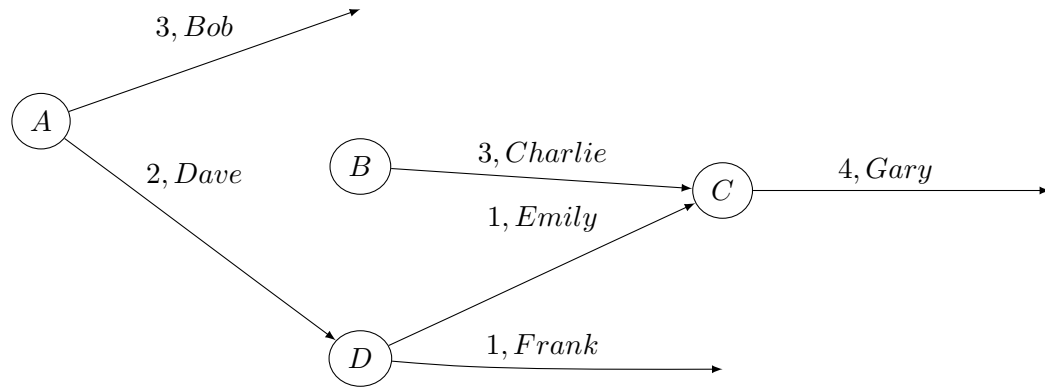


Fig. 3: Good DAG Y_1




Fig. 4: Bad DAG Y_2

X and Y_2 cannot be valid at the same time because there is a conflict regarding which private key can spend the output of the transaction B .

The existence of the two versions of the transaction B is proof that Bob attempted to double spend his output from transaction A . $Alice$ and $Charlie$ just discovered a proof of fraud committed by Bob and can use this proof of fraud so that one of the two can keep the coins in the transaction DAG and the other can get a refund from the network. Here is where the global part of the infrastructure comes into play.