

# GTL Template language

Jean-Luc Béchenec

August 20, 2016

# Contents

<b>1</b>	<b>About this document</b>	<b>4</b>
<b>2</b>	<b>Data types</b>	<b>5</b>
2.1	Operators priority	6
2.2	Special operators	6
2.2.1	The exists operator	6
2.2.2	The exists ... default (...) operator	6
2.2.3	The typeof operator	7
2.2.4	The mapof operator	7
2.2.5	The listof operator	9
2.3	Getters applicable to any data type	9
2.3.1	The type getter	9
2.3.2	The isANumber getter	9
2.3.3	The description getter	10
2.4	Setters applicable to any data type	10
2.4.1	The setDescription setter	10
2.4.2	The touch setter	10
2.5	The int data type	10
2.5.1	The int operators	10
2.5.2	The int getters	11
2.5.3	The int setters	14
2.5.4	The int functions	15
2.6	The char data type	16
2.6.1	The char operators	16
2.6.2	The char getters	17
2.7	The enum data type	18
2.7.1	The enum operators	18
2.7.2	The enum getters	18
2.8	The float data type	18
2.8.1	The float operators	18
2.8.2	The float getters	19
2.8.3	The float function	20
2.9	The string data type	20
2.9.1	The string operators	20
2.9.2	The string getters	21
2.9.3	The string setter	25
2.9.4	The string functions	26

2.10	The bool data type . . . . .	27
2.10.1	The bool operators . . . . .	27
2.10.2	The bool getters . . . . .	27
2.11	The struct data type . . . . .	28
2.11.1	The struct operators . . . . .	28
2.11.2	The struct getter . . . . .	28
2.12	The list data type . . . . .	29
2.12.1	The list operators . . . . .	29
2.12.2	The list getters . . . . .	30
2.13	The map data type . . . . .	33
2.13.1	The map operators . . . . .	33
2.13.2	The map getters . . . . .	33
2.14	The set data type . . . . .	34
2.14.1	The set operators . . . . .	34
2.14.2	The set getters . . . . .	35
2.14.3	The set setters . . . . .	36
2.15	The type data type . . . . .	36
<b>3</b>	<b>GTL instructions</b>	<b>38</b>
3.1	The %...% instruction . . . . .	38
3.2	The let instruction . . . . .	38
3.3	The unlet instruction . . . . .	39
3.4	The ! instruction . . . . .	41
3.5	The ? instruction . . . . .	41
3.6	The tab instruction . . . . .	41
3.7	The sort instruction . . . . .	41
3.8	The if instruction . . . . .	43
3.9	The foreach instruction . . . . .	44
3.10	The for instruction . . . . .	45
3.11	The loop instruction . . . . .	46
3.12	The repeat instruction . . . . .	47
3.13	The write instruction . . . . .	48
3.14	The template instruction . . . . .	48
3.14.1	Template invocation with a copy of variables . . . . .	49
3.14.2	Template invocation with arguments . . . . .	49
3.14.3	Conditional invocation of templates . . . . .	50
3.15	The input instruction . . . . .	50
3.16	The error and warning instructions . . . . .	51
3.17	The print and println instructions . . . . .	51
3.18	The display instruction . . . . .	52
3.19	The variables instruction . . . . .	53
<b>4</b>	<b>GTL modules</b>	<b>55</b>
4.1	Importing a module . . . . .	55
4.2	Writing a module . . . . .	55
4.2.1	The arguments . . . . .	55
4.2.2	Function definition . . . . .	56
4.3	Getter definition . . . . .	57
4.4	Setter definition . . . . .	59

<b>5</b>	<b>Using GTL in a GALGAS project</b>	<b>60</b>
5.1	Needed files . . . . .	60
5.2	Invoking a template . . . . .	60

# Chapter 1

## About this document

This document presents the syntax and the semantics of GTL 3, a template language used in Goil, the OIL compiler of Trampoline<sup>1</sup>, to generate code from the OIL or arXML description of an OSEK/AUTOSAR application.

GTL is written in GALGAS 3<sup>2</sup>, a lexical and syntactic analyzer, which is also a powerful domain specific language to write compilers and interpreters. GALGAS 3 is developed by Pierre Molinaro from the Real-Time Systems Group of IRCCyN, a french laboratory from a joint of the University of Nantes, École Centrale de Nantes, École des Mines de Nantes and CNRS. The first version of the GTL interpreter was written by Pierre Molinaro too. As needs have increased, more features was needed and this led to a major rewrite of the GTL interpreter; In fact no original code made its way in GTL 3.

### Convention

Code examples follow the following conventions:

- GTL example code snippets are presented in light blue boxes . In these examples, *Italic* writing are used for generic syntactic items. For instance, *expression* means any expression like `a + b` or `"a string"` . Boldface words are reserved words of GTL, like **foreach** or built-in functions, getters or setters like **setDescription** . Pieces of code delimited by `<` and `>` are optional.
- Standard output of examples are presented in light yellow boxes .
- Template string output of examples are presented in light green boxes .

---

<sup>1</sup>An OSEK and AUTOSAR 4.2 compliant RTOS, check <https://github.com/TrampolineRTOS/trampoline>.

<sup>2</sup>GALGAS 3 is free software distributed under the GPL license and can be found at <http://galgas.rts-software.org>

## Chapter 2

# Data types

GTL supports the following data types:

type	Description
<b>int</b>	arbitrary precision integer numbers. The GMP library is used
<b>char</b>	unicode chars
<b>float</b>	64 bits floating point numbers
<b>bool</b>	standard boolean
<b>enum</b>	enumerated type
<b>string</b>	unicode strings
<b>struct</b>	structured data
<b>list</b>	lists of data, may be accessed as a table
<b>map</b>	map (aka dictionary) of data
<b>set</b>	set of strings
<b>type</b>	the type of a data
<b>unconstructed</b>	an unconstructed variable

Data embed a location, that is a file name, a line and a column. Each time a variable is set, the corresponding location is set too. This allow to report errors efficiently. See 2.4.2 and 3.16.

Data embed a description string too. This allow to comment on the content of the data. See 2.3.3 and 2.4.1.

Each type has its set of operators, getters and setters. The expression, for getters, or the variable, for setters, is called the *target*. Getters return a value related to the expression but do not change it. They are used to get information from a data or to convert it into another type. Setters may only target a variable. Setters change the content of the variable and do not return anything. Getters and setters may have arguments. Syntax for getters without argument is as follow:

```
[expression aGetter]
```

When the getter takes arguments, they are listed after a colon and separated commas as follow:

```
[expression aGetter : arg1, arg2, ..., argN]
```

Syntax for setters without arguments is as follow:

```
[!variable aSetter]
```

When the setter takes arguments, they are listed after a colon and separated by commas as follow:

```
[!variable aSetter : arg1, arg2, ..., argN]
```

## 2.1 Operators priority

The following table gives all the operators available in GTL an their priority. Semantics of the operators is given for each data type. Operators of same priority are evaluated from left to right.

Priority	Operators
0	^
1	&
2	== != < > <= >=
3	<< >> + . -
4	* / mod
5	not ~ - + typeof mapof listof exists

## 2.2 Special operators

### 2.2.1 The **exists** operator

The **exists** operator tests the existence of a variable, a struct field, an item of a map or a list and returns a bool, **true** if the entity exists, **false** otherwise.

```
exists var
```

#### Example

```
let c := 3
if exists c then println "c exists" else println "c does not exist" end if
unlet c # delete c
if exists c then println "c exists" else println "c does not exist" end if
```

```
c exists
c does not exist
```

### 2.2.2 The **exists ... default (...)** operator

The **exists ... default (...)** operator tests the existence of a variable, a struct field, an item of a map or a list.

```
exists var default ( expression )
```

If the entity exists it is returned. Otherwise the evaluation of the default expression is returned.

#### Example

```

let aList := @( 1, 2, 3 )
let aSecondList := exists aList default ( @() )
display aSecondList
unlet aList # delete aList
let aSecondList := exists aList default ( @() )
display aSecondList

```

```

aSecondList from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 9:7
  list: @(
    0 :>
      integer: 1
    1 :>
      integer: 2
    2 :>
      integer: 3
  )
aSecondList from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 12:7
  list: @(
  )

```

### 2.2.3 The **typeof** operator

The **typeof** operator takes a variable as argument and return its type.

```
typeof var
```

⚠ | The **typeof** is deprecated. Use the **type** getter instead. See 2.3.1.

### 2.2.4 The **mapof** operator

The **mapof** may apply on struct or on list.

#### With a **struct**

The **mapof** operator converts a struct to a map.

```
mapof expression end
```

⚠ | **mapof** is deprecated, use the map getter on struct instead. See 2.11.2.

#### Example

```

let aStruct := @{ a: 1, b: 2, c: 3 }
display aStruct
let aMap := mapof aStruct end
display aMap

```

```

aStruct from file '/Users/jlb/Develop/GTL/examples/mapofTest.gtl', line 3:7
  struct: @{
    a :>
      integer: 1
  }

```



```

        b :>
            integer: 2
        c :>
            integer: 3
    }
aMap from file '/Users/jlb/Develop/GTL/examples/mapofTest.gtl', line 5:7
map: @[
  "a" :>
    integer: 1
  "b" :>
    integer: 2
  "c" :>
    integer: 3
]

```

## With a list

The `mapof` operator converts a list to a map according to a string field of each item of the list. So the list should be a list of struct.

```
mapof var by identifier
```



`mapof ... by` is deprecated, use the `mapBy` getter on list instead. See 2.12.2.

## Example

```

let aList := @(
  @{ age : 18, height : 180, name : "Arnold" },
  @{ age : 22, height : 170, name : "Bob" },
  @{ age : 29, height : 175, name : "John" }
)
let aMap := mapof aList by name
display aMap

```

```

aMap from file '/Users/jlb/Develop/GTL/examples/mapofTest.gtl', line 13:7
map: @[
  "Arnold" :>
    struct: @{
      age :>
        integer: 18
      height :>
        integer: 180
      name :>
        string: "Arnold"
    }
  "Bob" :>
    struct: @{
      age :>
        integer: 22
      height :>
        integer: 170
      name :>
        string: "Bob"
    }
  "John" :>
    struct: @{
      age :>

```

```

        integer: 29
      height :>
        integer: 175
      name :>
        string: "John"
    }
  ]

```

### 2.2.5 The **listof** operator

The **listof** operator apply to a map variable. It returns a **list** representation of the map. The elements of the **list** are sorted in the alphanumerical order of the map keys.

```
listof var end
```



**listof ... end** is deprecated, use the **list** getter on map instead. See 2.13.2.

## 2.3 Getters applicable to any data type

### 2.3.1 The **type** getter

The **type** getter returns the type of the expression. See the section 2.15.

Example

```

let a := 1
let typeOfA := [a type]
display typeOfA

```

```

typeOfA from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 4:7
  type: int

```

### 2.3.2 The **isANumber** getter

**isANumber** returns **true** if the expression is a number: **int** or **float**, **false** otherwise. This getter is useful to test the type of an argument in a function, a getter or a setter.

Example

```

let b := 0
let a := 1
if [a isANumber] then
  let b := a # if a is a number, it is copied in b
else
  let b := 0 # otherwise b is set to 0
end if
display b

```

```

b from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 13:7
  integer: 1

```

### 2.3.3 The **description** getter

**description** returns the string describing the data, if available, or an empty string otherwise. If the data is coming from an OIL source file, it corresponds to the description field (see section 2.3.11 of *System Generation – OIL: OSEK Implementation Language – Version 2.5*).

## 2.4 Setters applicable to any data type

### 2.4.1 The **setDescription** setter

**setDescription** takes one string argument `desc`. It sets the string describing the data to `desc`.

### 2.4.2 The **touch** setter

**touch** sets the location of modification of the data to the current one.

## 2.5 The **int** data type

The **int** data type support arbitrary precision arithmetic by using the GNU Multiple Precision Arithmetic Library (GMP).

### 2.5.1 The **int** operators

The **int** datatype supports the following operators:

#### Unary operators

Operator	Expression type	Meaning
+	<code>int ← +int</code>	Plus operator. No effect
-	<code>int ← -int</code>	Minus operator. Negation
~	<code>int ← ~int</code>	Not operator. Complementation by 1

#### Binary arithmetic operators

Operator	Expression type	Meaning
+	<code>int ← int + int</code>	Addition
-	<code>int ← int - int</code>	Substraction
*	<code>int ← int * int</code>	Multiplication
/	<code>int ← int / int</code>	Division
mod	<code>int ← int mod int</code>	Modulus

#### Binary bitwise operators

Operator	Expression type	Meaning
&	<code>int ← int &amp; int</code>	bitwise and
	<code>int ← int   int</code>	bitwise or
^	<code>int ← int ^ int</code>	bitwise exclusive or

Operator	Expression type	Meaning
<<	int ← int << int	shift left
>>	int ← int >> int	shift right

### Comparison operators

Operator	Expression type	Meaning
!=	bool ← int != int	Not equal
==	bool ← int == int	Equal
>	bool ← int > int	Greater than
<	bool ← int < int	Lower than
>=	bool ← int >= int	Greater or equal
<=	bool ← int <= int	Lower or equal

## 2.5.2 The int getters

### The string getter

**string** returns a string decimal representation of the int expression.

#### Example

```
let b := [42 string]
display b
```

```
b from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 18:7
  string: "42"
```

### The hexString getter

**hexString** returns a hexadecimal string representation of the int expression prefixed by "0x". If the int expression is negative a '-' is inserted before.

#### Example

```
let a := [42 hexString]
display a
let b := [-20 hexString]
display b
```

```
a from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 21:7
  string: "0x2A"
b from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 23:7
  string: "-0x14"
```

### the xString getter

**xString** returns a hexadecimal string representation of the int expression. If the expression is negative a '-' is inserted before.

#### Example

```
let a := [42 xString]
display a
let b := [-20 xString]
display b
```

```
a from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 26:7
  string: "2A"
b from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 28:7
  string: "-14"
```

### The `numberOfBytes` getter

`numberOfBytes` returns an int, the number of bytes needed to store an unsigned expression.

#### Example

```
println [255 numberOfBytes]
println [256 numberOfBytes]
```

```
1
2
```

### The `signedNumberOfBytes` getter

`signedNumberOfBytes` returns an int, the number of bytes needed to store a signed expression.

#### Example

```
println [127 signedNumberOfBytes]
println [128 signedNumberOfBytes]
```

```
1
2
```

### The `numberOfBits` getter

`numberOfBits` returns an int, the number of bits needed to store an unsigned expression.

#### Example

```
println [63 numberOfBits]
println [64 numberOfBits]
```

```
6
7
```

### The `signedNumberOfBits` getter

`signedNumberOfBits` returns an int, the number of bits needed to store a signed expression.

### Example

```
println [63 signedNumberOfBits]
println [64 signedNumberOfBits]
```

```
7
8
```

### The `sign` getter

`sign` returns an int, `-1` if the expression is strictly negative, `0` if it is null and `+1` if the expression is strictly positive.

### The `fitsUnsignedInByte` getter

`fitsUnsignedInByte` returns a bool, `true` if the expression fits in an unsigned byte, `false` otherwise.

### The `fitsSignedInByte` getter

`fitsSignedInByte` returns a bool, `true` if the expression fits in a signed byte, `false` otherwise.

### The `fitsUnsignedInWord` getter

`fitsUnsignedInWord` returns a bool, `true` if the expression fits in an unsigned 16 bits word, `false` otherwise.

### The `fitsSignedInWord` getter

`fitsSignedInWord` returns a bool, `true` if the expression fits in a signed 16 bits word, `false` otherwise.

### The `fitsUnsignedInLong` getter

`fitsUnsignedInLong` returns a bool, `true` if the expression fits in an unsigned 32 bits long, `false` otherwise.

### The `fitsSignedInLong` getter

`fitsSignedInLong` returns a bool, `true` if the expression fits in a signed 32 bits long, `false` otherwise.

### The `fitsUnsignedInLongLong` getter

`fitsUnsignedInLongLong` returns a bool, `true` if the expression fits in an unsigned 64 bits long long, `false` otherwise.

### The `fitsSignedInLongLong` getter

`fitsSignedInLongLong` returns a bool, `true` if the expression fits in a signed 64 bits long long, `false` otherwise.

### The `abs` getter

`abs` returns an int, the absolute value of the expression.

### The `bitAtIndex` getter

`bitAtIndex` takes one int argument: `index`. It returns `true` if the bit at index `index` is set and `false` otherwise. `index` 0 corresponds to the lowest significant bit.

#### Example

```
let a := [1 bitAtIndex: 0]
display a
```

```
a from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 63:7
  boolean: true
```

## 2.5.3 The `int` setters

### The `setBitAtIndex` setter

`setBitAtIndex` takes two arguments. The first one, `value`, is a bool. The second one, `index`, is the index of the bit to set. if `value` is `true` the bit is set to 1 and to 0 otherwise.

#### Example

```
let a := 0
[!a setBitAtIndex: true, 0]
display a
```

```
a from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 64:7
  integer: 1
```

### The `complementBitAtIndex` setter

`complementBitAtIndex` takes one int argument, `index`, which is the index of the bit to complement.

#### Example

```
let a := 1
[!a complementBitAtIndex: true, 1]
display a
```

```
a from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 68:7
  integer: 3
```

## 2.5.4 The `int` functions

The following built-in functions return an `int`.

### The function `majorVersion()`

`majorVersion()` takes no argument and returns the major version of the compiler in where GTL is embedded. For instance, if the version string is `"3.2.1"`, it returns `3`.

### The function `minorVersion()`

`minorVersion()` takes no argument and returns the minor version of the compiler in where GTL is embedded. For instance, if the version string is `"3.2.1"`, it returns `2`.

### The function `revision()`

`revision()` takes no argument and returns the revision of the compiler in where GTL is embedded. For instance, if the version string is `"3.2.1"`, it returns `1`.

### The function `max8bitsUnsignedInt()`

`max8bitsUnsignedInt()` takes no argument and returns the maximum unsigned number that fits in 8 bits.

### The function `max8bitsSignedInt()`

`max8bitsSignedInt()` takes no argument and returns the maximum signed number that fits in 8 bits.

### The function `min8bitsSignedInt()`

`min8bitsSignedInt()` takes no argument and returns the minimum signed number that fits in 8 bits.

### The function `max16bitsUnsignedInt()`

`max16bitsUnsignedInt()` takes no argument and returns the maximum unsigned number that fits in 16 bits.

### The function `max16bitsSignedInt()`

`max16bitsSignedInt()` takes no argument and returns the maximum signed number that fits in 16 bits.

### The function `min16bitsSignedInt()`

`min16bitsSignedInt()` takes no argument and returns the minimum signed number that fits in 16 bits.

### The function `max32bitsUnsignedInt()`

`max32bitsUnsignedInt()` takes no argument and returns the maximum unsigned number that fits in 32 bits.



### The function `max32bitsSignedInt ()`

`max32bitsSignedInt ()` takes no argument and returns the maximum signed number that fits in 32 bits.

### The function `min32bitsSignedInt ()`

`min32bitsSignedInt ()` takes no argument and returns the minimum signed number that fits in 32 bits.

### The function `max64bitsUnsignedInt ()`

`max64bitsUnsignedInt ()` takes no argument and returns the maximum unsigned number that fits in 64 bits.

### The function `max64bitsSignedInt ()`

`max64bitsSignedInt ()` takes no argument and returns the maximum signed number that fits in 64 bits.

### The function `min64bitsSignedInt ()`

`min64bitsSignedInt ()` takes no argument and returns the minimum signed number that fits in 64 bits.

## 2.6 The `char` data type

The `char` data type supports unicode characters. A literal char is delimited by a pair of `'`:

```
let a := 'A'
```

Literal chars support escaped special characters:

Escape sequence	Corresponding character
<code>\f</code>	form feed
<code>\n</code>	new line
<code>\r</code>	return
<code>\t</code>	horizontal tab
<code>\v</code>	vertical tab
<code>\\</code>	backslash
<code>\'</code>	'
<code>\0</code>	null character
<code>\unnnn</code>	unicode character with code <i>nnnn</i> in hexadecimal
<code>\Unnnnnnnn</code>	unicode character with code <i>nnnnnnnn</i> in hexadecimal

### 2.6.1 The `char` operators

The `char` data type supports the following operators:

#### Comparison operators

Operator	Expression type	Meaning
<code>!=</code>	<code>bool ← char != char</code>	Not equal
<code>==</code>	<code>bool ← char == char</code>	Equal
<code>&gt;</code>	<code>bool ← char &gt; char</code>	Greater than
<code>&lt;</code>	<code>bool ← char &lt; char</code>	Lower than
<code>&gt;=</code>	<code>bool ← char &gt;= char</code>	Greater or equal
<code>&lt;=</code>	<code>bool ← char &lt;= char</code>	Lower or equal

## 2.6.2 The `char` getters

### The `string` getter

`string` returns a string representation of the char expression. `['c' string]` returns string `"c"`.

### The `isAlnum` getter

`isAlnum` returns a bool, `true` if the char expression is an ASCII alphanumeric character: between `'A'` and `'Z'` or between `'a'` and `'z'` or between `'0'` and `'9'`, `false` otherwise.

### The `isAlpha` getter

`isAlpha` returns a bool, `true` if the char expression is an ASCII letter: between `'A'` and `'Z'` or between `'a'` and `'z'`, `false` otherwise.

### The `isDigit` getter

`isDigit` returns a bool, `true` if the char expression is an ASCII digit: between `'0'` and `'9'`, `false` otherwise.

### The `isCntrl` getter

`isCntrl` returns a bool, `true` if the char expression is an ASCII control character, i.e. strictly before the *SPACE* character, `false` otherwise.

### The `isLower` getter

`isLower` returns a bool, `true` if the char expression is an ASCII lower case letter: between `'a'` and `'z'`, `false` otherwise.

### The `isUpper` getter

`isUpper` returns a bool, `true` if the char expression is an ASCII upper case letter: between `'A'` and `'Z'`, `false` otherwise.

### The `isXDigit` getter

`isXDigit` returns a bool, `true` if the char expression is an ASCII hexadecimal digit: between `'A'` and `'F'` or between `'a'` and `'f'` or between `'0'` and `'9'`, `false` otherwise.

## 2.7 The **enum** data type

The **enum** data type allow to store identifiers in variables. A literal **enum** begins with a `'$'` followed with a name composed of ASCII letters, numbers and `'_'`.

### Example

```
let a := $auto
display a
```

```
a from file '/Users/jlb/Develop/GTL/examples/enumTest.gtl', line 4:7
enum: auto
```

### 2.7.1 The **enum** operators

#### Comparison operators

Operator	Expression type	Meaning
<code>!=</code>	<code>bool ← enum != enum</code>	Not equal
<code>==</code>	<code>bool ← enum == enum</code>	Equal

### 2.7.2 The **enum** getters

#### The **string** getter

**string** returns a string representation of the **enum** expression. `[@auto string]` returns string `"auto"`.

## 2.8 The **float** data type

The **float** data type is the standard IEEE754 64 bits floating point number.

### 2.8.1 The **float** operators

The **float** data type supports the following operators:

#### Unary operators

Operator	Expression type	Meaning
<code>+</code>	<code>float ← +float</code>	Plus operator. No effect
<code>-</code>	<code>float ← -float</code>	Minus operator. Negation

#### Binary arithmetic operators

Operator	Expression type	Meaning
<code>+</code>	<code>float ← float + float</code>	Addition
<code>-</code>	<code>float ← float - float</code>	Substraction
<code>*</code>	<code>float ← float * float</code>	Multiplication

Operator	Expression type	Meaning
/	float $\leftarrow$ float / float	Division

### Comparison operators

Operator	Expression type	Meaning
<b>!=</b>	bool $\leftarrow$ float != float	Not equal
<b>==</b>	bool $\leftarrow$ float == float	Equal
<b>&gt;</b>	bool $\leftarrow$ float > float	Greater than
<b>&lt;</b>	bool $\leftarrow$ float < float	Lower than
<b>&gt;=</b>	bool $\leftarrow$ float >= float	Greater or equal
<b>&lt;=</b>	bool $\leftarrow$ float <= float	Lower or equal

## 2.8.2 The **float** getters

### The **string** getter

**string** returns a string representation of the float expression. `[4.2 string]` returns string "4.2".

### The **cos** getter

**cos** returns the cosine of a float expression expressed in radian.

### The **sin** getter

**sin** returns the sine of a float expression expressed in radian.

### The **tan** getter

**tan** returns the tangent of a float expression expressed in radian.

### The **cosDegree** getter

**cosDegree** returns the cosine of a float expression expressed in degree.

### The **sinDegree** getter

**sinDegree** returns the sine of a float expression expressed in degree.

### The **tanDegree** getter

**tanDegree** returns the tangent of a float expression expressed in degree.

### The **exp** getter

**exp** returns the exponentiation of a float expression.

### The **logn** getter

**logn** returns the natural logarithm of a float expression.

### The **log2** getter

**log2** returns the logarithm base 2 of a float expression.

### The **log10** getter

**log10** returns the logarithm base 10 of a float expression.

### The **sqrt** getter

**sqrt** returns the square root of a float expression.

### The **power** getter

**power** takes one float argument, **p**. It returns the expression raised to the power of **p**.

## 2.8.3 The **float** function

The following function returns a float

### The **pi()** function

**pi()** returns an approximation of the  $\pi$  constant value (3.141592653589793238462643383279 50288).

## 2.9 The **string** data type

The string data type supports unicode. A literal string is delimited by a pair of `"`.

```
let a := "A literal string"
```

Literal strings support escaped special characters:

Escape sequence	Corresponding character
<code>\f</code>	form feed
<code>\n</code>	new line
<code>\r</code>	return
<code>\t</code>	horizontal tab
<code>\v</code>	vertical tab
<code>\\</code>	backslash
<code>\'</code>	'
<code>\"</code>	"
<code>\0</code>	null character
<code>\unnnn</code>	unicode character with code <i>nnnn</i> in hexadecimal
<code>\Unnnnnnnn</code>	unicode character with code <i>nnnnnnnn</i> in hexadecimal

### 2.9.1 The **string** operators

The string data type supports the following operators:

## Binary operator

Operator	Expression type	Meaning
+	string $\leftarrow$ string + string	Concatenation

## Comparison operators

Operator	Expression type	Meaning
!=	bool $\leftarrow$ string != string	Not equal
==	bool $\leftarrow$ string == string	Equal
>	bool $\leftarrow$ string > string	Greater than
<	bool $\leftarrow$ string < string	Lower than
>=	bool $\leftarrow$ string >= string	Greater or equal
<=	bool $\leftarrow$ string <= string	Lower or equal

### 2.9.2 The **string** getters

#### The **charAtIndex** getter

**charAtIndex** takes one int argument, the `index`. It returns a char, the character at index `index`. The first char is at index 0, the last char is at index length of the string minus 1. If `index` is greater or equal than the length of the target, a run time error occurs.

#### Example

```
let a := ["Hello" charAtIndex: 1]
display a
```

```
a from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 74:7
  char: e
```

#### The **indexOfChar** getter

**indexOfChar** takes one char argument, the `character` to look up. It returns an int, the index of the first occurrence of `character` in the target. If `character` is not found in the target, `-1` is returned.

#### Example

```
let a := ["Hello" indexOfChar: 'l']
let b := ["Hello" indexOfChar: 'z']
display a
display b
```

```
a from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 78:7
  integer: 2
b from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 79:7
  integer: -1
```

### The `indexOfCharInRange` getter

`indexOfCharInRange` takes two char argument, `minChar` and `maxChar` which define the character range to look up. It returns an int, the index of the first occurrence of the character being in range (bounds included) in the target. If `character` is not found in the target, `-1` is returned.

#### Example

```
let a := ["Hello" indexOfCharInRange: 'a', 'e']  
display a
```

```
a from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 82:7  
integer: 1
```

### The `containsChar` getter

`containsChar` takes one char argument, the `character` to look up. It returns a bool, `true` is the target contains the `character`, `false` otherwise.

### The `containsCharInRange` getter

`containsCharInRange` takes two char argument, `minChar` and `maxChar` which define the character range to look up. It returns a bool, `true` is the target contains a character within the range (bounds included), `false` otherwise.

### The `HTMLRepresentation` getter

`HTMLRepresentation` returns a representation of the string suitable for an HTML encoded representation. `'&'` is encoded by `&amp;`, `'"'` by `&quot;`, `'<'` by `&lt;` and `'>'` by `&gt;`.

### The `identifierRepresentation` getter

`identifierRepresentation` returns an unique representation of the string conforming to a C identifier. Any Unicode character that is not a latin letter is transformed into its hexadecimal code point value, enclosed by `'_'` characters. This representation is unique: two different strings are transformed into different C identifiers. For example: `value3` is transformed to `value_33_`; `+=` is transformed to `_2B__3D_`; `An_Identifier` is transformed to `An_5F_Identifier`.

### The `fileExists` getter

`fileExists` returns a bool, `true` if a file exists at the target path, `false` otherwise.

### The `length` getter

`length` returns an int, the number of characters in the string.

### The `lowercaseString` getter

`lowercaseString` returns the lowercased representation of the string.

### The `capitalized` getter

If the string is empty, `capitalized` returns the empty string; otherwise, it returns the string with the first character being replaced with the corresponding uppercase character.

### The `uppercaseString` getter

`uppercaseString` returns the uppercased representation of the target.

### The `leftSubString` getter

`leftSubString` takes one int argument, `number`, and returns the sub-string from the beginning of the target and with, `number`, of characters. If the sub-string is longer than the target, the target is returned.

#### Example

```
let str := ["Hello World !"] leftSubString : 5]
display str
```

```
str from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 85:7
string: "Hello"
```

### The `rightSubString` getter

`rightSubString` takes one int argument, `number`, and returns the sub-string from the end of the target and with `number` of characters. If the sub-string is longer than the target, the target is returned.

#### Example

```
let str := ["Hello World !"] leftSubString : 11] rightSubString: 5]
display str
```

```
str from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 88:7
string: "World"
```

### The `subString` getter

`subString` returns the sub-string from the `index` passed as first argument and with the `number` of characters passed as second argument. If the `index` is out of the target, the empty string is returned. If the number of characters is greater than the available sub-string, the sub-string is returned.

#### Example

```
let firstStr := ["Hello World !"] subString : 6, 5]
display firstStr
let secondStr := ["Hello"] subString : 10, 3]
display secondStr
let thirdStr := ["Hello"] subString : 2, 10]
display thirdStr
```



```
firstStr from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 91:7
  string: "World"
secondStr from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 93:7
  string: ""
thirdStr from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 95:7
  string: "llo"
```

### The `reversedString` getter

`reversedString` returns a mirrored string.

#### Example

```
let str := ["Hello World !" reversedString]
display str
```

```
str from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 98:7
  string: "! dlroW olleH"
```

### The `componentsSeparatedByString` getter

`componentsSeparatedByString` takes one string argument: `separator`. The target is cut into string pieces according to the `separator` and a list of the pieces is returned.

#### Example

```
let componentList := ["Hello World !" componentsSeparatedByString : " "]
display componentList
```

```
componentList from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 101:7
  list: @(
    0 :>
      string: "Hello"
    1 :>
      string: "World"
    2 :>
      string: "!"
  )
```

### The `columnPrefixedBy` getter

`columnPrefixedBy` takes one string argument, `prefix`, and returns the target with each line prefixed by `prefix`.

#### Example

```
let formattedStr := ["Hello\nWorld" columnPrefixedBy : "# "]
println formattedStr
```

```
# Hello
# World
```

### The `wrap` getter

`wrap` wraps the target to a width. This getter takes two int arguments: `width` and `shift`. The target is assumed to contain paragraphs separated by `'\n'`. It returns the target with each paragraph wrapped to `width`. In addition, each line of the paragraph except the first one is prefixed by `shift` spaces.

#### Example

```
let wrappedStr := ["Hello beautiful World.\nHow are you" wrap : 6, 2]
println wrappedStr
```

```
Hello
  beautiful
  World.
How
  are
  you
```

### The `subStringExists` getter

`subStringExists` takes one argument, `subString`. It returns a bool, `true` if the sub-string `subString` is found in the target, `false` otherwise.

### The `replaceString` getter

`replaceString` takes two argument, `find` and `replace`. It returns the target where each occurrence of `find` is replaced by `replace`.

### The `envVar` getter

`envVar` returns a string, the value of the target environment variable. If it does not exists, `envVar` returns the empty string.

### The `envVarExists` getter

`envVarExists` returns a bool, `true` if target environment variable exists, `false` otherwise.

## 2.9.3 The `string` setter

### The `setCharAtIndex` setter

`setCharAtIndex` takes two arguments. The first one is the `character` to set and the second one is the `index`. It sets the character at index `index` to `character`. If `index` is greater or equal than the length of the target, a run time error occurs.

#### Example

```
let a := "Hello"
[!a setCharAtIndex: 'a', 1]
display a
```

```
a from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 111:7
string: "Hallo"
```

## 2.9.4 The **string** functions

The following built-in functions return a string:

### The **version()** function

**version()** takes no argument and returns the version string of the compiler in which GTL is embedded. For instance, in goil version 3, it returns `"3.0.0"`.

### The **currentDir()** function

**currentDir()** takes no argument and returns the current directory.

### The **homeDir()** function

**homeDir()** takes no argument and returns the home directory.

### The **currentDateTime()** function

**currentDateTime()** takes no argument and returns the current date and time in the following format: `"<dayname> <month> <daynum> <time> <year>"`.

#### Example

```
println currentDateTime()
```

```
Wed Aug 17 15:16:20 2016
```

### The **trueFalse()** function

**trueFalse()** is deprecated and is replaced by the **trueOrFalse** getter (see 2.10.2) of the `bool` data type. It takes one `bool` argument and returns `"true"` or `"false"` according to the argument.

### The **TrueFalse()** function

**TrueFalse()** takes one `bool` argument and returns `"True"` or `"False"` according to the argument.

### The **yesNo()** function

**yesNo()** is deprecated and is replaced by the **YESorNO** getter (see 2.10.2) of the `bool` data type. This function takes one `bool` argument and returns `"YES"` or `"NO"` according to the argument.

### The **TRUEFALSE()** function

**TRUEFALSE()** is deprecated and is replaced by the **TRUEorFALSE** getter (see 2.10.2) of the `bool` data type. This function takes one `bool` argument and returns `"TRUE"` or `"FALSE"` according to the argument.

## 2.10 The **bool** data type

A true literal **bool** can be written as **true** or **yes** and a false literal **bool** can be written as **false** or **no**.

### 2.10.1 The **bool** operators

The **bool** data type supports the following operators:

#### Unary operator

Operator	Expression type	Meaning
<code>~</code>	<code>bool ← bool</code>	logical not
<code>not</code>	<code>bool ← bool</code>	logical not

#### Binary operator

Operator	Expression type	Meaning
<code>&amp;</code>	<code>bool ← bool &amp; bool</code>	logical and
<code> </code>	<code>bool ← bool   bool</code>	logical or
<code>^</code>	<code>bool ← bool ^ bool</code>	logical exclusive or

#### Comparison operators

For comparison operators, **false** is considered to be lower than **true**.

Operator	Expression type	Meaning
<code>!=</code>	<code>bool ← bool != bool</code>	Not equal
<code>==</code>	<code>bool ← bool == bool</code>	Equal
<code>&gt;</code>	<code>bool ← bool &gt; bool</code>	Greater than
<code>&lt;</code>	<code>bool ← bool &lt; bool</code>	Lower than
<code>&gt;=</code>	<code>bool ← bool &gt;= bool</code>	Greater or equal
<code>&lt;=</code>	<code>bool ← bool &lt;= bool</code>	Lower or equal

### 2.10.2 The **bool** getters

#### The **trueOrFalse** getter

**trueOrFalse** returns a string representation, **"true"** or **"false"**, of the **bool** expression.

#### The **string** getter

**string** returns a string representation, **"true"** or **"false"**, of the **bool** expression.

#### The **yesOrNo** getter

**yesOrNo** returns a string representation, **"yes"** or **"no"**, of the **bool** expression.

### The **TRUEOrFALSE** getter

**TRUEOrFALSE** returns a string representation, `"TRUE"` or `"FALSE"`, of the bool expression.

### The **YESOrNO** getter

**YESOrNO** returns a string representation, `"YES"` or `"NO"`, of the bool expression.

### The **int** getter

**int** returns an int representation, `1` for `true` or `0` for `false`, of the bool expression.

## 2.11 The **struct** data type

The struct data type allows to store a heterogeneous set of data in one variable. Struct members are accessed by using the `::` separator. If `a` is a struct, `a::b` refers to field `b` of `a`.

A literal struct is defined as follow:

```
@{ a: 1, b: 2, c: 3 }
```

This define a struct with fields `a`, `b` and `c` and respective values 1, 2 and 3.

### 2.11.1 The **struct** operators

The struct data type supports the following operators:

Operator	Expression type	Meaning
<code>!=</code>	<code>bool ← struct != struct</code>	Not equal
<code>==</code>	<code>bool ← struct == struct</code>	Equal

Two structs are equal if:

- they have the same number of field
- they have the same field names
- they have the same field values

### 2.11.2 The **struct** getter

#### The **map** getter

**map** returns a map representation of the target.

#### Example

```
let a := @{ a: 1, b: 2, c: 3 }  
let b := [a map]  
display a  
display b
```

```
a from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 120:7  
  struct: @{  
    a :>
```

```

        integer: 1
    b :>
        integer: 2
    c :>
        integer: 3
    }
b from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 121:7
map: @[
  "a" :>
    integer: 1
  "b" :>
    integer: 2
  "c" :>
    integer: 3
]

```

## 2.12 The **list** data type


The list data type allows to store a list of data. List items are accessed by using `[index]` where `index` is the rank of the element starting at 0. If `a` is a list, `a[0]` refers to element 0 of `a`.

A literal list is defined as follow:

```
@( 1, 2, 3 )
```

This define a list of int with elements 1 (index 0), 2 (index 1) and 3 (index 2).

An empty list can be initialized using the `emptylist` constant.

 The `emptylist` constant is deprecated. Use a literal empty list, `@()`, instead.

### 2.12.1 The **list** operators

The list data type supports the following operators:

#### Binary operators

Operator	Expression type	Meaning
+	<code>list ← list + any</code>	append any at the end of the list
	<code>list ← list   list</code>	Concatenate lists

#### Comparison operators

Operator	Expression type	Meaning
!=	<code>bool ← list != list</code>	Not equal
==	<code>bool ← list == list</code>	Equal

Two lists are equal if:

- they have the same number of elements
- they have the same elements values

### 2.12.2 The `list` getters

#### The `length` getter

`length` returns the number of elements in the list.

#### The `first` getter

`first` returns the first element of the list.

#### The `last` getter

`last` returns the last element of the list.

#### The `mapBy` getter

`mapBy` takes a string argument which is the field (for an item in a list of struct) or the key (for an item in a list of a map) used as key to store the element in the resulting map. It returns a map where each element is the element of the list with the key being the corresponding field/key. If any of the item does not have a corresponding field/key, a run-time error occurs.

#### Example

```
let myList := @(
  @{ age : 18, height : 180, name : "Arnold"},
  @{ age : 22, height : 170, name : "Bob"},
  @{ age : 29, height : 175, name : "John"}
)

let myMap := [myList mapBy : "name"]
display myMap
```

```
myMap from file '/Users/jlb/Develop/GTL/examples/dummy.gtl', line 9:7
map: @[
  "Arnold" :>
    struct: @{
      age :>
        integer: 18
      height :>
        integer: 180
      name :>
        string: "Arnold"
    }
  "Bob" :>
    struct: @{
      age :>
        integer: 22
      height :>
        integer: 170
      name :>
        string: "Bob"
    }
  "John" :>
    struct: @{
      age :>
        integer: 29
      height :>
        integer: 175
    }
```

```

        name :>
            string: "John"
    }
]

```

### The **set** getter

**set** assumes the list is a list of items convertible to string. If any of the list item is not convertible to a string, a runtime error occurs. **set** returns a set representation of the list.

#### Example

```

let aList := @( 1, 2, 4, "Hello", 4, 2, 1 )
let aSet := [aList set]
display aSet

```

```

aSet from file '/Users/jlb/Develop/GTL/examples/setTest.gtl', line 30:7
set: @!
      1, 2, 4, Hello
!

```

### The **subListTo** getter

**subListTo** takes an int argument which is the stop **index** of the sublist. It returns a sublist which is a copy of target list ranging from 0 to the **index** included. If the **index** is greater than or equals the length of the target, the target is returned.

#### Example

```

let aList := @( 1, 2, 3, 4 )
let aList := [aList subListTo: 1]
display aList

```

```

aList from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 125:7
list: @(
  0 :>
      integer: 1
  1 :>
      integer: 2
)

```

### The **subListFrom** getter

**subListFrom** takes an int argument which is the start **index** of the sublist. It returns a sublist which is a copy of target list ranging from **index** included to the end of the list.

#### Example

```

let aList := @( 1, 2, 3, 4 )
let aList := [aList subListFrom: 2]
display aList

```



```

aList from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 129:7
  list: @(
    0 :>
      integer: 3
    1 :>
      integer: 4
  )

```

### The **subList** getter

**subList** takes 2 int arguments. The first one is the start **index** of the sublist. The second one is the **length** of the sublist. It returns a sublist which is a copy of target list ranging from **index** included to up to **length** items.

### Example

```

let aList := @( 1, 2, 3, 4 )
let aFirstList := [aList subList: 1, 5]
display aFirstList
let aSecondList := [aList subList: 2, 1]
display aSecondList

```

```

aFirstList from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 133:7
  list: @(
    0 :>
      integer: 2
    1 :>
      integer: 3
    2 :>
      integer: 4
  )
aSecondList from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 135:7
  list: @(
    0 :>
      integer: 3
  )

```

### The **list** setters

#### The **insert** setter

**insert** takes 2 arguments. The first one is the **index** of the list where the data will be inserted. The second one is the **data** to insert. It inserts **data** before the item at **index**. If **index** is greater than or equals the length of the list, **data** is appended to the list.

### Example

```

let aList := @( 1, 2, 3, 4 )
[!aList insert: 1, "Hello"]
[!aList insert: 10, "At the end"]
display aList

```

```

aList from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 140:7
  list: @(
    0 :>

```

```

integer: 1
1 :>
  string: "Hello"
2 :>
  integer: 2
3 :>
  integer: 3
4 :>
  integer: 4
5 :>
  string: "At the end"
)

```

## 2.13 The map data type

The map data type allows to store an association of key and value. map members are accessed by using `[key]` where `key` is a string. If `a` is a map, `a["John"]` refers to an element of `a` having key `"John"`.

A literal map is defined as follow:

```
@[ "age" : 29, "height" : 175, "name" : "John" ]
```

An empty map can be initialized using the `emptymap` constant.

 The `emptymap` constant is deprecated. Use a literal empty map, `@[]`, instead.

### 2.13.1 The map operators

The map data type supports the following operators:

Operator	Expression type	Meaning
<code>!=</code>	<code>bool ← map != map</code>	Not equal
<code>==</code>	<code>bool ← map == map</code>	Equal

Two maps are equal if:

- they have the same number of items
- they have the same item keys
- they have the same item values

### 2.13.2 The map getters

**The length getter**

`length` returns an int, the number of elements in the map.

**The list getter**

`list` returns a list representation of the map. Elements of the list are in the alphanumerical order of the keys of the map.

## Example

```
let aMap := @[ "age" : 29, "height" : 175, "name" : "John" ]
let alist := [aMap list]
display aList
```

```
aList from file '/Users/jlb/Develop/GTL/examples/testTypes.gtl', line 144:7
list: @(
  0 :>
    integer: 29
  1 :>
    integer: 175
  2 :>
    string: "John"
)
```

## 2.14 The **set** data type

The set data type is a set of strings. Any data that can be converted to a string may be added to a set but the actual value stored in the set is the string representation of the data. Adding a data which is already in the set has no effect.

A literal set is defined as follow.

```
@! 1, 2, 3, 4, "Hello" !
```

A literal empty set is defined as follow.

```
@! !
```

### 2.14.1 The **set** operators

The set data type supports the following operators:

#### Binary operators

Operator	Expression type	Meaning
+	set $\leftarrow$ set + any	add the string representation of any to the set
-	set $\leftarrow$ set <sub>1</sub> - set <sub>2</sub>	remove from set <sub>1</sub> all the element of set <sub>2</sub>
	set $\leftarrow$ set   set	does the union of sets
&	set $\leftarrow$ set & set	does the intersection of sets

#### Comparison operators

Operator	Expression type	Meaning
!=	bool $\leftarrow$ set != set	Not equal
==	bool $\leftarrow$ set == set	Equal
>	bool $\leftarrow$ set <sub>1</sub> > set <sub>2</sub>	set <sub>2</sub> strictly included in set <sub>1</sub>
<	bool $\leftarrow$ set <sub>1</sub> < set <sub>2</sub>	set <sub>1</sub> strictly included in set <sub>2</sub>
>=	bool $\leftarrow$ set <sub>1</sub> >= set <sub>2</sub>	set <sub>2</sub> included in or equal to set <sub>1</sub>
<=	bool $\leftarrow$ set <sub>1</sub> <= set <sub>2</sub>	set <sub>1</sub> included in or equal to set <sub>2</sub>

## 2.14.2 The **set** getters

### The **length** getter

**length** returns an `int`, the number of elements in the set.

#### Example

```
let aSet := @! 1, 2, "yes", "no" !
let len := [aSet length]
display len
```

```
len from file '/Users/jlb/Develop/GTL/examples/setTest.gtl', line 32:7
integer: 4
```

### The **list** getter

**list** getter returns a list representation of the set. Each element of the returned list is a string. Elements of the list are sorted in the alphanumerical order.

#### Example

```
let aSet := @! 1, "yes", 2, "no" !
let aList := [aSet list]
display aList
```

```
aList from file '/Users/jlb/Develop/GTL/examples/setTest.gtl', line 36:7
list: @(
  0 :>
    string: "1"
  1 :>
    string: "2"
  2 :>
    string: "no"
  3 :>
    string: "yes"
)
```

### The **contains** getter

**contains** getter takes one argument, `item`, that must be convertible to a string and returns a `bool`, **true** if `item` is in the set, **false** otherwise.

#### Example

```
let aSet := @! 1, "yes", 2, "no" !
let ok := [aSet contains: "yes"]
display ok
```

```
ok from file '/Users/jlb/Develop/GTL/examples/setTest.gtl', line 40:7
boolean: true
```

### 2.14.3 The **set** setters

#### The **add** setter

**add** takes one argument `element` and add it to the target set. `element` must be convertible to a string. If `element` is already in the set, **add** does nothing.

The setter is redundant with the `+=` operator but more efficient because the set is not copied in the process.

#### Example

```
let a := @! 1, 2, "no" !
[!a add: "yes"]
display a
```

```
a from file '/Users/jlb/Develop/GTL/examples/setTest.gtl', line 5:7
set: @!
      1, 2, no, yes
      !
```

#### The **remove** setter

**remove** takes one argument, `element`, and removes it from the target set. `element` must be convertible to a string. If `element` is not in the set, **remove** does nothing.

The setter is redundant with the `+=` operator but more efficient because the set is not copied in the process.

#### Example

```
let a := @! 1, 2, "no" !
[!a remove: 2]
display a
```

```
a from file '/Users/jlb/Develop/GTL/examples/setTest.gtl', line 11:7
set: @!
      1, no
      !
```

## 2.15 The **type** data type

The type data type store the type of an expression. It can be used to check dynamically the type of the arguments passed to a function, a getter or a setter, see chapter 4.

A set of constants corresponding to each type is define. These constants begin with a `'@'`: `@int`, `@char`, `@bool`, `@float`, `@string`, `@enum`, `@struct`, `@list`, `@map`, `@set`, `@unconstructed` and `@type`.

To get the type of any expression, use the **type** getter. See 2.3.1.

#### Example

```
let a := 4
if [a type] == @int then
  let a += 1
end if
```

```
display a
let a := [a string]
if [a type] == @string then
  let a += "1"
end if
display a
```

```
a from file '/Users/jlb/Develop/GTL/examples/typeTest.gtl', line 14:7
  integer: 5
a from file '/Users/jlb/Develop/GTL/examples/typeTest.gtl', line 19:7
  string: "51"
```

## Chapter 3

# GTL instructions

### 3.1 The `%...%` instruction

The `%...%` is the literal template string instruction. Every character appearing between the `'%'` are accumulated in the output string of the template. GTL starts by assuming a `'%'` exists just before the first character of the file. So if the first character of the file is not a `'%'` the first instruction is a `%...%` instruction up to the first `'%'` in the file.

#### Example

```
# Assuming we start in code mode
%This is the output of a template
%
foreach item in ["Hello World !" componentsSeparatedByString: " "]
do
  !item
between%
%
end foreach%
%
```

```
This is the output of a template
Hello
World
!
```

### 3.2 The `let` instruction

`let` is the variable assignment instruction. The general form is:

```
let var := expression
```

If the variable does not exists, it is created. The variable is set to `expression`

If the `:= expression` is omitted, the variable is created and is unconstructed:

```
let var
```

As in the C language, GTL has assignment operators. For instance to increment an `int` variable, one can write:

```
let var += 1
```

The following table gives the available assignment operators and their meaning.

Assign.	int	float	string	bool	struct	list	map	uncons
+=	+	+	concat	NA	NA	append	NA	NA
-=	-	-	NA	NA	NA	NA	NA	NA
*=	*	*	NA	NA	NA	NA	NA	NA
/=	/	/	NA	NA	NA	NA	NA	NA
mod=	mod	NA	NA	NA	NA	NA	NA	NA
<<=	<<	NA	NA	NA	NA	NA	NA	NA
>>=	>>	NA	NA	NA	NA	NA	NA	NA
&=	bitwise &	NA	NA	logical &	NA	NA	NA	NA
=	bitwise	NA	NA	logical	NA	concat	NA	NA
^=	bitwise ^	NA	NA	logical ^	NA	NA	NA	NA

The scope of a variable depends on the location where the variable is assigned the first time. For instance, in the following code:

```
let a := 1
foreach task in TASKS do
  let b := 2
  let a += 1
end foreach
println a
println b
```

Because `a` is assigned for the first time outside the `foreach` loop, it is both accessible within the `foreach` loop and accessible after the `foreach` loop. So it contains the number of items in `TASKS + 1` after the `foreach`. Because `b` is assigned for the first time inside the `foreach` loop, its scope is set within the `foreach` loop and it does not exist after the loop anymore and `println b` will trigger an error.

### 3.3 The `unlet` instruction

The `unlet` instruction removes a variable, a struct field, a map item or a list item. The variable / struct field / map item / list item ceases to exist. If the variable / struct field / map item / list does not exist, `unlet` fails silently. Here are some examples.

#### Example 1

```
let a := 0

if exists a then
  println "'a' found"
else
  println "'a' not found"
end if

unlet a

if exists a then
  println "'a' found"
```



```

else
  println "'a' not found"
end if

```

```

'a' found
'a' not found

```

## Example 2

Here `unlet` is used to remove a field from a struct:

```

let myStruct := @{ a: 1, b: 2, c: 3 }
unlet myStruct::a
display myStruct

```

```

myStruct from file '/Users/jlb/Develop/GTL/examples/dummy.gtl', line 18:7
  struct: @{
    b :>
      integer: 2
    c :>
      integer: 3
  }

```

## Example 3

Here we use `unlet` to remove an item from a list:

```

let myList := @( 1, 2, 3, 4 )
unlet myList[2]
display myList

```

```

myList from file '/Users/jlb/Develop/GTL/examples/dummy.gtl', line 22:7
  list: @(
    0 :>
      integer: 1
    1 :>
      integer: 2
    2 :>
      integer: 4
  )

```

## Example 4

And here to remove an item from a map

```

let myMap := @[ "a": @( 1, 2) , "b": @( 3, 4) ]
unlet myMap["b"]
display myMap

```

```

myMap from file '/Users/jlb/Develop/GTL/examples/dummy.gtl', line 26:7
  map: @[
    "a" :>
      list: @(
        0 :>
          integer: 1
        1 :>
          integer: 2
      )
  ]

```

### 3.4 The `!` instruction

The `!` instruction emits an expression in the output template string. The syntax is

```
! expression
```

For instance the following program:

```
loop i from 1 to 10 do
  !" " !i
end loop
```

```
1 2 3 4 5 6 7 8 9 10
```

### 3.5 The `?` instruction

The `?` instruction get the current column index in the output string.

```
? var
```

Used with the `tab` instruction, see 3.6, `?` allows flexible formatting.

### 3.6 The `tab` instruction

The `tab` instruction emits spaces in the output string until the column given in argument is reached. If the current column is greater or equal than the column given in argument, no space is emitted.

```
tab expression
```

`expression` should be an int expression, otherwise a runtime error occurs.

### 3.7 The `sort` instruction

The `sort` instruction sorts a list. If elements of the list support operators `<` and `>` they are sorted using these two operators.

```
sort var > # descending order
sort var < # ascending order
```

#### Example

```
let aList := @( "wish", "you", "where", "here" )
sort aList >
display aList
sort aList <
display aList
```

```

aList from file '/Users/jlb/Develop/GTL/examples/dummy.gtl', line 30:7
  list: @(
    0 :>
      string: "you"
    1 :>
      string: "wish"
    2 :>
      string: "where"
    3 :>
      string: "here"
  )
aList from file '/Users/jlb/Develop/GTL/examples/dummy.gtl', line 32:7
  list: @(
    0 :>
      string: "here"
    1 :>
      string: "where"
    2 :>
      string: "wish"
    3 :>
      string: "you"
  )

```

If the elements of the list are struct, a second form exists:

```

sort var by identifier < # descending order
sort var by identifier < # ascending order

```

In this case, the field `identifier` of the list item is used as sorting key.

### Example

```

let aList := @(
  @ { age : 18, height : 180, name : "Arnold" },
  @ { age : 22, height : 170, name : "Bob" },
  @ { age : 29, height : 175, name : "John" }
)
sort aList by age >
display aList
sort aList by height <
display aList

```

```

aList from file '/Users/jlb/Develop/GTL/examples/dummy.gtl', line 40:7
  list: @(
    0 :>
      struct: @ {
        age :>
          integer: 29
        height :>
          integer: 175
        name :>
          string: "John"
      }
    1 :>
      struct: @ {
        age :>
          integer: 22
        height :>
          integer: 170
        name :>

```

```

        string: "Bob"
    }
2 :>
    struct: @({
        age :>
            integer: 18
        height :>
            integer: 180
        name :>
            string: "Arnold"
    })
)
aList from file '/Users/jlb/Develop/GTL/examples/dummy.gtl', line 42:7
list: @({
0 :>
    struct: @({
        age :>
            integer: 22
        height :>
            integer: 170
        name :>
            string: "Bob"
    })
1 :>
    struct: @({
        age :>
            integer: 29
        height :>
            integer: 175
        name :>
            string: "John"
    })
2 :>
    struct: @({
        age :>
            integer: 18
        height :>
            integer: 180
        name :>
            string: "Arnold"
    })
})

```

### 3.8 The **if** instruction

**if** is the conditional execution instruction. The forms are:

```

if expression then
    instruction_list
end if

if expression then
    instruction_list
else
    instruction_list
end if

if expression then
    instruction_list

```

```

elsif expression then
    instruction_list
end if

if expression then
    instruction_list
elsif expression then
    instruction_list
else
    instruction_list
end if

```

The `expression` must be a bool. In the following example, the blue text (within the `'%'`) is produced only if the `USECOM` bool variable is true:

```

if USECOM then %
#include "tpl_com.h" %
end if

```

### 3.9 The `foreach` instruction

This instruction iterates on the elements of a collection, a list or a map. The simplest form is the following one:

```

foreach var in expression do
    instruction_list
end foreach

```

Here `var` takes the value of each of the elements of the collection. If the collection is a list, the elements are iterated in the order of the list. If the collection is a map, the element are iterated in the alphanumerical order of the keys. In both cases, a variable named `INDEX` which contains the current iteration number is available inside the loop. `INDEX` ranges from 0 to the number of elements in the list minus 1. If the collection is a map, a second variable, `KEY`, which contains the key associated to the value of the current item, is available.

In the following example, for each element in the `ALARMS` list, the text between the `do` and the `end foreach` is produced with the `NAME` attribute of the current element of the `ALARMS` list inserted at the specified location.

```

foreach alr in ALARMS do
%
/* Alarm % !alr::NAME % identifier */
#define % !alr::NAME %_id % !INDEX %
CONST(AlarmType, AUTOMATIC) % !alr::NAME % = % !NAME %_id;
%
end foreach

```

A more general form of the `foreach` instruction is:

```

foreach key, var (index_var) in expression
before
    instruction_list
do
    instruction_list
between
    instruction_list
after

```

```
instruction_list
end foreach
```

`key` may be used only when iterating on a map and allows to give a custom name to the default `KEY` variable. `(index_var)` may be used both for a list or a map and allows to give a custom name to the default `INDEX` variable.

If the collection is not empty, the `before` section is executed once before the first execution of the `do` section. If the collection contains at least two elements, the `between` section is executed between the execution of the `do` section. If the list is not empty, the `after` section is executed once after the last execution of the `do` section.

The following example illustrates the general form. Here a table of pointers to alarm descriptors is generated:

```
#
# Initialize ALARMS with a list of 2 structs with a NAME field.
#
let ALARMS := @( @{ NAME: "alr1"}, @{ NAME: "alr2"} )

%
#define ALARM_COUNT % ![ALARMS length]

foreach alr in ALARMS
  before %
  tpl_time_obj *tpl_alarm_table[ALARM_COUNT] = {
  %
    do % &% !alr::NAME %_alarm_desc%
    between %,
  %
    after %
  };
  %
end foreach
```


```
#define ALARM_COUNT 2
tpl_time_obj *tpl_alarm_table[ALARM_COUNT] = {
  &alr1_alarm_desc,
  &alr2_alarm_desc
};
```

## 3.10 The `for` instruction

The `for` instruction iterates along a literal list of elements.

```
for var in expression, ... , expression do
  ...
end for
```

At each iteration, `var` gets the value of the current `expression`. As in the `foreach` instruction, `INDEX` is generated and ranges from `0` to the number of elements in the list minus 1.

 | The `for` instruction is deprecated. Use `foreach` with a literal list instead.

### 3.11 The loop instruction

The `loop` instruction iterates over a range of integers. Its simplest form is:

```
loop var from expression_start to expression_end do
  ...
end loop
```

Both `expression_start` and `expression_end` must be integer expressions. By default `var` is incremented by one from `expression_start`, inclusive, to `expression_end`, inclusive.

Like in the `foreach` instruction, `before`, `between` and `after` sections may be used. Moreover, `down` may be used to decrement `var` by one. `up` is a syntactic sugar which is here for symmetry purpose and may be omitted. `step` allows to increment or decrement by `increment`. If `step` is omitted, `step 1` is assumed.

```
loop var from expression <up|down> to expression <step increment>
  before ...
  do ...
  between ...
  after ...
end loop
```

For instance, in the following loop, `a` goes from 0 to 10 with an increment of 2:

```
loop a from 0 to 10 step 2 do
  println a
end loop
```

```
0
2
4
6
8
10
```


In the following loop, `a` goes from 25 to 20 with a decrement of 1:

```
loop a from 25 down to 20 do
  println a
end loop
```

```
25
24
23
22
21
20
```

Because the step can be a negative integer number, this output may be produced by the following program too:

```
loop a from 25 to 20 step -1 do
  display a
end loop
```

 | Despite the use of big integers the number of iteration is limited to  $2^{32} - 1$

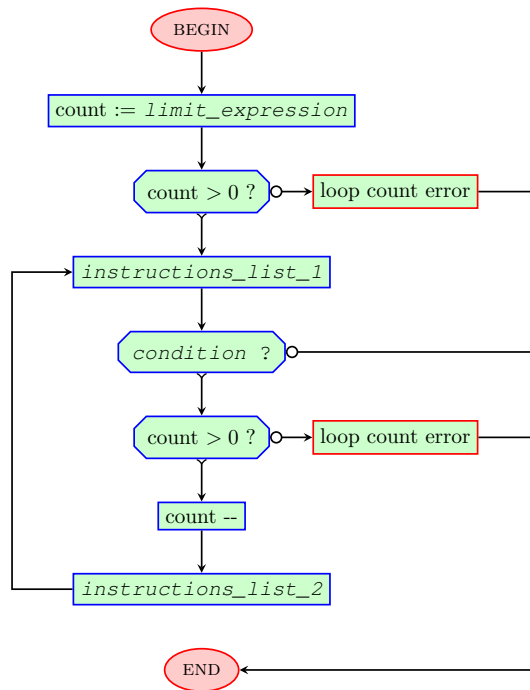


Figure 3.1: semantics of the **repeat** instruction

## 3.12 The **repeat** instruction

The **repeat** instruction combines the C **while** (...) { ... } and **do** { ... } **while** (...); in one instruction. The general form is:

```

repeat <(limit_expression)>
  instruction_list_1
while condition do
  instruction_list_2
end repeat

```

*limit\_expression* is an optional expression to bound the number of iterations. If the number of iterations exceeds *limit\_expression*, a runtime error is emitted. If *limit\_expression* is omitted, its default value is  $2^{32} - 1$ .

The semantics of this instruction is shown at figure 3.1

### Example

```

let aList := @( 1, 2, 3, 4 )
repeat ( [aList length] )
while [aList length] > 0 do
  println [aList first]
  unlet aList[0]
end repeat

```

1  
2



```
3
4
```

### 3.13 The **write** instruction

The **write** instruction writes the template output string to a file. The general form is:

```
write to <executable> expression :
    instruction_list
end write
```

Where *expression* is a string expression. Here the template output string built by instructions in the *instruction\_list* are written to the file named after the evaluation of *expression*.

If the optional keyword **executable** is present, the file has its executable bit set.

#### Example 1

```
write to "/tmp/outputOfTemplate" :
%Hello
%
end write
```

```
Created '/tmp/outputOfTemplate'.
```

The content of file at path '/tmp/outputOfTemplate' is:

```
Hello
```

#### Example 2

```
write to executable "/tmp/listfiles.sh" :
%# /bin/sh
ls -al
%
end write
```

```
Created '/tmp/listfiles.sh'.
```

The content of file at path '/tmp/outputOfTemplate' is:

```
# /bin/sh
ls -al
```

And since it is an executable file, one can type '/tmp/listfiles.sh' to execute the shell script.

### 3.14 The **template** instruction

The **template** instruction invokes another template. The output string built by the invoked template is included in the output string of the caller at the location occupied by the **template** instruction. The general form is:

```
template <(argument_list)> <if exists> file_reference <in hierarchy>
<or>
    <instruction_list>
<end template>
```

### 3.14.1 Template invocation with a copy of variables

The simplest form is:

```
template file_reference
```

The `file_reference` may be an identifier or `from` followed by an expression that evaluate to a string.

```
template aTemplate # identifier file reference
```

or

```
template from "aTemplate" # string file reference
```

The second one allow to use any file name. In both cases, the `template` instruction looks for a file named `aTemplate.extension`. `extension` is customizable. For *gtl* it is set to `"gtl"`. For *goil* it is set to `"goilTemplate"`.

If the template file is found it get a copy of the variables of the caller and is executed. If it is not found a runtime error occurs.

#### Example

Contents of callerTemplate.gtl:

```
loop a from 1 to 4 do
  template helloTemplate
  % % !a % %
end loop
%
%
```

Contents of helloTemplate.gtl:

```
Hello
```

```
Hello 1 Hello 2 Hello 3 Hello 4
```

### 3.14.2 Template invocation with arguments

Instead of passing a copy of all the variables to the invoked template, it is possible to pass arguments. In this case the invoked template works as a procedure and has no access to the variables of the caller. See 3.15 too.

#### Example

Contents of caller2Template.gtl:

```
loop a from 1 to 4 do
  template (a) hello2Template
end loop
%
%
```

Contents of hello2Template.gtl:

```
input(number)
%Hello % !number % %
```

```
Hello 1 Hello 2 Hello 3 Hello 4
```

### 3.14.3 Conditional invocation of templates

In some cases, the invocation of a template may be optional and if the template is not found, no error should occur. The following form goes this:

```
template if exists file_reference
```

If the template file is found it gets a copy of the variables of the caller and is executed. If it is not found the template invocation fails silently.

When the template file is not found it is possible to execute a list of instructions. This is done by adding a **or**, the instruction list and **end template**.

```
template if exists file_reference or  
    instruction_list  
end template
```

## 3.15 The **input** instruction

The **input** instruction is used in a template to retrieve the arguments passed to the template by the caller. See section 3.14.2

```
input(formal_argument_list)
```

**input** may be used at any time in the template. For each variable appearing in the *formal\_argument\_list* **input** pops the first value from the argument list passed by the caller. This can be done by one or more **input** instructions.

### Example

```
# The caller invoke a template with argument 1, 2, 3 and 4  
template (1, 2, 3, 4) aTemplate
```

Contents of file aTemplate.gtl:

```
input (a)    # retrieve 1  
input (b, c) # retrieve 2 in b and 3 in c  
input (d)    # retrieve 4  
input (e)    # trigger a runtime error, the argument list is empty
```

Arguments in the *formal\_argument\_list* may be typed. In the following example any data type may be passed for **d** but **c** requires an int and **a** requires a string.

### Example

```
template (3, 2, 1) aTemplate
```

Contents of file aTemplate.gtl:

```
input (c : @int, d) # retrieve 3 in c and 2 in d  
input (a : @string) # trigger an error int 1 is not a string
```

### 3.16 The **error** and **warning** instructions

It can be useful to generate an error or a warning if a data is not defined or if its value is inappropriate. **error** and **warning** have 2 forms:

```
error var : expression  
warning var : expression
```

or

```
error here : expression  
warning here : expression
```

`expression` must be of type string. In the first form, `var` is a variable. The file location of this variable may be a location in any input file of the compiler which embeds the GTL interpreter or in the template file if the variable was assigned in the template. This location is used to signal the location of the error or warning. In the second form, **here** means the current location in the template file.

In the following example taken from the Goil templates, an error is generated if the `ACTIVATION` attribute of an extended task is greater than `1`:

#### Example 1

```
# Check no extended task as an ACTIVATION attribute greater than 1  
foreach task in EXTENDEDTASKS do  
  if task::ACTIVATION > 1 then  
    error task::ACTIVATION : "An extended task cannot have ACTIVATION greater than 1"  
  end if  
end foreach
```

In this second example, a warning is generated if a template is not found:

#### Example 2

```
template if exists interrupt_wrapping or  
  warning here : "interrupt_wrapping.goilTemplate not found"  
end template
```

### 3.17 The **print** and **println** instructions

**print** and **println** print an `expression` to the standard output. **println** prints a `'\n'` after the expression. **println** may be used alone to print a `'\n'`.

```
print expression  
println <expression>
```

Any string, int, bool, float, enum, type and char may be printed. struct, list, map and unconstructed may not.

#### Example

```
foreach a in @( "Does", "anybody", "remember", "Vera", "Lynn", '?' ) do  
  print a  
  print " "  
end foreach  
println
```

Does anybody remember Vera Lynn ?

### 3.18 The **display** instruction

**display** prints the name of any variable, the location of the **display** instruction and the content of any variable. It is designed to be use for debug purpose. To get the following output, a **display TASKS** has been added to root.goilTemplate and the example in examples/cortex/armv7em/stm32f407/stm32f4discovery/alarms has been compiled by Goil.

#### Example

```
TASKS from file '/Users/jlb/Develop/trampoline-git-maintain/goil/templates/root.
goilTemplate', line 1467:7
list: @(
  0 :>
    struct: @({
      ACTIVATION :>
        integer: 1
      AUTOSTART :>
        boolean: false
      KIND :>
        string: "Task"
      NAME :>
        string: "blink"
      NONPREEMPTABLE :>
        boolean: false
      PRIORITY :>
        integer: 1
      SCHEDULE :>
        string: "FULL"
      STACKSIZE :>
        integer: 300
      USEFLOAT :>
        boolean: false
      USEINTERNALRESOURCE :>
        boolean: false
    })
  1 :>
    struct: @({
      ACTIVATION :>
        integer: 1
      AUTOSTART :>
        boolean: false
      KIND :>
        string: "Task"
      NAME :>
        string: "read_button"
      NONPREEMPTABLE :>
        boolean: false
      PRIORITY :>
        integer: 2
      SCHEDULE :>
        string: "FULL"
      STACKSIZE :>
        integer: 300
      USEFLOAT :>
        boolean: false
      USEINTERNALRESOURCE :>
```

```

        boolean: false
    }
)

```

### 3.19 The **variables** instruction

**variables** displays all the variables. It is designed to be use for debug purpose.

**variables**

#### Example

```

let a := @( 1, 2, 3 )
let b := @{ x:1, y:2, z:3 }
let c := @[ "age": 10, "name": "Vera" ]
let d := "Hello"
let e := 3
variables

```

```

===== Variables ===== Displayed from =====
file '/Users/jlb/Develop/GTL/examples/variables.gtl', line 7:9
=====
-----
a
-----
list: @(
  0 :>
    integer: 1
  1 :>
    integer: 2
  2 :>
    integer: 3
)
-----
b
-----
struct: @{
  x :>
    integer: 1
  y :>
    integer: 2
  z :>
    integer: 3
}
-----
c
-----
map: @[
  "age" :>
    integer: 10
  "name" :>
    string: "Vera"
]
-----
d
-----
string: "Hello"
-----

```

e

integer: 3

## Chapter 4

# GTL modules

GTL may be extended with functions, setters and getters. Definitions of these objects are done in separates `.gtm` files called modules.

### 4.1 Importing a module

Modules are imported by using the `import` statement. GTL prevents multiple import of the same module.

```
import expression
```

`expression` must evaluate to a string. `import` is not an instruction and must appear at the beginning of the template file before any instruction except the `%...%` instruction.

### 4.2 Writing a module

A module includes zero or more functions definitions, zero or more getter definitions and zero or more setter definitions. It may include `import` statements too but they must appear before any function / getter / setter definition. If `%...%` instructions are used they are ignored. Other instructions which output data in the output template string are forbidden.

#### 4.2.1 The arguments

Arguments are passed by copy. Each formal argument of the list may be typed or not. If a formal argument is typed, GTL emit a runtime error if the passed argument does not have the same type. Here is a formal argument list with the second argument typed.

```
a, b : @int, c
```

Any data type may be passed for arguments `a` and `c` but an `int` is required for argument `c`.

The type of an argument may be tested, check 2.15, 2.3.2 and 4.2.2.



## 4.2.2 Function definition

A function definition has the following form:

```
func func_name(formal_argument_list) result_var
    instruction_list
end func
```

The `formal_argument_list` may be empty. `result_var` is a local variable of the function which is used to return the result.

### Example 1

Content of function.gtm:

```
func square(x) result
    let result := x * x
end func
```

Content of template.gtl:

```
import "function"

let b := square(6)
display b
let b := square(2.6)
display b
```

```
b from file '/Users/jlb/Develop/GTL/examples/template.gtl', line 5:7
  integer: 36
b from file '/Users/jlb/Develop/GTL/examples/template.gtl', line 7:7
  float: 6.76
```

### Example 2

Content of function.gtm:

```
func square(x : @int) result
    let result := x * x
end func
```

Content of template.gtl:

```
import "function"

let b := square(6)
display b
let b := square(2.6)
display b
```

```
b from file '/Users/jlb/Develop/GTL/examples/template.gtl', line 5:7
  integer: 36
/Users/jlb/Develop/GTL/examples/template.gtl:6:17:19:
semantic error #1: int expected for x
let b := square(2.6)
-----^^^
```

### Example 3

Content of function.gtm:

```

func square(x) result
  if [x isANumber] then
    let result := x * x
  else
    error here : "int or float expected"
  end if
end func

```

Content of template.gtl:

```

import "function"

let b := square(6)
display b
let b := square(2.6)
display b
let b := square("Hello")
display b

```

```

b from file '/Users/jlb/Develop/GTL/examples/template.gtl', line 5:7
  integer: 36
b from file '/Users/jlb/Develop/GTL/examples/template.gtl', line 7:7
  float: 6.76
/Users/jlb/Develop/GTL/examples/template.gtl:6:18:24:
semantic error #1: int or float expected
let b := psquare("Hello")
-----^

```

## 4.3 Getter definition

A getter is defined as follow:

```

getter a_type getter_name(formal_argument_list) result_var
  instruction_list
end getter

```

`a_type` designates the data type on which the getter apply. It can be `@int`, `@char`, `@float`, `@bool`, `@enum`, `@string`, `@struct`, `@list`, `@map`, `@type` or `@unconstructed`. `getter_name` is the name of the getter. The same name may be used for several types. The `formal_argument_list` follows the same rules as those exposed in 4.2.2. `result_var` is the name of the variable used to store the result of the getter.

Within the getter, variable `self` is a copy of the variable targeted by the getter. It can be modified but the target will not be touched.

### Example 1

In this example a getter to get the square of an `int` is defined

Content of getter.gtm:

```

#-----
# getter : square of a int
#-----
getter @int square() result
  let result := self * self
end getter

```

Content of template.gtl:

```
import "getter"

let b := [6 square]
display b
let b := [b square]
display b
```

```
b from file '/Users/jlb/Develop/GTL/examples/testGetter.gtl', line 5:7
integer: 36
b from file '/Users/jlb/Develop/GTL/examples/testGetter.gtl', line 7:7
integer: 1296
```

## Example 2

In this example two getters, one to check a struct and the other to check a list are defined  
Content of getter.gtm:

```
#-----
# getter : returns true if the target has a field
#-----
getter @struct hasField(field : @string) result
  let selfAsMap := [self map]
  let result := exists selfAsMap[field]
end getter

#-----
# getter : returns true if all the elements of the list are
# structs and if all the elements of the list have a field
#-----
getter @list alwaysHasField(field : @string) result
  let result := true
  foreach element in self do
    let result &= [element hasField : field]
  end foreach
end getter
```

Content of template.gtl:

```
let c := @(
  @{ age : 18, height : 180, name : "Arnold" },
  @{ age : 22, height : 170, name : "Bob" },
  @{ age : 29, height : 175, name : "John" }
)

if [c alwaysHasField : "age"] then
  println "List 1 ok"
else
  println "List 1 ko"
end if

let c += @{ height : 150, name : "Sally" }

if [c alwaysHasField : "age"] then
  println "List 2 ok"
else
  println "List 2 ko"
end if
```

```
List 1 ok
List 2 ko
```

## 4.4 Setter definition

A setter is defined as follow:

```
setter a_type setter_name(formal_argument_list)
  instruction_list
end setter
```

`a_type` designates the data type on which the setter apply. It can be `@int`, `@char`, `@float`, `@bool`, `@enum`, `@string`, `@struct`, `@list`, `@map`, `@type` or `@unconstructed`. `setter_name` is the name of the setter. The same name may be used for several types. The `formal_argument_list` follows the same rules as those exposed in 4.2.2.

Within the setter, variable `self` is the variable targeted by the setter.

### Example

Content of `setter.gtm`:

```
#-----
# setter : delete all list items which are struct and with a
# field named age
#-----
setter @list deleteAge()
  let theList := self
  let offset := 0
  foreach element (index) in theList do
    if exists element::age then
      unlet self[index + offset]
      let offset -= 1
    end if
  end foreach
end setter
```

Content of `template.gtl`:

```
let c := @(
  @{ age : 18, height : 180, name : "Arnold" },
  @{ age : 22, height : 170, name : "Bob" },
  @{ age : 29, height : 175, name : "John" },
  @{          height : 150, name : "Sally" }
)

[!c deleteAge]
display c
```

```
c from file '/Users/jlb/Develop/GTL/examples/template.gtl', line 36:7
  list: @(
    0 :>
      struct: @({
        height :>
          integer: 150
        name :>
          string: "Sally"
      })
  )
```

## Chapter 5

# Using GTL in a GALGAS project

It is quite simple to include GTL in a GALGAS project. In this chapter we will list the files you will use, how to invoke a template and how to populate the variables with data.

### 5.1 Needed files

The following files from the standalone GTL project are needed:

File	Content
gtl_types.galgas	Internal types of GTL
gtl_expressions.galgas	Expression classes
gtl_data_types.galgas	Types of GTL
gtl_scanner.galgas	Lexical analyzer
gtl_parser.galgas	Instructions parser for the template files
gtl_instruction_parser.galgas	Instruction parser common to template and module files
gtl_module.galgas	Module classes
gtl_module_parser.galgas	Instruction parser for the module files
gtl_module_grammar.galgas	Grammar of a module file
gtl_expression_parser.galgas	Expression parser for template and module files
gtl_instructions.galgas	Instruction classes
gtl_grammar.galgas	Grammar of a template file
gtl_functions.galgas	Built-in functions
gtl_options.galgas	Options of GTL

Add them in your `galgas-sources` directory and reference them in your project file.

### 5.2 Invoking a template

The best way to invoke a template is to use the `invokeGTL` function. `invokeGTL` takes 3 arguments and returns the output string of the template. Arguments are:

### 5.2.1 The `rootTemplateName` argument

This argument is the file name of the GTL template to invoke. Its type is `@gtlString`. If your file name is in a `@lstring` use the `lstringToGtlString` function to build the `@gtlString`. If your file name is in a `@lstring` use the `stringToGtlString` function.

### 5.2.2 The `context` argument

This argument defines the execution context of GTL. It is an instance of the class `@gtlContext`, or a derived class if you want to customize it, that gathers the data of the context. Function `emptyContext` may be used to get a default context that may be completed after. The `@gtlContext` attributes may be changed by using the following setters