
## 面向连接的解复用: 例子

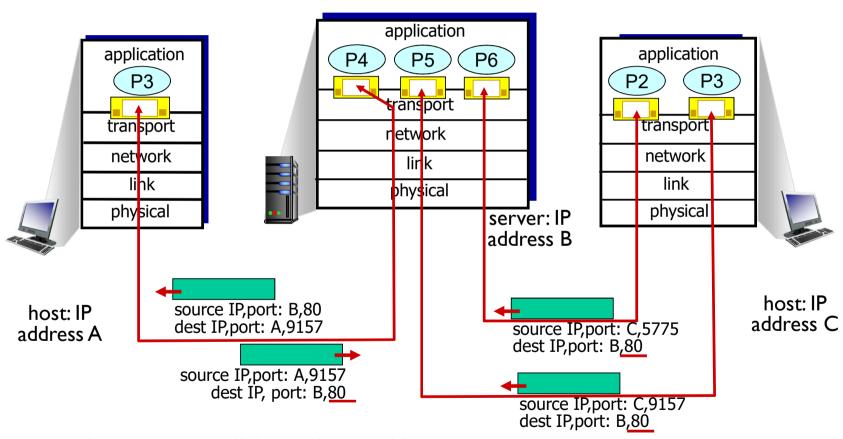

three segments, all destined to IP address: B, dest port: 80 are demultiplexed to *different* sockets