

National Autonomous University of México
School of Engineering
Division of Electrical Engineering



ICPC 2026-2027 Reference

CPCFI UNAM

FractalTeam

RacsoFractal, zum, Warddd

Contents

1	Template	4			
2	C++ Syntax	4			
2.1	Compilation sentences	4			
2.2	Custom comparators	4			
2.3	STL DS Usage	5			
2.4	Pragmas	5			
2.5	Bit Manipulation Cheat Sheet	6			
2.6	Comparing Floats	6			
2.7	Ceil	7			
3	Miscellaneous	7			
3.1	Binary Search	7			
3.1.1	*Parallel Binary Search	8			
3.1.2	*Ternary Search	8			
3.2	Kadane's Algorithm	8			
3.3	Coordinate Compression	8			
4	Queries	9			
4.1	Prefix Sum 2D	9			
4.2	Sqrt Decomposition	9			
4.2.1	Mo's Algorithm	9			
4.3	Fenwick Tree (BIT)	10			
4.3.1	2D Fenwick Tree (BIT)	10			
4.4	Segment Tree	11			
4.4.1	*2D Segment Tree	13			
4.4.2	Persistent Segment Tree	13			
4.4.3	Lazy Propagation	15			
4.5	*Merge Sort Tree	16			
4.6	Ordered Set	16			
4.6.1	Multi-Ordered Set	17			
4.7	*Treap	17			
4.8	*Trie	17			
5	Graph Theory	17			
5.1	Breadth-First Search (BFS)	17			
5.2	Deep-First Search (DFS)	19			
5.3	Shortest Path	20			
5.3.1	Dijkstra's Algorithm	20			
5.3.2	Bellman-Ford Algorithm	22			
5.3.3	Floyd-Warshall Algorithm	22			
5.4	Minimum Spanning Tree (MST)	23			
5.4.1	Prim's Algorithm	23			
5.4.2	*Kruskal's Algorithm	23			
5.5	Bipartite Checking	23			
5.6	*Negative Cycles	24			
5.7	Topological Sort	24			
5.8	Disjoint Set Union (DSU)	25			
5.9	Strongly Connected Components (SCC)	26			
5.9.1	Kosaraju's Algorithm	26			
5.9.2	*Tarjan's Algorithm	26			
5.10	2-SAT	26			
5.11	*Bridges and point articulation	29			
5.12	Flood Fill	29			
5.13	Lava Flow (Multi-source BFS)	30			
5.14	MaxFlow	32			
5.14.1	Dinic's Algorithm	32			
5.14.2	*Ford-Fulkerson Algorithm	39			
5.14.3	*Goldber-Tarjan Algorithm	39			
6	Trees	39			
6.1	Counting Childrens	39			
6.2	Tree Diameter	39			
6.3	*Centroid Decomposition	40			
6.4	Euler Tour	40			
6.5	*Lowest Common Ancestor (LCA)	41			
6.6	*Heavy-Light Decomposition (HLD)	41			
7	Strings	41			
7.1	Knuth-Morris-Pratt Algorithm (KMP)	41			
7.2	*Suffix Array	42			
7.3	*Rolling Hashing	42			
7.4	*Z Function	42			
7.5	*Aho-Corasick Algorithm	42			
8	Dynamic Programming	42			
8.1	*Coins	42			
8.2	*Longest Increasing Subsequence (LIS)	42			
8.3	Edit Distance	42			

8.4	*Knapsack	43	10.6	How all neighbours of a grid looks like	52
8.5	*SOS DP	43	10.7	Motivation	53
8.6	*Digit DP	43			
8.7	*Bitmask DP	43			
9	Mathematics	43			
9.1	Number Theory	43			
9.1.1	Greatest Common Divisor (GCD)	43			
9.1.2	Gauss Sum	43			
9.1.3	Fermat's Little Theorem	43			
9.1.4	Modulo Inverse	43			
9.1.5	*Chinese Remainder Theorem	44			
9.1.6	Binpow	44			
9.1.7	Prime checking	44			
9.1.8	Prime factorization	44			
9.1.9	Sieve of Eratosthenes	45			
9.1.10	Sum of Divisors	45			
9.2	Combinatorics	45			
9.2.1	Binomial Coefficients	45			
9.2.2	Common combinatorics formulas	46			
9.2.3	Stars and Bars	46			
9.3	Probability	46			
9.3.1	Laplace's Rule	46			
9.3.2	Probability Distributions	47			
9.3.3	Expected Value	47			
9.4	Computational Geometry	47			
9.4.1	Cross Product	47			
9.4.2	Polygon Area	48			
9.4.3	*Convex Hull	48			
9.5	Linear Algebra	48			
9.5.1	XOR Basis	48			
9.5.2	Matrix Exponentiation (Linear Recurrency)	49			
9.5.3	*Fast Fourier Transform (FFT)	50			
10	Appendix	51			
10.1	What to do against WA?	51			
10.2	Primitive sizes	51			
10.3	Printable ASCII characters	51			
10.4	Numbers bit representation	52			
10.5	How a <code>vector<vector<pair<int,int>>></code> looks like	52			

1 Template

```

1 // Racso programmed here
2 #include <bits/stdc++.h>
3 using namespace std;
4 typedef long long ll;
5 typedef long double ld;
6 typedef __int128 sll;
7 typedef pair<int,int> ii;
8 typedef pair<ll,ll> pll;
9 typedef vector<int> vi;
10 typedef vector<ll> vll;
11 typedef vector<ii> vii;
12 typedef vector<vi> vvi;
13 typedef vector<vii> vvii;
14 typedef vector<pll> vpll;
15 typedef unsigned int uint;
16 typedef unsigned long long ull;
17 #define fi first
18 #define se second
19 #define pb push_back
20 #define all(v) v.begin(),v.end()
21 #define rall(v) v.rbegin(),v.rend()
22 #define sz(a) (int)(a.size())
23 #define fori(i,a,n) for(int i = a; i < n; i++)
24 #define endl '\n'
25 const int MOD = 1e9+7;
26 const int INF = INT_MAX;

```

```

27 const long long LLINF = LLONG_MAX;
28 const double EPS = DBL_EPSILON;
29 void printVector( auto& v ){ fori(i,0,sz(v)) cout <<
    v[i] << " "; cout << endl; }
30 void fastIO() { ios_base::sync_with_stdio(0); cin.
    tie(0); cout.tie(0); }

```

Listing 1: Racso's template.

2 C++ Sintaxis

2.1 Compilation sentences

To compile and execute in C++:

```

g++-13 -Wall -o solucion.exe solucion.cpp
g++ -std=c++20 -Wall -o main a.cpp ./solucion.exe < input.txt > output.txt

```

To compile and execute in Java:

```

javac -Xlint Solucion.java
java Solucion < input.txt > output.txt

```

To execute in Python (two options):

```

python3 solucion.py < input.txt > output.txt
ppyy3 solucion.py < input.txt > output.txt

```

2.2 Custom comparators

```

1 // Using function
2 bool cmpFunction(const pair<int,int> &a, const pair<
    int,int> &b) {
3     return a.second < b.second;

```

```

4 }
5 sort(all(v), cmpFunction);
6 // Using functor
7 struct CmpFunctor {
8     bool operator()(const pair<int,int> &a, const pair
9         <int,int> &b) const {
10         return a.second < b.second;
11     };
12 sort(all(v), CmpFunctor());
13 // Using lambda function
14 sort(all(v), [](const pair<int,int> &a, const pair<
15     int,int> &b) {
16     return a.second < b.second;
17 });

```

Listing 2: Template for custom sorting, using as example ordering a vii ascending by second element.

2.3 STL DS Usage

std::string

find

```

size_t find (const string& str, size_t pos = 0) const;
size_t find (const char* s, size_t pos = 0) const;
size_t find (const char* s, size_t pos, size_t n) const;
size_t find (char c, size_t pos = 0) const;

```

str Another string with the subject to search for.

pos position of the first character in the string to be considered in the search. If this is greater than the string length, the function never finds matches. note:

the first character is denoted by a value of 0.

s Pointer to an array of characters. If argument n is specified, the sequence to match are the first n characters in the array. Otherwise, a null-terminated sequence is expected.

n Length of sequence of characters to match.

c Individual character to be searched for.

Return — The position of the first character of the first match. If no matches were found, the function returns string::npos.

Complexity — Unspecified, but generally up to linear in length()-pos times the length of the sequence to match (worst case).

Note — This is a note.

2.4 Pragmas

```

1 #pragma GCC optimize("O3")
2 #pragma GCC target("avx2,bmi,bmi2,lzcnt,popcnt")
3 #pragma GCC optimize("unroll-loops")

```

Listing 3: Common pragmas.

2.5 Bit Manipulation Cheat Sheet

Bitwise operators:

- $\&$ (AND): Sets each bit to 1 if both bits are 1.
- $|$ (OR): Sets each bit to 1 if at least one bit is 1.
- $\wedge$ (XOR): Sets each bit to 1 if bits are different.
- $\sim$ (NOT): Inverts all bits.
- $\ll$ (Left shift): Shifts bits left, fills with 0.
- $\gg$ (Right shift): Shifts bits right.

Basic Bit Tasks:

- Get bit: $(n \& (1 \ll i)) \neq 0$
- Set bit: $n | (1 \ll i)$
- Clear bit: $n \& \sim(1 \ll i)$
- Toggle bit: $n \wedge (1 \ll i)$
- Clear LSB: $n \& (n - 1)$
- Get LSB: $n \& -n$

Set Operations:

- Subset check: $(A \& B) == B$
- Set union: $A | B$
- Set intersection: $A \& B$
- Set difference: $A \& \sim B$
- Toggle subset: $A \hat{=} B$

Equations:

Properties of bitwise:

- $a | b = a \oplus b + a \& b$

$$\bullet a \oplus (a \& b) = (a | b) \oplus b$$

$$\bullet b \oplus (a \& b) = (a | b) \oplus a$$

$$\bullet (a \& b) \oplus (a | b) = a \oplus b$$

In addition and subtraction:

$$\bullet a + b = (a | b) + (a \& b)$$

$$\bullet a + b = a \oplus b + 2(a \& b)$$

$$\bullet a - b = (a \oplus (a \& b)) - ((a | b) \oplus a)$$

$$\bullet a - b = ((a | b) \oplus b) - ((a | b) \oplus a)$$

$$\bullet a - b = (a \oplus (a \& b)) - (b \oplus (a \& b))$$

$$\bullet a - b = ((a | b) \oplus b) - (b \oplus (a \& b))$$

$$\text{Gray code: } G = B \oplus (B \gg 1)$$

C++ built in functions:

- `__builtin_popcount(x)` - Count the number of set bits in x.
- `__builtin_clz(x)` - Count the number of leading zeros in x.
- `__builtin_ctz(x)` - Count the number of trailing zeros in x.

2.6 Comparing Floats

```
1 long double a, b, EPS = 1e-9;
2 if( abs(a - b) < EPS ) {
3     // 'a' equals 'b'
4 }
```

Listing 4: Check if two real numbers are equal using an epsilon scope.

2.7 Ceil

$$\left\lceil \frac{a}{b} \right\rceil = \frac{a+b-1}{b}$$

(Originally I thought $\left\lceil \frac{a}{b} \right\rceil = \frac{a-1}{b} + 1$, but this calculates the wrong way in the cases where $a = 0$)

```
1 int myCeil(long long a, long long b) {
2     return (a + b - 1)/b;
3 }
```

Listing 5: A way to do ceil operation between integers without making explicit conversions. `a` and `b` are `int`, but the operation `a+b-1` can cause an overflow, so they must be casted into `long long` to avoid this. The result must be `int` anyway.

3 Miscellaneous

3.1 Binary Search

```
1 int binary_search( vector<int>& list, int n, int
   target ) {
2     int x0 = 0, x1 = n-1, mid;
3     while( x0 <= x1 ) {
4         mid = (x0 + x1) / 2; // (x1 - x0) / 2 + x0;
5         if( list[mid] == target )
6             return mid;
7         list[mid] < target ? x0 = mid + 1 : x1 = mid
8         - 1;
9     }
10    return -1;
```

Listing 6: Classic (Vanilla) implementation of Binary Search. Returns the index where `target` was found. Binary Search works on $O(\log_2(n))$, let n be the size of the container.

```
1 int binary_search( vector<int>& list, int n, int
   target ) {
2     int ans = 0;
3     function<bool(int)> check = [&](int idx)->bool {
4         return idx < n && list[idx] <= target;
5     };
6     for( int i = 31; i >= 0; i-- ) {
7         if( check( ans + (1 << i) ) )
8             ans += 1 << i;
9     }
10    return list[ans] == target ? ans : -1;
11 }
```

Listing 7: Logarithmic jumps implementation of Binary Search. Returns the index where `target` was found. Binary Search works on $O(\log_2(n))$, let n be the size of the container.

```
1 int binary_search( vector<int>& list, int n, int
   target ) {
2     int left = 1, right = n + 1, mid;
3     while(right - left >= 1) {
4         mid = left + (right - left) / 2;
5         if( list[mid] >= target && target > list[mid -
6         1]) {
```



```

6      //----- TODO logic here -----//
7      break;
8  }
9  else
10     if( list[mid] < target )
11         left = mid + 1;
12     else
13         right = mid;
14 }
15 }

```

Listing 8: Binary Search implementation for searching an element in the interval $(numbers_{i-1}, numbers_i]$. Originally used on Codeforces problem 474 - B (Worms). Returns the index where `target` was found. Binary Search works on $O(\log_2(n))$, let n be the size of the container.

```

1 function<bool(ll)> check = [&](ll t) -> bool {
2     ll products = 0;
3     for(ll machine : v) {
4         products += t / machine;
5         if( products >= target )
6             return true;
7     }
8     return products >= target;
9 };
10 for(int i = 0; i < 70; i++) {
11     mid = (x0 + x1) / 2;
12     check(mid) ? x1 = mid : x0 = mid + 1;
13 }

```

Listing 9: Implementation of Binary Search in the Answer. Originally used on CSES problem *Factory Machines*. Binary Search works on $O(\log_2(n))$, let n be the size of the container.

3.1.1 *Parallel Binary Search

3.1.2 *Ternary Search

3.2 Kadane's Algorithm

```

1 ll arns = v[0], maxSum = 0;
2 for(i,0,n)
3 {
4     maxSum += v[i];
5     arns = max(arns, maxSum);
6     maxSum = max(0LL, maxSum);
7 }

```

Listing 10: Uses Kadane's Algorithm to find maximum subarray sum in $O(n)$.

3.3 Coordinate Compression

```

1 //Previously read vector<int> a(n)
2 vector<int> coords = a;
3 sort(all(coords));
4 coords.erase(unique(all(coords)), coords.end()); //
    erases duplicates
5 //Reassings every value in vector "a" to the new
    corresponding value

```

```

6 for(int &x : a) x = lower_bound(all(coords), x) -
  coords.begin();

```

Listing 11: Coordinate Compression implementation for a vector of integers. Replaces elements in the original vector to newly assigned minimal numbers. Runs in $O(n \log(n))$.

4 Queries

4.1 Prefix Sum 2D

```

1 for(int i = 1; i <= n; i++)
2   for(int j = 1; j <= n; j++)
3   {
4     prefix[i][j] = prefix[i][j-1] + prefix[i-1][j] -
      prefix[i-1][j-1];
5     prefix[i][j] += forest[i-1][j-1] == '*' ? 1 : 0;
6   }
7 for(int i = 0; i < q; i++)
8 {
9   pair<int,int> p1, p2;
10  cin >> p1.fi >> p1.se >> p2.fi >> p2.se;
11  int arns = prefix[p2.fi][p2.se];
12  arns -= prefix[p2.fi][p1.se-1] + prefix[p1.fi-1][
    p2.se];
13  arns += prefix[p1.fi-1][p1.se-1];
14  cout << arns << endl;
15 }

```

Listing 12: Construction and query of how many 1's are there in a matrix. Originally used on *Forest Queries* from CSES.

4.2 Sqrt Decomposition

4.2.1 Mo's Algorithm

```

1 struct Query{
2   int l, r, idx;
3 };
4 //vector queries ya leído y 0-indexado anteriormente
5 int block_size = (int)sqrt(n);
6 auto mo_cmp = [&](Query a, Query b) { //custom
  cmptor
7   int block_a = a.l / block_size;
8   int block_b = b.l / block_size;
9   if(block_a != block_b) return block_a < block_b;
10  if(block_a & 1) return a.r < b.r; //zig-zag
  sorting
11   return a.r > b.r;
12 };
13 sort(all(queries), mo_cmp);

```

Listing 13: Implementation of Mo's Algorithm for offline query sorting. Efficient in static range queries problems, since it's easier to implement than a segment tree. Runs in $O((n + q)\sqrt{n} \cdot F)$, where F stands for the time complexity of an update (usually $O(1)$ or $O(\log(n))$).

4.3 Fenwick Tree (BIT)

Let f be some group operation (a binary **associative** function over a set with an **identity** and **inverse** elements) and A be an array of integers of length N . Denote f 's infix function as $*$; that is, $f(x, y) = x * y$ for arbitrary integers x, y .

The Fenwick tree is a data structure which:

- Calculates the value of function f in the given range $[l, r]$ (i.e. $A_l * A_{l+1} * \dots * A_r$) in $O(\log N)$ time.
- Updates the value of an element of A in $O(\log N)$ time.

Operations supported by BIT: sum, XOR, counting frequencies, order statistics.

Operations not supported by BIT: minimum, maximum, gcd, and / or.

BIT basically obtains ranges by subtracting prefixes: $range(l, r) = prefix(r) * prefix(l - 1)$.

```
1 template<typename T = long long>
2 struct BIT {
3     int n;
4     vector<T> tree;
5     BIT(int n) : n(n), tree(n+1,0) {}
6     BIT(vector<T> const &v) : BIT( v.size() ) {
7         for(size_t i = 0; i < v.size(); i++)
8             update(i+1,v[i]);
9     }
10    void update(int idx, T val) {
11        while( idx <= n ) {
12            tree[idx] += val;
13            idx += idx & -idx;
14        }
15    }
16    T prefix(int idx) const {
17        T pref = 0;
```

```
18    while( idx > 0 ) {
19        pref += tree[idx];
20        idx -= idx & -idx;
21    }
22    return pref;
23 }
24 T query(int l, int r) const {
25     return prefix(r) - prefix(l-1);
26 }
27 };
```

Listing 14: BIT implementation for sum queries. Builds in $O(n \log n)$, queries in $O(\log n)$.

4.3.1 2D Fenwick Tree (BIT)

```
1 template<typename T = long long>
2 struct BIT2D {
3     int n, m;
4     vector<vector<T>> tree;
5     BIT2D(int n, int m) : n(n), m(m), tree(n+1,vector<
6         T>(m+1,0)) {}
7     BIT2D(vector<vector<T>> const &mat) : BIT2D(mat.
8         size(), mat[0].size()) {
9         for(int i = 0; i < n; i++)
10             for(int j = 0; j < m; j++)
11                 update(i+1,j+1,mat[i][j]);
12     }
13     void update(int x, int y, T val) const {
```

```

12     while( x <= n ) {
13         int j = y;
14         while( j <= m ) {
15             tree[x][y] += val;
16             j += j & -j;
17         }
18         x += x & -x;
19     }
20 }
21 T prefix(int x, int y) const {
22     T pref = 0;
23     while( x > 0 ) {
24         int j = y;
25         while( j > 0 ) {
26             pref += tree[x][y];
27             j -= j & -j;
28         }
29         x -= x & -x;
30     }
31     return pref;
32 }
33 T query(int x1, int y1, int x2, int y2) const {
34     return prefix(x2,y2) - prefix(x1-1,y2) - prefix(
35         x2,y1-1) + prefix(x1-1,y1-1);
36 };

```

Listing 15: 2D BIT implementation for sum queries. Builds in $O(n \log n)$, queries in $O(\log n)$.

4.4 Segment Tree

```

1  typedef long long ll;
2  typedef vector<ll> vll;
3  typedef vector<int> vi;
4  const int INF = INT_MAX;
5  class Segment_tree {
6      public: vll t;
7      Segment_tree( int n = 1e5+10 ) {
8          t.assign(n*4,INF);
9      }
10     void update(int node, int index, int tl, int tr,
11         int val) {
12         if( tr < index || tl > index ) return;
13         if( tr == tl ) t[node] = val;
14         else {
15             int mid = tl + ((tr-tl)>>1);
16             int lft = node << 1;
17             int right = lft + 1;
18             update(lft,index,tl,mid,val);
19             update(right,index,mid+1,tr,val);
20             t[node] = min(t[lft],t[right]);
21         }

```

```

22  ll query(int node, int l, int r, int tl, int tr)
    {
23      if( tl > r || tr < l ) return INF;
24      if( tl >= l and tr <= r ) return t[node];
25      else {
26          int mid = tl + ((tr-tl)>>1);
27          int lft = node << 1;
28          int rght = lft + 1;
29          ll q1 = query(lft,l,r,tl,mid);
30          ll q2 = query(rght,l,r,mid+1,tr);
31          return min(q1,q2);
32      }
33  }
34  void build(vi &v, int node, int tl, int tr) {
35      if( tl == tr ) t[node] = v[tl];
36      else {
37          int mid = tl + ((tr-tl)>>1);
38          int lft = node << 1;
39          int rght = lft + 1;
40          build(v,lft,tl,mid);
41          build(v,rght,mid+1,tr);
42          t[node] = min(t[lft],t[rght]);
43      }
44  }
45 };
46 Segment_tree st(n);
47 st.build(v,1,0,n-1);
48 st.update(1,a-1,0,n-1,b);

```

```

49 st.query(1,a-1,b-1,0,n-1));

```

Listing 16: Segment Tree for dynamic range **minimum** queries. Racso's implementation. The input vector and the update/query is 0-indexed, the tree nodes are 1-indexed.

```

1  struct Node{
2      ll zum;
3      Node() : zum(0) {}
4
5      Node(ll val){
6          zum = val;
7      }
8
9      static Node merge(const Node& a, const Node& b){
10         Node res;
11         res.zum = a.zum + b.zum;
12         return res;
13     }
14 };
15
16 struct SegmentTree{
17     int n;
18     vector<Node> tree;
19
20     SegmentTree(int n) : n(n), tree(4*n){}
21
22     void build(const vector<ll>& a, int node, int l,
        int r){

```

```

23     if(l==r){
24         tree[node] = Node(a[l]);
25         return;
26     }
27     int mid = l + (r-1)/2;
28     build(a, 2*node, l, mid);
29     build(a, 2*node + 1, mid + 1, r);
30     tree[node] = Node::merge(tree[2*node], tree
31 [2*node + 1]);
32 }
33 void update(int node, int l, int r, int idx, ll
34 x){
35     if(l == r){
36         tree[node] = Node(x);
37         return;
38     }
39     int mid = l + (r-1)/2;
40     if(idx <= mid) update(2*node, l, mid, idx, x
41 );
42     else update(2*node + 1, mid + 1, r, idx, x);
43     tree[node] = Node::merge(tree[2*node], tree
44 [2*node + 1]);
45 }
46 Node query(int node, int l, int r, int tl, int
47 tr){
48     if(tl > r || tr < l) return Node();

```

```

46     if(tl <= l && r <= tr) return tree[node];
47     int mid = l + (r-1)/2;
48     return Node::merge(
49         query(2*node, l, mid, tl, tr),
50         query(2*node + 1, mid + 1, r, tl, tr)
51     );
52 }
53 };

```

Listing 17: Segment Tree for static range **sum** queries. Zum's implementation.

4.4.1 *2D Segment Tree

4.4.2 Persistent Segment Tree

```

1 struct Node{
2     ll zum;
3     int lc, rc;
4     Node() : zum(0), lc(0), rc(0) {}
5     Node(ll val) : zum(val), lc(0), rc(0) {}
6     static Node merge(const Node& a, const Node& b){
7         Node res;
8         res.zum = a.zum + b.zum;
9         return res;
10    }
11 };
12
13 struct PersistentSegmentTree{
14     int n;
15     vi roots;

```

```

16     vector<Node> tree;
17     PersistentSegmentTree(int n) : n(n) {
18         tree.pb(Node());
19     }
20     int build(const vll& a, int l, int r){
21         int node = tree.size();
22         tree.pb(Node());
23         if(l == r){
24             tree[node] = Node(a[l]);
25             return node;
26         }
27         int mid = l + (r-1) / 2;
28         int left_child = build(a, l, mid);
29         int right_child = build(a, mid + 1, r);
30         tree[node] = Node::merge(tree[left_child],
31 tree[right_child]);
32         tree[node].lc = left_child;
33         tree[node].rc = right_child;
34         return node;
35     }
36     int update(int prev, int l, int r, int idx, ll x
37 ){
38         int node = tree.size();
39         tree.pb(tree[prev]);
40         if(l == r){
41             tree[node] = Node(x);
42             return node;
43         }

```

```

42         int mid = l + (r-1) / 2;
43         int left_child = tree[node].lc;
44         int right_child = tree[node].rc;
45         if(idx <= mid){
46             left_child = update(tree[prev].lc, l,
47 mid, idx, x);
48         }
49         else{
50             right_child = update(tree[prev].rc, mid
51 + 1, r, idx, x);
52         }
53         tree[node] = Node::merge(tree[left_child],
54 tree[right_child]);
55         tree[node].lc = left_child;
56         tree[node].rc = right_child;
57         return node;
58     }
59     Node query(int node, int l, int r, int tl, int
60 tr){
61         if(tl > r || tr < l || node == 0) return
62 Node();
63         if(tl <= l && tr >= r) return tree[node];
64         int mid = l + (r-1) / 2;
65         return Node::merge(
66             query(tree[node].lc, l, mid, tl, tr),
67             query(tree[node].rc, mid + 1, r, tl, tr)
68         );
69     }

```

```
65 };
```

Listing 18: Persistent Segment Tree for Static Range **Sum** Version Queries.

4.4.3 Lazy Propagation

```
1 struct Node{ // Ejemplo con query de suma en rango y
    update de suma en rango
2     ll zum;
3     Node() : zum(0) {} //elemento neutro
4     Node(ll val) : zum(val) {}
5     static Node merge(const Node& a, const Node& b){
6         Node res;
7         res.zum = a.zum + b.zum; //Aquí se cambia la
            operación(es) del problema
8         return res;
9     }
10 };
11 struct Update{
12     ll add_val;
13     Update() : add_val(0) {} //elemento neutro
14     Update(ll val) : add_val(val) {}
15     bool is_empty() const{
16         return add_val == 0;
17     }
18     void clear(){
19         add_val = 0;
20     }
21     void apply(Node& node, int l, int r) const{
```

```
22         ll cnt = r - l + 1;
23         // se suma el valor agregado por la cantidad de
            nodos hijos modificados (solo aplica para suma)
24         node.zum += add_val * cnt;
25     }
26     // si hay más de una operación aquí se deben
            priorizar
27     void combine(const Update& other){
28         add_val += other.add_val;
29     }
30 };
31 struct LazySegmentTree{
32     int n;
33     vector<Node> tree;
34     vector<Update> lazy;
35     LazySegmentTree(int n) : n(n), tree(4*n), lazy(4*n)
        {}
36     void build(const vll& a, int node, int l, int r){
37         if(l == r){
38             tree[node] = Node(a[l]);
39             return;
40         }
41         int mid = l + (r-l) / 2;
42         build(a, 2 * node, l, mid);
43         build(a, 2 * node + 1, mid + 1, r);
44         tree[node] = Node::merge(tree[2 * node], tree[2
            * node + 1]);
45     }
```



```

46 void push(int node, int l, int r){
47     if(!lazy[node].is_empty()){
48         int mid = l + (r-1) / 2;
49         lazy[node].apply(tree[2 * node], l, mid);
50         lazy[node].apply(tree[2 * node + 1], mid + 1,
51             r);
52         lazy[2 * node].combine(lazy[node]);
53         lazy[2 * node + 1].combine(lazy[node]);
54         lazy[node].clear();
55     }
56 void update(int node, int l, int r, int tl, int tr
57     , const Update& upd){
58     if(tl > r || tr < l) return;
59     if(tl <= l && tr >= r){
60         upd.apply(tree[node], l, r);
61         lazy[node].combine(upd);
62         return;
63     }
64     push(node, l, r);
65     int mid = l + (r-1)/2;
66     update(2 * node, l, mid, tl, tr, upd);
67     update(2 * node + 1, mid + 1, r, tl, tr, upd);
68     tree[node] = Node::merge(tree[2 * node], tree[2
69         * node + 1]);
70     }
71 Node query(int node, int l, int r, int tl, int tr)
72 {

```

```

70     if(tl > r || tr < l) return Node();
71     if(tl <= l && tr >= r) return tree[node];
72     push(node, l, r);
73     int mid = l + (r-1) / 2;
74     return Node::merge(
75         query(2 * node, l, mid, tl, tr),
76         query(2 * node + 1, mid + 1, r, tl, tr)
77     );
78 }
79 // wrappers para el main
80 void build(const vll& a) { build(a, 1, 0, n - 1);
81     }
82 void update(int tl, int tr, const Update& upd) {
83     update(1, 0, n - 1, tl, tr, upd); }
84 Node query(int tl, int tr) { return query(1, 0, n
85     - 1, tl, tr); }
86 };
87 LazySegmentTree segtree(n);
88 segtree.build(a);
89 //sumar 5 a [1, 4] (0-indexed)
90 segtree.update(1, 4, Update((11)5));
91 segtree.query(0, 3).zum

```

Listing 19: Lazy Propagation Segment Tree for Dynamic Range **Sum** Queries. Zum's Implementation for scalability.

4.5 *Merge Sort Tree

4.6 Ordered Set

```

1 //<-- Header.
2 #include <bits/stdc++.h>
3 #include <ext/pb_ds/assoc_container.hpp>
4 #include <ext/pb_ds/tree_policy.hpp>
5 using namespace std;
6 using namespace __gnu_pbds;
7 template<typename T, typename Cmp = less<T>>
8 using ordered_set = tree<T,null_type,Cmp,rb_tree_tag
    ,tree_order_statistics_node_update>;
9 //<-- Declaration.
10 ordered_set<int> oset;
11 //<-- Methods usage.
12 // K-th element in a set (counting from zero).
13 ordered_set<int>::iterator it = oset.find_by_order(k
    );
14 // Number of items strictly smaller than k.
15 ordered_set<int>::iterator it = oset.order_of_key(k
    );
16 // Every other std::set method.

```

Listing 20: Ordered set necessary includes in header, declaration of the object, and usage of its new methods.

4.6.1 Multi-Ordered Set

```

1 //<-- Header.
2 #include <bits/stdc++.h>
3 #include <ext/pb_ds/assoc_container.hpp>

```

```

4 #include <ext/pb_ds/tree_policy.hpp>
5 using namespace std;
6 using namespace __gnu_pbds;
7 template<typename T, typename Cmp = less<T>>
8 using ordered_set = tree<T,null_type,Cmp,rb_tree_tag
    ,tree_order_statistics_node_update>;
9 //<-- Use in main.
10 ordered_set<pair<int,int>> multi_oset;
11 map<int,int> cuenta;
12 function<void(int)> insertar = [&](int val) -> void
    {
13     multi_oset.insert({val,++cuenta[val]});
14 };
15 function<void(int)> eliminar = [&](int val) -> void
    {
16     multi_oset.erase({val,cuenta[val]--});
17 };

```

Listing 21: Declaration of multi-oset structure.

4.7 *Treap

4.8 *Trie

5 Graph Theory

5.1 Breadth-First Search (BFS)

```

1 vector<vector<int>> graph;
2 vector<bool> visited;
3 graph.assign(n, vector<int>() ); // <--- main

```

```

4 visited.assign(n, false); // <--- main
5
6 void bfs( int s ) {
7     queue<int> q;
8     q.push( s );
9     visited[ s ] = true;
10    while( ! q.empty() ) {
11        int u = q.front();
12        q.pop();
13        for( auto v : graph[ u ] ) {
14            if( ! visited[ u ] ) {
15                visited[ u ] = true;
16                q.push( v );
17                // --- ToDo logic here ---
18            }
19        }
20    }
21    return;
22 }

```

Listing 22: Iterative implementation of BFS graph traversal over a graph represented as a AdjacencyList on vector of vectors. BFS runs in $O(|V| + |E|)$.

```

1 int n, m;
2 string arns = "";
3 cin >> n >> m;
4 vector<vector<bool>> visited(n, vector<bool>(m, false)
5     );
6 vector<string> path(n, string(m, '0'));

```

```

6 vector<string> grid(n);
7 vii dirs = {{0,1},{0,-1},{1,0},{-1,0}};
8 string commands = "LRUD";
9 queue<ii> q;
10 ii start, end, curr;
11 function<bool(int,int)> valid = [&](int i, int j) ->
12     bool {
13         return ( i >= 0 && i < n && j >= 0 && j < m &&
14             grid[i][j] != '#' && ! visited[i][j] );
15     };
16 fori(i,0,n) cin >> grid[i];
17 fori(i,0,n) {
18     fori(j,0,m)
19         if( grid[i][j] == 'A' ) {
20             visited[i][j] = true;
21             q.push( {i,j} );
22         }
23     }
24 while( ! q.empty() ) {
25     curr = q.front();
26     q.pop();
27     int i = curr.fi;
28     int j = curr.se;
29     if( grid[i][j] == 'B' ) {
30         end.fi = i;
31         end.se = j;
32         break;
33     }
34 }

```

```

32     int newI, newJ;
33     fori(I,0,4) {
34         newI = i + dirs[I].fi;
35         newJ = j + dirs[I].se;
36         if( valid(newI,newJ) ) {
37             visited[newI][newJ] = true;
38             q.push( {newI,newJ} );
39             path[newI][newJ] = commands[I];
40         }
41     }
42 }
43 while( path[ end.fi ][ end.se ] != '0' ) {
44     fori(i,0,4) {
45         if( path[ end.fi ][ end.se ] == commands[i] )
46         {
47             arns += i & 1 ? commands[i-1] : commands[i
48             +1];
49             end.fi -= dirs[i].fi;
50             end.se -= dirs[i].se;
51         }
52     }
53 reverse(all(arns));
54 if( arns == "" ) cout << "NO" << endl;
55 else cout << "YES" << endl << arns.size() << endl <<
    arns << endl;

```

Listing 23: BFS on Grid to find shortest path from an starting point A to an end B . Once the path is found, it reconstruct it with movements $LRUD$. Works in $O(n \cdot m)$. Originally used on problem *Labyrinth* from CSES.

5.2 Deep-First Search (DFS)

```

1 vector<vector<int>> graph;
2 vector<bool> visited;
3 graph.assign(n, vector<int>() ); // <--- main
4 visited.assign(n, false); // <--- main
5
6 void dfs( int s ) {
7     if( visited[s] == true ) return;
8     visited[s] = true;
9     vector<int>::iterator i;
10    for( i = graph[s].begin(); i < graph[s].end();
11    ++i) {
12        if( ! visited[*i] ) {
13            // --- ToDo logic here ---
14            dfs(*i);
15        }
16    }

```

Listing 24: Recursive implementation of DFS graph traversal over a graph represented as a AdjacencyList on vector of vectors. DFS runs in $O(|V| + |E|)$.

```

1 vector<vector<int>> graph;

```

```

2 vector<bool> visited;
3 void dfs( int s ) {
4     stack<int> stk;
5     stk.push(s);
6     while (!stk.empty()) {
7         int u = stk.top();
8         stk.pop();
9         if ( visited[u] ) continue;
10        visited[u] = true;
11        // --- ToDo logic here ---
12        for(auto it = graph[u].rbegin(); it != graph
13            [u].rend(); ++it)
14            if (!visited[*it])
15                stk.push(*it);
16    }

```

Listing 25: Iterative implementation of DFS graph traversal over a graph represented as a AdjacencyList on vector of vectors. DFS runs in $O(|V| + |E|)$.

```

1 typedef long long ll;
2 vector<vector<ll>> adj;
3 vector<bool> visited;
4 function<void(ll)> dfs = [&](ll u) -> void {
5     if( visited[u] ) return;
6     visited[u] = true;
7     for( ll v : adj[u] )
8         dfs(v);
9 };

```

```

10 dfs(n);

```

Listing 26: DFS implementation with a lambda function (adjacency list and visited don't need to be passed thorough argument). DFS runs in $O(|V| + |E|)$.

```

1 typedef long long ll;
2 typedef vector<ll> vll;
3 map<ll,vll> adj;
4 set<ll> visited;
5 function<void(ll)> dfs = [&](ll u) -> void {
6     if( visited.count(u) ) return;
7     visited.insert(u);
8     for( ll v : adj[u] )
9         dfs(v);
10 };
11 dfs(n);

```

Listing 27: DFS implementation with a lambda function implemented with a map instead of vector of vectors, and a set to track visited nodes. DFS runs in $O(|V| + |E|)$.

5.3 Shortest Path

5.3.1 Dijkstra's Algorithm

```

1 typedef long long ll;
2 typedef pair<ll,ll> pll;
3
4 vector<vector<ll>> graph;
5 vector<ll> visited;

```

```

6 graph.assign(n, vector<ll>() ); // <--- main
7 visited.assign(n, false); // <--- main
8
9 vector<ll> dijkstra( int n, int source, vector<
    vector<pll>> &graph ) {
10     vector<ll> dist( n, INF );
11     priority_queue<pll, vector<pll>, greater<pll>> pq;
12     dist[ source ] = 0;
13     pq.push( {0, source} );
14     while( ! pq.empty() ) {
15         ll d = pq.top().first;
16         ll u = pq.top().second;
17         pq.pop();
18         if( d > dist[ u ] ) continue;
19         for( auto &edge : graph[ u ] ) {
20             ll v = edge.first;
21             ll weight = edge.second;
22             if( dist[ u ] + weight < dist[ v ] ) {
23                 dist[ v ] = dist[ u ] + weight;
24                 pq.push( {dist[ v ], v} );
25             }
26         }
27     }
28     return dist;
29 }

```

Listing 28: Iterative implementation of Dijkstra's Algorithm for shortest path. Returns a vector with the shortest distance to every other vertex in the graph. $O(|E| \times \log_2(|V|))$. Doesn't work with negative weights.

```

1 vvp11 graph(n+1,vp11());
2 vector<bool> visited(n+1,false);
3 function<v11(int)> dijkstra = [&](int source) -> v11
    {
4     v11 dist(n+1,INF);
5     priority_queue<pll,vp11,greater<pll>> pq;
6     dist[source] = 0;
7     pq.push({0,source});
8     while( ! pq.empty() ) {
9         ll d = pq.top().fi;
10        ll u = pq.top().se;
11        pq.pop();
12        if( d > dist[u] ) continue;
13        for(pll edge : graph[u]) {
14            ll v = edge.fi;
15            ll w = edge.se;
16            if( dist[u] + w < dist[v] ) {
17                dist[v] = dist[u] + w;
18                pq.push({dist[v],v});
19            }
20        }
21    }
22    return dist;

```

```
23 };
```

Listing 29: Iterative implementation of Dijkstra's Algorithm as a Lambda Function for shortest path over an adjacency list. Returns a vector with the shortest distance to every other vertex in the graph. $O(|E| \times \log_2(|V|))$. Doesn't work with negative weights.

5.3.2 Bellman–Ford Algorithm

```
1 int V, E;
2 cin >> V >> E;
3 vvi edges(E, vi(3, 0));
4 for(int i = 0; i < E; i++)
5     cin >> edges[i][0] >> edges[i][1] >> edges[i][2];
6 function<vi(int)> bellman_ford = [&](int src) -> vi
7 {
8     vi dist(V, INF);
9     dist[src] = 0;
10    for(int i = 0; i < V; i++) {
11        for( vi edge : edges ) {
12            int u = edge[0];
13            int v = edge[1];
14            int w = edge[2];
15            if( dist[u] != INF and dist[u] + w < dist[v] ) {
16                if( i == V-1 )
17                    return {-1};
18                dist[v] = dist[u] + w;
19            }
20        }
21    }
```

```
20 }
21 return dist;
22 };
```

Listing 30: Finds the shortest route from a source vertex, to every other one in the graph. Works over a list of edges. Runs in $O(|V| \times |E|)$. Can be used to find negative cycles.

5.3.3 Floyd-Warshall Algorithm

```
1 vvl1 dist(n+1, vll(n+1, INF));
2 for(int i = 1; i <= n; i++)
3     dist[i][i] = 0;
4 for(int i = 0; i < m; i++) {
5     dist[u][v] = w;
6     dist[v][u] = w;
7 }
8 function<void()> floyd_warshall = [&]() -> void {
9     for(int k = 1; k <= n; k++)
10        for(int i = 1; i <= n; i++)
11            for(int j = 1; j <= n; j++)
12                if( dist[i][k] < INF and dist[k][j] < INF )
13                    dist[i][j] = min( dist[i][j], dist[i][k] +
14                        dist[k][j] );
15 };
```

Listing 31: Implementation of Floyd Warshall's Algorithm for finding APSP (*All Pairs Shortest Path*). Runs in $O(|V|^3)$, work with negative weights and can detect negative cycles (if $\text{dist}[i][i] < 0$).

5.4 Minimum Spanning Tree (MST)

5.4.1 Prim's Algorithm

```

1 function<ll()> prim = [&]() -> ll
2 {
3     priority_queue<pll,vpll,greater<pll>> pq;
4     ll res = 0;
5     pq.push({0,1});
6     while( ! pq.empty() )
7     {
8         pll p = pq.top();
9         pq.pop();
10        int w = p.fi;
11        int u = p.se;
12        if( visited[u] ) continue;
13        res += w;
14        visited[u] = true;
15        for(pll v : graph[u])
16            if( ! visited[v.fi] )
17                pq.push({v.se,v.fi});
18    }
19    for(int i = 1; i <= V; i++)
20        if( ! visited[i] )
21            return -1;
22    return res;
23 };

```

Listing 32: Implementation of Prim's Algorithm that returns the total weight of the MST in a adjacency list. Runs in $O(|E|\log|V|)$.

5.4.2 *Kruskal's Algorithm

5.5 Bipartite Checking

```

1 vi cnt(3,0), color(V+1,0);
2 function<void(int)> bfs = [&](int s) -> void {
3     queue<int> q;
4     bool bipartite = true;
5     q.push(s);
6     color[s] = 1;
7     cnt[1]++;
8     while( ! q.empty() ) {
9         int u = q.front();
10        q.pop();
11        for(int v : adj[u]) {
12            if( color[v] == 0 ) {
13                color[v] = 3 - color[u];
14                cnt[ color[v] ]++;
15                q.push(v);
16            }
17            else if( color[v] == color[u] )
18                bipartite = false;
19        }
20    }
21    if(!bipartite) {
22        cnt[1] = cnt[2] = false;
23    }
24 };

```


Listing 33: Checking bipartiteness with BFS, count how many vertices were colored as 1 and 2, or set them to zero if the component is not bipartite.

5.6 *Negative Cycles

5.7 Topological Sort

```

1 vi topo;
2 vvi graph(V+1,vi());
3 vector<bool> visited(V+1,false);
4 function<void(int)> dfs = [&](int u) -> void {
5     visited[u] = true;
6     for(int v : graph[u])
7         if( ! visited[v] )
8             dfs(v);
9     topo.pb(u);
10 };
11 function<void()> topological_sort = [&]() -> void {
12     for(int i = 1; i <= V; i++)
13         if( ! visited[i] )
14             dfs(i);
15     reverse(all(topo));
16 };
17 topological_sort();
18 for(int i = 0; i < V; i++) cout << topo[i] << " ";

```

Listing 34: Recursive toposort implementation for unweighted DAG through vvi with DFS with inverted postorder. Runs in $O(|V| + |E|)$.

```

1 vi indegree(V+1,0);
2 vvi graph(V+1,vi());
3 vector<bool> visited(V+1,false);
4 fori(i,0,E) {
5     graph[u].pb(v);
6     indegree[v]++;
7 }
8 function<vi()> topological_sort = [&]() -> vi {
9     vi order, deg = indegree; // copy
10    queue<int> q;
11    for(int i = 1; i <= V; i++)
12        if( deg[i] == 0 )
13            q.push(i);
14    while( ! q.empty() ) {
15        int u = q.front(); q.pop();
16        order.pb(u);
17        for(int v : graph[u]) {
18            deg[v]--;
19            if(deg[v] == 0)
20                q.push(v);
21        }
22    }
23    return order;
24 };
25 vi topo = topological_sort();
26 if( (int)(topo.size()) != V ) cout << "IMPOSSIBLE"
    << endl;

```

Listing 35: Kahn's Algorithm for Topological Sorting using BFS and indegree vertex analysis (nodes in a cycle will never have indegree zero). Works over unweighted directed graphs containing cycles through vvi. Runs in $O(|V| + |E|)$.

5.8 Disjoint Set Union (DSU)

```

1 class DisjointSets {
2 private:
3     vector<int> parents;
4 public:
5     vector<int> sizes;
6     DisjointSets(int size) : parents(size), sizes(size
7         , 1) {
8         for (int i = 0; i < size; i++) { parents[i] = i;
9         }
10    /** @return the "representative" node in x's
11        component */
12    int find( int x ) {
13        return parents[x] == x ? x : ( parents[x] =
14        find( parents[x] ) );
15    }
16    /** @return whether the merge changed connectivity
17        */
18    bool unite( int x, int y ) {
19        int x_root = find(x);
20        int y_root = find(y);

```

```

21        if (x_root == y_root) return false;
22        if ( sizes[x_root] < sizes[y_root] ) swap(x_root
23        ,y_root);
24        sizes[x_root] += sizes[y_root];
25        parents[y_root] = x_root;
26        return true;
27    }
28    /** @return whether x and y are in the same
29        connected component */
30    bool connected( int x, int y ){
31        return find(x) == find(y);
32    }
33    void printLists() {
34        cout << "Printing parents..." << endl;
35        for(auto i : parents)
36            cout << i << " ";
37        cout << endl << "Printing sizes..." << endl;
38        for(auto i : sizes )
39            cout << i << " ";
40    }
41 };
42 DisjointSets dsu( V );
43 int number_of_components = V, largest_component = 1;
44 if( dsu.unite(x, y) ) {
45     largest_component = max( largest_component, dsu.
46     sizes[ dsu.find( x ) ] );
47     number_of_components--;
48 }

```

Listing 36: Template and usage of DSU with path compression. Complexity of $O(m \alpha(n))$ for a sequence of m operations over n elements. Where α denotes Ackerman function, where $\alpha(n) \leq 4, \forall n \leq 10^{18}$. Practically $O(1)$.

5.9 Strongly Connected Components (SCC)

5.9.1 Kosaraju's Algorithm

```

1 vvi adj(V+1,vi()), condensed, components;
2 vector<bool> visited;
3 function<void(int,const vvi&,vi&)> dfs = [&](int u,
    vvi const& g, vi& output) -> void {
4     visited[u] = true;
5     for(int v : g[u])
6         if( ! visited[v] )
7             dfs(v,g,output);
8     output.push_back(u);
9 };
10 function<void()> kosaraju = [&]() -> void {
11     vvi adj_t(V+1);
12     vi order, roots(V+1,0);
13     visited.assign(V+1,false);
14     condensed.assign(V+1,vi());
15     for(int v = 1; v <= V; v++)
16         for(int u : adj[v])
17             adj_t[u].push_back(v);
18     for(int i = 1; i < V; i++)
19         if( !visited[i] )

```

```

20     dfs(i,adj,order);
21     visited.assign(V+1,false);
22     reverse(order.begin(), order.end());
23     for(int v : order) {
24         if( !visited[v] ) {
25             vi component;
26             dfs(v,adj_t,component);
27             components.push_back(component);
28             int root = *component.begin();
29             for(int u : component)
30                 roots[u] = root;
31         }
32     }
33     for(int v = 0; v < V; v++)
34         for(int u : adj[v])
35             if( roots[u] != roots[v] )
36                 condensed[ roots[v] ].push_back( roots[u] );
37 };
38 kosaraju();

```

Listing 37: Template for implementing Kosaraju's and obtaining the condensed graph, and list of components for 1-indexed adjacency list. Runs in $O(|V| + |E|)$.

5.9.2 *Tarjan's Algorithm

5.10 2-SAT

```

1 struct TwoSatSolver {
2     int n_vars;
3     int n_vertices;

```

```
4     vector<vector<int>> adj, adj_t;
5     vector<bool> used;
6     vector<int> order, comp;
7     vector<bool> assignment;
8
9     TwoSatSolver(int _n_vars) : n_vars(_n_vars),
n_vertices(2 * n_vars), adj(n_vertices), adj_t(
n_vertices), used(n_vertices), order(), comp(
n_vertices, -1), assignment(n_vars) {
10         order.reserve(n_vertices);
11     }
12     void dfs1(int v) {
13         used[v] = true;
14         for (int u : adj[v]) {
15             if (!used[u])
16                 dfs1(u);
17         }
18         order.push_back(v);
19     }
20
21     void dfs2(int v, int cl) {
22         comp[v] = cl;
23         for (int u : adj_t[v]) {
24             if (comp[u] == -1)
25                 dfs2(u, cl);
26         }
27     }
28
```

```
29     bool solve_2SAT() {
30         order.clear();
31         used.assign(n_vertices, false);
32         for (int i = 0; i < n_vertices; ++i) {
33             if (!used[i])
34                 dfs1(i);
35         }
36
37         comp.assign(n_vertices, -1);
38         for (int i = 0, j = 0; i < n_vertices; ++i)
39         {
40             int v = order[n_vertices - i - 1];
41             if (comp[v] == -1)
42                 dfs2(v, j++);
43         }
44
45         assignment.assign(n_vars, false);
46         for (int i = 0; i < n_vertices; i += 2) {
47             if (comp[i] == comp[i + 1])
48                 return false;
49             assignment[i / 2] = comp[i] > comp[i +
50 1];
51         }
52         return true;
53     }
54
55     void add_disjunction(int a, bool na, int b, bool
56 nb) {
```

```

54     // na and nb signify whether a and b are to
    be negated
55     a = 2 * a ^ na;
56     b = 2 * b ^ nb;
57     int neg_a = a ^ 1;
58     int neg_b = b ^ 1;
59     adj[neg_a].push_back(b);
60     adj[neg_b].push_back(a);
61     adj_t[b].push_back(neg_a);
62     adj_t[a].push_back(neg_b);
63 }
64
65 static void example_usage() {
66     TwoSatSolver solver(3); // a, b, c
67     solver.add_disjunction(0, false, 1, true);
68     // a v not b
69     solver.add_disjunction(0, true, 1, true);
70     // not a v not b
71     solver.add_disjunction(1, false, 2, false);
72     // b v c
73     solver.add_disjunction(0, false, 0, false);
74     // a v a
75     assert(solver.solve_2SAT() == true);
76     auto expected = vector<bool>(True, False,
77     True);
78     assert(solver.assignment == expected);
79 }
80 };

```

Listing 38: 2-SAT implementation from `cp-algorithms.com`. Each component added is a expression of the form $a \vee b$, which is equivalent to $\neg a \Rightarrow b \wedge \neg b \Rightarrow a$ (if one of the variables is false, then the other one must be true). A directed graph is constructed based on these implication: For each x , there's two vertices v_x and $v_{\neg x}$. If there is an edge $a \Rightarrow b$, then there also is an edge $\neg b \Rightarrow \neg a$. For any x , if x is reachable from $\neg x$ and $\neg x$ is reachable from x , the problem has no solution. This means, each variable must be in a different SCC than their negative. This is verified by the method `solve_2SAT()`, which returns a boolean: `True` if it has a solution and `False` if it doesn't.

Giant Pizza How does a particular 2-SAT problem look like? Following is the statement for the problem CSES 1684 (Giant Pizza):

Uolevi's family is going to order a large pizza and eat it together. A total of n family members will join the order, and there are m possible toppings. The pizza may have any number of toppings. Each family member gives two wishes concerning the toppings of the pizza. The wishes are of the form "topping x is good/bad". Your task is to choose the toppings so that at least one wish from everybody becomes true (a good topping is included in the pizza or a bad topping is not included).

Input

The first input line has two integers n and m : the number of family members and toppings. The toppings are numbered $1, 2, \dots, m$. After this, there are n lines describing the wishes. Each line has two wishes of the form " $+$ x " (topping x is good) or " $-$ x " (topping x is bad).

Output

Print a line with m symbols: for each topping " $+$ " if it is included and " $-$ " if it is not included. You can print any valid solution. If there are no valid solutions, print "IMPOSSIBLE".

```

1 int main(){
2     fastIO();
3     int n = nxt(), m = nxt();
4     TwoSatSolver TwoSat(m);
5
6     fori(i, 0, n){
7         char type1, type2;
8         int top1, top2;
9         cin >> type1 >> top1 >> type2 >> top2;
10
11         top1--; top2--;
12         TwoSat.add_disjunction(top1, type1 == '-',
13                                top2, type2 == '-');
14
15         if(TwoSat.solve_2SAT()){
16             fori(i, 0, m){
17                 if(TwoSat.assignment[i])
18                     cout << "+ ";
19                 else
20                     cout << "- ";
21             }
22         }
23         else cout << "IMPOSSIBLE";
24         return 0;
25 }

```

Listing 39: Main method for solving CSES 1684 Giant Pizza using 2-SAT template.

5.11 *Bridges and point articulation

5.12 Flood Fill

```

1 vector<string> grid(n);
2 vii dirs = {{0,1},{0,-1},{1,0},{-1,0}};
3 ii start;
4 int arns = 0;
5 function<void(int,int)> traverse = [&](int i, int j)
6     -> void {
7     if( grid[i][j] == '#' ) return;
8     int newI, newJ;
9     if( grid[i][j] != '.' ) arns += grid[i][j] - '0';
10    grid[i][j] = '#';
11    for( ii move : dirs ) {
12        newI = i + move.fi; newJ = j + move.se;
13        if( newI >= 0 && newI < n && newJ >= 0 && newJ <
14            m && grid[newI][newJ] == 'T' )
15            return;
16    }
17    for( ii move : dirs ) {
18        newI = i + move.fi; newJ = j + move.se;
19        if( newI >= 0 && newI < n && newJ >= 0 && newJ <
20            m )
21            traverse(newI, newJ);
22    }
23 }
24 fori(i,0,n)
25     cin >> grid[i];

```

```

23 fori(i,0,n) {
24     fori(j,0,m) {
25         if( grid[i][j] == 'S' ) {
26             grid[i][j] = '.';
27             start.fi = i;
28             start.se = j;
29         }
30     }
31 }
32 traverse(start.fi, start.se);
33 cout << arns << endl;

```

Listing 40: Traverse a matrix of 'n' x 'm' on grid representation. The matrix is composed of '.' for a valid space (empty), '#' for a wall, 'T' for a trap, and a number for a treasure. This implementation takes the sum of every treasure in the maze. The condition for moving to the next location is that there are no Traps nearby (up, down, left, right), so the player will never be killed while traversing. It also implements a way to read numerous test cases, but without knowing beforehand how many there are. Runs in $O(n \cdot m)$. Originally used on the problem *Treasures* from 2024-2025 ICPC Bolivia Pre-National Contest.

5.13 Lava Flow (Multi-source BFS)

```

1 typedef array<int,3> iii;
2
3 vii dirs = {{1,0},{0,1},{-1,0},{0,-1}};
4 map<int,string> path = {{0,"D"},{1,"R"},{2,"U"},{3,"
    L"}}};
5 int n, m;

```

```

6 string arns = "";
7 bool escaped = false;
8 cin >> n >> m;
9 vector<string> grid(n);
10 vvi times(n,vi(m,INF)), prev(n,vi(m,-1));
11 vector<vector<bool>> visited(n,vector<bool>(m,false)
    );
12 queue<iii> q;
13 ii start, end;
14 for(int i = 0; i < n; i++) {
15     cin >> grid[i];
16     for(int j = 0; j < m; j++) {
17         if( grid[i][j] == 'M' ) {
18             q.push({i,j,0});
19             times[i][j] = 0;
20         }
21         else if( grid[i][j] == 'A' )
22             start = {i,j};
23     }
24 }
25 function<bool(int,int)> valid = [&](int I, int J) ->
    bool {
26     return (I >= 0) and (I < n) and (J >= 0) and (J <
        m) and (grid[I][J] != '#') and (times[I][J] ==
        INF);
27 };
28 function<bool(int,int)> valid_player = [&](int I,
    int J) -> bool {

```

```
29     return (I >= 0) and (I < n) and (J >= 0) and (J <
30         m) and (!visited[I][J]) and (grid[I][J] != '#');
31 };
32 function<bool(int,int)> is_border = [&](int I, int J
33     ) -> bool {
34     return I == 0 || I == n-1 || J == 0 || J == m-1;
35 };
36 // Corner cases
37 if( is_border(start.fi,start.se) ) {
38     cout << "YES" << endl << "0" << endl;
39     return 0;
40 }
41 // Multi-Source BFS
42 while( ! q.empty() ) {
43     iii u = q.front();
44     q.pop();
45     for(ii dir : dirs) {
46         int newI = u[0] + dir.fi;
47         int newJ = u[1] + dir.se;
48         int w = u[2] + 1;
49         if( valid(newI,newJ) ) {
50             times[newI][newJ] = w;
51             q.push({newI,newJ,w});
52         }
53     }
54 }
55 // Player BFS
56 q.push({start.fi,start.se,0});
57
58 visited[start.fi][start.se] = true;
59 while( ! q.empty() and !escaped ) {
60     iii u = q.front();
61     q.pop();
62     for(int i = 0; i < 4; i++) {
63         int newI = u[0] + dirs[i].fi;
64         int newJ = u[1] + dirs[i].se;
65         int w = u[2] + 1;
66         if( valid_player(newI,newJ) and w < times[newI][
67             newJ] ) {
68             visited[newI][newJ] = true;
69             prev[newI][newJ] = i;
70             q.push({newI,newJ,w});
71             if( is_border(newI,newJ) ) {
72                 end.fi = newI;
73                 end.se = newJ;
74                 escaped = true;
75                 break;
76             }
77         }
78     }
79 }
80 if( !escaped ) {
81     cout << "NO" << endl;
82     return 0;
83 }
84 // Path reconstruction
85 cout << "YES" << endl;
```



```

82 int i = end.fi;
83 int j = end.se;
84 while( prev[i][j] != -1 ) {
85     int oldI = i;
86     arns += path[ prev[i][j] ];
87     i -= dirs[prev[i][j]].fi;
88     j -= dirs[prev[oldI][j]].se;
89 }
90 reverse(all(arns));
91 cout << sz(arns) << endl << arns << endl;

```

Listing 41: Classic Lava Flow problem implementation, where the timer from the starting point A needs to be less than every other in the MS-BFS starting in M places. Once one edge is reached, the path is reconstructed from the output. Runs in BFS complexity $O(|V| + |E|)$. Originally used in the CSES problem *Monsters*.

5.14 MaxFlow

5.14.1 Dinic's Algorithm

```

1  const ll INF = 1e17;
2  /**
3   * @brief Represents a directed edge in a flow
      network.
4   * @details Stores the edge's source, destination,
      capacity, and current flow.
5   *          Used in max-flow algorithms like Dinic
      or Ford-Fulkerson. */
6  struct flowEdge {
7      int u; // Source node

```

```

8      int v; // Destination node
9      ll cap; // Maximum flow capacity of the edge
10     ll flow = 0; // Current flow through the edge (
        initially 0)
11     flowEdge( int u, int v, ll cap ) : u(u), v(v), cap
        (cap) {};
12 };
13 /**
14  * @brief Implementation of Dinic's max-flow
        algorithm.
15  * @details Manages a flow network with BFS (Level
        Graph) and DFS (Blocking Flow) optimizations. */
16 struct Dinic {
17     vector<flowEdge> edges; // All edges in the flow
        network (including reverse edges)
18     vector<vi> adj;
19     int n; // Total number of nodes in the graph
20     int s; // Source node
21     int t; // Sink node (destination of flow)
22     int id = 0; // Counter for edge indexing
23     vi level; // Stores the level (distance from 's')
        of each node during BFS
24     vi next; // Optimization for DFS: tracks the next
        edge to explore for each node
25     queue<int> q; // Queue for BFS traversal
26     /**
27      * @brief Constructs a Dinic solver for a flow
        network.

```

```

28     * @param n Number of nodes.
29     * @param s Source node.
30     * @param t Sink node. */
31 Dinic( int n, int s, int t ) : n(n), s(s), t(t) {
32     adj.resize(n); // Initialize adjacency list for
    'n' nodes.
33     level.resize(n); // Prepare level array for BFS.
34     next.resize(n); // Prepare next-edge array for
    DFS.
35     fill(all(level),-1); // Mark all levels as
    unvisited (-1).
36     level[s] = 0; // The source has level 0.
37     q.push(s); // Start BFS from the source.
38 }
39 /**
40  * @brief Adds a directed edge and its residual
    reverse edge to the flow network. */
41 void addEdge( int u, int v, ll cap ) {
42     edges.emplace_back(u,v,cap); // Original edge: u
    -> v
43     edges.emplace_back(v,u,0); // Residual edge: v
    -> u
44     adj[u].pb(id++);
45     adj[v].pb(id++);
46 }
47 /**
48  * @brief Performs BFS to construct the level
    graph (Layered Network) from source 's' to sink '
    t'.
49     * @details Assigns levels (minimum distances
    from 's') to all nodes and checks if 't' is
    reachable.
50     * Levels are used to guide the DFS
    phase in Dinic's algorithm.
51     * @return bool True if the sink 't' is reachable
    (i.e., there exists an augmenting path), false
    otherwise. */
52 bool bfs() {
53     while( ! q.empty() ) {
54         int curr = q.front();
55         q.pop();
56         for( auto e : adj[curr] ) {
57             if( edges[e].cap - edges[e].flow < 1 ) //
    Skip saturated edges (no residual capacity).
58                 continue;
59             if( level[ edges[e].v ] != -1 ) // Skip
    already visited nodes (level assigned).
60                 continue;
61             // Assign level to the neighbor node.
62             level[ edges[e].v ] = level[ edges[e].u ] +
    1; // Next level = current + 1.
63             q.push( edges[e].v ); // Add neighbor to the
    queue for further BFS.
64         }
65     }

```

```

66     return level[t] != -1; // Return whether the
        sink 't' was reached (level[t] != -1).
67 }
68 /**
69  * @brief Finds a blocking flow using DFS in the
        level graph constructed by BFS.
70  * @param u Current node being processed.
71  * @param flow Maximum flow that can be sent from
        'u' to the sink 't'.
72  * @return ll The amount of flow successfully
        sent to 't'. */
73 ll dfs( int u, ll flow ) {
74     if( flow == 0 ) // No remaining flow to send.
75         return 0;
76     if( u == t )    // Reached the sink; return
        accumulated flow.
77         return flow;
78     // Explore edges from 'u' using 'next[u]' to
        avoid revisiting processed edges.
79     for( int& cid = next[u]; cid < sz(adj[u]); cid++
        ) {
80         int e = adj[u][cid]; // Index of the edge in '
        edges'.
81         int v = edges[e].v;  // Destination node of
        the edge.
82         // Skip invalid edges:
83         // 1. Not in the level graph (level[u] + 1 !=
        level[v]). Just edges in exactly one leve ahead (
        ensures shortest paths).
84         // 2. No residual capacity (cap - flow < 1).
85         if( level[edges[e].u] + 1 != level[v] || edges
        [e].cap - edges[e].flow < 1 )
86             continue;
87         ll f = dfs( v, min(flow, edges[e].cap - edges[
        e].flow ) ); // Recursively send flow to 'v'.
88         if( f == 0 ) // No flow could be sent via this
        edge.
89             continue;
90         // Update residual capacities:
91         edges[e].flow += f;          // Increase flow in
        the original edge.
92         edges[ e ^ 1 ].flow -= f; // Decrease flow in
        the reverse edge. (All reverse edges have
        distinct parity)
93         return f;                  // Return the flow
        sent.
94     }
95     return 0; // No augmenting path found from 'u'.
96 }
97 /**
98  * @brief Computes the maximum flow from source '
        s' to sink 't' using Dinic's algorithm.
99  * @details Iterates through BFS and DFS phases
        to find the maximum flow.
100         Accumulates flow while there exists
        augmentation paths in the residual graph.

```

```

101     Restart auxiliary structures for every new
      phase.
102     * @return ll The maximum flow value. */
103 ll maxFlow() {
104     ll flow = 0; // Tracks the total flow sent.
105     while( bfs() ) { // While there are augmenting
      paths:
106         fill(all(next),0); // Reset 'next' for DFS.
107         for( ll f = dfs(s,INF); f != 0ll; f = dfs(s,
      INF) ) // Send blocking flow in the level graph:
108             flow += f;
109         // Reset for next BFS phase:
110         fill(all(level),-1);
111         level[s] = 0;
112         q.push(s);
113     }
114     return flow;
115 }
116 /**
117     * @brief Finds edges belonging to the minimum
      cut after maxFlow().
118     * @details First, it marks all the reachable
      nodes from 's' with an augmentation path after
      obtained the max flow
119         and all the saturated edges coming out from
      any of the nodes who belong to the min-cut.
120     For 'minCut()' to work, 'maxFlow()' must be
      first executed to get the min-cut.

```

```

121     If only is needed the value, is enough
      returning the value of 'maxFlow()'.
122     * @return vii List of edges (u, v) in the min-
      cut. Its size is the minimum number of 'roads' to
      close. */
123 vii minCut() {
124     vii ans;
125     fill(all(level),-1); // Reset levels.
126     level[s] = 0;          // Mark source as reachable
      .
127     q.push(s);
128     while( ! q.empty() ) { // BFS to mark nodes
      reachable from 's' in the residual graph.
129         int curr = q.front();
130         q.pop();
131         for( int id = 0; id < sz(adj[curr]); id++ ) {
      // For every edge going out from 'curr'.
132             int e = adj[curr][id];
133             // If 'v' is has not been visited yet, and
      the edge have residual capacity.
134             if( level[edges[e].v] == -1 && edges[e].cap
      - edges[e].flow > 0 ) {
135                 q.push(edges[e].v);
136                 level[edges[e].v] = level[edges[e].u] + 1;
137             }
138         }
139     }
140     for( int i = 0; i < sz(level); i++ ) {

```

```

141     if( level[i] != -1 ) {
142         for( int id = 0; id < sz(adj[i]); id++ ) {
143             int e = adj[i][id];
144             if( level[edges[e].v] == -1 && edges[e].
cap - edges[e].flow == 0 )
145                 ans.emplace_back(edges[e].u,edges[e].v);
146         }
147     }
148 }
149 return ans;
150 }
151 /**
152  * @brief Reconstructs the maximum bipartite
matching after running 'maxFlow()'.
153  * @details Every edge that belong to the
original graph and have flow greater than zero,
belongs to the matching.
154     For 'maximumMatching()' to work, 'maxFlow()'
'.
155  * @return vii List of matched pairs (boy, girl).
*/
156 vii maximumMatching() {
157     vii ans;
158     fill(all(level),-1); // Reset levels.
159     level[s] = 0;        // Mark source as reachable
.
160     q.push(s);

```

```

161     while( ! q.empty() ) { // BFS to mark nodes
reachable via saturated edges with flow greater
than zero.
162         int curr = q.front();
163         q.pop();
164         for( int id = 0; id < sz(adj[curr]); id++ ) {
165             int e = adj[curr][id];
166             // If 'v' has not been visited yet, the edge
is saturated and have flow greater than zero.
167             if( level[edges[e].v] == -1 && edges[e].cap
- edges[e].flow == 0 && edges[e].flow != 0ll ) {
168                 q.push(edges[e].v);
169                 level[edges[e].v] = level[edges[e].u] + 1;
170             }
171         }
172     }
173     for( int i = 0; i < sz(level); i++ ) { //
Collect original edges (boy -> girl) that are
saturated and have flow > 0.
174         if( level[i] != -1 ) {
175             for( int id = 0; id < sz(adj[i]); id++ ) {
176                 int e = adj[i][id];
177                 if( edges[e].u != s && edges[e].v != t
&& edges[e].cap - edges[e].flow == 0 && edges[e].
flow != 0ll )
178                     ans.emplace_back(edges[e].u,edges[e].v
);
179             }

```

```

180     }
181 }
182 return ans;
183 }
184 };

```

Listing 42: Commented template for solving MaxFlow problems with Dinic's algorithm. Works in complexity $O(|V|^2 \times |E|)$. In bipartite graphs and graphs with unitary max capacity the complexity turns $O(|E| \times \sqrt{|V|})$.

Download Speed How does a particular flow problem looks like? Following is the statement for the problem CSES 1694 (Download Speed):

Consider a network consisting of n computers and m connections. Each connection specifies how fast a computer can send data to another computer.

Kotivalo wants to download some data from a server. What is the maximum speed he can do this, using the connections in the network?

Input

The first input line has two integers n and m : the number of computers and connections. The computers are numbered $1, 2, \dots, n$. Computer 1 is the server and computer n is Kotivalo's computer.

After this, there are m lines describing the connections. Each line has three integers a , b , and c : computer a can send data to computer b at speed c .

Output

Print one integer: the maximum speed Kotivalo can download data.

```

1 int main() {
2     fastIO();
3     int n, m, u, v, w;
4     cin >> n >> m;

```

```

5     Dinic flow(n+1,1,n); // size n+1 to fix 0-
indexed indexes, 1 is the source (server), 'n' is
the sink (Kotivalo)
6     for(i,0,m) {
7         cin >> u >> v >> w;
8         flow.addEdge(u,v,w);
9     }
10    cout << flow.maxFlow() << endl;
11    return 0;
12 }

```

Listing 43: Main method for solving CSES 1697 Download Speed using MaxFlow template.

Police Chase Max Flow-Min Cut Theorem: MaxFlow = MinCut.

Following is the statement for the problem CSES 1695 (Police Chase):

Kaaleppi has just robbed a bank and is now heading to the harbor. However, the police wants to stop him by closing some streets of the city.

What is the minimum number of streets that should be closed so that there is no route between the bank and the harbor?

Input

The first input line has two integers n and m : the number of crossings and streets. The crossings are numbered $1, 2, \dots, n$. The bank is located at crossing 1, and the harbor is located at crossing n .

After this, there are m lines that describing the streets. Each line has two integers a and b : there is a street between crossings a and b . All streets are two-way streets, and there is at most one street between two crossings.

Output

First print an integer k : the minimum number of streets that should be closed. After this, print k lines describing the streets. You can print any valid solution.

```

1 int main() {
2     fastIO();
3     int n, m, u, v;
4     vii minCut;
5     cin >> n >> m;
6     Dinic flow(n+1,1,n); // size n+1 to fix 0-
// indexed indexes, 1 is the source (bank), 'n' is
// the sink (harbor)
7     fori(i,0,m) {
8         cin >> u >> v;
9         flow.addEdge(u,v,1);
10        flow.addEdge(v,u,1);
11    }
12    flow.maxFlow();
13    minCut = flow.minCut();
14    cout << (sz(minCut)/2) << endl;
15    for(int i = 0; i < sz(minCut); i += 2)
16        cout << minCut[i].fi << " " << minCut[i].se
<< endl;
17    return 0;
18 }

```

Listing 44: Main method for solving CSES 1695 Police Chase using MaxFlow template.

School Dance MaxFlow = MinCut = MaxMatching.

Following is the statement for the problem CSES 1696 (School Dance):

There are n boys and m girls in a school. Next week a school dance will be organized. A dance pair consists of a boy and a girl, and there are k potential pairs.

Your task is to find out the maximum number of dance pairs and show how this number can be achieved.

Input

The first input line has three integers n , m and k : the number of boys, girls, and potential pairs. The boys are numbered $1, 2, \dots, n$, and the girls are numbered $1, 2, \dots, m$.

After this, there are k lines describing the potential pairs. Each line has two integers a and b : boy a and girl b are willing to dance together.

Output

First print one integer r : the maximum number of dance pairs. After this, print r lines describing the pairs. You can print any valid solution.

```

1 int main() {
2     fastIO();
3     int n, m, k, a, b;
4     ll maxPairs;
5     vii pairs;
6     cin >> n >> m >> k;
7     Dinic flow(n+m+2,0,n+m+1);
8     fori(boy,0,n+1)
9         flow.addEdge(0,boy,1);
10    fori(girl,n+1,n+m+1)
11        flow.addEdge(girl,n+m+1,1);
12    fori(i,0,k) {
13        cin >> a >> b;
14        flow.addEdge(a,n+b,1);
15    }

```

```

16     maxPairs = flow.maxFlow();
17     pairs = flow.maximumMatching();
18     cout << maxPairs << endl;
19     for(i,0,sz(pairs))
20         cout << pairs[i].fi << " " << (pairs[i].se -
21         n) << endl;;
22     return 0;
23 }

```

Listing 45: Main method for solving CSES 1696 School Dancing using MaxFlow template.

5.14.2 *Ford-Fulkerson Algorithm

5.14.3 *Goldber-Tarjan Algorithm

6 Trees

6.1 Counting Childrens

```

1 vi childrens(n+1,0);
2 vvi graph(n+1);
3 vector<bool> visited(n+1, false);
4 for(i,2,n+1) {
5     cin >> tmp;
6     graph[tmp].pb(i);
7     graph[i].pb(tmp);
8 }
9 function<int(int)> dfs = [&](int u) -> int {
10     visited[u] = true;
11     for(int v : graph[u]) {

```

```

12         if( !visited[v] )
13             childrens[u] += dfs(v);
14     }
15     return childrens[u] + 1;
16 };
17 dfs(1);

```

Listing 46: Algorithm that counts how many childrens does every node have, from 2..n in a rooted tree (root = 1).

6.2 Tree Diameter

```

1 vector<vector<int>> adj(V+1,vector<int>());
2 int diameter = 0;
3 function<int(int,int)> dfs = [&](int u, int p) ->
4     int {
5     int mxDepth1 = -1, mxDepth2 = -1;
6     for(int v : adj[u]) {
7         if( v == p ) continue;
8         int depth = dfs( v, u );
9         if( depth > mxDepth1 ) {
10             mxDepth2 = mxDepth1;
11             mxDepth1 = depth;
12         }
13         else if( depth > mxDepth2 )
14             mxDepth2 = depth;
15     }
16     if( mxDepth1 != -1 and mxDepth2 != -1 )

```



```

16     diameter = max(diameter, mxDepth1 + mxDepth2 + 2)
17     ;
18     if( mxDepth1 != -1 )
19         diameter = max(diameter, mxDepth1 + 1);
20     return mxDepth1 + 1;
21 };
22 dfs(1,0);

```

Listing 47: Calculates the length of Tree Diameter using a DP approach. Runs in $O(|V|)$.

```

1 vector<vector<int>> adj(V+1,vector<int>());
2 int diameter = 0, farthest = 1;
3 function<void(int,int,int)> dfs = [&](int u, int p,
4     int dist) -> void {
5     if( dist > diameter ) {
6         farthest = u;
7         diameter = dist;
8     }
9     for( int v : adj[u] ) {
10         if( v == p ) continue;
11         dfs(v,u,dist+1);
12     }
13 };
14 dfs(1,0,0);
15 diameter = 0;
16 dfs(farthest,0,0);

```

Listing 48: Calculates the length of Tree Diameter using the double DFS method. Runs in $O(|V|)$.

6.3 *Centroid Decomposition

6.4 Euler Tour

```

1 int timer = 0;
2 // Queries on subtree range [in,out)
3 function<void(int,int)> euler_tour = [&](int u, int
4     p) -> void {
5     in[u] = timer++;
6     for(int v : adj[u])
7         if( v != p )
8             euler_tour(v,u);
9     out[u] = timer;
10 };
11 euler_tour(1,0);
12 //==== Queries with Fenwick Tree
13 BIT<ll> bit(V);
14 for(int u = 1; u <= V; u++) bit.update(in[u]+1,v[u])
15     ;
16 // Update 'node' to 'val' (set operation)
17 bit.update(in[node]+1,val-v[node]);
18 v[node] = val;
19 // Query (ET is 0-idx, but BIT 1-idx)
20 cout << bit.query(in[node]+1,out[node]) << endl;
21 //==== Queries with Segment Tree

```

```

20 vll flat(V+1);
21 for(int i = 1; i <= V; i++)
22     flat[ in[i] ] = v[i];
23 Segment_tree st(V);
24 st.build(flat,1,0,V-1);
25 st.update(1,in[node],0,V-1,val);
26 st.query(1,in[node],out[node]-1,0,V-1);

```

Listing 49: Euler Tour implementation, runs in $O(|V| + |E|)$. Works with an 1-indexed logic, but the time mapping is 0-indexed. Brings necessary logic to work with BIT and ST templates.

6.5 *Lowest Common Ancestor (LCA)

6.6 *Heavy-Light Decomposition (HLD)

7 Strings

7.1 Knuth-Morris-Pratt Algorithm (KMP)

```

1 // Longest Prefix-Suffix
2 vi compute_LPS(string s) {
3     size_t len = 0, i = 1, sz = s.size();
4     vi lps(sz,0);
5     while( i < sz ) {
6         if( s[i] == s[len] )
7             lps[i++] = ++len;
8         else
9             if( len != 0 )
10                 len = lps[len-1];
11         else

```

```

12             lps[i++] = 0;
13     }
14     return lps;
15 }
16 // Get number of occurrences of a pattern p in a
17 // string s
18 int kmp(string s, string p) {
19     size_t n = s.size(), m = p.size();
20     if( m == 0 ) return 0; // empty pattern:
21     // convention, 0 occurrences
22     vi lps = compute_LPS(p);
23     size_t i = 0, j = 0;
24     int cnt = 0;
25     while( i < n ) {
26         if( p[j] == s[i] ) {
27             j++; i++;
28         }
29         if( j == m ) { // Full match
30             cnt++;
31             j = lps[ j - 1 ];
32         }
33         else if( i < n and p[j] != s[i] ) { // Mismatch
34             // after j matches
35             if( j != 0 )
36                 j = lps[ j - 1 ];
37             else
38                 i++;
39         }
40     }
41     return cnt;
42 }

```

```

37     }
38     return cnt;
39 }

```

Listing 50: KMP algorithm for counting how many times a pattern appear into a string. Runs in $O(n + m)$.

7.2 *Suffix Array

7.3 *Rolling Hashing

7.4 *Z Function

7.5 *Aho-Corasick Algorithm

8 Dynamic Programming

8.1 *Coins

8.2 *Longest Increasing Subsequence (LIS)

8.3 Edit Distance

```

1 int EditDistance(string word1, string word2) {
2     int n = word1.length();
3     int m = word2.length();
4
5     // dp[i][j] = costo para convertir los primeros
    'i' chars de word1
6     // en los primeros 'j' chars de word2.
7     vector<vector<int>> dp(n + 1, vector<int>(m + 1)
8 );
9
10    // Casos base: Llenar la primera fila y columna

```

```

10    for (int i = 0; i <= n; ++i) {
11        dp[i][0] = i; // Costo de 'i' eliminaciones
12    }
13    for (int j = 0; j <= m; ++j) {
14        dp[0][j] = j; // Costo de 'j' inserciones
15    }
16
17    // Llenar el resto de la tabla
18    for (int i = 1; i <= n; ++i) {
19        for (int j = 1; j <= m; ++j) {
20            // Se usa i-1 y j-1 porque los strings
            son 0-indexados
21            if (word1[i - 1] == word2[j - 1]) {
22                // Si los caracteres coinciden, no
                hay costo adicional
23                dp[i][j] = dp[i - 1][j - 1];
24            } else {
25                // Costo de 1 + el mínimo de las 3
                operaciones
26                dp[i][j] = 1 + min({dp[i - 1][j -
27                    1], // Reemplazar
28                        dp[i - 1][j],
29                        // Eliminar
30                        dp[i][j - 1]});
31                // Insertar
32            }
33        }
34    }
35 }

```

```

32
33     // La respuesta final está en la esquina
    inferior derecha
34     return dp[n][m];
35 }

```

Listing 51: Dynamic Programming Edit Distance Implementation

8.4 *Knapsack

8.5 *SOS DP

8.6 *Digit DP

8.7 *Bitmask DP

9 Mathematics

9.1 Number Theory

9.1.1 Greatest Common Divisor (GCD)

```

1 int gcd(int a, int b) {
2     if (a == 0) return b;
3     if (b == 0) return a;
4     if (a == b) return a;
5     if (a > b)
6         return gcd(a - b, b);
7     return gcd(a, b - a);
8 }

```

Listing 52: Implementation of handmade GCD, because using gcd() runs slow with long long, also __gcd().

9.1.2 Gauss Sum

The sum of the first n natural numbers in $O(1)$.

$$S = \frac{n(n+1)}{2} \quad (1)$$

$$n = \sqrt{2S + \frac{1}{4}} - \frac{1}{2} \quad (2)$$

```

1 int S = (1LL * n * (1LL * n + 1LL)) / 2;
2 int n = (int)( sqrt( 2 * S + 0.25 ) - 0.5 )

```

Listing 53: Implementation of the Gauss Sum.

9.1.3 Fermat's Little Theorem

$$a^{-1} \equiv 1 \pmod{p} \quad \forall p \text{ primo}, (a, p) = 1$$

$$a^{p-2} \cdot a = 1$$

$$\Rightarrow a^{-1} \equiv a^{p-2} \pmod{p}$$

9.1.4 Modulo Inverse

```

1 const int MOD = 1e9+7;
2 int binpow( long long a, long long b ) { // a^b
3     long long sol = 1;
4     a %= MOD;
5     while( b > 0 ) {
6         if( b & 1 )
7             sol = ( 1LL * sol * a ) % MOD;
8         a = ( 1LL * a * a ) % MOD;
9         b >>= 1;
10    }

```

```

11     return sol % MOD;
12 }
13 int inv(int a) {
14     return bnpow(a, MOD-2);
15 }

```

Listing 54: Computes $a^{-1}(m)$ in $O(\log(MOD))$.

9.1.5 *Chinese Remainder Theorem

9.1.6 Bnpow

```

1  const int MOD = 1e9+7;
2  int bnpow( long long a, long long b ) { // a^b
3      long long sol = 1;
4      a %= MOD;
5      while( b > 0 ) {
6          if( b & 1 )
7              sol = ( 1LL * sol * a ) % MOD;
8          a = ( 1LL * a * a ) % MOD;
9          b >>= 1;
10     }
11     return sol % MOD;
12 }

```

Listing 55: Applying binary exponentiation to a problem requiring $a^b \bmod (10^9 + 7)$ in $O(\log_2(b))$.

9.1.7 Prime checking

```

1 bool prime( int n ){
2     if( n == 2 )
3         return true;
4     if( n % 2 == 0 || n <= 1 )
5         return false;
6     for( int i = 3; i * i <= n; i += 2 )
7         if( ( n % i ) == 0 )
8             return false;
9     return true;
10 }

```

Listing 56: Returns if n is a prime number in $O(\sqrt{n})$. Avoids overflow $\forall n \leq 10^6$ ($\approx INT_MAX$).

9.1.8 Prime factorization

```

1 void prime_factorization(vll& factorization, ll n) {
2     for(long long d = 2; d*d <= n; d++) {
3         while(n % d == 0) {
4             factorization.push_back(d);
5             n /= d;
6         }
7     }
8     if( n > 1 )
9         factorization.push_back(n);
10 }

```

Listing 57: Returns prime factorization of the number n using *trial division*, simplest way. Runs in $O(\sqrt{n})$. e.g. for 12 the result is 2x2x3.

9.1.9 Sieve of Eratosthenes

```

1 void sieve_of_eratosthenes(vector<bool>& is_prime,
  int n) {
2     is_prime.assign(n+1,true);
3     is_prime[0] = is_prime[1] = false;
4     for(int i = 2; i <= n; i++) {
5         if( is_prime[i] && (long long)i * i <= n ) {
6             for(int j = i*i; j <= n; j += i)
7                 is_prime[j] = false;
8         }
9     }
10 }
```

Listing 58: Calculates every prime number up to n with sieve of eratosthenes in a boolean 1-indexed vector. Runs in $O(n \log \log n)$.

9.1.10 Sum of Divisors

```

1 ll sum_of_divisors(ll n) {
2     ll sum = 1;
3     for (ll i = 2; i * i <= n; i++) {
4         if(n % i == 0) {
5             int e = 0;
6             do {
7                 e++;
8                 n /= i;
9             } while (n % i == 0);
10            ll s = 0, pow = 1;
```

```

11            do {
12                s += pow;
13                pow *= i;
14            } while (e-- > 0);
15            sum *= s;
16        }
17    }
18    if(n > 1)
19        sum *= (1 + n);
20    return sum;
21 }
```

Listing 59: Calculates the sum of all divisors of number n . e.g. $sum_of_divisors(12) = 18$. Runs in $O(\sqrt{n})$.

```

1 void sum_of_divisors_sieve( vll& sigma, int n ) {
2     sigma.assign(n+1,0);
3     for(int i = 1; i <= n; i++)
4         for(int j = i; j <= n; j+=i)
5             sigma[j] += i;
6 }
```

Listing 60: Calculates the sum of all divisors of all numbers from 1 to n . Runs in $O(n \log(n))$.

9.2 Combinatorics

9.2.1 Binomial Coefficients

```

1 const int MAXN = 1e6+1;
```

```

2  vll fact(MAXN+1), inv(MAXN+1);
3  int binpow( ll a, ll b ) { // a^b
4      ll sol = 1;
5      a %= MOD;
6      while( b > 0 ) {
7          if( b & 1 )
8              sol = ( 1LL * sol * a ) % MOD;
9          a = ( 1LL * a * a ) % MOD;
10         b >>= 1;
11     }
12     return sol % MOD;
13 }
14 void combi() {
15     fact[0] = inv[0] = 1;
16     fori(i,1,MAXN+1) {
17         fact[i] = fact[i-1] * i % MOD;
18         inv[i] = binpow( fact[i], MOD - 2 );
19     }
20 }
21 ll nCr( ll n, ll r ) {
22     return fact[n] * inv[r] % MOD * inv[n-r] % MOD;
23 }
24 combi();
25 nCr(a,b);

```

Listing 61: Template for calculating binomial coefficients $\binom{n}{k} = \frac{n!}{k!(n-k)!}$. Precalculate *fact* and *inv* runs in $O(MAXN \cdot \log_2(MOD))$ ($\log_2(MOD) \approx 30$). So, in general case when $NMAX = 10^6$ and $MOD = 10^9 + 7$ can be generalizad to $O(n \cdot \log(n))$, $n \leq 10^6$.

9.2.2 Common combinatorics formulas

$$\binom{n}{2} = \frac{n(n-1)}{2} \quad (3)$$

$$\sum_{k=0}^n \binom{n}{k} = 2^n \quad (4)$$

$$\sum_{k=0}^n \binom{n}{k} \binom{n}{n-k} = \binom{2n}{n} \quad (5)$$

$$\sum_{k=0}^n k \binom{n}{k} = n2^{n-1} \quad (6)$$

$$\sum_{k=0}^{\infty} \binom{2k}{k} \binom{2n-2k}{n-k} = 4^n \quad (7)$$

9.2.3 Stars and Bars

The number of ways to accomodate a binary string made of n and k elements.
The number of ways I have to accomodate n equal balls into k bags.

$$\binom{n+k-1}{k-1} = \binom{n+k-1}{n}$$

9.3 Probability

9.3.1 Laplace's Rule

$$P(A) = \frac{\text{Favorable cases}}{\text{Total possible cases}}$$

Discrete probability of an event A where all cases are equally probable.

9.3.2 Probability Distributions

Geometric Distribution

$$P(X = k) = (1 - p)^{k-1}p$$

p = Probability of a single success.

"La probabilidad de que X sea exactamente igual a k es $1 - p$ - la probabilidad de un éxito a la potencia de la cantidad de fracasos por la probabilidad del éxito".

Models the probability of having exactly $k - 1$ failures before a success in the k 'th try.

Binomial Distribution

$$P(X = k) = \binom{n}{k} p^k (1 - p)^{n-k}$$

p = Probability of a single success.

k = Number of total successes we are looking for.

n = Total number of tries.

"La probabilidad de que ocurran k éxitos en n intentos es de la binomial de número de intentos sobre la cantidad de éxitos buscados, por la probabilidad de un éxito a la potencia de los éxitos buscados por $1 - p$ - la probabilidad de los éxitos buscados a la potencia de la diferencia entre la cantidad de intentos y de éxitos".

Models the probability of having exactly k successes in n total tries (no matter the order). We're looking for k successes and $n - k$ failures.

9.3.3 Expected Value

Expected Value is the average of all possible results. Use when asked for "the expected number of tries".

Discrete Random Variable X :

$$E[X] = \sum_{i=1}^n x_i P(x_i)$$

Continuous Random Variable X :

$$E[X] = \int_{-\infty}^{\infty} x f(x) dx$$

Properties of Expected Value

Property	Formula
Linearity (always)	$E[X + Y] = E[X] + E[Y]$
Constant	$E[c] = c$
Multiplication	$E[cX] = cE[X]$
Product (if indep.)	$E[XY] = E[X]E[Y]$
Non-Negativity	$X \geq 0 \implies E[X] \geq 0$
Monotonicity	$X \leq Y \implies E[X] \leq E[Y]$
Total Exp. (partitions)	$E[X] = \sum_y E[X Y = y]P(Y = y)$
Variance	$Var(X) = E[X^2] - (E[X])^2$

9.4 Computational Geometry

9.4.1 Cross Product

```

1 struct Point {
2     ll x, y;
3
4     Point operator-(const Point& other) const { //
5         Resta de puntos (sobrescritura del operador "-")
6         return {x - other.x, y - other.y};
7     }
8
9     ll cross(const Point& other) const {
10         return x * other.y - y * other.x;
11     };

```

Listing 62: Template for the **Point** structure (or 2D vector) that has its own subtraction operator and its cross product

9.4.2 Polygon Area

```

1 double polygon_area(const vector<Point>& p){
2     ll area = 0;
3     int n = p.size();
4     for(i,0,n){
5         area += p[i].cross(p[(i+1) % n]);
6     }
7     return abs((double)area)/2;
8 }

```

Listing 63: Obtains the area of a polygon formed by a set of Points (2D) stored in a `std::vector` with a time complexity of $O(n)$. It returns a double, since it has a division by 2, but it can return a ll for double the area. Requires the `Point` struct seen in the previous listing.

9.4.3 *Convex Hull

9.5 Linear Algebra

9.5.1 XOR Basis

```

1 template<typename T = int, int B = 31>
2 struct Basis {
3     T basis[B];
4     int bsz = 0;
5     void clear() {
6         memset(basis, 0, sizeof basis);
7         bsz = 0;
8     }
9     Basis() {

```

```

10     clear();
11 }
12 bool insert(T x) {
13     for(int bit = B-1; bit >= 0; bit--) {
14         if( x & (1 << bit) ) {
15             if( basis[bit] )
16                 x ^= basis[bit];
17             else {
18                 basis[bit] = x;
19                 bsz++;
20                 return true;
21             }
22         }
23     }
24     return false;
25 }
26 T max() {
27     int mx = 0;
28     for(int bit = B-1; bit >= 0; bit--)
29         mx = std::max(mx, mx ^ basis[bit]);
30     return mx;
31 }
32 bool can(T x) {
33     for(int bit = B-1; bit >= 0; bit--)
34         x = min(x, x ^ basis[bit]);
35     return x == 0;
36 }
37 bool merge(Basis& b) {

```

```

38     bool f = false;
39     for(int bit = B-1; bit >= 0; bit--)
40         if( b.basis[bit] and ! insert(b.basis[bit]) )
41             f = true;
42     return f;
43 }
44 T kth(int k) {
45     T x = 0;
46     T cnt = ((T)1 << bsz);
47     for(int i = B-1; i >= 0; i--) {
48         if(! basis[i] )
49             continue;
50         if( k > (cnt >> 1) ) {
51             if( ! (x >> i & 1) )
52                 x ^= basis[i];
53             k -= cnt >> 1;
54         }
55         else
56             if( x >> i & 1 )
57                 x ^= basis[i];
58         cnt >>= 1;
59     }
60     return x;
61 }
62 };

```

Listing 64: Template for implementing XOR Basis and its operations: insert, max number doable, can do a certain number with that basis, merge two basis and find the k-th number doable.

9.5.2 Matrix Exponentiation (Linear Recurrency)

```

1  template <typename T> void matmul(vector<vector<T>>&
    &a, const vector<vector<T>>& b) {
2      size_t n = a.size(), m = a[0].size(), p = b[0].
        size();
3      assert(m == b.size());
4      vector<vector<T>> c(n,vector<T>(p));
5      for(size_t i = 0; i < n; i++)
6          for(size_t j = 0; j < p; j++)
7              for(size_t k = 0; k < m; k++)
8                  c[i][j] = (c[i][j] + a[i][k] * b[k][j])
9
        % MOD;
10     a = c;
11 }
12 template <typename T> struct Matrix {
13     vector<vector<T>> mat;
14     Matrix() {}
15     Matrix(vector<vector<T>> a) { mat = a; }
16     Matrix(int n, int m) {
17         mat.resize(n);
18         for(int i = 0; i < n; i++) {mat[i].resize(m);
19
        }

```

```

18     }
19     int rows() const { return mat.size(); }
20     int cols() const { return mat[0].size(); }
21     void makeIden() {
22         for(int i = 0; i < rows(); i++)
23             for(int j = 0; j < cols(); j++)
24                 mat[i][j] = (i == j ? 1 : 0);
25     }
26     Matrix operator*=(const Matrix &b) {
27         matmul(mat, b.mat);
28         return *this;
29     }
30     void print() {
31         for(int i = 0; i < rows(); i++) {
32             for(int j = 0; j < cols(); j++)
33                 cout << mat[i][j] << " ";
34             cout << endl;
35         }
36     }
37     Matrix operator*(const Matrix &b) { return Matrix
38         (*this) *= b; }
39 };
40 int main() {
41     Matrix<ll> A( {{1,1},{1,0}} );
42     Matrix<ll> ini(2,1);
43     ini.mat[0][0] = 0;
44     ini.mat[1][0] = 1;
45     Matrix<ll> iden(2,2);

```

```

45     iden.makeIden();
46     ll n;
47     cin >> n;
48     while(n > 0) {
49         if( n & 1 ) iden *= A;
50         A *= A;
51         n >>= 1;
52     }
53     Matrix<ll> res = iden * ini;
54     cout << res.mat[0][0] << endl;
55     return 0;
56 }

```

Listing 65: Template to pow a matrix of size n to a certain exponent with logarithmic time (using binpow), and multiply it to another matrix, with modulo operation, as well as how to use it. Full implementation for calculating n -th Fibonacci term with linear recurrency.

9.5.3 *Fast Fourier Transform (FFT)

10 Appendix

10.1 What to do against WA?

1. Have you done the correct complexity analysis?
2. Have you understood well the statement?
3. Have you corroborated yet the trivial test cases?
4. Have you checked all the corner cases?
5. Have you proposed a lot of non-trivial test cases?
6. Isn't there any possibility of overflow? (Multiplying two `int` needs to be fitted into a `long long`)
7. Have you done a desktop test?
8. Have you read all the variables? (`tc` variable on `main`)
9. Every part of your code works as it's meant to?

10.2 Primitive sizes

Data type	[B]	Minimum value it takes	Maximum value it takes
bool	1	0	1
signed char	1	-128	127
unsigned char	1	0	255
signed int	4	$-2,147,483,648 \approx -2 \times 10^9$	$2,147,483,647 \approx 2 \times 10^9$
unsigned int	4	0	$4,294,967,295 \approx 4 \times 10^9$
signed short	2	-32,768	32,767
unsigned short	2	0	65,535
signed long long int	8	$-9,223,372,036,854,775,808 \approx -9 \times 10^{18}$	$9,223,372,036,854,775,807 \approx 9 \times 10^{18}$
unsigned long long int	8	0	$18,446,744,073,709,551,615 \approx 18 \times 10^{18}$
float	4	1.1×10^{-38}	3.4×10^{38}
double	8	2.2×10^{-308}	1.7×10^{308}
long double	12	3.3×10^{-4932}	1.1×10^{4932}

Table 1: Capacity of primitive data types in C++.

10.3 Printable ASCII characters

32	whitespace	58	:	65	A	97	a
33	!	59	;	66	B	98	b
34	"	60	;	67	C	99	c
35	#	61	=	68	D	100	d
36	\$	62	;	69	E	101	e
37	%	63	?	70	F	102	f
38	&	64	@	71	G	103	g
39	'	91	[	72	H	104	h
40	(	92	\	73	I	105	i
41	)	93	]	74	J	106	j
42	*	94	^	75	K	107	k
43	+	95	-	76	L	108	l
44	,	96	'	77	M	109	m
45	-	126	~	78	N	110	n
46	.			79	O	111	o
47	/			80	P	112	p
48	0			81	Q	113	q
49	1			82	R	114	r
50	2			83	S	115	s
51	3			84	T	116	t
52	4			85	U	117	u
53	5			86	V	118	v
54	6			87	W	119	w
55	7			88	X	120	x
56	8			89	Y	121	y
57	9			90	Z	122	z

Table 2: Code and symbol of printable ASCII characters.

10.4 Numbers bit representation

1	00000001	31	00011111	61	00111101	91	01011011	121	01111001
2	00000010	32	00100000	62	00111110	92	01011100	122	01111010
3	00000011	33	00100001	63	00111111	93	01011101	123	01111011
4	00000100	34	00100010	64	01000000	94	01011110	124	01111100
5	00000101	35	00100011	65	01000001	95	01011111	125	01111101
6	00000110	36	00100100	66	01000010	96	01100000	126	01111110
7	00000111	37	00100101	67	01000011	97	01100001	127	01111111
8	00001000	38	00100110	68	01000100	98	01100010	128	10000000
9	00001001	39	00100111	69	01000101	99	01100011	129	10000001
10	00001010	40	00101000	70	01000110	100	01100100	130	10000010
11	00001011	41	00101001	71	01000111	101	01100101	131	10000011
12	00001100	42	00101010	72	01001000	102	01100110	132	10000100
13	00001101	43	00101011	73	01001001	103	01100111	133	10000101
14	00001110	44	00101100	74	01001010	104	01101000	134	10000110
15	00001111	45	00101101	75	01001011	105	01101001	135	10000111
16	00010000	46	00101110	76	01001100	106	01101010	136	10001000
17	00010001	47	00101111	77	01001101	107	01101011	137	10001001
18	00010010	48	00110000	78	01001110	108	01101100	138	10001010
19	00010011	49	00110001	79	01001111	109	01101101	139	10001011
20	00010100	50	00110010	80	01010000	110	01101110	140	10001100
21	00010101	51	00110011	81	01010001	111	01101111	141	10001101
22	00010110	52	00110100	82	01010010	112	01110000	142	10001110
23	00010111	53	00110101	83	01010011	113	01110001	143	10001111
24	00011000	54	00110110	84	01010100	114	01110010	144	10010000
25	00011001	55	00110111	85	01010101	115	01110011	145	10010001
26	00011010	56	00111000	86	01010110	116	01110100	146	10010010
27	00011011	57	00111001	87	01010111	117	01110101	147	10010011
28	00011100	58	00111010	88	01011000	118	01110110	148	10010100
29	00011101	59	00111011	89	01011001	119	01110111	149	10010101
30	00011110	60	00111100	90	01011010	120	01111000	150	10010110

10.5 How a vector<vector<pair<int,int>>> looks like

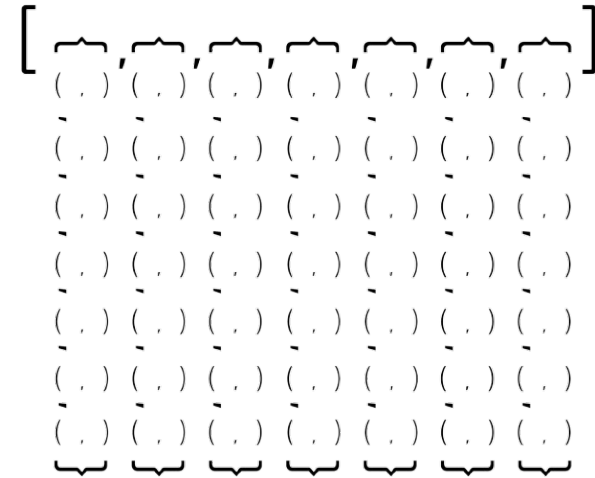


Figure 1: Visual representation of a vector of vector of pairs.

10.6 How all neighbours of a grid looks like

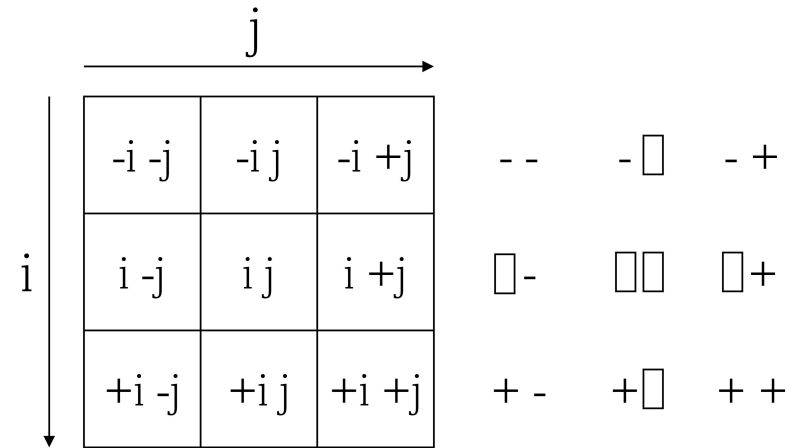


Figure 2: Visual representation of how all adjacent cells in a grid look like.

10.7 Motivation

