# Assignment 2 DD2424 Oscar Azrak

### 1. Introduction

This assignment aimed to develop, train and evaluate a two-layer neural network for image classification using the CIFAR-10 dataset. The network was trained using mini-batch gradient descent which was applied to a cost function that consisted of the cross-entropy loss and an L2 regularization term on the weight matrices. The network's performance was optimized by fine tuning the regularization parameter and utilizing a cyclical learning rate. This allowed me to achieve best test accuracy for this assignment.

### 2. Method

- 1. Download and extract the contents of CIFAR-10 dataset
- 2. Load the dataset and split the data to train, validation and test sets.
- 3. Normalize the relevant datasets.
- 4. Initialize model parameters
- 5. Implement relevant functions
- 6. Compute and compare the numerical and analytical gradients
- 7. Train the model using default settings
- 8. Find the best parameters
- 9. Evaluate the model on the test set

#### 3. Results

The central difference, h of 10<sup>-5</sup>, was used where these errors were observed:

Relative error	Relative error	Relative error	Relative error
W1	b1	W2	b2
0.053610802	3.7 <sup>-7</sup>	9.99 <sup>-8</sup>	2.32 <sup>-9</sup>

The relative errors were obtained by comparing the difference of the analytical and numerical gradients for each variable. The fact that the errors were small indicates high accuracy of the gradient calculations. It is important to note that this is not an absolute guarantee, but it provides a strong indication of the implementation's accuracy.


The range for retrieving best lambdas for the coarse search used values generated on a log space in the range of  $10^{-5}$  to  $10^{-1}$ .

Lambda	Accuracy
0.0359	45.18%
0.00001	42.16%
0.0129	42.06%

The range for retrieving the best lambdas for the fine search used values generated using the best performing lambda.

Lambda	Accuracy
0.03553	45.48%
0.03634	45.45%
0.03713	45.37%

## Plots of the loss, costs and accuracy:

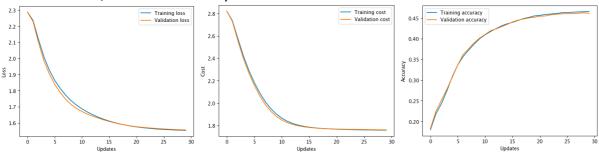

Both the losses and costs have an down going trend while the training has an up going trend. Although the accuracy is not >50%, it still improved with the fine search.