

# Hand-authored fixture — maintenance style sample

---

Technical maintenance documentation

Source-based analysis · developer maintenance

Snapshot: 0052a12dae50179afd966c893556492f64f00c56062b570a6f5fc375854d88d3

Scope: .

Snapshot kind: non-Git directory. File hashes identify the source material read for this document.

# Contents

## 1 System overview

### 1.1 Fixture purpose and constraints

## 2 Ledger

### 2.1 Maintenance context

### 2.2 Component index

## 3 Knowledge gaps and coverage

## 4 Evidence references

# 1 System overview

## 1.1 Fixture purpose and constraints

The README identifies hand-authored synthetic fixture material and describes documentation intent; it is not proof of executed behavior. [1]

Account.debit(amount: int) returns the remaining integer balance; it raises ValueError before mutation for non-positive amounts or insufficient balance. [2]

| Subsystem | Indexed components | Unresolved ownership |
|-----------|--------------------|----------------------|
| ledger    | 4                  | 0                    |

## 2 Ledger

### 2.1 Maintenance context

#### 2.1.1 Where it fits

The fixture library owns the balance mutation boundary. [2]

#### 2.1.2 Inputs

| Input  | Type / Shape     | Source | When             | Evidence |
|--------|------------------|--------|------------------|----------|
| amount | positive integer | caller | debit invocation | [2]      |

#### 2.1.3 Outputs

| Output            | Type / Shape | Destination | When                           | Evidence |
|-------------------|--------------|-------------|--------------------------------|----------|
| remaining balance | integer      | caller      | accepted debit                 | [2]      |
| ValueError        | exception    | caller      | invalid or insufficient amount | [2]      |

The README identifies hand-authored synthetic fixture material and describes documentation intent; it is not proof of executed behavior. [1]

Account.debit(amount: int) returns the remaining integer balance; it raises ValueError before mutation for non-positive amounts or insufficient balance. [2]

The fixture declares Python >=3.11 and pytest discovery under tests. [3]

The test expects an insufficient withdrawal to raise ValueError and preserve balance 10. This test was read, not run. [4]

#### 2.1.4 Interface details

The following layout fixture repeats a supported interface row to exercise multi-page tables; it is not additional application functionality. [2]

| Case          | Interface / path | Expected source behavior        |
|---------------|------------------|---------------------------------|
| Layout row 01 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 02 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 03 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 04 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 05 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 06 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 07 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 08 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 09 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 10 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 11 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 12 | Account.debit    | Reject non-positive amount. [2] |

| Case          | Interface / path | Expected source behavior        |
|---------------|------------------|---------------------------------|
| Layout row 13 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 14 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 15 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 16 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 17 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 18 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 19 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 20 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 21 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 22 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 23 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 24 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 25 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 26 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 27 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 28 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 29 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 30 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 31 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 32 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 33 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 34 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 35 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 36 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 37 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 38 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 39 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 40 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 41 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 42 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 43 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 44 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 45 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 46 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 47 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 48 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 49 | Account.debit    | Reject non-positive amount. [2] |

| Case          | Interface / path | Expected source behavior        |
|---------------|------------------|---------------------------------|
| Layout row 50 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 51 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 52 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 53 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 54 | Account.debit    | Reject non-positive amount. [2] |
| Layout row 55 | Account.debit    | Reject non-positive amount. [2] |

### 2.1.5 Interface details

Layout sample typography: résumé, Київ, Δstate, → output. Long path example: `samples/very_long_repository_component_name/maintenance_contracts/repeated_interface_example.py`. This sentence is fixture presentation data alongside the supported debit signature. [2]

```
def debit(self, amount: int) -> int:
    # Source interface; do not execute during documentation.
    ...
```

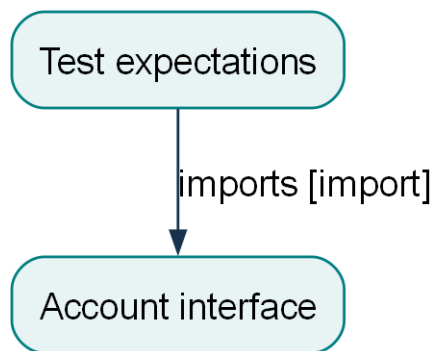


Figure 1. The test source imports the account implementation; an import does not prove a runtime execution. Solid edges: observed in source; dashed: inferred/unknown. Geometry checked; visual review is separate.

## 2.2 Component index

| Component            | Responsibility / ownership                                                            |
|----------------------|---------------------------------------------------------------------------------------|
| README.md            | Primary placement supported by the fixture's explicit source responsibilities. Source |
| ledger.py            | Primary placement supported by the fixture's explicit source responsibilities. Source |
| pyproject.toml       | Primary placement supported by the fixture's explicit source responsibilities. Source |
| tests/test_ledger.py | Primary placement supported by the fixture's explicit source responsibilities. Source |

### 3 Knowledge gaps and coverage

Accepted analysis packets: 1 / 1.

Indexed files: 4 / 4.

Semantically reviewed: 10 / 10.

Eligible lines with accepted analysis: 38 / 38. Redacted lines: 0. Unresolved ownership: 0.

Delivered/accepted ranges do not prove understanding of every line.

Citations and matching hashes do not establish semantic entailment.

Semantic review is a Copilot judgment, not an automated proof.

Redaction is heuristic and can miss secrets; review repository sensitivity first.

Tests were read as source; target code was never run by this toolkit.

Human approval is never assigned by the engine.

Review limitation: Hand-authored fixture review record for deterministic testing. No live Copilot semantic review occurred.

Review context records: 0 fresh; 2 same-context. Context provenance is reported, not independently proven by scripts.

Visual QA is recorded after export in preview/preview.json when pages are rendered and inspected; if absent, it is pending. Human approval: not assigned. See coverage.json for full denominators and review context provenance.

| Excluded / unavailable material       | Reason                                             |
|---------------------------------------|----------------------------------------------------|
| .docgen                               | toolkit or generated artifacts; excluded-directory |
| .github/skills/generate-documentation | toolkit or generated artifacts; excluded-directory |
| docgen.toml                           | toolkit configuration; excluded                    |
| docs/generated                        | toolkit or generated artifacts; excluded-directory |

## 4 Evidence references

- [1] an-0251d63ddffdd14171ce.f1 · observed · documentation · README.md:1-6
- [2] an-0251d63ddffdd14171ce.f2 · observed · implementation · ledger.py:1-15
- [3] an-0251d63ddffdd14171ce.f3 · observed · declaration · pyproject.toml:1-7
- [4] an-0251d63ddffdd14171ce.f4 · observed · test-expectation · tests/test\_ledger.py:1-10