
3. INSTALACIÓN BBDD EJEMPLO

Sakila DB

ESQUEMA BBDD SAKILA

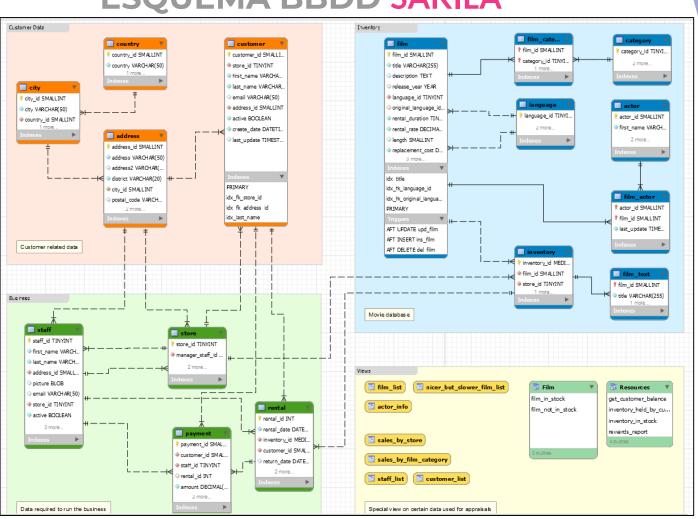

DESCARGAR E INSTALAR LA BBDD SAKILA

- MySQL doc: https://dev.mysql.com/doc/index-other.html
 - Sakila: downloads.mysql.com/docs/sakila-db.zip
 - Como instalar: https://dev.mysql.com/doc/sakila/en/sakilainstallation.html

Resumen instalación:

To install the Sakila sample database, follow these steps:

- 1. Extract the installation archive to a temporary location such as c:\temp\ or /tmp/. When you unpack the archive, it creates a directory named sakila-db that contains the sakila-schema.sql and sakila-data.sql files.
- 2. Connect to the MySQL server using the **mysql** command-line client with the following command:

```
1 shell> mysql -u root -p
```

En nuestro caso:

C:\xampp\mysql\bin

Enter your password when prompted. A non-root account can be used as long as the account has privileges to create new databases.

- 3. Execute the sakila-schema.sql script to create the database structure by using the following command:
- 1 mysql> SOURCE C:/temp/sakila-db/sakila-schema.sql;

Replace c:/temp/sakila-db with the path to the sakila-schema.sql file on your system.

Note

On Windows, use slashes, rather than backslashes, when executing the SOURCE command.

- 4. Execute the sakila-data.sql script to populate the database structure with the following command:
 - 1 mysql> SOURCE C:/temp/sakila-db/sakila-data.sql;

Replace C:/temp/sakila-db with the path to the sakila-data.sql file on your system.

¡GRACIAS!

¿Preguntas?