

How to Prompt on Quash

A beginner's guide for prompting for perfect execution and results.

Index

1. Test Case Prompts	... 3
2. Test Suites	... 8
3. Using Test Data	... 10
4. Using Backend Validations	... 10



Quash can help you generate tests, and execute them, all by using just simple english language prompts. To get the best results out of the AI agents, it is important you prompt it well.

In this guide, we will look at both -

1

How to write your test cases better for Quash's execution engine to achieve smooth test runs.

2

How to prompt the AI agent to generate tests better in the Test Studio.

This prompt guide will outline the primary best practices of writing your prompts. That said, the best way to learn how to use any tool is to use it and experiment for yourself!

1. Test Case Prompts

We will start by looking at how you should write your test case prompts in Quash. You can write these prompts in the input box on the New Task page, or when you create a new test case from the Test Cases page, or when you add a test case inside a Test Suite.

The primary thing to keep in mind here is that you're writing a *test case*, and not a *command* for the agent. You should NOT write the prompt like

✗ *"Hey, test out the login functionality for me",*


but instead write it like

✓ *"Open the app, then tap on login, enter hamza@quashbugs.com as email and mahoraga001 as password, and then tap on the login button".*

1.1 Structure of a Test Case

Every test case should ideally have detailed steps that the agent will follow, along with any validations that need to be made.


Largely, this is what your prompt should look like:

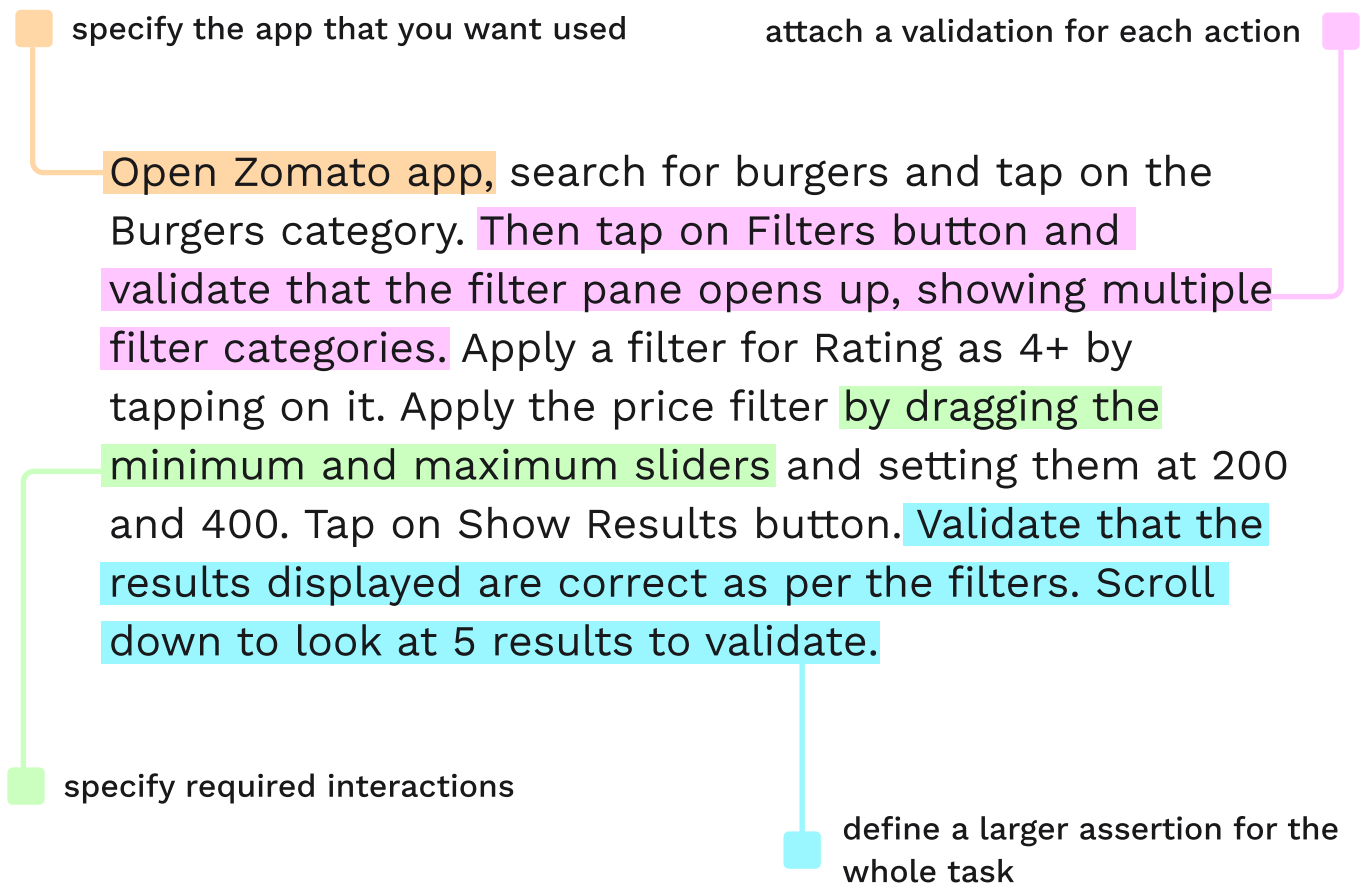

Notice how this prompt has **detailed steps**, and includes **validations** for individual steps and the larger prompt.

1.2 Complex Interactions

If actions on your app have specific interactions required to complete a task, it's better to specify that explicitly. These interactions would include taps, swipes, drag, long press, pinch and everything else.

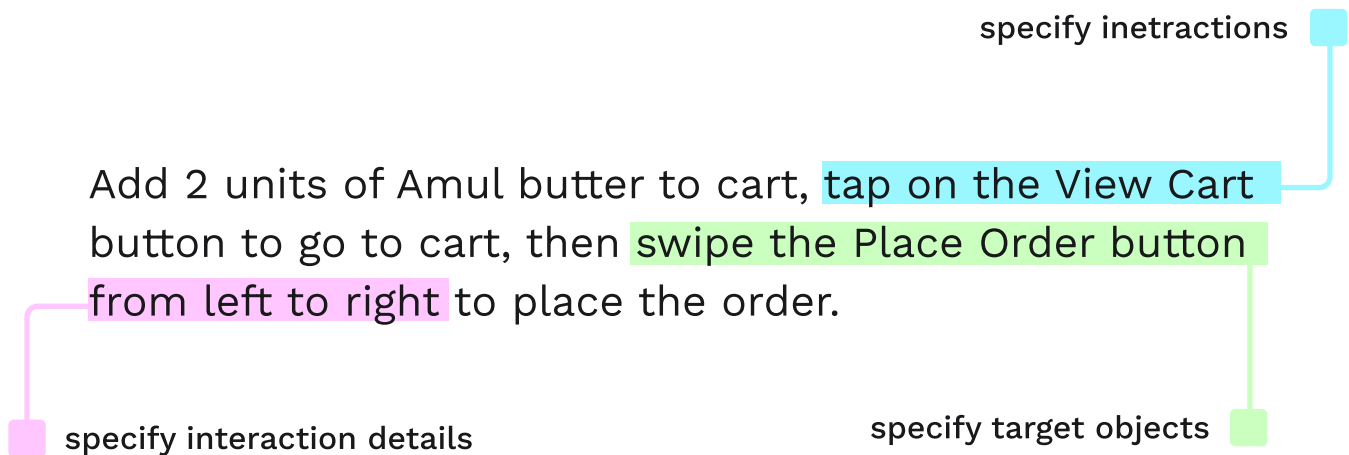

For specific interactions that include positions, directions, and other properties, specify them clearly.

1.3 Cross-application tasks

You can ask Quash to perform actions across multiple applications, simple by specifying the flow in steps.

In Zomato app, go to Account → Saved addresses. Tap on the Share icon button on an address, tap on the Copy Link button. Close Zomato app, open Messages app, paste and send the copied link to Hamza.

If your task requires remembering variables, or performing mathematical calculations on them, you can simply ask Quash to do so in the prompt.

information to note down during actions

call out any information that is important to note down before actions

Open the Cred app, and note the displayed number of cred coins on the top right. Go to the Deals tab, and avail two deals. For each deal, note the number of cred coins required. Go back to home and validate that the correct number of cred coins have been deducted from the available coins and the resultant amount is being displayed.

... Go back to home and validate that the displayed number of cred coins equals the number of coins that were displayed earlier minus the sum of required coins to avail the two deals.

write clearly about the required calculation

you can also use words like add, subtract, sum, multiple etc.

1.5 Looped Tasks

For flows that require you to repeat the same action/set of actions multiple times, you should mention the task and the number of repetitions clearly.

clearly state the number of repetitions
for an action

... Open a story and tap on the bookmark icon button to bookmark it. Bookmark **3 more stories** the same way - tapping to open them, and the tapping on the bookmark icon button to bookmark them.

clearly state the actions that need to be repeated

1.6 Conditional Actions

To handle scenarios when you want Quash to make the choice of taking an action based on a condition, you can write the prompt in a general if, then, else tone.

If statement

... If a popup opens up with a New Year campaign offer, copy the coupon code and dismiss it. Else, tap on the cart button on the top right to go to the cart page.

Then statement

Else statement

1.7 Data Extraction

You can also ask Quash to remember and use data as per your requirements by using words like note, remember, etc.

clearly state what data needs to be remembered

... In the search results, note the flight number and departure date of the flight. Then go to Track Flight option through the bottom nav and enter the same flight number and departure date. Then click on the Track button.

recall the data and state where to use it

2. Test Suites

A test suite is a collection of multiple test cases. Think of it as a folder, that you can create on any logic - for a specific feature, module, criticality, regression, sanity etc. It is important to note if you are creating a **Sequential** or an **Isolated** test suite.

For a **Sequential** suite, every next test case should pick up from where the previous test case leaves the app. It is recommended to validate the state of the app both in the start and at the end of the prompt, and have a validation attached to each test case.

If you want to test out a long flow, it is recommended that you break it down into multiple test cases and create a larger sequential suite.

TEST 1 Open the app, search for mushrooms and apply a filter for 500g. Validate that results are displayed as per the applied filter.

TEST 2 Validate that you're on the search results page with a filter applied. open the first result and add it to cart. Go to cart and validate the item is displayed.

repeat the same validation in consecutive tasks

For an **Isolated** suite, every test case is independent of each other, so the whole flow much be covered end-to-end in each individual test case. Every test case should include the required setup and then the teardown steps as well.

common setup steps

TEST 1 Open the app, search for mushrooms and apply a filter for weight as 500g. Add the first result to cart and validate it is displayed in cart. Then remove the item from cart and close the app.

TEST 2 Open the app, search for mushrooms and apply a filter for price as 100-500. Add the first result to cart and validate it is displayed in cart. Then remove the item from cart and close the app.

the main test steps

common teardown steps

3. Using Test Data

If you have created Test Data tables in your workspace on Quash, and want to use that test data in your test case prompts, you can do that by typing the “/” symbol and then selecting the data table that you want to use. You will be asked what row of the table you want to use when you run the test or the test suite.

... In the traveller details page, enter the details from `/traveller_details` and then click on the Save button...

4. Using Backend Validations

You can use backend validations as part of your prompt. Simply enable the use in prompt option for a validation and then call it by typing @ in your prompt.

validation to fetch data and use it

Open Uber app. Sign up using the phone number 9898987766. `Call @get_otp (phone=9898987766)` to get the OTP and enter it. Enter the name as Bruno Walker and date of birth as 01/01/1990. Then `call @get_user (phone=9898987766)`

and validate that the correct user details are returned in the response.

validation to verify correct data