

# MTH 4300, Lecture 12

Defining a Class: Step 1;  
Step 2: Creating Member Functions;  
Step 2a: What is `->` and Omitting `this->`;  
Step 2b: Accessors vs Mutators;  
Step 3: Constructors

E Fink

March 13, 2025

# 1. Defining a Class: Step 1

The minimal class definition looks like:

```
class YourClassName {  
public:  
    // Declarations of member (attribute) variables  
}; // <--- SEMI-COLON!
```

So, for example, if I had a program where keeping track of Dogs was really important, I could declare

```
class Dog {  
public:  
    int age;  
    double weight;  
    string owner;  
}; // <--- SEMI-COLON!
```


**L12x1\_dog.cpp**

# Defining a Class: Step 1

Then, you can declare a Dog object just the way you would declare any other variable:

```
Dog fido;
```

The presence of this Dog object causes three variables to be created: `fido.age`, `fido.weight`, and `fido.owner`. These variables get placed in the appropriate stack frame just like any other variable.



For now, to give the member variables values, you can assign by, e.g. `fido.age = 5`; Later, we won't do things like this, for two reasons:

- We will soon start restricting direct access to member variables from within `main()`. This is called *information hiding*, and despite how it may sound, it is a helpful thing to do.
- We will also start using *constructors* to initialize our objects.

# Defining a Class: Step 1

## L12x2\_fundy.cpp

Imagine that you are creating an app called Fundy, where users can create their own fundraisers.

Create the definition of a class called `Fundraiser`, whose objects are meant to represent individual fundraisers. `Fundraiser` objects should each have three member variables:

- the cause for the fundraiser (i.e., a message describing what the fundraiser is for)
- the target value for the fundraiser, in dollars (i.e., the amount that the fundraiser is hoping to raise)
- and the current amount raised.

Then, in `main()`, create just one `Fundraiser` object – this fundraiser should be for the survivors of the Krakatoa volcano, and the fundraising target should be \$1,000,000 – and assign its members appropriately.

## 2. Step 2: Member Functions

Member functions represent behaviors done by/with/to objects.

As we've seen, calling a member function looks like

```
object_name.fn_name();
```

Let's break this down. First, the parentheses at the end indicate that we are calling a function. The syntax of the call is different than the functions we've seen in C++, but similar to Python method calls. You should read it as “do `fn_name()` to (or with) `object_name`.”

The variable `object_name` is, in a way, a silent argument to the function. Depending on the behavior we are talking about, there may be other arguments necessary; these would go within the parentheses. It is also possible that the function should have a return value – in that case, it'd be likely that you would instead write something like

```
x = object_name.fn_name();
```

With the variable `x` catching the return value.

## Step 2: Member Functions

Fine, so how do you create member functions?

To declare a member function: put its prototype (return type, name, *ADDITIONAL* parameters) inside the class definition:

```
class YourClassName {  
public:  
    // member variables  
    ret_type fn_name(param1_type, param2_type);  
}; // <--- SEMI-COLON!
```

E.g.

```
class Dog {  
public:  
    // members omitted  
    int age_in_dog_years();  
    void bark_num_times(int);  
};
```

## Step 2: Creating Member Functions

Later, you have to actually define the member function, which is often done outside (but below) the class definition. This is actually similar to writing a normal function, with two major differences:

- Instead of  
ret\_type fn\_name(param\_type param\_name);  
you write  
ret\_type YourClassName::fn\_name(param\_type param\_name);
- You don't need to declare or pass the *member variables* of the object which called the member function – just refer to them by `this->member_var_name`. (We will explain later exactly what `this` means, exactly what `->` means, and that neither of these are truly needed for the current purpose.) You may think of `this->` as being akin to `self`. in Python.


Example:

```
int Dog::age_in_dog_years() {  
    int answer = 7 * (this->age); // age is a member  
    // Q: WHOSE age?  
    // A: this object that just called the function  
    return answer;  
}
```

## Step 2: Creating Member Functions

Methods are just functions; when they are called, a stack frame gets added to the call stack. Of course, all (outside) parameters have space reserved in that frame, as do all local variables.

But there is one extra special variable that gets put into the stack frame: `this`, which is a pointer to the object who called it.

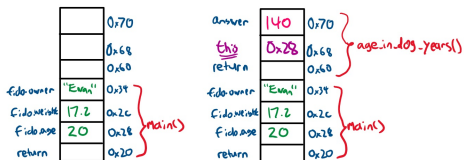

E.g. suppose that `fido` is a `Dog` object. Then of course `&fido` would provide `fido`'s address (the address of the first attribute, really). Let's say you add the line

```
cout << "Here is what this contains: " << this;
```

to the function `age_in_dog_years()`. Then, a call to `fido.age_in_dog_years()` would cause this `cout` line to display this address.



## Step 2: Member Functions

### L12x3\_methods.cpp

Create methods for the Fundraiser class.

- `.donate()`, which receives a double named `x` as outside argument, and adds `x` to the current (and returns nothing);
- `.met()`, which receives no outside arguments, and returns a `bool`, reflecting if the amount current is above the target value;
- `.beats()`, which receives another Fundraiser named `other` as an outside argument, and returns a `bool` which is true if the Fundraiser in question has more money currently than the other one.

(For the last one: if we have a Fundraiser object as an OUTSIDE argument, you still need to use the `.` notation that access that object's member variables. Only *the object which calls the function* can have its members referenced with the `this->` notation.)