

CLIENT USER MANUAL

AR Conversational

Complete Client Guide

Ask. Route. Review. Hand off.

Version 1.0.0 | Windows Desktop

Reviewed 26 August 2026

Document control

Field	Value
Product	AR Conversational Windows desktop application
Guide version	1.0.0
Audience	Bank employees, client-demo operators, implementation teams, support, and administrators
Scope	AR Conversational; ARAPI authoring and execution are referenced only at the handoff boundary
Evidence basis	Version 1.0.0 source review, successful frontend build, running Tauri desktop application, and reproduced screenshots
Review date	26 August 2026

Client-safe scope: Screens use local demonstration data and contain no API keys. Never enter production secrets, personal data, real account identifiers, or confidential documents into a demo or support session.

How to use this guide

- Read Sections 2-4 before operating a new installation or client demonstration.
- Use Section 6 for the visual walkthrough; every figure comes from the running AR Conversational desktop app.
- Use Sections 7-9 to understand modes, automatic routing, explicit agent selection, evidence, and answer limitations.
- Use Section 10 when conversational instructions cross into ARAPI catalog, BotJob, or execution work.
- Use Appendix A to locate every visible control and Appendix E for client acceptance.

Contents

- [1. About AR Conversational](#)
- [2. Read this before using the current release](#)
- [3. Installation and first launch](#)
- [4. End-to-end quick start](#)
- [5. Interface fundamentals](#)
- [6. Screen-by-screen guide](#)
- [7. Employee and client modes](#)
- [8. Banking agents and routing](#)
- [9. Questions, answers, limitations, and evidence](#)
- [10. ARAPI delegation and cross-application workflow](#)
- [11. Read-only API Catalog](#)
- [12. AI provider settings](#)
- [13. Security and operational practices](#)
- [14. Troubleshooting](#)
- [15. Feature status matrix](#)
- [Appendix A. Complete control index](#)
- [Appendix B. Agent reference](#)
- [Appendix C. Local API reference](#)
- [Appendix D. Glossary](#)
- [Appendix E. Client acceptance checklist](#)

Navigation: In Word, hold Ctrl while clicking an entry. In most PDF viewers, click normally. Each major section includes a Back to contents link.

1. About AR Conversational

[Back to contents](#)

AR Conversational is a Windows desktop banking-assistant interface for employee and client-demonstration conversations. It routes questions to named banking agents, relates answers to the API catalog shared with ARAPI, and delegates catalog/test/BotJob instructions to the ARAPI assistant workflow.

The React interface communicates with a localhost C# backend on port 8787. AR Conversational and ARAPI share catalog and settings data. The conversational app intentionally keeps endpoint import, workflow editing, generated scripts, and execution review in the separate ARAPI application.

Core concepts

Conversation mode: Employee or Client context used for automatic routing candidates, examples, input wording, and supported answer presentation.

Banking agent: A named routing profile with a mode, purpose, and banking keywords.

Auto-route: The default selection that chooses among agents for the current mode by keyword score.

Explicit agent: A manually selected agent that overrides automatic mode filtering for the next questions.

Evidence: Up to three method/path records selected from the shared catalog for a normal banking question.

Delegation: Handoff of catalog/test/BotJob wording to the ARAPI assistant route.

Synthetic answer: A local demonstration response produced from built-in mock records, never live core-banking data.

Application boundary

Use AR Conversational for	Use ARAPI for
Employee/client banking questions	OpenAPI/Swagger import and catalog ownership
Automatic or explicit banking-agent routing	BotJob creation and detailed workflow editing
Viewing catalog evidence and limitations	Bash/curl generation and controlled command-line execution
Read-only endpoint search	Test execution history, reports, environments, and mock controls
Shared AI-provider settings	Reviewing or approving delegated assistant actions

2. Read this before using the current release

[Back to contents](#)

Version basis: This manual describes the observed AR Conversational 1.0.0 desktop build reviewed on 26 August 2026. Catalog counts, provider state, and demo records will differ by workstation.

Current-build qualifications

- Balance/account answers in the reviewed build use local synthetic customer accounts with masked IBANs. They are not live or core-banking data and must not support a customer or financial decision.
- Visible conversation turns are held in the mounted page only. Navigating away, reloading, or restarting clears them; version 1.0.0 has no conversation-history workspace.
- Auto-route filters candidate agents by Employee/Client mode and scores keywords. A manually selected agent overrides that automatic mode filter.
- Endpoint evidence is a keyword-based catalog match, not API-contract validation, authorization proof, or runtime-success evidence.
- Normal /agents/ask and delegated /app-assistant/chat answers are deterministic in the reviewed C# path. They do not prove that the selected external provider generated the text.
- Provider Test reports a local configuration indicator in the reviewed build. Connected/OK and a zero-millisecond value are not an external-provider round-trip.
- Provider records and the selected default are shared with ARAPI. A change in either application affects the shared setting.
- Provider-list responses omit stored keys and the UI masks entry. The reviewed save path does not independently demonstrate an encryption transform, so protect the local database as credential-bearing.
- Delegated run wording can execute all saved BotJobs against the built-in Mock environment. Always inspect execution history in ARAPI and never interpret a local green result as a real banking-system change.
- Port 5174 is the development Vite UI port. The packaged Tauri desktop app loads bundled frontend files and does not require a public listener on that port.

Production safeguard: Treat AR Conversational as a local assistant and demonstration interface. Human review, customer authorization, source-system verification, and the organization's banking controls remain mandatory.

3. Installation and first launch

[Back to contents](#)

Install or unpack

1. Use the AR Conversational installer supplied by your organization, or unpack the approved portable bundle into a user-writable directory.
2. Keep the executable, packaged backend sidecar, and any supplied data directory together. Do not move individual binary files out of the distribution.
3. Launch AR Conversational. A resizable desktop window opens; no application login is shown in version 1.0.0.

Verify first launch

- Confirm the top-right sidecar indicator becomes online.
- Open Home and confirm Shared backend is online on port 8787.
- Review Agent catalog coverage. A partial count means some agents currently have no keyword-matching catalog endpoints; it does not mean the installation failed.
- Open API Catalog and confirm expected imported endpoints are visible. If empty, import specifications in ARAPI.
- Open Settings and confirm local service information and the intended shared default provider record.

Shared local data

Both desktop applications use the same local database selected by their shell. A portable distribution may use data\arweb.db beside the executable when a data directory is supplied; other bundles use an application-data location. Back up the exact deployment path before upgrades or migrations.

Local-only services: The backend is intended for localhost access. Do not bind, proxy, or firewall-publish port 8787 to an untrusted network.

4. End-to-end quick start

[Back to contents](#)

1. Start AR Conversational and wait for sidecar online.
2. On first use, choose Start as Bank Employee or Start as e-Banking Client. Choose the perspective appropriate for the demonstration; this is not user authentication.

3. Open Coverage and review the currently wired agents. Close Coverage when finished.
4. Leave the agent selector on Auto-route for the first question, or choose a named agent when the responsibility is known.
5. Enter one specific, non-sensitive question and choose Send (or press Enter). Do not include real customer or credential data.
6. Read the complete answer and every limitation. Expand endpoints used when evidence is available, then validate the method/path in API Catalog or ARAPI.
7. If the response is delegated to ARAPI, open ARAPI and review the catalog match, BotJob, mock execution, or other action before acceptance.
8. Capture only approved, sanitized evidence. Remember that leaving the page clears visible conversation turns.

Safe first questions

Employee: Which catalog endpoints support account-balance servicing?
Client demo: Show my demonstration account balances.
Catalog handoff: Search the catalog for payment endpoints.

Never paste: Real names, IBANs, account numbers, authentication tokens, API keys, confidential messages, production payloads, or regulated customer documents.

5. Interface fundamentals

[Back to contents](#)

Global layout

Sidebar: Four destinations: Home, AR Conversational, API Catalog, and Settings.

Page title: The upper-left top bar repeats the current workspace name.

Employee / Client: The top-bar mode buttons change the in-memory conversation perspective. They do not authenticate a user or change the catalog.

sidecar indicator: Shows whether the React UI can reach the localhost backend. It refreshes approximately every five seconds.

No login required: A product-state notice, not a security guarantee. Windows access and data-file permissions form part of the boundary.

Sidebar destinations

Destination	Purpose
Home	Overview, shared-backend status, agent coverage, and shortcuts.
AR Conversational	Employee/client banking questions, agent routing, evidence, and ARAPI delegation.
API Catalog	Read-only search of the endpoint inventory shared with ARAPI.
Settings	Shared provider records, default selection, connection indicator, and local ports.

Common interaction states

- Blue filled button: selected mode or main page action.
- Outlined button: available secondary action, such as Mode, Coverage, Test, or Set default.
- Dimmed button: disabled until required text or configuration exists, or represents the current default.
- Green indicator: online, configured default, or Connected according to its label; read the release qualification for Provider Test.
- Orange limitation panel: mandatory warning about synthetic data, evidence quality, or another constraint.
- Chevron: expands or collapses provider details or endpoint evidence.

Keyboard and session behavior

Action	Behavior
Enter in the question field	Submits non-empty text when no request is already running.
Mouse/keyboard activate Send	Sends one local request and appends the result to this mounted page.
Navigate to another sidebar page	Unmounts the conversation workspace and clears its visible turns.
Reload/restart	Clears visible turns and starts a new UI session.
Mode change	Changes routing context for subsequent questions; it is not identity or authorization.

6. Screen-by-screen guide

[Back to contents](#)

The following 15 figures show every main AR Conversational screen and the important interactive states captured from the running desktop application. The values are demonstration data; the controls and safeguards are the focus.

6.1 Home overview

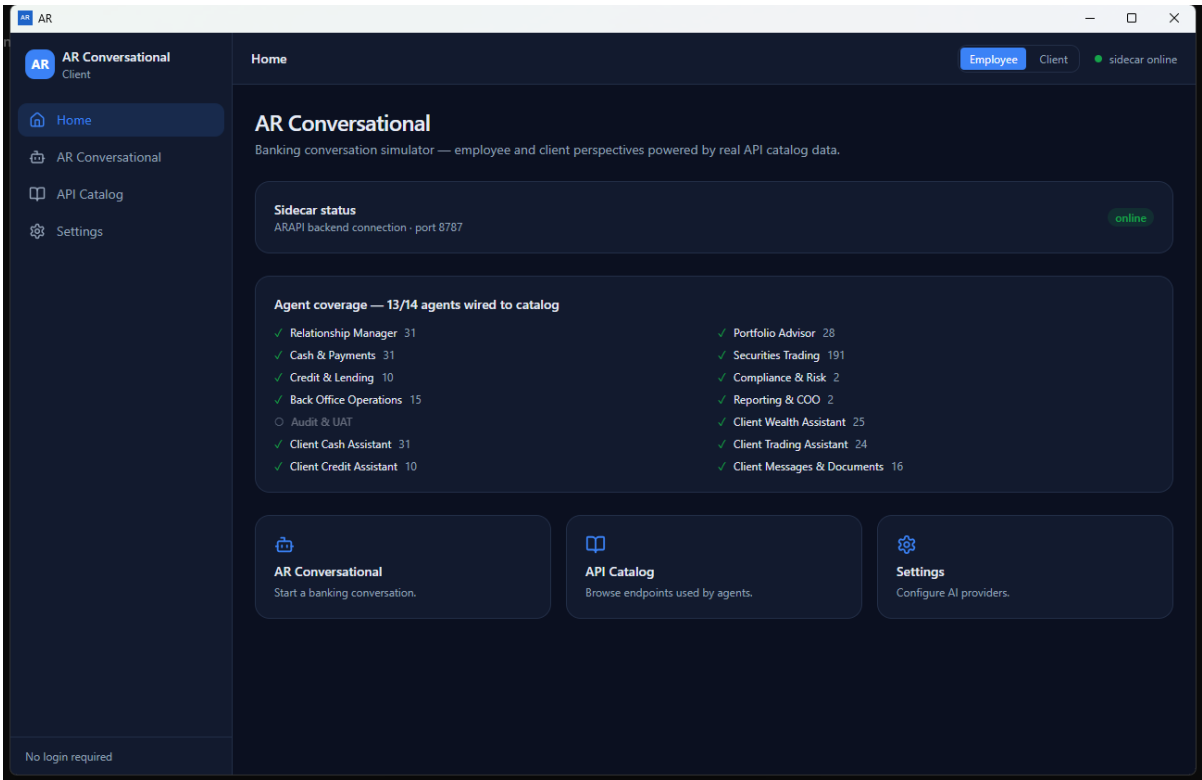


Figure 1. Home overview

Confirm the backend is online and review current catalog coverage before starting a client or employee conversation.

Coverage reading: 13/14 in this capture is dynamic keyword coverage, not a fixed product limit or a successful API-call count.

6.2 Employee conversation workspace

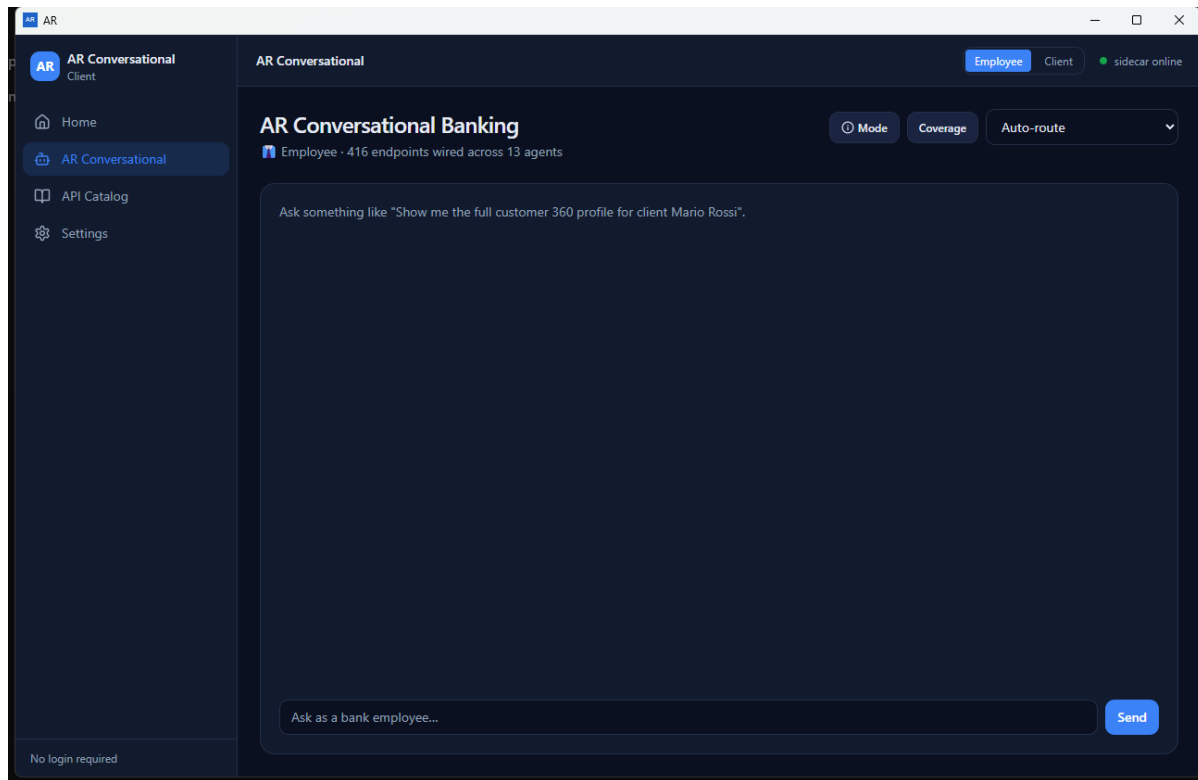


Figure 2. Employee conversation workspace

Employee mode changes automatic routing candidates, example language, and the way supported synthetic balance results are introduced.

Session scope: Questions and answers remain visible only while this conversation page stays mounted.

6.3 Conversation mode chooser

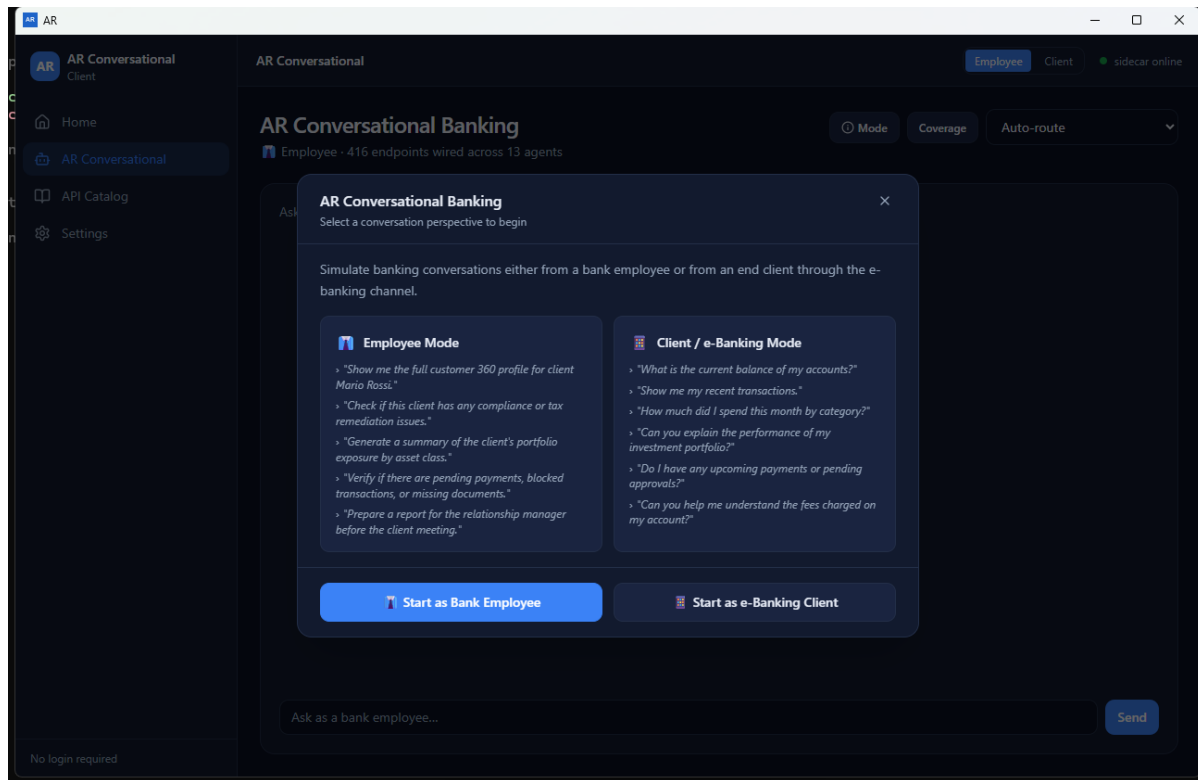


Figure 3. Conversation mode chooser

Choose the perspective that matches the simulation. Close keeps the current mode; the Mode button reopens this chooser later.

Mode is not identity: Start as e-Banking Client changes routing and wording. It does not authenticate a customer or authorize account access.

6.4 Agent catalog coverage

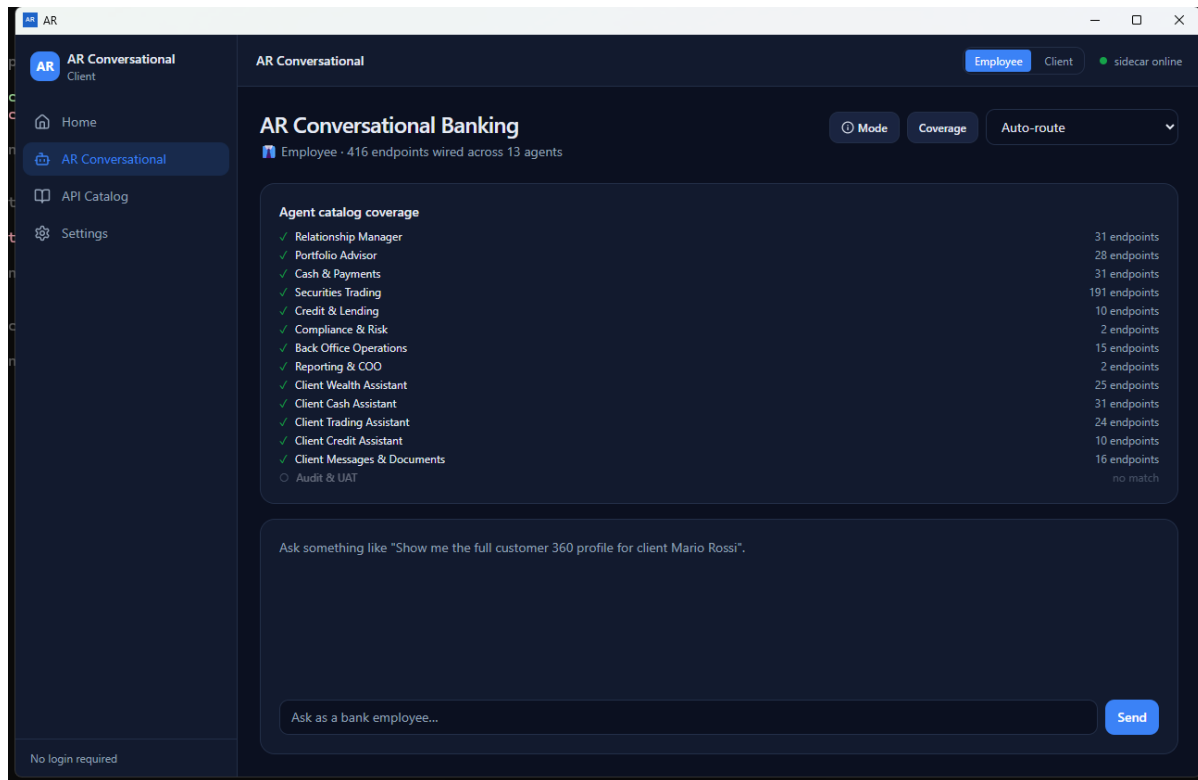


Figure 4. Agent catalog coverage

Coverage is a keyword-match inventory, not proof that every endpoint is suitable or callable for the question.

Match quality: A wired label/count indicates keyword overlap with catalog records. Validate each endpoint's real contract and ownership in ARAPI.

6.5 Explicit agent selection

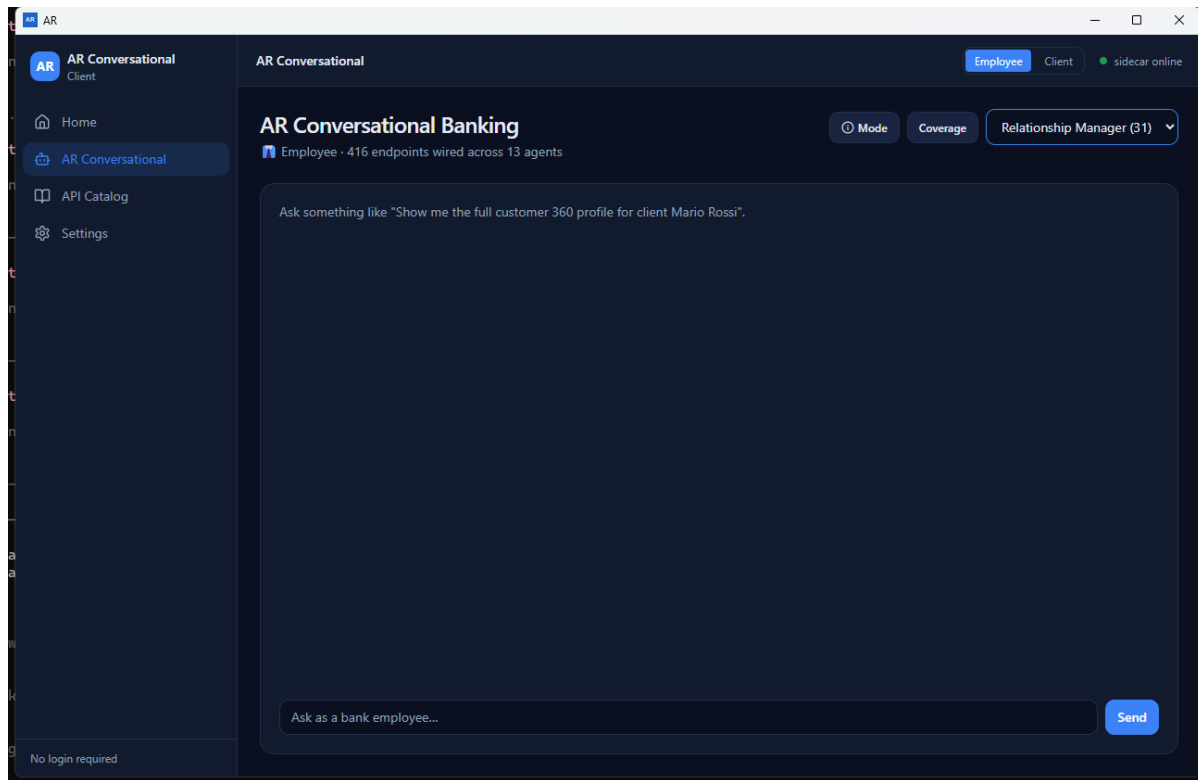


Figure 5. Explicit agent selection

An explicit selection takes precedence over automatic mode-and-keyword routing for the next question.

Override: Relationship Manager remains forced until Auto-route or another agent is selected, even if the active mode would normally choose another group.

6.6 Client e-Banking workspace

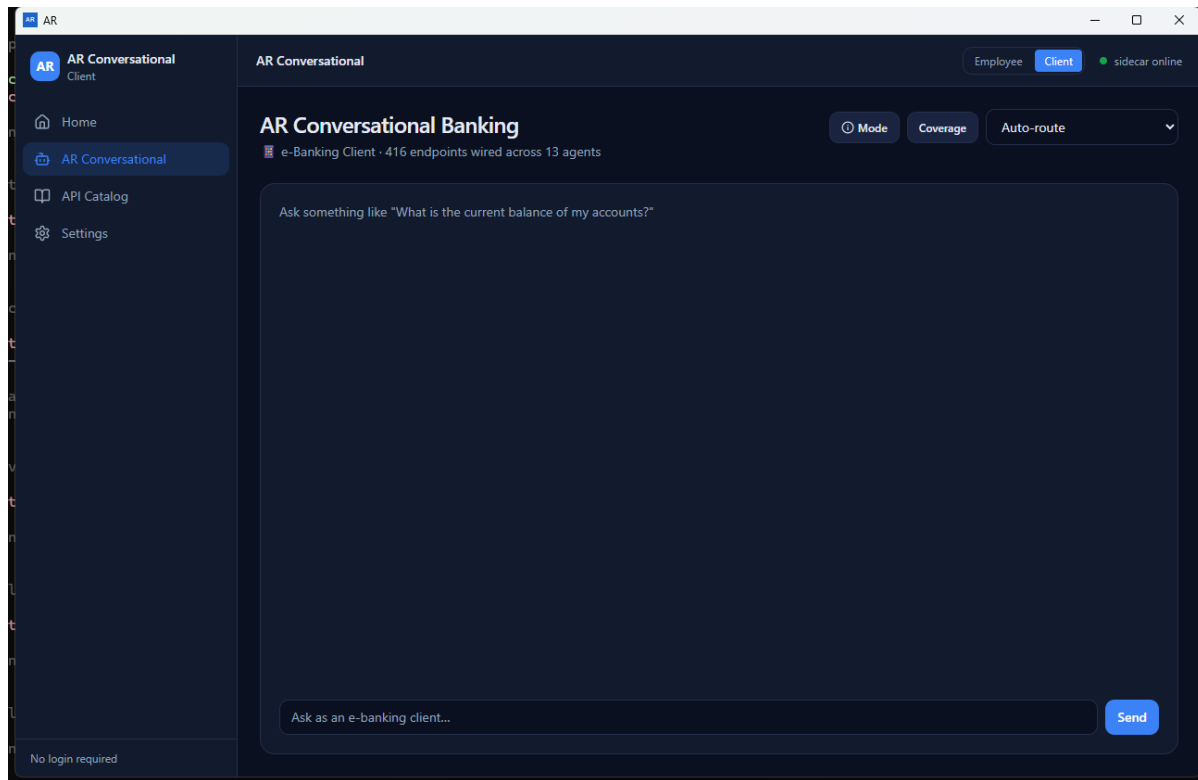


Figure 6. Client e-Banking workspace

Use Client mode for end-client wording and client-agent automatic routing. It does not authenticate or identify a real client.

Client-safe demonstration: Use synthetic questions only. The client mode is a presentation context, not a connected e-banking session.

6.7 Synthetic client balance answer

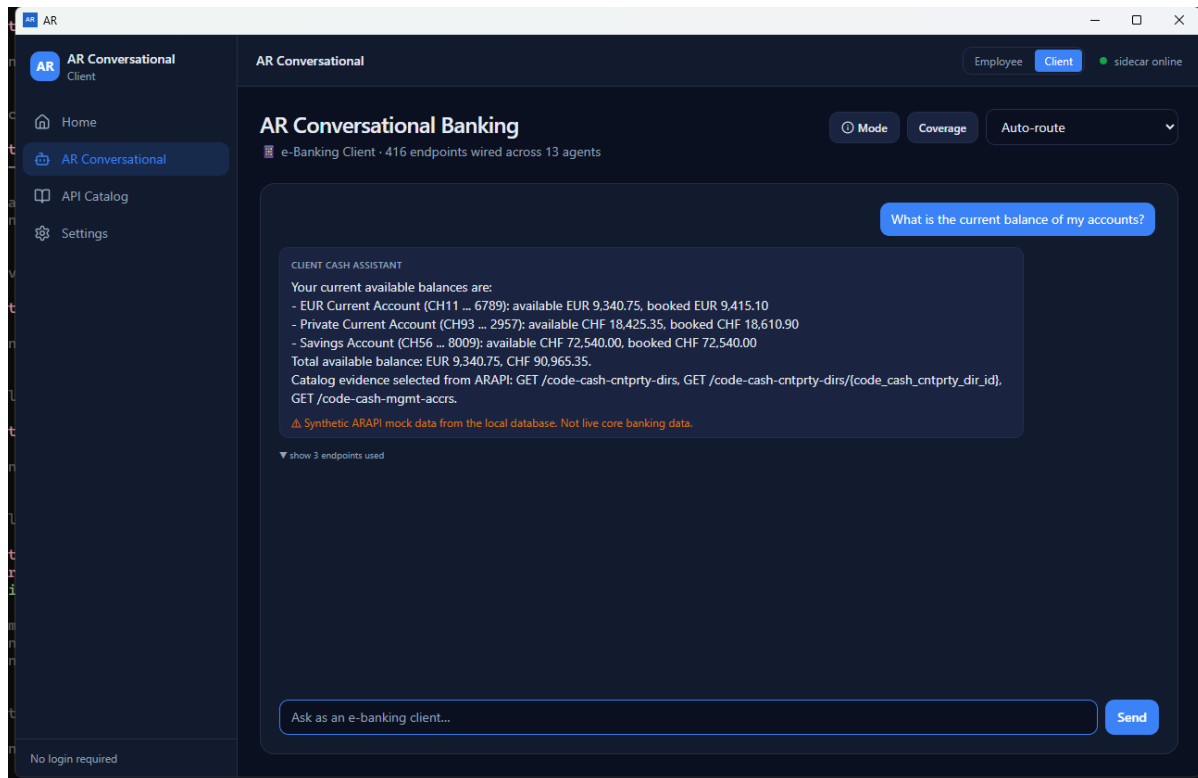


Figure 7. Synthetic client balance answer

The displayed balances are local synthetic ARAPI mock data, not live core-banking data and not suitable for financial decisions.

Synthetic balances: All shown account records are local demonstration data with masked identifiers. Never quote them as a customer position.

6.8 Expanded endpoint evidence

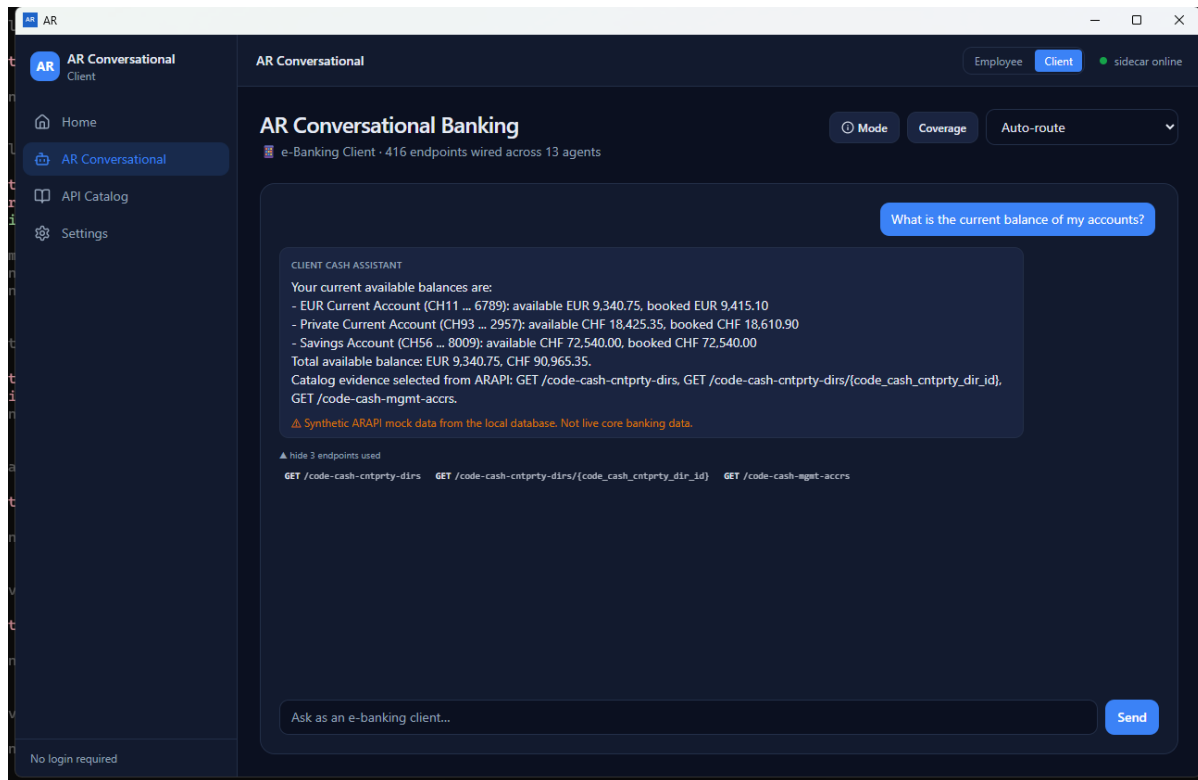


Figure 8. Expanded endpoint evidence

Evidence shows which catalog records were selected by keyword matching; review every method and path before relying on it.

Evidence boundary: Method/path pills are catalog matches. They do not show that authorization, request validation, network execution, or a source-system response occurred.

6.9 ARAPI catalog-search delegation

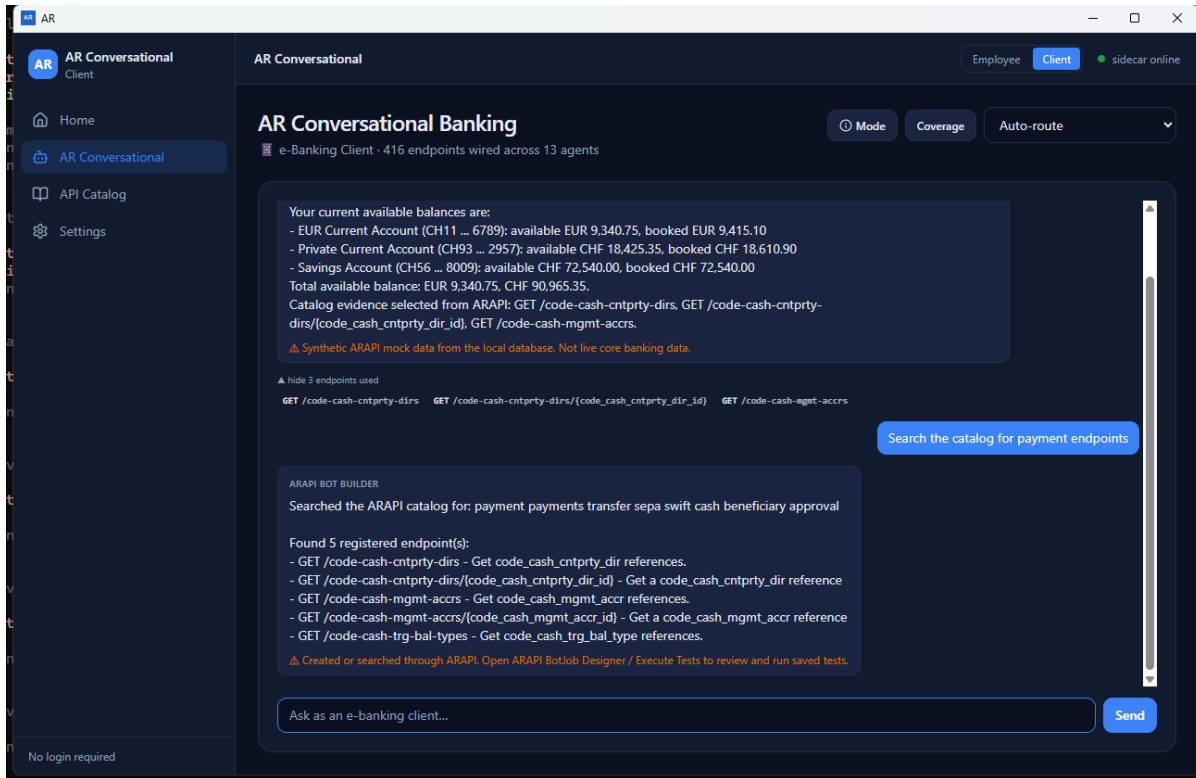


Figure 9. ARAPI catalog-search delegation

Catalog, BotJob, test-build, and related instructions are delegated to ARAPI. Review work in the separate ARAPI application.

Human handoff: Open ARAPI and review any matched endpoint, synthetic record, BotJob, or run. The conversational card is not final approval.

6.10 API Catalog overview

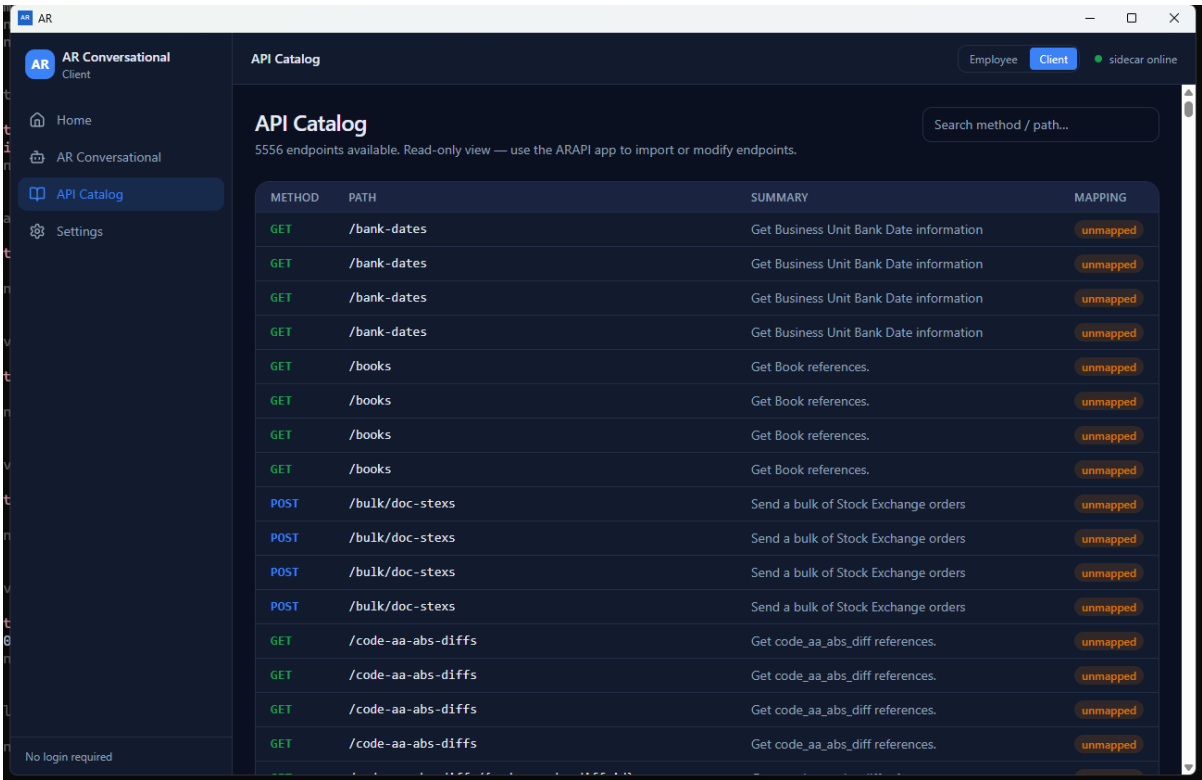


Figure 10. API Catalog overview

Endpoint counts and rows depend on the shared database. Import or modify specifications only in ARAPI.

Read-only: Import, edit, and mapping controls intentionally remain in ARAPI.

6.11 Filtered API Catalog

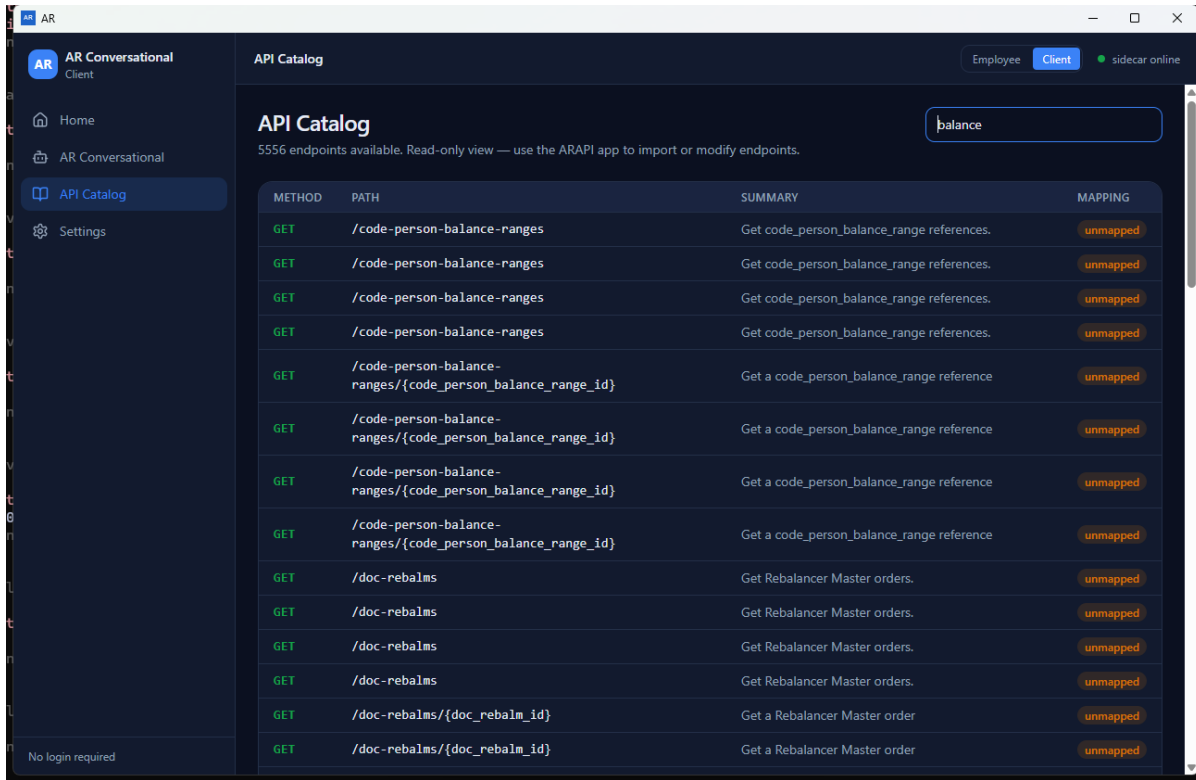


Figure 11. Filtered API Catalog

Search matches method, path, or summary text. Broad terms may return semantically weak matches that require human review.

Search semantics: Filtering uses method/path/summary text. A broad word such as balance may include technically or semantically unsuitable endpoints.

6.12 Settings provider list


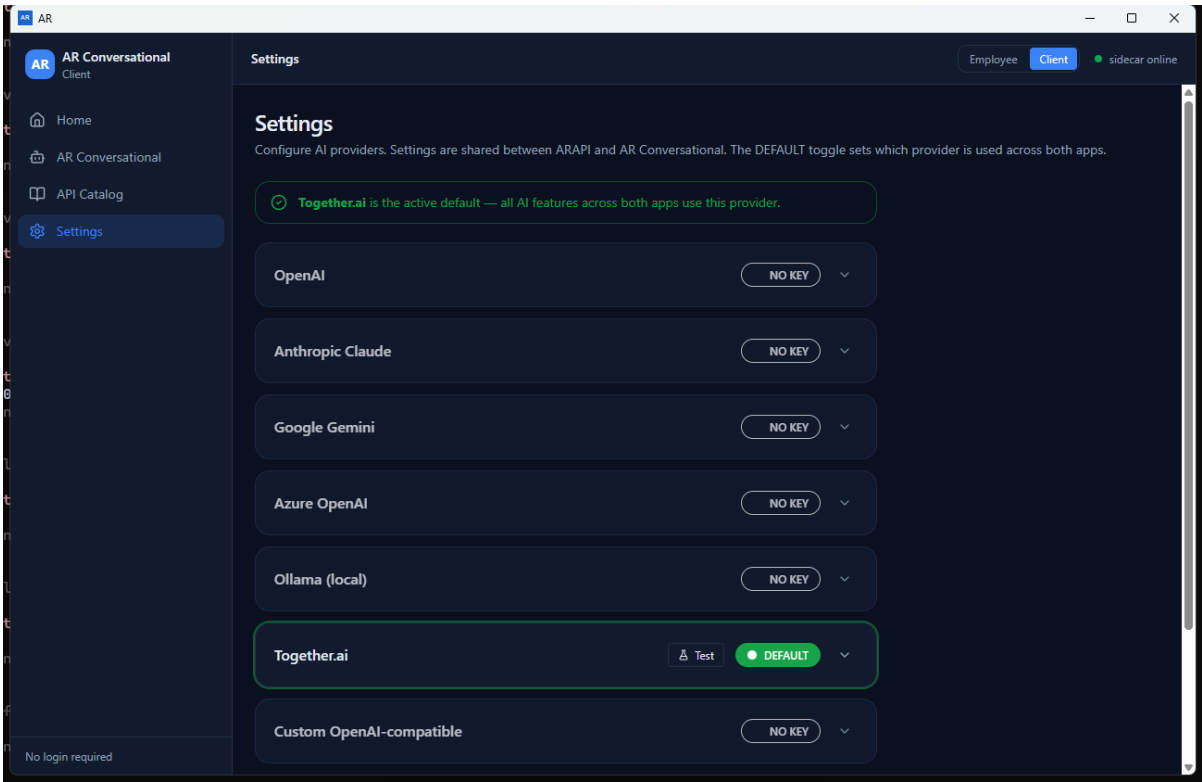


Figure 12. Settings provider list

Settings are shared with ARAPI. Changing the default or provider record affects both applications.

Shared setting: Changing provider records or default selection here changes the shared setting seen by ARAPI.

6.13 Provider configuration form

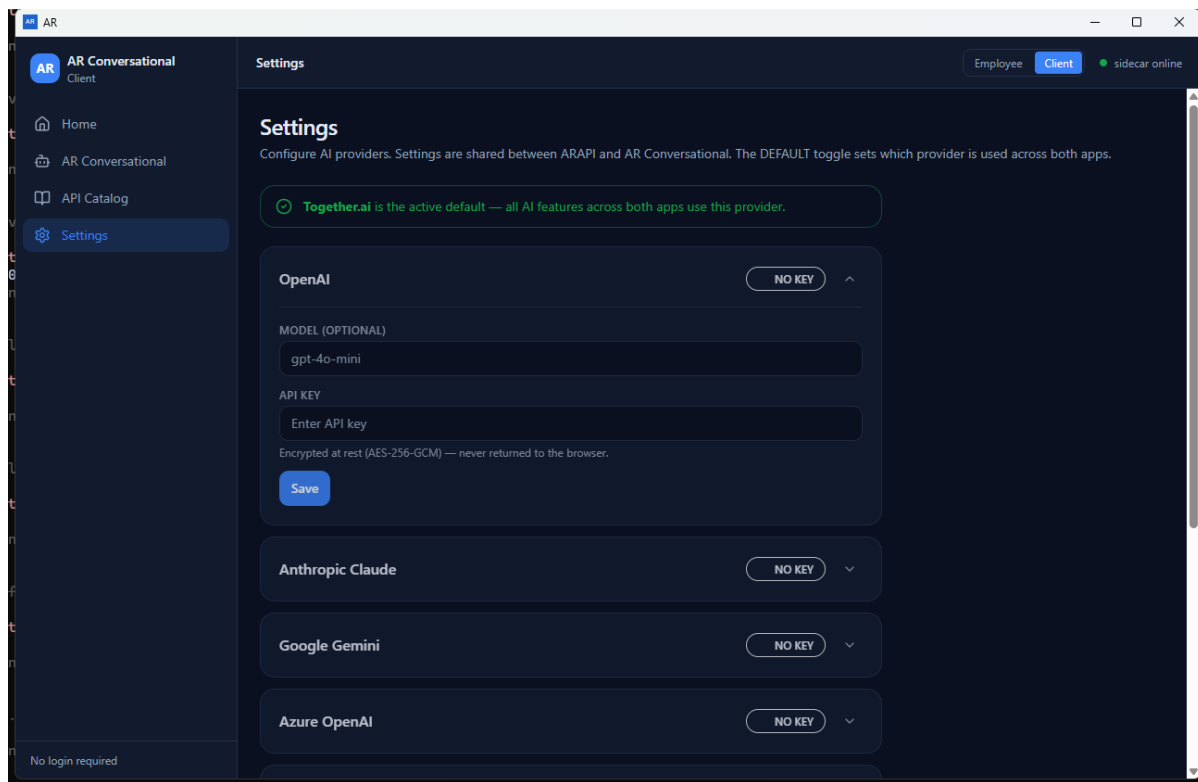

The screenshot shows the 'Settings' page of the AR Conversational Client. The left sidebar contains navigation links: Home, AR Conversational, API Catalog, and Settings (highlighted). The main content area is titled 'Settings' and includes a sub-header: 'Configure AI providers. Settings are shared between ARAPI and AR Conversational. The DEFAULT toggle sets which provider is used across both apps.' A green notification bar states: 'Together.ai is the active default — all AI features across both apps use this provider.' Below this, there are four provider configuration sections: OpenAI, Anthropic Claude, Google Gemini, and Azure OpenAI. Each section has a 'NO KEY' button and a dropdown arrow. The OpenAI section also includes a 'MODEL (OPTIONAL)' field with 'gpt-4o-mini' entered, an 'API KEY' field with the placeholder 'Enter API key', and a 'Save' button. A note below the API key field states: 'Encrypted at rest (AES-256-GCM) — never returned to the browser.' The bottom left corner of the sidebar indicates 'No login required'.

Figure 13. Provider configuration form

Leave a saved key field blank to preserve the existing key. Never place production credentials in screenshots or support tickets.

Credential handling: Blank after a saved key preserves it. Protect the local data store and never capture a typed production key.

6.14 Settings local services

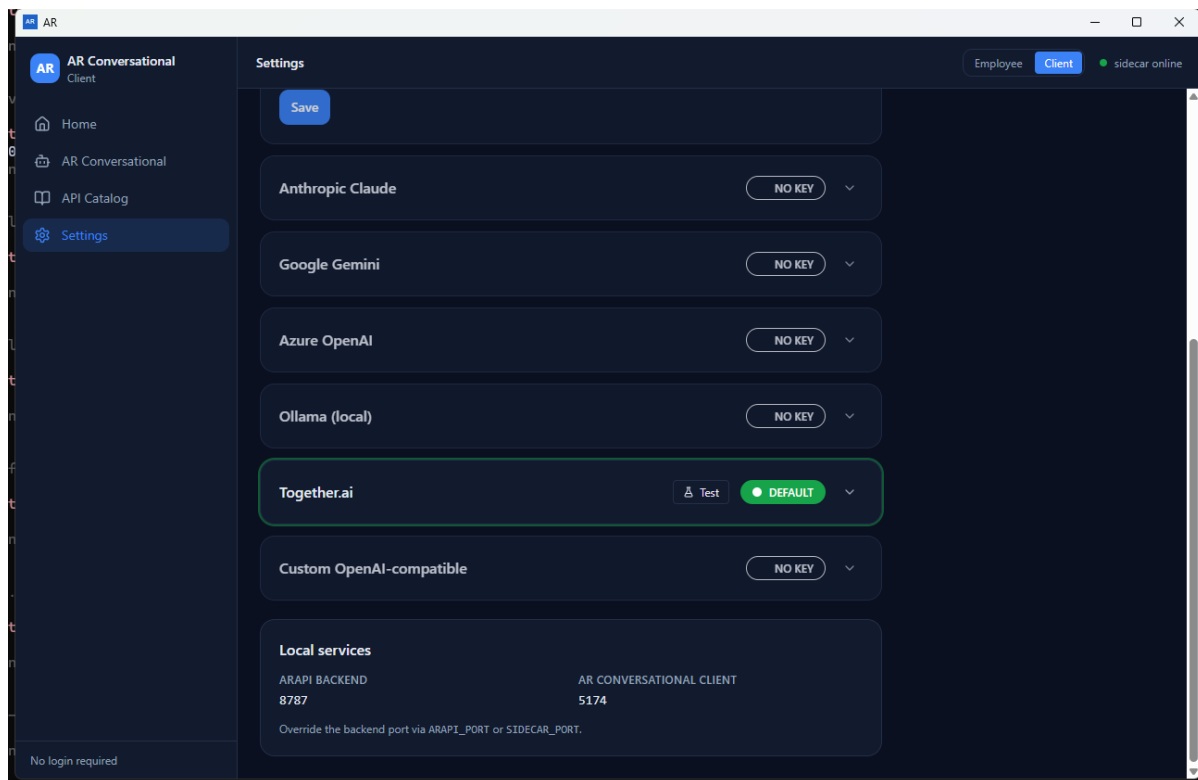


Figure 14. Settings local services

The backend is localhost-only. Port 5174 is the Vite development UI port; packaged desktop operation does not require exposing it.

Port scope: 8787 is the localhost backend; 5174 is development UI only. Neither should be advertised as a public client service.

6.15 Provider Test result

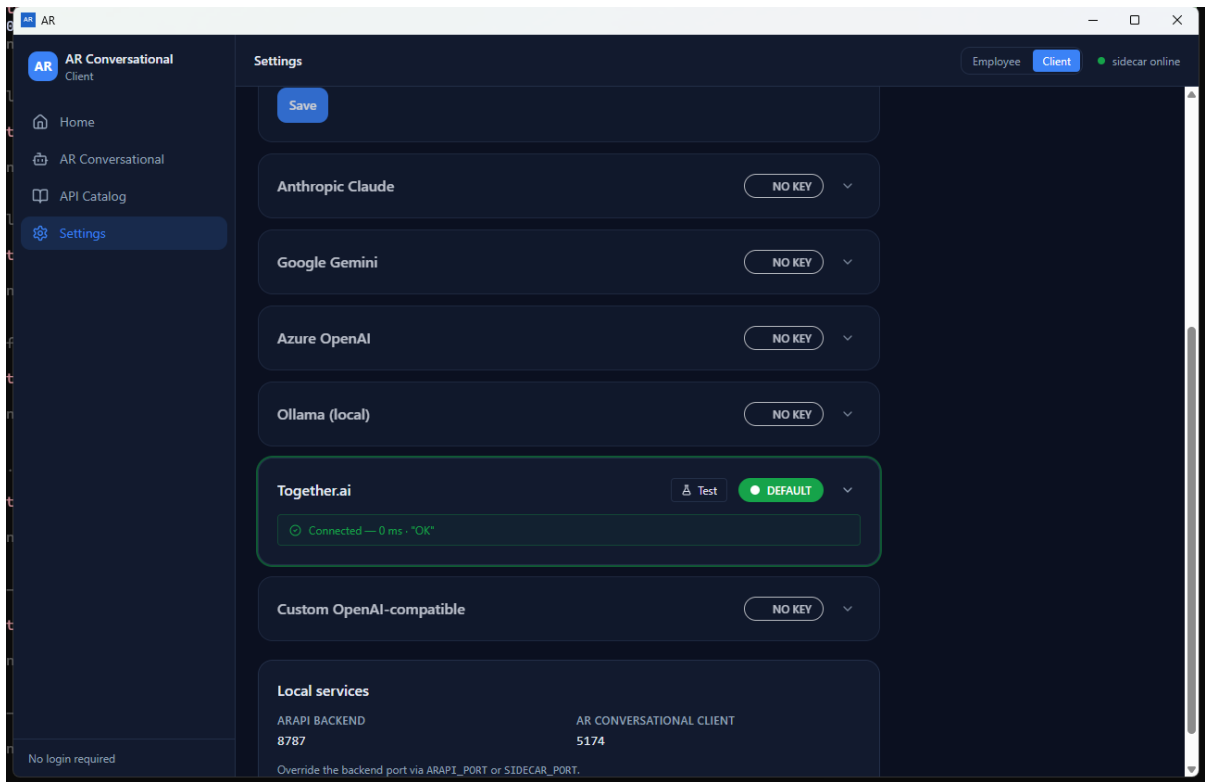


Figure 15. Provider Test result

In the reviewed C# build this is a local configuration indicator, not an external provider round-trip or proof that an LLM processed a request.

Connected qualification: In the reviewed build, this proves only that a local provider record exists. It does not prove external network, credentials, model entitlement, or LLM processing.

7. Employee and client modes

[Back to contents](#)

Mode controls the conversation perspective used by the interface and automatic agent routing. It is not login, customer identity, entitlement, consent, or upstream API authorization.

Behavior	Employee mode	Client mode
Automatic candidates	Nine employee agents	Five client agents
Example language	Servicing, operations, portfolio, controls	Balances, payments, trading, lending, messages
Input presentation	Bank-employee question context	e-Banking client-style question context
Synthetic balance wording	Employee-oriented explanation	Client-oriented account summary

Behavior	Employee mode	Client mode
Authentication effect	None	None
Catalog effect	None; shared inventory	None; shared inventory

Choose or change mode

1. At first use, read the welcome comparison and select Start as Bank Employee or Start as e-Banking Client.
2. Later, select the top-bar Employee/Client button for a direct change, or select Mode in the workspace to reopen the comparison.
3. Ask a new question after the change. Previously displayed text is not reprocessed or relabeled.
4. Return the agent selector to Auto-route if you want mode-filtered automatic routing; an explicit agent selection still takes precedence.

First-use modal behavior

The introduction is remembered locally after closing or choosing a mode. Use the Mode button to reopen it. Clearing browser/webview storage may cause it to appear again.

Client demonstrations: State explicitly that Client mode is synthetic and local before showing balances or messages. Do not let the visual context imply connection to a customer's bank session.

8. Banking agents and routing

[Back to contents](#)

How Auto-route works

1. The backend takes the current Employee/Client mode and builds that mode's candidate list.
2. It compares banking keywords from the question with each candidate's routing profile.
3. The highest-scoring candidate handles the normal banking question; deterministic fallback behavior applies when scoring is weak.
4. If a named agent is selected, that explicit ID is used instead of the mode-filtered automatic selection.
5. The answer returns the agent name plus any evidence and limitations; inspect them before relying on the response.

Routing is classification: Agent choice does not grant data access, verify customer identity, validate an API contract, or invoke a live banking system.

Agent groups

Mode	Agent	Primary purpose
Employee	Relationship Manager	Customer-facing service, onboarding, accounts, balances, and payments.
Employee	Portfolio Advisor	Investment advisory and portfolio support.
Employee	Cash & Payments	Payments, transfers, and cash operations.
Employee	Securities Trading	Trading and execution workflows.
Employee	Credit & Lending	Loan and credit servicing.
Employee	Compliance & Risk	Compliance checks, risk, and controls.
Employee	Back Office Operations	Settlement, reconciliation, and operations support.
Employee	Reporting & COO	Reporting, analytics, and operational oversight.
Employee	Audit & UAT	Audit trail and test support.
Client	Client Wealth Assistant	Client-facing wealth and investment support.
Client	Client Cash Assistant	Client-facing cash, balance, and payment support.
Client	Client Trading Assistant	Client trading support.
Client	Client Credit Assistant	Client lending support.
Client	Client Messages & Documents	Client document and message handling.

Coverage panel

Coverage calls the local agent/capability inventory and displays current keyword-match counts against the shared catalog. Counts change after ARAPI imports or catalog changes. Zero means no current keyword match; it is not an agent permission state.

When to select an agent explicitly

- The organizational owner is known and the question is intentionally narrow.
- You are testing a specific agent's wording or evidence selection.
- Auto-route repeatedly chooses an adjacent responsibility for ambiguous wording.
- You are demonstrating how an agent behaves outside its normal mode. Label that as an override and not normal routing.

Reset after testing: Choose Auto-route when explicit-agent testing is finished, especially before changing from Employee to Client mode.

9. Questions, answers, limitations, and evidence

[Back to contents](#)

Write an effective question

- Ask one business question or instruction at a time.
- Use specific banking nouns and actions: account balance, payment status, portfolio holdings, loan repayment, compliance screening, settlement, or statement.
- State whether you want an explanation, a catalog search, or an ARAPI test/BotJob handoff.
- Use synthetic identifiers only; remove all production credentials and customer data.
- If evidence is important, ask for the relevant endpoint area and then validate it in API Catalog/ARAPI.

Request lifecycle

Stage	What happens	What the operator must verify
1. Submit	UI sends question, mode, and optional agent to localhost.	No sensitive text; intended mode/agent.
2. Classify	Normal banking question or delegated ARAPI intent is selected.	The returned agent/action matches the request.
3. Answer	Deterministic local answer or delegated action result is returned.	Read the complete content; do not infer external AI use.
4. Evidence	Up to three catalog records may be attached.	Method/path/summary and real contract suitability.
5. Limitations	Synthetic/no-match/other warnings may be shown.	Treat every limitation as mandatory acceptance context.
6. Handoff	ARAPI review may be required.	Open the separate app and inspect saved artifacts/history.

Synthetic balance response

Balance/account wording is the one normal-question area with a detailed local demonstration response in the reviewed backend. It reads built-in synthetic account rows, masks identifiers, totals the mock values, and appends a clear limitation. It does not query a core-banking system.

Financial-use prohibition: Do not communicate synthetic balances to a customer, reconcile them, make an investment/credit/payment decision from them, or retain them as evidence of a real position.

Evidence interpretation

Method/path: The endpoint record selected from the imported catalog.

Why it appeared: Keyword overlap between the expanded question and endpoint metadata.

What it proves: Only that a catalog record was selected for display.

What it does not prove: Schema correctness, data entitlement, authentication, network execution, response validity, or successful business effect.

Conversation retention

Version 1.0.0 does not persist visible turns as a searchable conversation history. If the organization needs an audit record, capture an approved sanitized summary and the corresponding ARAPI/source-system evidence before navigating away. Do not use screenshots as the only live-system proof.

10. ARAPI delegation and cross-application workflow

[Back to contents](#)

Prompts containing test creation/building, BotJob, catalog-search, catalog-for, or payment-endpoint intent are sent to the shared ARAPI assistant route rather than the normal banking-agent route.

Common delegated intents

Intent	Typical wording	Observed local result
Search/list	Search the catalog for payment endpoints	Returns matched endpoint records and a handoff warning.
Create/build	Create a BotJob for an account flow	May use an imported match or create a synthetic mock-only record and saved BotJob.
Run	Run the BotJobs	Can execute all saved BotJobs against the built-in Mock environment and return local summaries.

Required handoff procedure

1. Read the conversational action/result card and identify whether it searched, created, or ran anything.
2. Open the separate ARAPI application using the same local deployment/database.
3. For search: validate method, path, summary, imported source, banking mapping, and ownership.

4. For create: open BotJob Designer and review endpoint origin, every command, variable, body, header, ordering, enabled state, and environment.
5. For run: open Execute Tests/History and identify every job that ran, the Mock target, status rows, and limitations.
6. Delete or quarantine unwanted synthetic/demo artifacts only through approved ARAPI data-management procedures.
7. Obtain human approval before generating Bash/curl or pointing any environment at a non-mock target.

No silent acceptance: A delegated card is an instruction result, not approval of an API contract, BotJob, test outcome, or production change.

Recommended division of responsibilities

Role	AR Conversational responsibility	ARAPI responsibility
Business user	Ask a sanitized question; read limitations.	Review business intent and expected effects.
API owner	Interpret catalog evidence cautiously.	Confirm real specification, method/path, schemas, and authorization.
QA/operator	Identify the requested handoff.	Review BotJob, environment, generated script, run, and target evidence.
Administrator	Protect workstation/local service.	Protect shared DB, credentials, backups, and deployment bundle.

11. Read-only API Catalog

[Back to contents](#)

API Catalog displays endpoints imported by ARAPI into the shared database. AR Conversational does not import, edit, delete, or map specifications.

Search

1. Open API Catalog from the sidebar or Home shortcut.
2. Enter a method, path fragment, or summary word in Search method / path.
3. Review every returned row: HTTP method, path, summary, and mapping status.
4. Clear or replace the search term to restore the broader inventory.
5. Open ARAPI for source/import details, corrections, or workflow selection.

Interpret the rows

Field	Meaning	Review point
Method	GET, POST, PUT, DELETE, and other imported verbs.	Write methods may have side effects in a real target.
Path	Imported route template.	Confirm parameter names and base URL in the source contract.
Summary	Specification description used by search/routing.	May be incomplete or ambiguous.
Mapping	Banking taxonomy status from ARAPI.	Unmapped does not automatically mean unusable; requires owner review.

Catalog stewardship: When results are missing, stale, duplicated, or incorrectly described, correct the trusted specification/import in ARAPI. Do not try to compensate with confidential prompt text.

12. AI provider settings

[Back to contents](#)

Settings stores provider records shared by ARAPI and AR Conversational. The current deterministic conversation routes do not prove that the selected provider generated an answer; configure these records only for approved shared features and future integration needs.

Supported records

Provider	Default model shown	Base URL field
OpenAI	gpt-4o-mini	No
Anthropic Claude	claude-3-5-haiku-20241022	No
Google Gemini	gemini-1.5-flash	No
Azure OpenAI	gpt-4o-mini	Yes - deployment endpoint
Ollama (local)	llama3.2	Yes - usually http://localhost:11434
Together.ai	meta-llama/llama-3-8b-chat-hf	No
Custom OpenAI-compatible	gpt-4o-mini	Yes - deployment endpoint

Configure or update

1. Expand the intended provider card.
2. Confirm or enter Model. For Azure, Ollama, or Custom, confirm Base URL according to the approved deployment.

3. Enter a scoped, revocable API key only when required. The field masks typed characters.
4. Select Save. After a key is stored, leaving the key field blank on a later save preserves it.
5. Select SET DEFAULT on a configured provider when it should be the shared default. If exactly one keyed provider exists, the backend may promote it automatically.
6. Select Test and interpret the result using the qualification below; perform any approved real provider/network validation separately.

Badges and controls

Control/state	Meaning
NO KEY	No stored key is reported for the provider; default selection is disabled.
SET DEFAULT	Available for a keyed, non-default provider; changes the shared default.
DEFAULT	The provider is the current shared default; choose another configured provider to change it.
Test	Returns the reviewed build's local provider-record indicator.
Connected / OK / 0 ms	Does not prove an external request, credential validity, model access, or provider-generated response.

Credential safeguards

- Use non-production or narrowly scoped keys wherever possible; rotate them according to policy.
- Do not put keys in screenshots, manuals, chat questions, logs, or support attachments.
- Provider-list API responses omit key values and the UI masks input, but the local database must still be classified and protected as credential-bearing.
- Restrict Windows account access and data-directory ACLs; back up and dispose of the database under credential-handling policy.
- Before claiming provider connectivity, perform an approved end-to-end check that actually contacts the provider and records sanitized evidence.

UI label qualification: Although the Settings page presents an encryption-at-rest statement, the reviewed C# save path does not independently demonstrate an encryption transform. Do not rely on that label as the only credential control.

13. Security and operational practices

[Back to contents](#)

Security boundary

AR Conversational has no internal login in version 1.0.0. The managed Windows account, endpoint controls, local file permissions, backend localhost binding, API credentials, source-system authorization, and organizational procedures form the operational boundary.

Required practices

- Install only an approved, signed distribution on an organization-managed Windows device.
- Keep backend port 8787 on localhost and block unapproved network exposure.
- Protect and back up the shared local database; it may contain catalog data, BotJobs, provider records, and credential-bearing fields.
- Use synthetic demonstration data. Do not enter production personal, banking, authentication, or confidential information into questions.
- Treat screenshots, reports, provider state, catalog details, and delegated ARAPI artifacts according to their data classification.
- Require human review and source-system evidence for any real API action or customer-facing statement.
- Separate development, mock, UAT, and production responsibilities; never infer target authorization from the selected conversation mode.
- Record application version, operator, sanitized question/purpose, agent/mode, ARAPI handoff, evidence location, and exceptions for controlled testing.

What not to enter

Prohibited input	Use instead
Real customer name, IBAN, account number	Synthetic names and clearly fake identifiers.
API key, OAuth token, password, session cookie	Approved secret store or runtime environment in ARAPI workflows.
Confidential payment/portfolio/credit content	Sanitized scenario that preserves only the test intent.
Production request/response body	Schema-only example with fabricated values.
Regulated documents or messages	Approved redacted sample designed for testing.

Operational evidence

For real-system acceptance, combine the sanitized conversational request with reviewed ARAPI artifacts and authoritative target evidence: approved request/response capture, service logs, audit record, database/state confirmation, or a business-owner reconciliation. A conversational answer or screenshot alone is insufficient.

No-login does not mean no security: Do not deploy the app on a shared/unmanaged account or assume Client mode identifies a customer. Apply workstation, file, credential, network, and source-system controls.

14. Troubleshooting

[Back to contents](#)

When escalating, include AR Conversational version, installation type, exact displayed message, current mode/agent, sanitized question, backend status, and reproduction steps. Remove credentials and customer data.

sidecar offline

Close and reopen the desktop app, confirm no process is already occupying port 8787, and contact the deployment administrator if status remains offline. Do not expose the port publicly.

Home shows no agent coverage

Wait for the backend to become online. If the list remains absent, verify GET /agents locally and restart the approved application bundle.

Agents show no match or zero endpoints

Open ARAPI, import a trusted OpenAPI/Swagger specification, and verify that relevant method/path/summary terms exist. Counts are keyword matches and update with the catalog.

The wrong agent answered

Return the selector to Auto-route and use a more specific question, or explicitly choose the intended agent. An explicit agent overrides the current mode's automatic candidate filter.

Send does nothing

Enter non-whitespace text and wait for the current request to finish. Send is disabled while busy; pressing Enter also submits.

A conversation disappeared

Visible turns are component memory only. Navigating away, reloading, or restarting clears them; there is no conversation-history workspace in 1.0.0.

A balance answer looks like real customer data

Stop and read the orange limitation. The reviewed build returns local synthetic accounts with masked IBANs. Never use it for customer service, valuation, or a financial decision.

Evidence appears unrelated

Evidence is selected by keyword matching and is limited to a few catalog records. Review method, path, summary, ownership, authorization, and the real contract in ARAPI before use.

An instruction was delegated to ARAPI

Prompts about creating/building tests, BotJobs, catalog searches, or payment endpoints use the ARAPI assistant route. Open ARAPI Designer/Execute Tests to review any result.

A delegated instruction says BotJobs were executed

The current delegated run intent can execute all saved BotJobs against the built-in Mock environment. Review ARAPI execution history and do not interpret local green rows as proof of a real downstream change.

Provider Test says Connected but AI behavior fails

The reviewed C# Test result is a local configuration indicator. Verify the record, model, base URL, entitlement, proxy/firewall, and an approved external provider check outside this indicator.

Catalog is empty or read-only

Use the separate ARAPI application's Import APIs workflow. AR Conversational intentionally provides no import, edit, or category-mapping controls.

Port 5174 cannot be reached

Port 5174 is the Vite development UI port. A packaged Tauri desktop app loads its bundled frontend and does not require a public web listener on 5174.

Safe diagnostic information

- AR Conversational version and installer/portable distribution type.
- Home sidecar status, backend port, and dynamic agent-coverage count.

- Current mode and selected agent name (or Auto-route).
- A fully sanitized reproduction question and the displayed limitation text.
- Endpoint methods/paths shown as evidence when those catalog details are approved for sharing.
- Provider name/model/base-URL hostname and badge state; never the key or Authorization data.
- Whether ARAPI shows the same catalog/provider data and whether a delegated artifact/run exists.

15. Feature status matrix

[Back to contents](#)

Capability	Status	Qualification
Employee and Client modes	Available	Presentation/routing context only; not authentication.
14 named banking agents	Available	Nine employee and five client routing profiles.
Auto-route	Available	Mode filter plus keyword score; explicit agent overrides.
Agent coverage	Available	Dynamic catalog keyword counts, not execution proof.
Normal banking answers	Available with qualification	Deterministic local response and catalog evidence.
Synthetic balance answer	Demo only	Local mock accounts; no core-banking connection.
Endpoint evidence	Available with qualification	Up to three keyword matches; validate contract in ARAPI.
Conversation history	Not persisted	Visible turns clear on navigation/reload/restart.
ARAPI search/list delegation	Available	Returns catalog matches for human review.
ARAPI BotJob creation delegation	Available with qualification	May create synthetic mock-only endpoint/job.
ARAPI run delegation	Available with qualification	Can run all saved jobs against built-in Mock.
API Catalog	Read-only	Search method/path/summary; import/edit remains in ARAPI.
Seven provider records	Available	Shared with ARAPI; protect the local data store.
Provider default selection	Available	Shared record state; not proof of LLM use.
Provider Test	Local indicator	Not an external provider round-trip in reviewed build.
Frontend development port 5174	Development only	Not required as a public listener in packaged desktop.
Backend port 8787	Available	Localhost-only shared C# backend.

Appendix A. Complete control index

[Back to contents](#)

This index covers all visible navigation, buttons, selectors, fields, disclosure controls, status controls, and important conditional actions in AR Conversational 1.0.0.

Area	Control	Available when	Result
Global	Home sidebar item	Always	Opens the overview and current shared-backend/agent status.
Global	AR Conversational sidebar item	Always	Opens the conversation workspace; remounting clears visible turns.
Global	API Catalog sidebar item	Always	Opens the read-only shared endpoint inventory.
Global	Settings sidebar item	Always	Opens shared provider and local-service settings.
Global	Employee / Client top-bar buttons	Always	Changes the current in-memory conversation perspective.
Global	sidecar status indicator	Always	Shows whether the UI can reach the localhost backend; refreshed every five seconds.
Home	AR Conversational shortcut card	Always	Opens the conversation workspace.
Home	API Catalog shortcut card	Always	Opens the read-only catalog.
Home	Settings shortcut card	Always	Opens provider settings.
Conversation	Mode	Always	Opens the Employee/Client comparison modal.
Mode chooser	Close (x)	Modal open	Closes the chooser without changing the current mode and records the introduction as seen.
Mode chooser	Start as Bank Employee	Modal open	Selects Employee mode and closes the chooser.
Mode chooser	Start as e-Banking Client	Modal open	Selects Client mode and closes the chooser.
Conversation	Coverage	Always	Shows or hides agent names and dynamic catalog-match counts.
Conversation	Agent selector / Auto-route	Agents loaded	Uses mode and keyword routing when blank, or forces the selected agent.
Conversation	Question input	Always	Accepts one question/instruction. Enter sends; empty text is ignored.
Conversation	Send	Non-empty question and not busy	Sends one request to the local backend and appends the result to the visible session.
Conversation	show/hide endpoints used	Answer includes evidence	Expands or collapses selected catalog method/path pills.
API Catalog	Search method / path	Catalog loaded	Filters by method, path, or summary; does not change the catalog.
Settings	Provider expand/collapse chevron	Always	Shows or hides Model, optional Base URL, API key, and Save.

Area	Control	Available when	Result
Settings	NO KEY badge	Provider has no saved key	Disabled status; a key must be saved before selecting the provider as default.
Settings	SET DEFAULT	Provider has a key and is not default	Makes the provider the shared default across both apps.
Settings	DEFAULT badge	Provider is current default	Shows the provider selected for shared AI features; disabled until another provider is chosen.
Settings	Test	Provider has a key	Shows the current build's provider-test result.
Provider form	Model	Provider expanded	Stores the optional model value.
Provider form	Base URL	Azure, Ollama, or Custom provider expanded	Stores the provider/deployment endpoint.
Provider form	API key	Provider expanded	Accepts a new masked key; blank on a later save preserves the existing value.
Provider form	Save	Provider expanded	Persists the shared provider record and clears the typed key field.

Appendix B. Agent reference

[Back to contents](#)

Keywords summarize routing intent; the live score uses backend profiles and the wording in the current question. Coverage counts depend on the imported catalog.

Mode	Agent	Purpose	Example routing terms
Employee	Relationship Manager	Customer-facing service, onboarding, accounts, balances, and payments.	customer, onboarding, account, balance, payment
Employee	Portfolio Advisor	Investment advisory and portfolio support.	portfolio, holdings, allocation, investment, recommendation
Employee	Cash & Payments	Payments, transfers, and cash operations.	payment, transfer, SEPA, SWIFT, cash
Employee	Securities Trading	Trading and execution workflows.	trade, order, execution, security
Employee	Credit & Lending	Loan and credit servicing.	loan, credit, mortgage, repayment
Employee	Compliance & Risk	Compliance checks, risk, and controls.	compliance, AML, risk, screening
Employee	Back Office Operations	Settlement, reconciliation, and operations support.	settlement, reconciliation, operations
Employee	Reporting & COO	Reporting, analytics, and operational oversight.	report, analytics, audit
Employee	Audit & UAT	Audit trail and test support.	audit, UAT, log
Client	Client Wealth Assistant	Client-facing wealth and investment support.	wealth, portfolio, investment
Client	Client Cash Assistant	Client-facing cash, balance, and payment support.	payment, transfer, cash
Client	Client Trading Assistant	Client trading support.	trade, market, security
Client	Client Credit Assistant	Client lending support.	loan, credit, mortgage
Client	Client Messages & Documents	Client document and message handling.	document, message, statement

Appendix C. Local API reference

[Back to contents](#)

Administrator/developer reference: These are the localhost JSON routes used by the AR Conversational UI. Normal client use should stay in the desktop interface. Never publish the API publicly or send it secrets outside approved settings workflows.

Method	Route	Purpose
GET	/health	Backend liveness used for the online/offline indicator.
GET	/catalog/endpoints	Read the endpoint inventory shared with ARAPI.
GET	/agents	List 14 agents with dynamic catalog capability counts.
GET	/agents/capabilities	List agent names and endpoint-count summaries.
POST	/agents/ask	Route one banking question by mode/explicit agent and return answer, evidence, and limitations.
POST	/app-assistant/chat	Handle delegated ARAPI catalog/BotJob instructions.
GET	/settings/ai-providers	List provider records without returning key values.
POST	/settings/ai-providers	Create/update a shared provider record.
POST	/settings/ai-providers/set-default	Set the shared default provider by record ID.
POST	/settings/ai-providers/test	Return the current build's local provider-test result.

Appendix D. Glossary

[Back to contents](#)

Term	Meaning
Agent	A named routing profile with employee/client mode, description, and banking keywords.
Auto-route	Selection behavior that filters agents by mode and scores banking keywords in the question.
Capability count	Current count of catalog endpoints that keyword-match an agent; not a permission or runtime-success guarantee.
Conversation mode	Employee or Client UI context used for examples, placeholder text, automatic candidates, and supported answer wording.
Evidence	Up to three method/path catalog records selected for a normal banking question.
Limitation	A warning returned with an answer, such as synthetic data or no matching endpoint.
Synthetic data	Local demonstration records used by the reviewed C# backend; never live core-banking data.
Delegation	Routing of catalog/test/BotJob language from AR Conversational to the shared ARAPI assistant endpoint.
Shared database	The local data store used by both desktop apps for catalog, provider settings, BotJobs, and related records.
Default provider	The provider record marked as shared default; in this build the label alone does not prove an external LLM call occurred.

Appendix E. Client acceptance checklist

[Back to contents](#)

Application and security

- Version and distribution type are recorded; the approved bundle launches without a global Node.js dependency.
- sidecar online appears after a clean launch and port 8787 remains localhost-only.
- The exact shared local database path, backup/restore procedure, and ACL owner are documented.
- Operators understand that there is no internal login and Client mode is not authentication.

Conversation and catalog

- Employee and Client modes, Auto-route, and explicit agent selection behave as documented.
- All 14 agents are listed and coverage changes when the shared catalog changes.
- A synthetic balance demonstration displays masked identifiers and a visible no-live-data limitation.
- Evidence can be expanded and is understood as keyword matching, not execution proof.
- API Catalog search is read-only and the ARAPI import/correction owner is identified.
- Conversation turns are confirmed to clear on navigation/reload/restart.

ARAPI handoff

- A catalog-search instruction produces a reviewable ARAPI delegation card.
- Created/synthetic BotJobs are reviewed in ARAPI before save, script generation, or execution.
- Any delegated run is reconciled against ARAPI History and identified as built-in Mock unless separately proven.
- Human approval and target-side evidence are required for non-mock acceptance.

Providers and support

- Provider records/default selection are confirmed as shared with ARAPI.
- Keys are scoped, revocable, absent from screenshots, and the local database is protected as credential-bearing.
- Provider Test is accepted only as a local configuration indicator; any external validation is performed separately.
- Support procedures list sanitized evidence and explicitly prohibit credentials/customer data in tickets.

Sign-off: Record approver, date, application build, workstation/deployment, shared-data location, tested modes/agents, catalog source, evidence location, exceptions, and remediation owner.

[Return to contents](#)