

Misurazione Implicita in Psicologia: Impostare gli esperimenti

Dr. Ottavia M. Epifania

`ottavia.epifania@unipd.it`

Master di II secondo Livello in

Psicologia quantitativa. Misurazione, valutazione e analisi di variabili
psicosociali

22 luglio 2022, Padova

Contenuti

Cosa ci serve

The Inquisit file

Experiment time!

Table of Contents

Cosa ci serve

The Inquisit file

Experiment time!

- Download  e seguire le istruzioni !!! la demo è valida solo per un mese!!
- Download the AGE IAT from Inquisit test library
- The Inquisit Test library

Open the file and run the experiment!

Once you're done, send me the resulting `.dat` file (we'll use this afternoon for the data analysis part)

Did you like the experiment? Would you change something? Would you add something?

Table of Contents

Cosa ci serve

The Inquisit file

Experiment time!

1. User manual (keep it or not)
2. Welcome
3. Etichette e stimoli
4. Pagine di istruzione & summary dei risultati
5. Preparare il materiale
6. Preparare i “blocchi” dell’esperimento
7. L’esperimento

```
<htmlpage iatintro>
/ file = "intro_pictureiat.htm"
</htmlpage>
```

Implicit Association Test

In this task you will press the 'E' key (left response key) or the 'I' key (right response key) to categorize words and pictures into groups as fast as you can. Here are the four groups and the words and pictures that belong to them:

Category	Item
Good	Joy, Love, Peace, Wonderful, Pleasure, Glorious, Laughter, Happy
Bad	Agony, Terrible, Horrible, Nasty, Evil, Awful, Failure, Hurt
Young	
Old	

The task has 7 parts and the instructions change for each one. Pay attention!

Press [space] to continue

intro_pictureiat.htm Si apre con il blocco note

```
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<meta name="robots" content="noindex, nofollow"/>
<title>iat intro</title>
<style>
.center {
text-align: center;
}
.left {
text-align: left;
}
[.....]
```

Può essere modificato e salvato (ad esempio, per mettere le istruzioni in italiano)

Define “Attribute A” (in this case, “Good”)

```
<item attributeAlabel>  
/1 = "Good"  
</item>
```

Definisce la prima delle dimensioni valutative (i.e., “Good”)

```
<item attributeA>  
/1 = "Joy"  
/2 = "Love"  
/3 = "Peace"  
/4 = "Wonderful"  
/5 = "Pleasure"  
/6 = "Glorious"  
/7 = "Laughter"  
/8 = "Happy"  
</item>
```

Elenco di tutte le parole che appartengono a “Good”
Per aggiungere ulteriori parole:
/9 = ‘‘Bello’’
/10 = ‘‘Carino’’

Same thing with the target category “Target A” (‘in this case “Young”’), just remember to import the images (have to be in the same folder)

```
<item targetAlabel>  
/1 = "Young"  
</item>
```

First define the label of the target category (i.e., “Young”)

```
<item targetA>  
/1 = "yf1.jpg"  
/2 = "yf4.jpg"  
/3 = "yf5.jpg"  
/4 = "ym2.jpg"  
/5 = "ym3.jpg"  
/6 = "ym5.jpg"  
</item>
```

List all the elements belonging to the superordinate category “Young” (i.e., the images in the same folder)

```
<instruct>  
/ navigationbuttonfontstyle =  
("Arial", 3%, false, false, false, false, 5, 1)  
</instruct>
```

This defines the button to navigate through pages. Here you define its appearance, not its behavior.

To change the font:

```
("font-name", height, bold, italic, underline, strikeout,  
quality, set)
```

font-name: e.g., “Arial”, “Tahoma”, “Courier New”

quality: quality of the font, 1-5

set: characters set (e.g., latin, greek. 1 stands for the default of the computer on which Inquisit runs)

```
<item instructions>  
/ 1 = "Put your left[...]."  
  
/ 2 = "Put your left finger [...]"  
  
/ 3 = "Press the left 'E' "  
  
[...]  
</item>
```

Same as the attribute stimuli “Good”, here the instructions are defined as a list of items


Again, this is only the content of the instructions

```
'<%item.attributeAlabel.item(1)%>'
```

Allows for automatically including the label of attribute A in the instruction text. It uses “item” because it is supposed to be “fixed”

```
'<%expressions.leftTarget%>'
```

Allows for automatically including the target **displayed on the left side of the screen**. It uses “expressions” because the target displayed on the left side of the screen changes according to the experiment

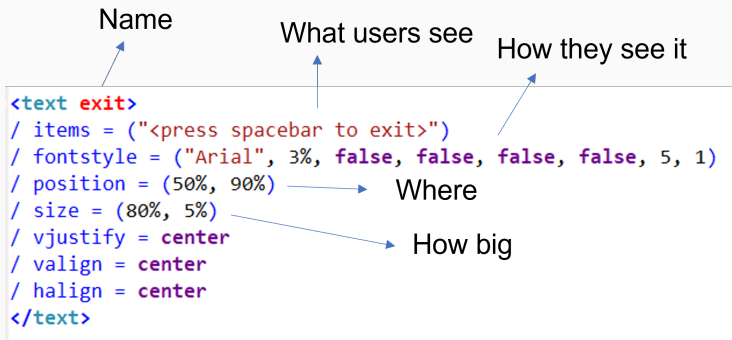

No actual behavior has been defined yet

Use what defined in `<item instructions>` (`/items = instructions`) and add some fancy formatting:

```
<text instructions>
/ items = instructions
/ position = (10%, 25%)
/ halign = left
/ valign = top
/ hjustify = left
/ vjustify = center
/ size = (80%, 50%)
/ select = values.instructionIndex
</text>
```

`/ select = values.instructionIndex` tells which page of instructions to show

With `<trial instructions>` we finally set the behavior of “instructions” throughout the experiment:

```
<trial instructions>
/ ontrialbegin = [
values.progresswidth += 10;
values.instructionIndex += 1;
]
/ stimulustimes = [1=instructions, spacebar, progressbar, progressbar_fill]
/ correctresponse = (" ")
/ errormessage = false
/ recorddata = false
/ showmousecursor = true
</trial>
```

`/ stimulustimes = [1=instructions, spacebar, progressbar, progressbar_fill]` → stimuli that have to be included in the instructions trial.

Set the appearance of the word stimuli:

```
<text attributeA>  
/ items = attributeA  
/ fontstyle = ("Arial", 5%)  
/ txcolor = green  
</text>
```

Set the behavior of the stimuli!


```
<trial attributeA>  
/ validresponse = ("E", "I")  
/ correctresponse = ("E")  
/ stimulusframes = [1 = attributeA, errorReminder]  
/ posttrialpause = parameters.ISI  
</trial>
```

Set the appearance of the stimuli:

```
<picture targetA>  
/ items = targetA  
/ size = (20%, 20%)  
</picture>
```

Set the behavior of the stimuli.

```
<trial targetAleft>  
/ validresponse = ("E", "I")  
/ correctresponse = ("E")  
/ stimulusframes = [1 = targetA, errorReminder]  
/ posttrialpause = parameters.ISI  
</trial>
```

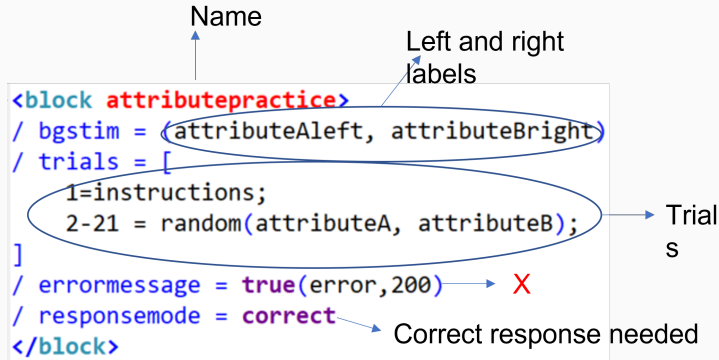

`1=instructions;` First trial is an instruction page (the first one)

`2-21 = random(attributeA, attributeB);` Trials from 2 to 21 are randomly drawn from `attributeA` and `attributeB` stimuli

Total number of trials = 20

```
/ bgstim = (targetAleftmixed, orleft, attributeAleft, targetBr  
/ trials = [  
1=instructions;  
3,5,7,9,11,13,15,17,19,21= random(targetAleft, targetBright);  
2,4,6,8,10,12,14,16,18,20 = random(attributeA, attributeB)]  
/ errormessage = true(error,200)  
/ responsemode = correct  
[...]
```

Target and stimuli are presented one at a time, one image, one word

Table of Contents

Cosa ci serve

The Inquisit file

Experiment time!

Primo gruppo

```
<expt>
```

```
/ onexptbegin = [
```

```
values.conditionOrder = "c-ic" % associative conditions order  
]
```

```
/ preinstructions = (iatintro) % the ‘‘welcome’’ page
```

```
/ groups = (1 of 2) % actual conditions presentation
```

```
/ blocks = [ % the IAT itself
```

```
    1=targetcompatiblepractice; 2=attributepractice;
```

```
    3=compatibletest1; 4=compatibletestinstructions; 5=com
```

```
    6=targetincompatiblepractice; 7=incompatibletest1;
```

```
    8=incompatibletestinstructions; 9=incompatibletest2;
```

```
    10=summary; % the results
```

```
    11 = end; % goodbye
```

```
]
```

```
</expt>
```

Secondo gruppo

```
<expt>
```

```
/ onexptbegin = [
```

```
values.conditionOrder = "ic-c"
```

```
]
```

```
/ preinstructions = (iatintro)
```

```
/ groups = (2 of 2) % change the grouping
```

```
/ blocks = [ % change the conditions presentation order
```

```
1=targetincompatiblepractice; 2=attributepractice;
```

```
3=incompatibletest1; 4=incompatibletestinstructions; 5=incompatible
```

```
6=targetcompatiblepractice; 7=compatibletest1;
```

```
8=compatibletestinstructions; 9=compatibletest2;
```

```
10=summary;
```

```
11 = end;
```

```
]
```

```
</expt>
```

Si possono avere tutti i gruppi che si vogliono, a seconda del numero di condizioni sperimentali

In questo caso:

- Tutti i soggetti dispari / groups = (1 of 2) vedono prima la condizione compatibile e poi quella incompatibile
- Tutti i soggetti pari / groups = (2 of 2) vedono prima la condizione incompatibile e poi quella compatibile

Se avessimo un questionario, dovremmo specificarlo qui nell'ordine in cui vogliamo presentarlo rispetto alle misure implicite

La prima cosa da fare, ovviamente, è tradurre il tutto in italiano (vi lascio divertire)

Attenzione! Per non complicare troppo le operazioni, si possono tradurre solo le parti che i partecipanti vedranno