

Quick Recap :

- Express


- ↳ Node v/s Express
- ↳ Req/Res cycle
- ↳ Routes
- ↳ Middlewares
- ↳ HTTP Methods

API

↳ Application Programming Interface



example.com/api/login

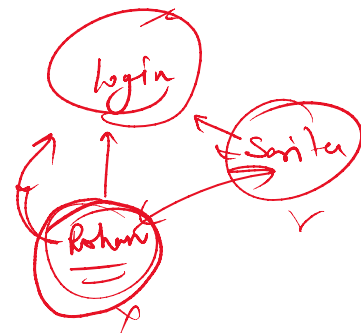

RESTful APIs :

↳ Representational State Transfer
globally accepted

① Statelessness : Each request should contain all the necessary information to process it.


② Client-Server Architecture : $C \xrightarrow{\quad} S$
 $\xleftarrow{\quad}$

③ Cachability : response should be cacheable

④ Uniform Interface :

④ Uniform Interface:

- Resource $\Rightarrow$ /login, /register, /get-details
- Standard Method $\Rightarrow$ GET, POST, PUT, PATCH, DELETE
- response: $\begin{cases} \text{body: } \{ & \} \\ \text{url: } \{ & \} \\ \text{head: } \{ & \} \end{cases}$

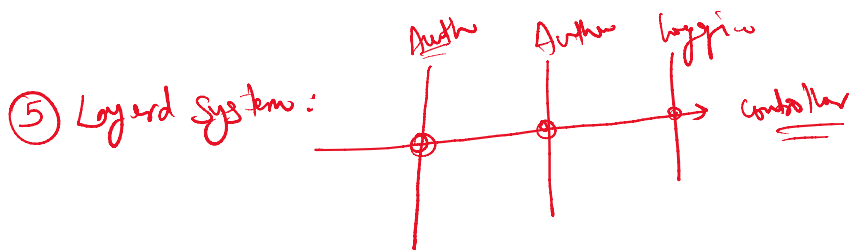

Notes-App

A. Functional Requirements


- It should create a Notes (JSON)
- It should read notes
- It should edit/update notes.
- It should delete Notes.

C $\rightarrow$ POST
 R $\rightarrow$ GET
 U $\rightarrow$ PUT
 D $\rightarrow$ DELETE

} JSON


CORS $\Rightarrow$ cross origin resource sharing

XSS

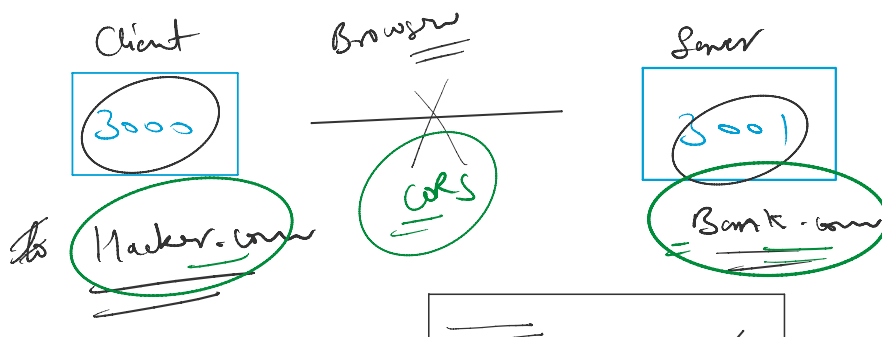


Plan...

Security

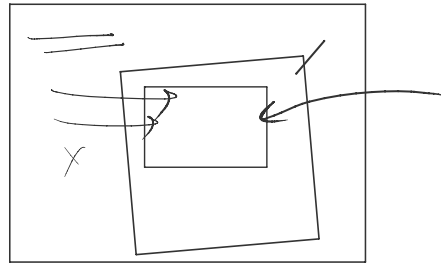

#

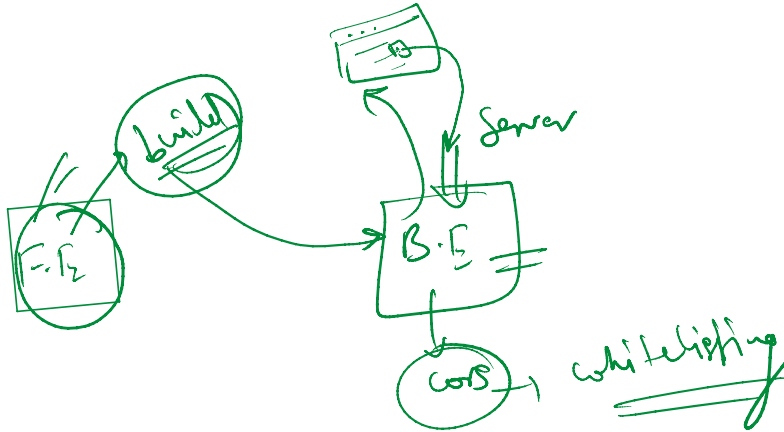

* Create Note:

I/P =>

Name
Description
Contact

H/W

Create

Show