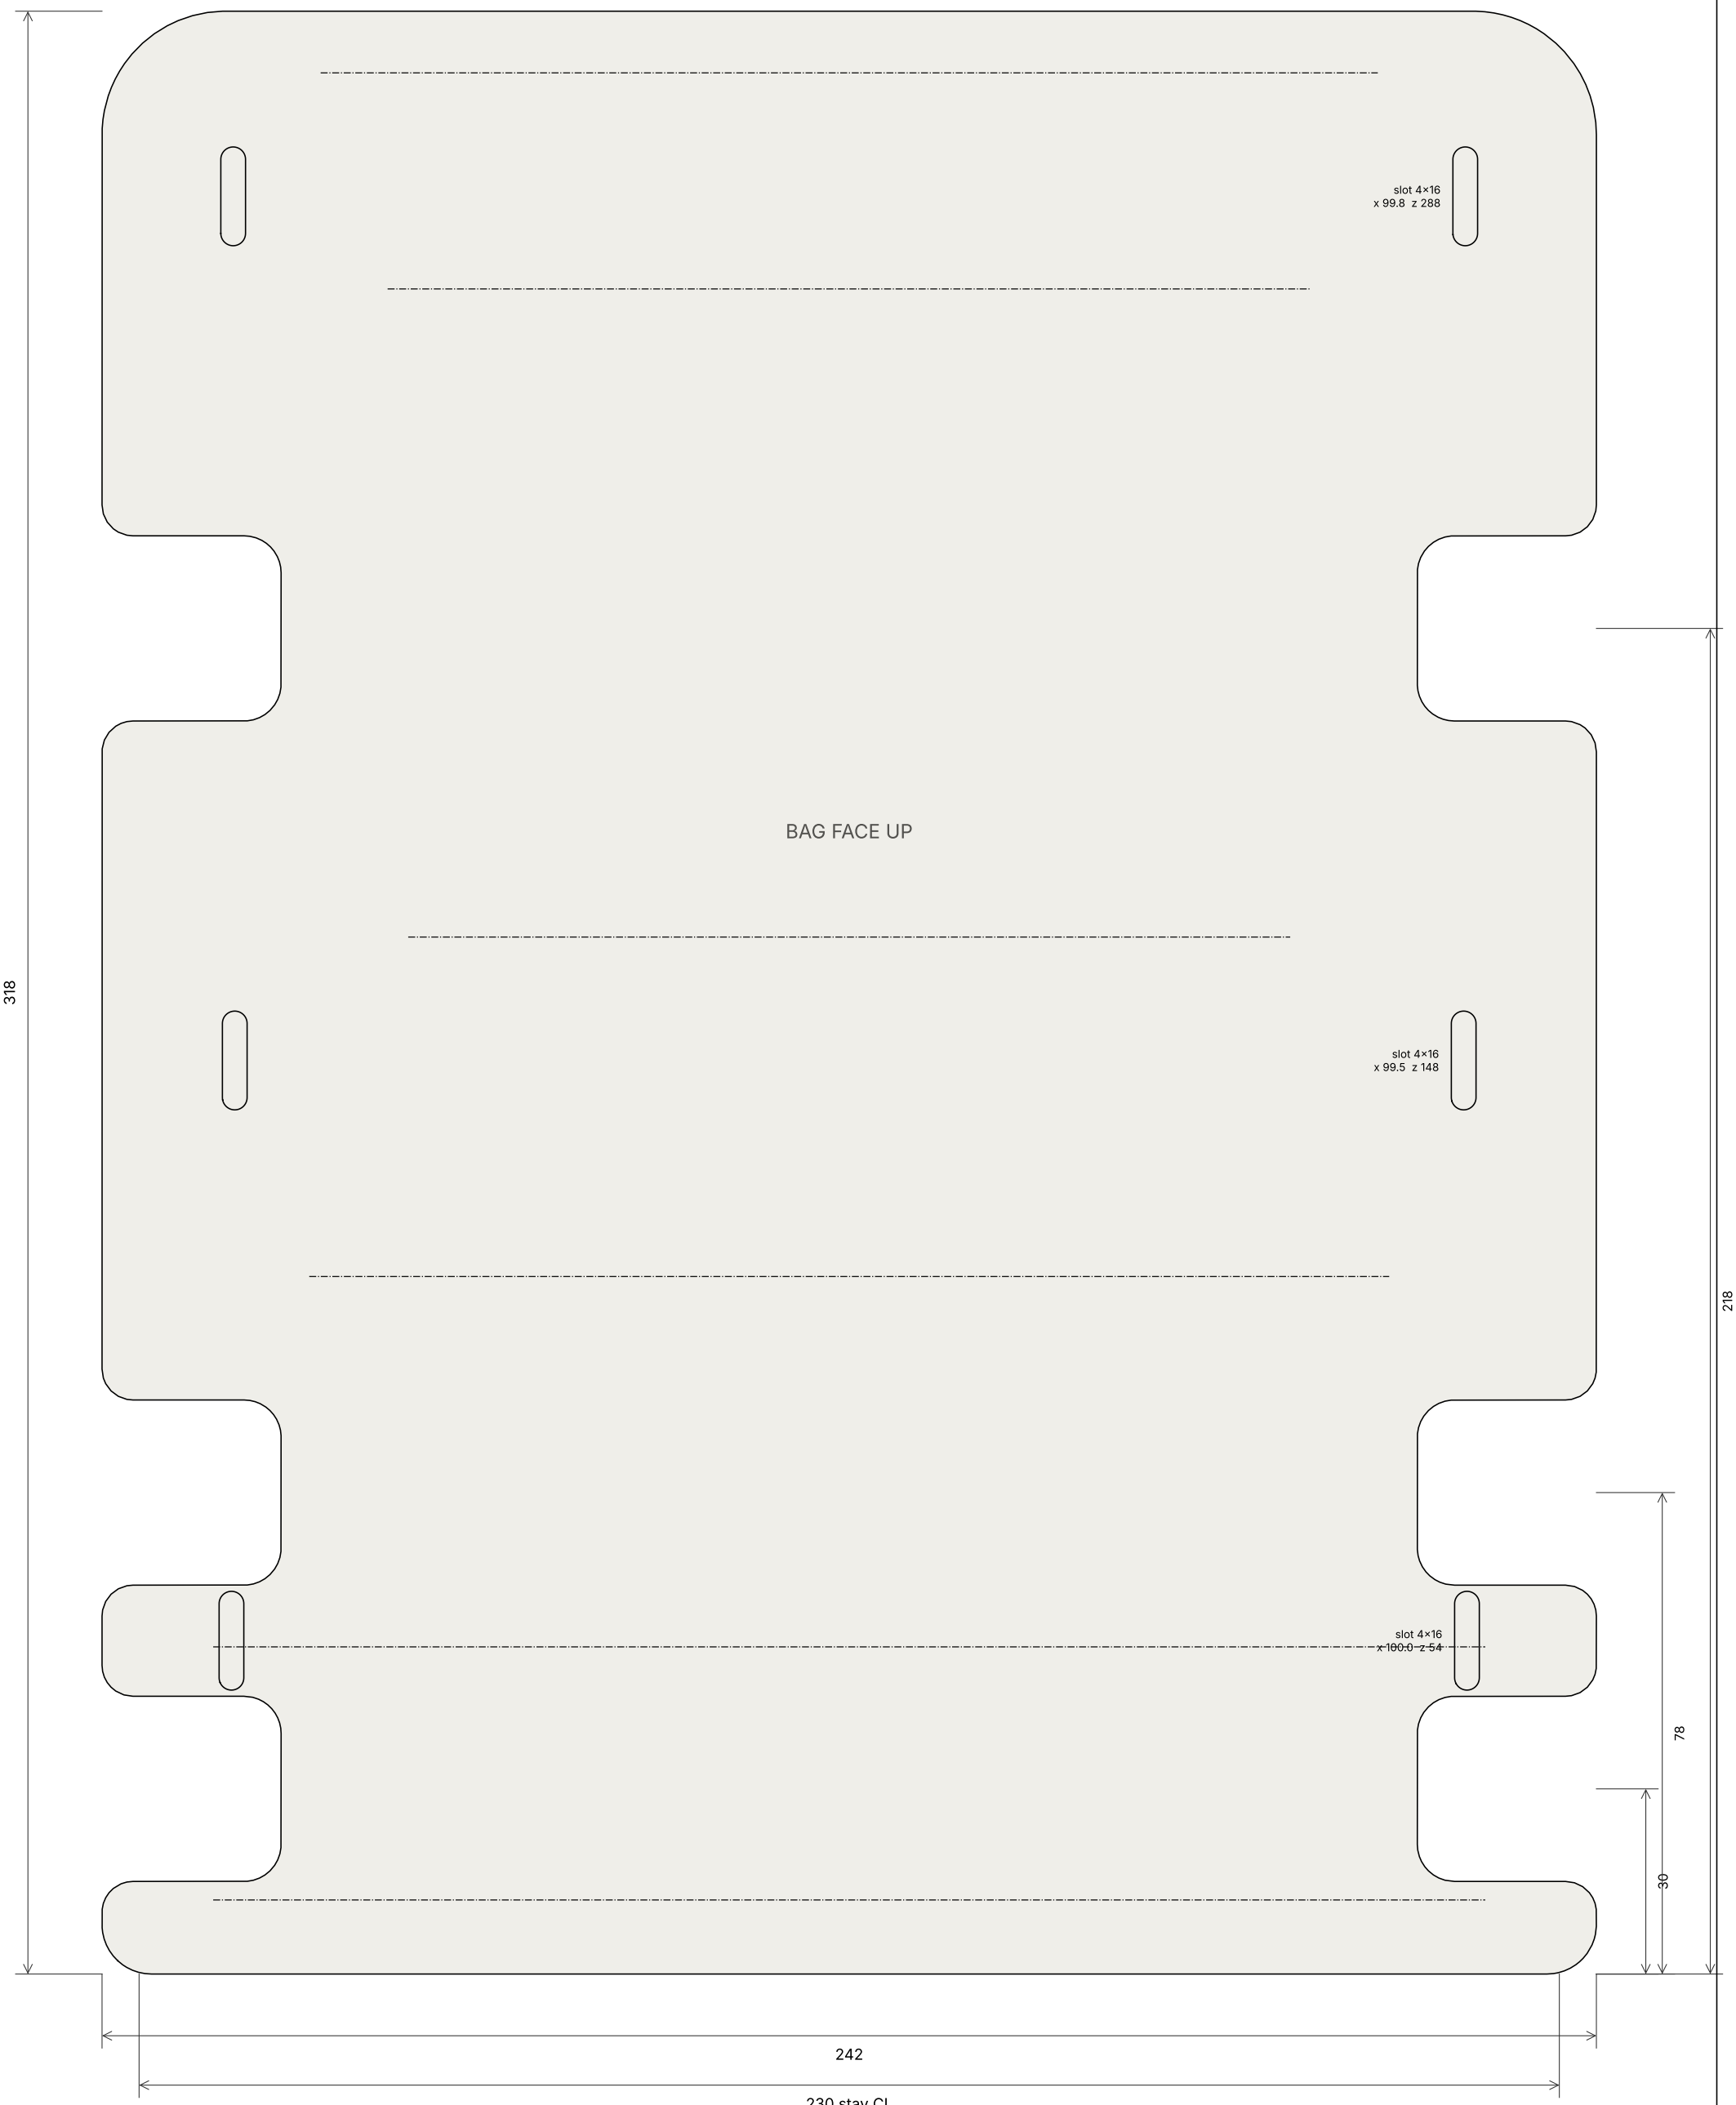

BP-06 rev C SPREADER Hunting-Appeal Pack 5200

20261105 huntkit.gendesign.spreader_layout_report

100 mm check bar

BP-06 rev C SPREADER HDPE 1.5 mm (0.060 in) scale 1:1 on A3 units mm (in = mm / 25.4)

Mass: sheet 102 g + 6 clips 25 g + 6 carbon cross stays 73 g (frame ribs/lands/sockets +16 g are printed in the frame)

Stock: HDPE framesheet 0.060 in (1.5 mm). Cut by CNC router, water-jet, or by hand: jigsaw + file.

Origin: frame axis x 0, frame z 0 (bottom edge at z 112). Dims from the bottom edge unless shown.

Tolerances: outline +/-0.5, slots +/-0.3. Inside corners R >= 6 (drill the notch roots first). Deburr.

Notches at the cleats US2 z 142, IM1 z 190, IM2 z 330: 30 tall, root at x +/-92, R6.

No bonding: HDPE takes no glue. Lies on the carbon cross stays and the clip saddles, 6 mm above the stay crowns; held by 6 PA12 snap clips.

Blue dash = printed rib, black dash-dot = removable carbon cross stay, green dot = flush land (frame side).

Wash: pop 6 clips, lift the sheet out, pull the carbon cross stays out of their sockets, hose everything.

Ventilation: solid sheet (bag-side blood barrier). Air path is the gutter between the rails.