

Templates

Rupesh Nasre.

OOAIA
January 2020

Queue Interface

```
class Queue {  
public:  
    Queue();  
    ~Queue();  
    void insert(int x);  
    int remove();  
  
private:  
    int a[100];  
    int head, tail;  
};
```

Queue Implementation

```
class Queue {  
public:  
    Queue() {  
        head = 0;  
        tail = 0;  
    }  
    ~Queue() { }  
    void insert(int x);  
    int remove();  
  
private:  
    int a[100];  
    int head, tail;  
};
```

Queue Implementation

```
class Queue {  
public:  
    Queue() {  
        head = 0;  
        tail = 0;  
    }  
    ~Queue() {}  
    void insert(int x);  
    int remove();  
  
private:  
    int a[100];  
    int head, tail;  
};  
void Queue::insert(int x) { ← Name resolution  
    // insert code.  
}
```

This allows us to separate interface from its implementation.

Queue Implementation

```
class Queue {  
public:  
    Queue() {  
        head = 0;  
        tail = 0;  
    }  
    ~Queue() {}  
    void insert(int x);  
    int remove();  
  
private:  
    int a[100];  
    int head, tail;  
};  
void Queue::insert(int x) {  
    // insert code.  
}  
int Queue::remove() {  
    // ...  
}
```

Can we do anything about the dependence on `int`?


Type Generality

```
#define TYPE int
class Queue {
public:
    Queue() {
        head = 0;
        tail = 0;
    }
    ~Queue() { }
    void insert(TYPE x);
    TYPE remove();

private:
    TYPE a[100];
    int head, tail;
};
void Queue::insert(TYPE x) {
    // insert code.
}
TYPE Queue::remove() {
    // ...
}
```

I need to change the interface for different users.

Type Generality

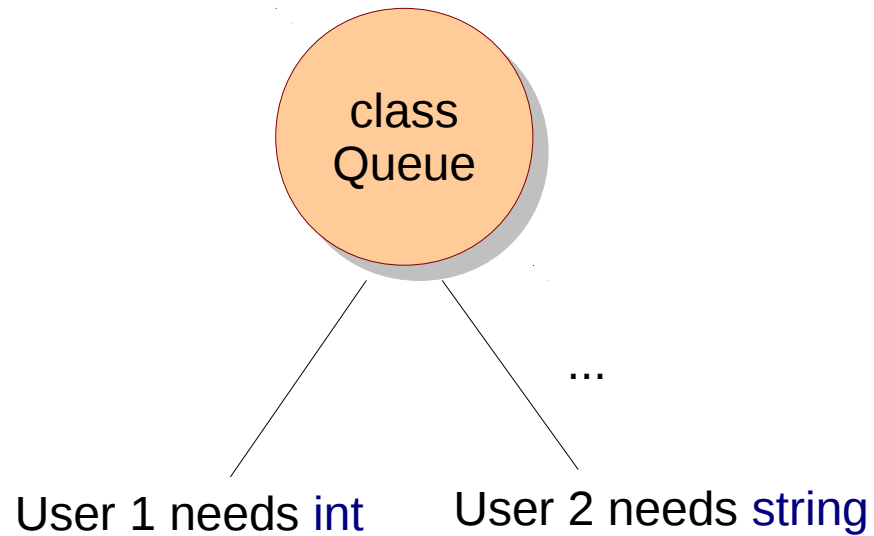

Type Generality

Tricks / Hacking

```
#define TYPE int  
#include "queue"
```

```
void main() {  
    Queue q;  
    q.insert(10);  
    ...  
}
```

User 1

```
#define TYPE string  
#include "queue"
```

```
void main() {  
    Queue q;  
    q.insert("ooaia");  
    ...  
}
```

User 2

User also needs to know which variable to define (TYPE).

Type Generality

```
#include "queue"
```

```
void main() {  
    Queue<int> q;  
    q.insert(10);  
    ...  
}
```

User 1

```
#include "queue"
```

```
void main() {  
    Queue<string> q;  
    q.insert("cs24");  
    ...  
}
```

User 2

Templates

```
template <class TYPE>
```

I need NOT change the interface for different users.

```
class Queue {  
public:  
    Queue() {  
        head = 0;  
        tail = 0;  
    }  
    ~Queue() {}  
    void insert(TYPE x);  
    TYPE remove();  
};
```

```
private:  
    TYPE a[100];  
    int head, tail;
```

```
};
```

```
void Queue::insert(TYPE x) {  
    // insert code.
```

```
}
```

```
TYPE Queue::remove() {  
    // ...
```

```
}
```

These don't compile.

Templates

```
template <class TYPE>
class Queue {
public:
    Queue() {
        head = 0;
        tail = 0;
    }
    ~Queue() { }
    void insert(TYPE x);
    TYPE remove();
```

```
private:
    TYPE a[100];
    int head, tail;
```

```
};
```

```
template <class TYPE>
```

```
void Queue::insert(TYPE x) {
```

```
    // insert code.
```

```
}
```

```
template <class TYPE>
```

```
TYPE Queue::remove() {
```

```
    // ...
```

```
}
```

Still don't compile.



Templates

```
template <class TYPE>
class Queue {
public:
    Queue() {
        head = 0;
        tail = 0;
    }
    ~Queue() { }
    void insert(TYPE x);
    TYPE remove();

private:
    TYPE a[100];
    int head, tail;
};

template <class TYPE>
void Queue<TYPE>::insert(TYPE x) {
    // insert code.
}

template <class TYPE>
TYPE Queue<TYPE>::remove() {
    // ...
}
```

Compiles successfully.

Classwork

- Create a class **Group** templated with the type of elements to be stored in the group.
- Implement methods: **add** and **find**.
- Instantiate **int Group** and check **add+find**.
- Instantiate **string Group** and check **add+find**.

Classwork

```
#include <iostream>
#include <vector>
#include <algorithm>

template<class T>
class Group {
public:
    void add(T element);
    bool find(T element);
    T findwrapper(T element);

private:
    std::vector<T> group;
};
...
```

```
template<class T>
void Group<T>::add(T element) {
    group.push_back(element);
}

template<class T>
bool Group<T>::find(T e) {
    std::find(group.begin(), group.end(), e)
    != group.end();
}

template<class T>
T Group<T>::findwrapper(T e) {
    std::cout <<
        (find(e) ? "Found " : "Not found ");
    return e;
}
```

```
int main() {  
    Group<int> group;  
  
    group.add(5);  
    group.add(6);  
    group.add(8);  
    group.add(5);  
    std::cout << group.findwrapper(5) << std::endl;  
    std::cout << group.findwrapper(2) << std::endl;  
    std::cout << group.findwrapper(6) << std::endl;  
  
    Group<std::string> groupstr;  
    groupstr.add("one");  
    groupstr.add("two");  
    groupstr.add("three");  
    groupstr.add("five");  
  
    std::cout << groupstr.findwrapper("two") << std::endl;  
    std::cout << groupstr.findwrapper("four") << std::endl;  
    std::cout << groupstr.findwrapper("five") << std::endl;  
  
    return 0;  
}
```

Multiple Template Arguments

```
template<class T1, class T2>
class Group {
public:
    Group() { std::cout << "class instantiated.\n"; }
    void add(std::pair<T1, T2> e);
    bool present(std::pair<T1, T2> e);
private:
    std::vector<std::pair<T1, T2> > elements;
};

template<class T1, class T2>
void Group<T1, T2>::add(std::pair<T1, T2> e) {
    elements.push_back(e);
}

template<class T1, class T2>
bool Group<T1, T2>::present(std::pair<T1, T2> e) {
    return (find(elements.begin(), elements.end(), e) != elements.end());
}
```