




Question One: Using the figures below, create a directory and file structure under your home directory on your LINUX system exactly as shown in each figure. A directory is represented in the figures as a rectangle, and a text file is represented as a circle. Then, takes screenshots of the commands you used in sequence to create the structure for each figure. The directories and files that already exist in your home directory before you begin are irrelevant for our purposes in these exercises. (10 points)

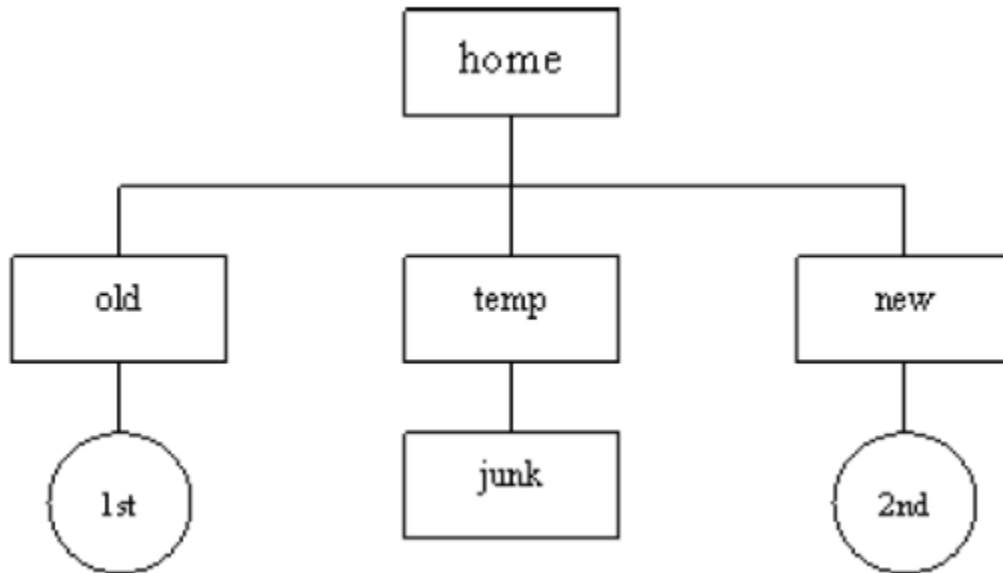

```
[o.manley94@quincy.edu@thor ~]$ cd
[o.manley94@quincy.edu@thor ~]$ cd home
-bash: cd: home: No such file or directory
[o.manley94@quincy.edu@thor ~]$ mkdir old
[o.manley94@quincy.edu@thor ~]$ cd old
[o.manley94@quincy.edu@thor old]$ touch 1st.txt
[o.manley94@quincy.edu@thor old]$ cd
[o.manley94@quincy.edu@thor ~]$ mkdir new
[o.manley94@quincy.edu@thor ~]$ cd new
[o.manley94@quincy.edu@thor new]$ touch 2nd.txt
[o.manley94@quincy.edu@thor new]$ cd
[o.manley94@quincy.edu@thor ~]$ mkdir temp
mkdir: cannot create directory 'temp': File exists
[o.manley94@quincy.edu@thor ~]$ cd temp
[o.manley94@quincy.edu@thor temp]$ mkdir junk
mkdir: cannot create directory 'junk': File exists
[o.manley94@quincy.edu@thor temp]$ cd temp
-bash: cd: temp: No such file or directory
[o.manley94@quincy.edu@thor temp]$ cd
[o.manley94@quincy.edu@thor ~]$ cd temp
[o.manley94@quincy.edu@thor temp]$ cd junk
[o.manley94@quincy.edu@thor junk]$
```

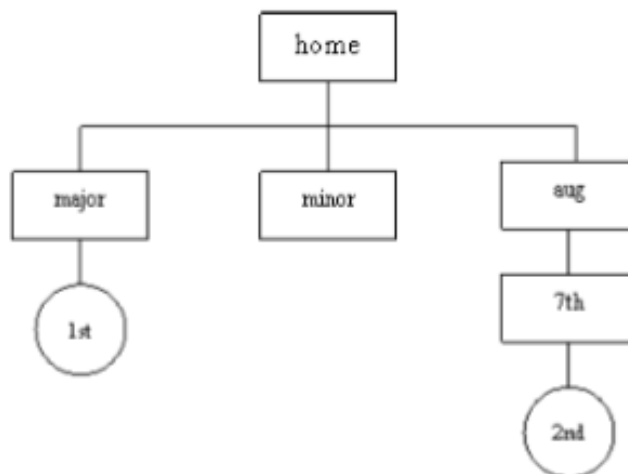

```
[o.manley94@quincy.edu@thor ~]$ cd ~
[o.manley94@quincy.edu@thor ~]$ mkdir minor
[o.manley94@quincy.edu@thor ~]$ mkdir major
[o.manley94@quincy.edu@thor ~]$ cd major
[o.manley94@quincy.edu@thor major]$ touch 1st.txt
[o.manley94@quincy.edu@thor major]$ cd
[o.manley94@quincy.edu@thor ~]$ mkdir aug
[o.manley94@quincy.edu@thor ~]$ cd aug
[o.manley94@quincy.edu@thor aug]$ mkdir 7th
[o.manley94@quincy.edu@thor aug]$ touch 2nd.txt
[o.manley94@quincy.edu@thor aug]$ cd
[o.manley94@quincy.edu@thor ~]$
```

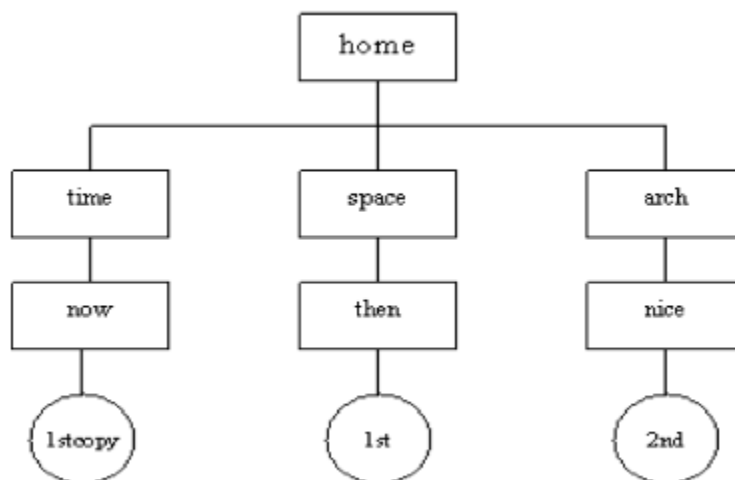

```
[o.manley94@quincy.edu@thor ~]$ mkdir time
[o.manley94@quincy.edu@thor ~]$ cd timd
-bash: cd: timd: No such file or directory
[o.manley94@quincy.edu@thor ~]$ cd time
[o.manley94@quincy.edu@thor time]$ mkdir now
[o.manley94@quincy.edu@thor time]$ cd now
[o.manley94@quincy.edu@thor now]$ touch lstcopy.txt
[o.manley94@quincy.edu@thor now]$ cd
[o.manley94@quincy.edu@thor ~]$ mkdir space
[o.manley94@quincy.edu@thor ~]$ cd space
[o.manley94@quincy.edu@thor space]$ mkdir then
[o.manley94@quincy.edu@thor space]$ cd then
[o.manley94@quincy.edu@thor then]$ touch lst.txt
[o.manley94@quincy.edu@thor then]$ cd
[o.manley94@quincy.edu@thor ~]$ mkdir arch
[o.manley94@quincy.edu@thor ~]$ cd arch
[o.manley94@quincy.edu@thor arch]$ mkdir nice
[o.manley94@quincy.edu@thor arch]$ cd nice
[o.manley94@quincy.edu@thor nice]$ touch 2nd.txt
[o.manley94@quincy.edu@thor nice]$ cd
[o.manley94@quincy.edu@thor ~]$
```

Question Two: Refer to Figure 3 in question 1 to write a **single** bash shell statement (one command) that will perform the following operation(s) while assuming you are currently located in your home directory. (30 points).

a- List the contents of the nice subdirectory" in a long listing format.

```
[o.manley94@quincy.edu@thor then]$ cd
[o.manley94@quincy.edu@thor ~]$ cd arch/nice
[o.manley94@quincy.edu@thor nice]$ ls -l
total 0
-rw-r--r-- 1 o.manley94@quincy.edu domain users@quincy.edu 0 Sep  7 20:53 2nd.txt
[o.manley94@quincy.edu@thor nice]$
```

b- List the contents of your home directory recursively.

```
[o.manley94@quincy.edu@thor nice]$ cd
[o.manley94@quincy.edu@thor ~]$ ls
a.out  arch  aug  hello.c  major  minor  new  old  space  temp  test  time
[o.manley94@quincy.edu@thor ~]$
```

c- Type the following command (including the quotes) `ls -la "time space arch"` and write down the result.

```
[o.manley94@quincy.edu@thor ~]$ ls -la "time space arch"
ls: cannot access time space arch: No such file or directory
[o.manley94@quincy.edu@thor ~]$
```

d- Type the following command (including the quotes) `ls -la "arch space time" || pwd` and write down the result.

```
[o.manley94@quincy.edu@thor ~]$ ls -la "arch space time" || pwd
ls: cannot access arch space time: No such file or directory
/home/quincy.edu/o.manley94
[o.manley94@quincy.edu@thor ~]$ ls -la "arch space time" || pwd
ls: cannot access arch space time: No such file or directory
/home/quincy.edu/o.manley94
[o.manley94@quincy.edu@thor ~]$
```

e- Copy the file “1st” from the “then” subdirectory to the “nice” subdirectory.

```
[o.manley94@quincy.edu@thor nice]$ cd
[o.manley94@quincy.edu@thor ~]$ cd arch/nice
[o.manley94@quincy.edu@thor nice]$ cp 1st.txt
cp: missing destination file operand after '1st.txt'
Try 'cp --help' for more information.
[o.manley94@quincy.edu@thor nice]$ ls
2nd.txt
[o.manley94@quincy.edu@thor nice]$ cd then
-bash: cd: then: No such file or directory
[o.manley94@quincy.edu@thor nice]$ cd
[o.manley94@quincy.edu@thor ~]$ cd then
-bash: cd: then: No such file or directory
[o.manley94@quincy.edu@thor ~]$ cd then
-bash: cd: then: No such file or directory
[o.manley94@quincy.edu@thor ~]$ cd space/then
[o.manley94@quincy.edu@thor then]$
[o.manley94@quincy.edu@thor then]$ ls
1st.txt
[o.manley94@quincy.edu@thor then]$ cp 1st.txt
cp: missing destination file operand after '1st.txt'
Try 'cp --help' for more information.
[o.manley94@quincy.edu@thor then]$ cp 1st.txt && mv home/arch/nice
cp: missing destination file operand after '1st.txt'
Try 'cp --help' for more information.
[o.manley94@quincy.edu@thor then]$ ls
1st.txt
[o.manley94@quincy.edu@thor then]$ cp 1st.txt ../../arch/nice
[o.manley94@quincy.edu@thor then]$ cd
[o.manley94@quincy.edu@thor ~]$ cd nice
-bash: cd: nice: No such file or directory
[o.manley94@quincy.edu@thor ~]$ cd arch
[o.manley94@quincy.edu@thor arch]$ cd nice
[o.manley94@quincy.edu@thor nice]$ ls
1st.txt 2nd.txt
[o.manley94@quincy.edu@thor nice]$
```

f- Delete the files “1st” and “2nd” in the “nice” subdirectory.

```
[o.manley94@quincy.edu@thor nice]$ rm 1st.txt && 2nd.txt
-bash: 2nd.txt: command not found
[o.manley94@quincy.edu@thor nice]$ ls
2nd.txt
[o.manley94@quincy.edu@thor nice]$ rm 2nd.txt
[o.manley94@quincy.edu@thor nice]$ ls
[o.manley94@quincy.edu@thor nice]$
```

Question Three: Run the following sequence of commands under your shell. What are the outputs of the three *pwd* commands? Why are the outputs of the last two *pwd* commands different? Show your work. (10 points)

```
$ pwd
$ csh
$ cd /usr
$ pwd
...
$ <Ctrl-D>
$ pwd
...
$
```

```
[o.manley94@quincy.edu@thor ~]$ pwd
/home/quincy.edu/o.manley94
[o.manley94@quincy.edu@thor ~]$ csh
[o.manley94@quincy.edu@thor ~]$ cd /usr
[o.manley94@quincy.edu@thor /usr]$ pwd
/usr
[o.manley94@quincy.edu@thor /usr]$ ...
...: Command not found.
[o.manley94@quincy.edu@thor /usr]$ exit
[o.manley94@quincy.edu@thor ~]$ pwd
/home/quincy.edu/o.manley94
[o.manley94@quincy.edu@thor ~]$ ...
-bash: ...: command not found
[o.manley94@quincy.edu@thor ~]$
```

The reason why the last two “pwd” commands were different is because with the first “pwd” command, we were in the user directory. Then, we exited the directory which then brought me to the home directory with the second “pwd” command.