


T2

- 1) Draw a sequence of stack frames like Figure 2.2 (in slides) showing the progress of each of the following segments of code, each beginning with an empty stack s . Assume the following declarations have been made:

A)

Lopputulos:

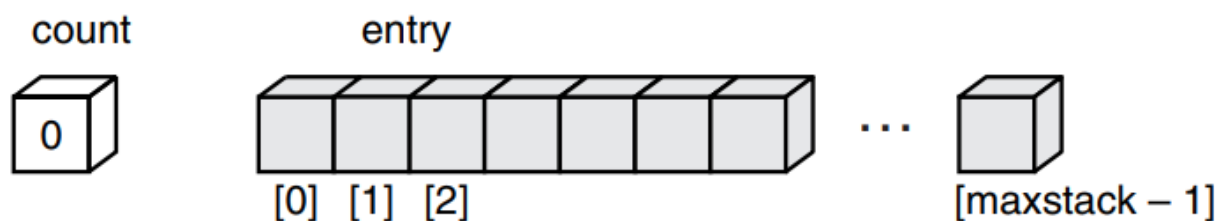


(a) Stack is empty.

Stack on lopuksi tyhjä.

B)

Lopputulos:

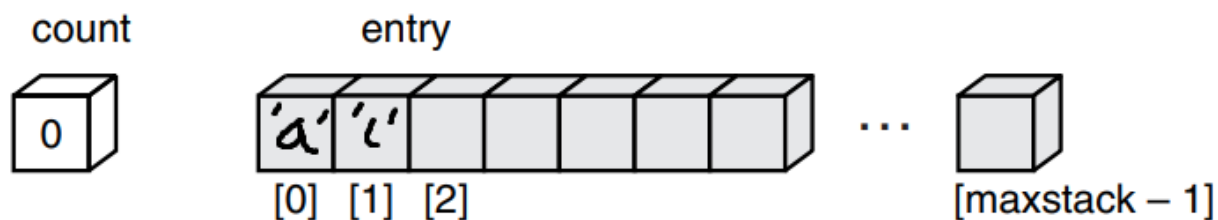


Lopuksi stackin arvot ovat: $\text{Stack}[0] = \text{'a'}$, ja $\text{Stack}[1] = \text{'c'}$.

$x = \text{'c'}$

$y = \text{'b'}$

C)

Lopputulos:

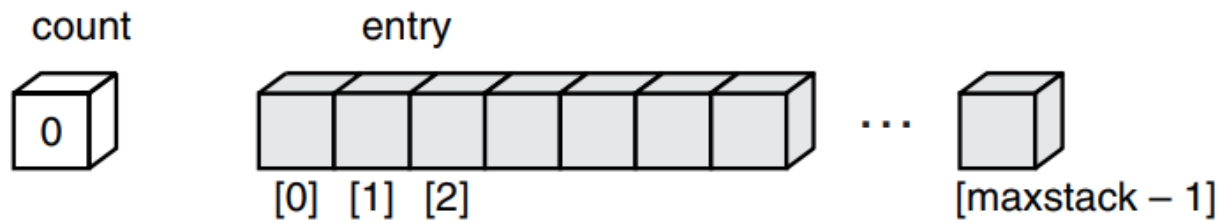


(a) Stack is empty.

Stack on lopuksi tyhjä.

D)

Lopputulos:

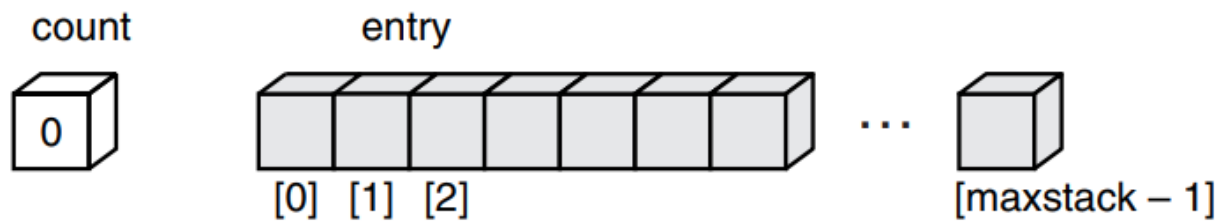

(a) Stack is empty.

Stack on lopuksi tyhjä.

x = 'a'