

0.1 Installation using the Installer

With SLiMS Meranti, in addition to the manual installation (the first way), installation can also be performed using the SLiMS Installer features. The steps to use the SLiMS installer are:

1. Create a database
2. Create a username and password for the database
3. Call SLiMS with a webbrowser, e.g `http://localhost/slims-slims5/`, then the browser will automatically redirect to `http://localhost/slims-slims5/install/index.php`.

The appearance of the steps are as follows:

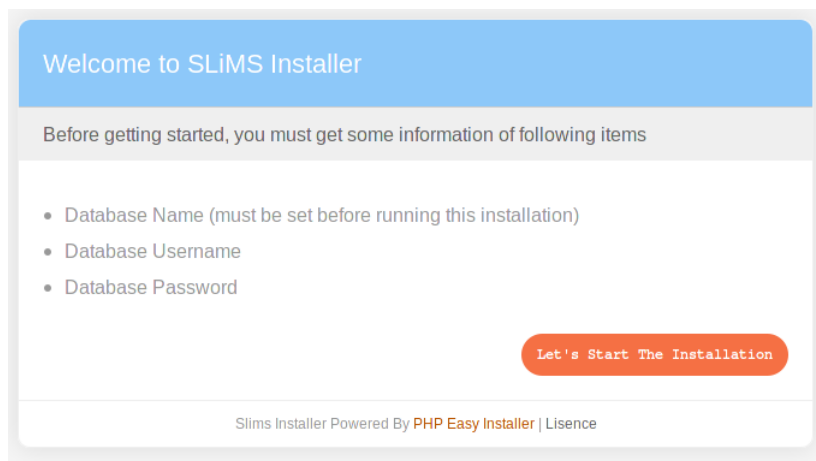


Figure 0.1: Installer Feature

Click on Let's Start The Installation

4. Fill in the host, database name, username and password that will be used (already made earlier). As well, specify whether to install the sample data or not. Display fields as shown below:

Step 1 - Generate the database

Please complete following form with your database connection information

Database Host: localhost (default : localhost)

Database Name: meranti

Database Username: slims-ins

Database Password: slims-ins

Generate Sample Data: ☐ Yes ☒ No

Cancel Continue

Slims Installer Powered By PHP Easy Installer | Lisence

Figure 0.2: Filling the Installer Feature

5. Click Continue. If successful, the display will appear as follows:

Step 2 - Installation Completed

Hooray, the installation was successful

The sysconfig.local.inc.php file was sucessfully created.
For security reasons, please remove install/ folder from your server.

OK, start the SLIMS

Slims Installer Powered By PHP Easy Installer | Lisence

Figure 0.3: Installation using the Installer Feature completed successfully

As shown in the figure above, for security, please remove the install folder.