

# SPECTRA-DA: Target-Label-Free Model Selection for Graph Domain Adaptation via Spectral Agreement

Anonymous authors

Paper under double-blind review

## Abstract

Unsupervised graph domain adaptation (UGDA) is usually evaluated as a training problem, yet deployment also requires choosing an algorithm, hyperparameter, seed, and checkpoint without target labels. This selection problem is obscured when public training loops report the best target-domain score. We introduce GDA-Select, a sealed-label trajectory protocol for target-label-free UGDA model selection, and Spectra-DA, a covariance-aware risk-recovery selector built from graph-spectral agreement. Our key observation is that observable pairwise disagreement equals the sum of individual risks minus cross-model error covariance; a tight target-graph spectral frame decomposes this identity into frequency bands without changing the total hard-label risk. We derive covariance-controlled recovery bounds and estimate the missing covariance from labeled source-simulated graph shifts matched to the target through unlabeled descriptors. Nonnegative recovery produces a target-label-free risk score, while spectral bands are used primarily to expose heterogeneous covariance regimes. On a frozen development evaluation with four tasks, 44 held-out source-simulated shift folds, and 675 candidates per task, Spectra-DA reduces mean normalized regret from 0.02278 to 0.01415 (37.9% relative), reaches median Kendall  $\tau = 0.933$  and a 95.5% top-5% hit rate, and records zero label accesses or protocol violations. Ablation identifies covariance correction as the main empirical driver; the incremental top-1 benefit of spectral conditioning is modest and statistically inconclusive. A separate one-time real-target development comparison shows that Transfer Score remains stronger in top-1 selection (0.1467 versus 0.2560 normalized regret), even though our method has higher rank correlation. This result exposes top-of-ranking calibration and cross-family covariance transport reliability as unresolved limitations; we therefore make no state-of-the-art claim before the pending sealed 16-transfer evaluation.

## 1 Introduction

Unsupervised graph domain adaptation (UGDA) transfers a node classifier from a labeled source graph to an unlabeled target graph whose attributes and topology may follow a different distribution (Wu et al., 2020; Dai et al., 2022; Liu et al., 2023). Recent methods address propagation mismatch, conditional structure shift, homophily shift, and composite feature-structure shift with increasingly specialized adaptation objectives (Liu et al., 2023; 2024a;c; Fang et al., 2025a; Yang et al., 2025; Fang et al., 2025b; Chen et al., 2026). These advances answer how a candidate model should be trained, but leave a separate deployment question unresolved: without any target label, which algorithm, hyperparameter setting, random seed, and checkpoint should be used?

This question is obscured when target labels are used after training to select the best checkpoint. For example, our audit of the public ADAlign implementation<sup>1</sup> finds that the training loop computes target Micro- and Macro-F1 at every epoch and reports the maximum target

<sup>1</sup><https://github.com/gxingyu/ADAlign>, audited on August 20, 2026.

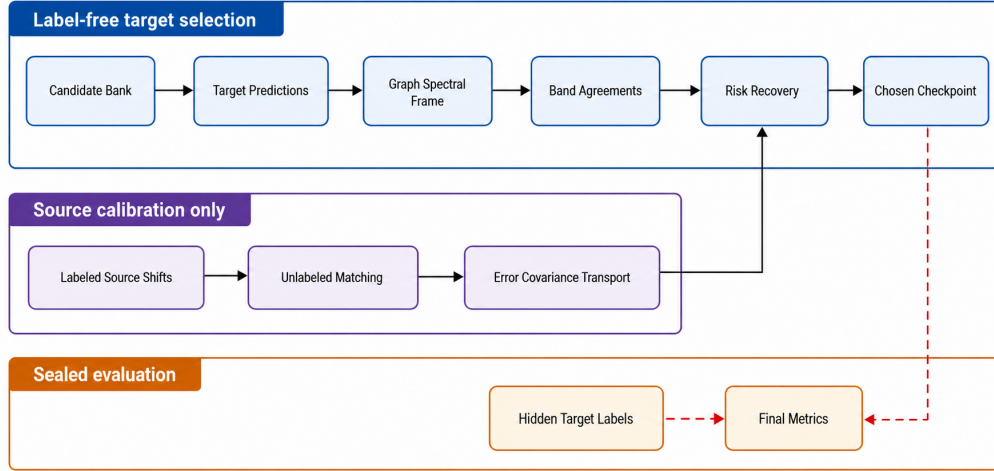


Figure 1: SPECTRA-DA pipeline. Frozen candidate predictions are decomposed over a tight target-graph spectral frame. Observable band-wise disagreement is combined with error covariance transported from labeled source simulations, yielding covariance-corrected target-risk estimates without exposing target labels to the selector. The hidden labels are used only by the isolated evaluator after the selector is frozen.

score. This procedure does not leak target labels into gradient updates, but it does implement a target-label oracle selector; consequently, the reported model is not available in the intended unlabeled deployment setting. Existing UGDA benchmarks standardize training and transfer tasks (Liu et al., 2024b), whereas general-domain label-free selectors based on embedded validation, neighborhood density, transfer scores, or cross-model agreement do not explicitly model target graph structure (You et al., 2019; Saito et al., 2021; Yang et al., 2023; Jiang et al., 2021; Baek et al., 2022).

Target-label-free UGDA selection is technically difficult because observable model agreement is not individual model accuracy. Given candidate errors  $E_m$  and  $E_n$ , their pairwise disagreement contains the sum of individual risks minus twice their error covariance. Classical unsupervised classifier evaluation therefore relies on restrictive structure in cross-classifier errors (Parisi et al., 2014; Jaffe et al., 2015). The difficulty is amplified in trajectory banks: adjacent checkpoints and related GNN backbones share errors, while graph shifts change which shared errors appear at local, community, and global scales. A useful selector must exploit graph structure without assuming that candidate errors are independent.

We propose Spectra-DA, a covariance-aware model-selection layer for a frozen UGDA candidate bank. As illustrated in Figure 1, Spectra-DA first decomposes hard or soft candidate predictions using a tight spectral frame on the unlabeled target graph. It then converts band-wise pair disagreement into individual risk through a covariance-corrected pair-sum system. Because target error covariance is unobservable, the method estimates it from labeled source-simulated feature, topology, homophily, label-prior, and conditional structure shifts, matched to the target with unlabeled graph and committee descriptors. Nonnegative recovery produces the label-free selection score; the robust refit and source-only bootstrap term are implementation refinements rather than core contributions.

The current evidence supports three contributions, with a narrower scope than a state-of-the-art selector claim. First, we formalize GDA-Select, a sealed-label protocol that jointly evaluates algorithm, hyperparameter, seed, and checkpoint selection over immutable candidate trajectories. Second, we derive covariance-aware risk recovery from pairwise disagreement: the tight spectral frame gives an exact error decomposition, the pair-sum system exposes cross-model error covariance as the hidden term, and the recovery bound shows how covariance misspecification propagates to risk error. Third, we identify calibration reliability as the central empirical bottleneck. On four source-simulated development tasks and

44 held-out shifts, covariance correction reduces mean normalized regret from 0.02278 to 0.01415, while spectral conditioning adds only a modest and statistically inconclusive increment over global covariance. On the separately sealed real-target development comparison, Transfer Score attains lower top-1 regret (0.1467 versus 0.2560), whereas our selector attains higher Kendall correlation. This split shows that source-simulated calibration can succeed while real-shift top-1 selection still fails; consequently, the paper studies the reliability of covariance correction rather than claiming full 16-transfer state of the art.

## 2 Related Work

Unsupervised graph domain adaptation. Early graph-transfer systems learn domain-invariant node representations with adversarial alignment or shared encoders (Zhang et al., 2019; Wu et al., 2020; Dai et al., 2022). Later work makes the shift model more graph-specific: StruRW corrects conditional structure, GRADE measures subtree discrepancy, A2GNN revisits propagation, and PairAlign separates label and conditional-structure effects (Liu et al., 2023; Wu et al., 2023; Liu et al., 2024a;c). Recent methods additionally target smoothing, attribute-driven mismatch, disentangled spectral shift, homophily, or composite distributions (Chen et al., 2025; Fang et al., 2025a; Yang et al., 2025; Fang et al., 2025b; Chen et al., 2026). GDABench consolidates 16 algorithms and 74 transfers for systematic comparison (Liu et al., 2024b). These methods optimize the adapted predictor; Spectra-DA instead holds all candidate predictors fixed and studies how to choose among them without target labels.

Label-free model selection under domain shift. Unsupervised domain adaptation has developed proxy criteria based on target entropy, feature geometry, neighborhood density, transferability, and cross-model agreement. DEV estimates target risk by embedding adapted features into importance-weighted validation (You et al., 2019); SND scores the density of target features in a model-induced neighborhood graph (Saito et al., 2021); and Transfer Score combines transferability and discriminability without target labels (Yang et al., 2023). Agreement-based criteria exploit empirical relations between classifier agreement and accuracy under shift (Jiang et al., 2021; Baek et al., 2022), while recent work combines multiple unsupervised signals for practical algorithm selection (Xiong et al., 2026). Such criteria are relevant baselines, but they treat the target examples as a generic sample set and do not use the observed target adjacency to localize agreement errors by graph frequency. GDA-Select further evaluates one joint candidate bank spanning algorithms, hyperparameters, seeds, and checkpoints under an auditable sealed-label protocol.

Unsupervised classifier accuracy estimation. A complementary literature estimates classifier accuracy from unlabeled prediction agreement. Spectral meta-learning ranks predictors when their off-diagonal covariance has rank-one structure (Parisi et al., 2014), and moment-based estimators recover classifier accuracies under related low-rank or conditional-independence assumptions (Jaffe et al., 2015). UGDA trajectory banks violate the spirit of these assumptions because checkpoints from one run and methods sharing a GNN backbone produce strongly correlated errors. Our disagreement identity makes this dependence explicit through a band-wise error covariance term, and our recovery bound quantifies how covariance misspecification propagates to risk error.

Graph spectral representations. Graph spectral methods decompose signals with functions of the graph Laplacian (Shuman et al., 2013a). Spectral graph wavelets provide localized multiscale atoms (Hammond et al., 2011); tight graph frames preserve signal energy (Shuman et al., 2013b); and Chebyshev polynomials enable localized filtering without eigendecomposition (Defferrard et al., 2016). Spectral ideas have also been used inside adaptation algorithms to align graph bases, regularize transfer, or augment graph signals (Xiao et al., 2023; Pang et al., 2023; Yang et al., 2025). In contrast, Spectra-DA uses a tight spectral frame after training: it decomposes candidate prediction errors, recovers individual target risk from pairwise disagreement, and calibrates the otherwise hidden covariance separately in each band. This distinction is important because a tight frame alone cannot improve a lin-

ear selector; the gain must arise from band-conditioned calibration, reliability, constraints, or uncertainty.

### 3 SPECTRA-DA

#### 3.1 Problem setting and sealed selection

We study model selection after UGDA training. Let  $\mathcal{G}_S = (A_S, X_S, Y_S)$  be a labeled source graph and  $\mathcal{G}_T = (A_T, X_T)$  an unlabeled target graph. A frozen candidate bank  $\mathcal{H} = \{h_m\}_{m=1}^M$  contains different adaptation algorithms, hyperparameters, random seeds, and checkpoints. The selector may access source labels, both public graphs, and candidate probabilities  $P_m$  and embeddings  $Z_m$ , but never target labels  $Y_T$ . It outputs

$$\hat{m} = \arg \min_{m \in [M]} \hat{R}_T(h_m). \quad (1)$$

For single-label node classification, Micro-F1 equals accuracy, so true risk is  $R_T(h_m) = 1 - \text{MicroF1}_T(h_m)$ . Evaluation measures the regret of  $h_{\hat{m}}$  relative to the best candidate in the same immutable bank.

GDA-Select enforces this information boundary operationally. Public trajectory artifacts contain source-validation and unlabeled target outputs but no target label field. Candidate-bank hashes bind every score vector to a fixed ordering. The selector process cannot import the sealed evaluator, and access counters record attempted label reads. Only after code, candidates, and scores are frozen does an isolated evaluator load  $Y_T$  to compute aggregate metrics. This protocol prevents direct target-oracle selection and repeated feedback from a hidden target leaderboard.

#### 3.2 Tight spectral risk decomposition

Global disagreement cannot distinguish graph-smooth errors from locally oscillatory errors. We therefore decompose predictions over the target graph, following the graph-signal-processing view of Laplacian spectral filters (Shuman et al., 2013a; Hammond et al., 2011). Let

$$L_T = I - D_T^{-1/2} A_T D_T^{-1/2} \quad (2)$$

be the symmetric normalized Laplacian. We define  $B$  Gaussian spectral windows  $\tilde{g}_b$  and normalize them pointwise,

$$\tilde{g}_b(\lambda) = \exp\left(-\frac{(\lambda - \mu_b)^2}{2\sigma^2}\right), \quad g_b(\lambda) = \frac{\tilde{g}_b(\lambda)}{\sqrt{\sum_j \tilde{g}_j(\lambda)^2}}. \quad (3)$$

The resulting filters  $G_b = g_b(L_T)$  satisfy  $\sum_b G_b^\top G_b = I$ . A Chebyshev approximation applies all filters jointly without eigendecomposition (Defferrard et al., 2016); the implementation rejects configurations whose maximum frame error exceeds the frozen tolerance.

Let  $H_m \in \{0, 1\}^{n_T \times C}$  be the hard one-hot prediction of candidate  $m$ , and define the unknown error signal  $E_m = H_m - Y_T$ . Its band risk is

$$r_{m,b} = \frac{1}{n_T} \|G_b E_m\|_F^2. \quad (4)$$

Lemma 1 (Exact hard-error decomposition). If the spectral filter bank is tight, then

$$\text{Err}_T(h_m) = \frac{1}{2} \sum_{b=1}^B r_{m,b}. \quad (5)$$

Proof. Tightness gives  $\sum_b r_{m,b} = n_T^{-1} \text{tr}(E_m^\top (\sum_b G_b^\top G_b) E_m) = n_T^{-1} \|E_m\|_F^2$ . Two one-hot class vectors have squared distance zero when correct and two when incorrect, hence  $\|E_m\|_F^2 = 2n_T \text{Err}_T(h_m)$ .  $\square$

The same frame identity decomposes Brier risk for soft probabilities  $P_m$ , but not classification error exactly. We use hard predictions for the theorem and soft predictions as a smoother empirical signal. An approximate-frame bound is given in Appendix A.1.

### 3.3 Recovering individual risk from pair disagreement

Although  $r_{m,b}$  is hidden, pairwise spectral disagreement is observable:

$$d_{mn,b} = \frac{1}{n_T} \|G_b(H_m - H_n)\|_F^2. \quad (6)$$

Since  $H_m - H_n = E_m - E_n$ , expansion yields the exact relation

$$d_{mn,b} = r_{m,b} + r_{n,b} - 2c_{mn,b}, \quad c_{mn,b} = \frac{1}{n_T} \langle G_b E_m, G_b E_n \rangle_F. \quad (7)$$

Thus disagreement fails to identify individual risk only through the cross-model error covariance  $c_{mn,b}$ .

Let  $A_{\text{pair}} \in \mathbb{R}^{\binom{M}{2} \times M}$  have one row  $e_m + e_n$  per unordered candidate pair. Stacking Equation equation 7 within a band gives

$$\mathbf{d}_b = A_{\text{pair}} \mathbf{r}_b - 2\mathbf{c}_b. \quad (8)$$

For zero covariance, the untruncated complete-pair solution has the closed form

$$\tilde{r}_{m,b} = \frac{s_{m,b} - S_b/(M-1)}{M-2}, \quad (9)$$

where  $s_{m,b} = \sum_{n \neq m} d_{mn,b}$  and  $S_b = \sum_{i < j} d_{ij,b}$ . The practical estimator uses nonnegative least squares because finite-sample and covariance errors can otherwise yield negative risks.

Theorem 1 (Covariance-controlled recovery). For a complete pair graph,  $A_{\text{pair}}^\top A_{\text{pair}} = (M-2)I + \mathbf{1}\mathbf{1}^\top$ . The unconstrained zero-covariance least-squares estimator satisfies

$$\|\hat{\mathbf{r}}_b - \mathbf{r}_b\|_2 \leq \frac{2}{\sqrt{M-2}} \|\mathbf{c}_b\|_2. \quad (10)$$

Proof. Equation equation 8 gives  $\hat{\mathbf{r}}_b - \mathbf{r}_b = -2A_{\text{pair}}^+ \mathbf{c}_b$ . The stated Gram matrix has eigenvalue  $M-2$  orthogonal to  $\mathbf{1}$  and  $2(M-1)$  along  $\mathbf{1}$ , so  $\|A_{\text{pair}}^+\|_2 = 1/\sqrt{M-2}$ .  $\square$

The theorem separates conditioning from systematic shared error. A larger, more diverse committee improves the  $1/\sqrt{M-2}$  factor, but adding many correlated checkpoints does not make  $\mathbf{c}_b$  vanish.

### 3.4 Shift-conditioned covariance transport

Target covariance cannot be measured without  $Y_T$ , so Spectra-DA estimates it from labeled source simulations. This step is the strongest assumption in the method: the source-simulation bank must contain covariance corrections that are relevant to the real target, and the unlabeled descriptors must identify them reliably. We construct pseudo-target graphs

$$\tilde{\mathcal{G}}_S^{(k)} = \mathcal{T}_{\xi_k}(\mathcal{G}_S, Y_S) \quad (11)$$

that perturb features, topology, homophily, class prior, and conditional structure. Frozen candidates run inference on each graph. Since  $Y_S$  remains known, we measure its band risks  $r_{m,b}^{(k)}$  and error covariances  $c_{mn,b}^{(k)}$  without touching real target labels.

Each simulated graph and the real target is represented by an unlabeled shift descriptor  $\delta$  containing degree, spectral-moment, feature-smoothness, embedding, and committee-prediction statistics. We match the target to the simulation bank with simplex weights

$$\alpha_T = \arg \min_{\alpha \in \Delta^K} \left\| \Sigma^{-1/2} \left( \sum_k \alpha_k \delta_k - \delta_T \right) \right\|_2^2 + \lambda_\alpha \|\alpha\|_2^2, \quad (12)$$

where  $\Delta^K = \{\alpha \geq 0 : \sum_k \alpha_k = 1\}$  and descriptor variances are floored. The transported prior risk and covariance are

$$\tilde{r}_{m,b} = \sum_k \alpha_{T,k} r_{m,b}^{(k)}, \quad \hat{c}_{mn,b} = \sum_k \alpha_{T,k} c_{mn,b}^{(k)}. \quad (13)$$

Corollary 1 (Transport error). If Equation equation 8 is corrected with  $\hat{\mathbf{c}}_b$ , its unconstrained least-squares solution satisfies

$$\|\hat{\mathbf{r}}_b - \mathbf{r}_b\|_2 \leq \frac{2}{\sqrt{M-2}} \|\hat{\mathbf{c}}_b - \mathbf{c}_b\|_2. \quad (14)$$

Equation equation 14 states the empirical requirement plainly: the unlabeled descriptor geometry must predict the covariance components that matter for recovery. The assumption is testable and can fail under an unseen shift family; Section 4 reports this limitation rather than aggregating it away.

### 3.5 Practical recovery and reliability accounting

The practical solver combines transported covariance with reliability weights and a support-aware prior:

$$\hat{\mathbf{r}}_b = \arg \min_{\mathbf{r}_b \geq 0} \left\| W_b^{1/2} [A_{\text{pair}} \mathbf{r}_b - (\mathbf{d}_b + 2\hat{\mathbf{c}}_b)] \right\|_2^2 \quad (15)$$

$$+ \lambda_r \|\mathbf{r}_b\|_2^2 + \lambda_p \|\mathbf{r}_b - \tilde{\mathbf{r}}_b\|_2^2. \quad (16)$$

Pairs with high transported error correlation receive less weight, and the prior is disabled when the target descriptor falls outside the frozen source-simulation support. The frozen implementation additionally winsorizes extreme pair observations and performs one Tukey/endpoint-reliability refit. We treat this as a solver detail: Table 2 shows that it does not explain the aggregate gain.

The frozen selector uses a conservative source-only uncertainty term rather than treating transported covariance as always trustworthy. Bootstrap resampling of simulated shifts yields risk estimates  $\hat{R}_T^{(q)}(h_m)$  and uncertainty  $u_m = \text{Std}_q[\hat{R}_T^{(q)}(h_m)]$ . The final selector uses

$$\hat{m} = \arg \min_m \left[ \frac{1}{2} \sum_b \hat{r}_{m,b} + \beta u_m \right]. \quad (17)$$

All resampling operates on source-simulated calibration data, so the score remains target-label-free. Its empirical contribution is reported separately from covariance transport in Table 2; in the current frozen run it is a guardrail, not the dominant source of gain.

The failure mode suggests a stronger reliability criterion for future selectors. Let  $U_m^{\text{tr}}$  measure disagreement among plausible transported covariance corrections or their induced risk-correction vectors, and let  $T_m$  be an independent transferability score such as Transfer Score. The underlying conservative principle is

$$\text{score}_m = \hat{R}_m + \lambda U_m^{\text{tr}} - \gamma T_m, \quad (18)$$

where aggressive covariance correction is penalized when transport is unstable and an independent transferability prior can veto an overconfident top prediction. The released evaluation scaffold uses the rank-normalized pre-registered version of this rule,

$$s_m = (1 - \eta) \text{rank}(\hat{R}_m)/\tau + \lambda \text{rank}(U_m^{\text{tr}}) + \gamma \text{rank}(-T_m), \quad (19)$$

with only  $\lambda, \gamma, \eta, \tau$  allowed to vary under source-family holdout. We do not report this as a completed result; it is the direct design implication of the real-target failure analysis in Section 4.

**Attribution boundary and complexity.** With an exact tight frame, identical linear recovery in every band, and no band-dependent calibration, summing spectral estimates equals applying the same recovery operator to global disagreement. Therefore spectral value must be attributed to band-conditioned covariance, weights, constraints, or uncertainty—not to decomposition alone. Joint Chebyshev filtering costs  $O(BK|E_T|MC)$ , while band-wise Gram matrices form all pair disagreements in  $O(BM^2n_TC)$ . Recovery designs are cached by committee size; source-shift calibration requires candidate inference but no GNN retraining.

## 4 Experiments

The experiments ask three questions: how much target-label oracle selection changes UGDA evaluation, which components explain the source-simulated development gain, and where the learned covariance correction fails under real target shifts. Because the one-time 16-transfer sealed evaluation is not yet complete, all numbers in this section are explicitly development or source-simulated results.

### 4.1 Experimental setup

Candidate banks and evaluation scope. The four pre-registered development tasks are ACMv9→Citationv1, Citationv1→ACMv9, USA→BRAZIL, and BRAZIL→USA. We report two deliberately separated evaluations. The equal-protocol real-target comparison uses the pre-registered Gate-1 bank of 140 frozen candidates per task and is evaluated once by the trusted sealed process. The source-simulated refinement study uses 675 candidates per task: five method families (SourceOnly, A2GNN, GRADE, PairAlign, and ADAlign), three configurations, three seeds, and 15 checkpoints. Its development objective contains 44 leave-one-source-simulated-shift-out folds and cannot invoke the sealed evaluator. Candidate trajectories store source-validation outputs, unlabeled target outputs, embeddings, losses, runtime, and memory metadata. Frozen implementation values and the source-only sidecar rank gate are listed in Appendix A.4.

Baselines. The pre-registered selector suite includes last and best source-validation selection, target entropy, information maximization, agreement reference, global committee disagreement, GDE, SND, DEV with source-validation features, Transfer Score, and ALine-S/ALine-D. All selectors receive the same candidate bank and public artifacts (Jiang et al., 2021; Saito et al., 2021; You et al., 2019; Yang et al., 2023; Baek et al., 2022). The 0.02278 reference reported below is the original frozen SPECTRA selector used to start controlled source-simulated refinement, not a competing method. Table 1 supplies the missing equal-protocol comparison on the four real-target development tasks. The complete 16-transfer sealed comparison remains pending.

Metrics and guardrails. For fold  $t$ , normalized regret is

$$\text{NRegret}_t = \frac{R_t(h_{\hat{m}}) - \min_m R_t(h_m)}{\max_m R_t(h_m) - \min_m R_t(h_m) + 10^{-12}}. \quad (20)$$

Mean normalized regret is primary. We additionally report CVaR<sub>20%</sub>, worst-fold regret, median Kendall  $\tau$ , mean Spearman  $\rho$ , top-weighted Kendall, risk-estimation MAE, oracle-F1 gap, top-5% hit rate, bootstrap selection stability, localized-gain share, runtime, and protocol audits. A variant is rejected if it improves the mean by concentrating gains in one fold, worsens the regret tail, drops Kendall below 0.925, exceeds 480 seconds, or accesses target labels.

### 4.2 Equal-protocol selector comparison

Transfer Score is the strongest selector in this real-target development comparison, attaining mean normalized regret 0.1467 and selected Micro-F1 58.64%. In contrast, Spectra-DA obtains 0.2560 regret and 52.81% Micro-F1, so the present evidence does not support superiority over existing label-free selectors. The diagnostic is nevertheless informative: Spectra-DA reaches median Kendall  $\tau = 0.695$ , substantially above Transfer Score’s 0.356, but fails to convert this global ranking quality into a competitive top choice. This is the empirical signature of unreliable correction rather than an uninformative risk signal: the method orders much of the bank reasonably, yet its covariance-adjusted top candidate is not conservative enough under real shift.

### 4.3 Source-simulated refinement and core attribution

Table 2 evaluates one controlled change at a time over the same four development tasks, 44 held-out shift folds, and 675 candidates per task. The pre-frozen full selector lowers

Table 1: One-time trusted development evaluation on the pre-registered Gate-1 real-target bank (four tasks, 140 frozen candidates per task). All selectors receive identical public artifacts. This scope is distinct from the 675-candidate source-simulated refinement study in Table 2. Best values are marked as blue bold  $\star$ ; our selector is marked as green bold  $\dagger$ .

| Selector                    | Mean NRegret $\downarrow$         | F1 gap (pt) $\downarrow$         | Median $\tau$ $\uparrow$         | Top-5% hit $\uparrow$         | Micro-F1 (%) $\uparrow$          |
|-----------------------------|-----------------------------------|----------------------------------|----------------------------------|-------------------------------|----------------------------------|
| Source validation           | 0.2638                            | 11.56                            | <b>0.761<math>\star</math></b>   | 0%                            | 53.40                            |
| Last source validation      | 0.2388                            | 10.93                            | 0.683                            | 0%                            | 54.03                            |
| Entropy                     | 0.2153                            | 8.80                             | 0.526                            | <b>50%<math>\star</math></b>  | 56.17                            |
| Infomax                     | 0.1984                            | 7.84                             | 0.577                            | <b>50%<math>\star</math></b>  | 57.12                            |
| DEV                         | 0.5013                            | 27.10                            | 0.405                            | 0%                            | 37.86                            |
| SND                         | 0.8780                            | 47.12                            | -0.582                           | 0%                            | 17.84                            |
| Transfer Score              | <b>0.1467<math>\star</math></b>   | <b>6.33<math>\star</math></b>    | 0.356                            | <b>50%<math>\star</math></b>  | <b>58.64<math>\star</math></b>   |
| GDE                         | 0.7539                            | 38.73                            | 0.001                            | 0%                            | 26.24                            |
| ALine-S                     | 0.2638                            | 11.56                            | <b>0.761<math>\star</math></b>   | 0%                            | 53.40                            |
| ALine-D                     | 0.4737                            | 26.07                            | 0.274                            | 0%                            | 38.89                            |
| Agreement reference         | 0.5365                            | 28.81                            | -0.094                           | 0%                            | 36.15                            |
| Global disagreement         | 0.5414                            | 29.14                            | -0.050                           | 0%                            | 35.82                            |
| SPECTRA-Static              | 0.5414                            | 29.14                            | -0.048                           | 0%                            | 35.82                            |
| Spectra-DA (ours) $\dagger$ | <b>0.2560<math>\dagger</math></b> | <b>12.16<math>\dagger</math></b> | <b>0.695<math>\dagger</math></b> | <b>0%<math>\dagger</math></b> | <b>52.81<math>\dagger</math></b> |

Table 2: Core source-simulated attribution study (four development tasks, 44 held-out shifts). “Cov.” denotes transported covariance; “UCB” is bootstrap uncertainty. The frozen full row was fixed before this ablation. Lower regret and higher rank/hit metrics are better. Best values are marked as blue bold  $\star$ ; the frozen submitted variant is marked as green bold  $\dagger$ ; values that are both are orange  $\star\dagger$ .

| Variant                                    | Mean NRegret $\downarrow$          | CVaR <sub>20%</sub> $\downarrow$   | Median $\tau$ $\uparrow$          | Top-5% hit $\uparrow$                 |
|--------------------------------------------|------------------------------------|------------------------------------|-----------------------------------|---------------------------------------|
| Global linear recovery                     | 0.27767                            | 0.62134                            | 0.4814                            | 0.0%                                  |
| Spectral linear recovery                   | 0.27767                            | 0.62134                            | 0.4813                            | 0.0%                                  |
| Spectral + prior + UCB, no cov.            | 0.05057                            | 0.18877                            | 0.8550                            | 72.7%                                 |
| Global + cov. + UCB (no band conditioning) | 0.01471                            | 0.04886                            | <b>0.9442<math>\star</math></b>   | <b>95.5%<math>\star</math></b>        |
| Spectral + cov. + UCB, no robust refit     | <b>0.01397<math>\star</math></b>   | <b>0.04758<math>\star</math></b>   | 0.9398                            | <b>95.5%<math>\star</math></b>        |
| Spectral + cov., no UCB                    | 0.01452                            | 0.04941                            | 0.9434                            | <b>95.5%<math>\star</math></b>        |
| Spectra-DA (ours, frozen full) $\dagger$   | <b>0.01415<math>\dagger</math></b> | <b>0.04793<math>\dagger</math></b> | <b>0.9424<math>\dagger</math></b> | <b>95.5%<math>\star\dagger</math></b> |

mean normalized regret from the original selector’s 0.02278 to 0.01415, a 37.915% relative reduction. It reaches  $\text{CVaR}_{20\%} = 0.04793$ , worst-fold regret 0.08388, top-weighted Kendall 0.99462, and a 95.45% top-5% hit rate in 327.39 seconds, with zero target-label accesses and zero protocol violations. This is a source-simulated refinement result, not a comparison against the real-target selectors in Table 1.

The ablation identifies covariance correction, rather than spectral decomposition by itself, as the main empirical driver. Removing covariance raises mean regret from 0.01415 to 0.05057; the paired mean difference has a 95% bootstrap interval [0.01583, 0.06026]. Global and spectral linear recovery are identical in selection regret, matching the equivalence result in Appendix A.2. Band-conditioned covariance improves the frozen full row by 3.83% relative to its equal-information global control, but only four of 44 selections change and the paired interval  $[-0.00073, 0.00265]$  crosses zero. The present evidence therefore supports band-wise heterogeneity, but not a strong claim that spectral conditioning alone consistently improves top-1 selection.

The solver refinements are secondary. Removing the robust refit slightly improves mean regret to 0.01397, while removing UCB changes the frozen mean from 0.01415 to 0.01452; in each comparison at most four folds select a different candidate. We retain the pre-frozen full row for protocol consistency, but treat robust fitting and bootstrap uncertainty as implementation details rather than contributions.



Table 3: Source-simulated covariance diagnostics. “Below global” is the fraction of task-shift comparisons whose band correlation is below the corresponding global correlation.

| Statistic               | Global | Low    | Mid    | High  |
|-------------------------|--------|--------|--------|-------|
| Mean  error correlation | 0.487  | 0.381* | 0.573  | 0.617 |
| Transport NMAE          | 0.092  | 0.227  | 0.069* | 0.186 |
| Below global            | –      | 98.9%* | 0.0%   | 5.1%  |

#### 4.4 Do spectral bands expose different error regimes?

The source-only preflight evaluates 176 leave-one-simulated-shift-out comparisons over the planned 16-task calibration bank, with 675 candidates per task. Table 3 rejects a simplistic explanation that every graph frequency decorrelates model errors. The low-frequency band has lower absolute error correlation than the global statistic in 98.9% of task-shift comparisons, but the middle and high bands are more correlated on average. Conversely, the middle band has the lowest covariance-transport NMAE. The supported mechanism is therefore band-wise heterogeneity: different frequencies expose different correlation and transportability regimes that a band-conditioned recovery rule can treat differently.

#### 4.5 Failure analysis and scope

The dominant unresolved issue is cross-family covariance transport. A low-rank risk-correction variant (SARC) performs poorly under shift-family holdout, with mean regret 0.06977; moreover, descriptor distance has Spearman correlation  $-0.04954$  with risk-correction distance. Thus the current unlabeled descriptor geometry does not reliably identify which source simulation has a transferable error-covariance correction. Full covariance interactions remain selection-relevant, but predicting them for an unseen shift family is not solved by the current model.

The source-simulated results support covariance-aware risk recovery and expose band-wise covariance heterogeneity, whereas the real-target comparison shows that the operational selector is not yet competitive with Transfer Score. Together, these results indicate that the hard problem is not recovering risk from disagreement once the correction is known, but deciding when a source-simulated covariance correction should be trusted on an unseen target. The evidence therefore does not establish full UGDA state of the art, broad method-ranking reversals, or generalization to all 16 ADAlign transfers. Those claims require a frozen one-time target evaluation across Citation, Airport, Blog, and Twitch families, paired task-level uncertainty, equal-information comparison to global calibration, and explicit reliability tests such as leave-one-shift-family-out covariance correction. We preserve this boundary throughout the paper.

## 5 Conclusion

This paper reframes UGDA evaluation around a deployment requirement: selecting an algorithm, configuration, seed, and checkpoint without reading target labels. GDA-Select makes this requirement auditable through immutable trajectories and sealed labels, while Spectra-DA estimates target risk with a covariance-aware recovery system built on candidate disagreement. The tight graph-spectral frame supplies an exact decomposition and exposes band-wise heterogeneity, but the resulting analysis identifies cross-model error covariance as the central hidden term and quantifies how covariance transport error affects recovered risk. In the current frozen development scope, the method lowers mean normalized regret by 37.9%, ranks the candidate bank accurately near its optimum, and satisfies the zero-access protocol on source-simulated folds. On the separately sealed real-target Gate-1 comparison, however, Transfer Score remains stronger in top-1 regret (0.1467 versus 0.2560), so the current evidence does not support a state-of-the-art claim.

The core ablation sharpens the technical conclusion. Covariance correction is essential on source-simulated folds, while spectral band conditioning provides only a modest, statistically inconclusive improvement over an equal-information global covariance control. Robust re-fitting and bootstrap uncertainty do not drive the result and are therefore implementation details, not contributions.

The central limitation is transportability: current unlabeled descriptors do not reliably predict risk-correction geometry for unseen shift families. The next method iteration should therefore be conservative rather than more expressive: penalize transport uncertainty, fuse the recovered risk with an independent transferability prior such as Transfer Score, and choose all weights by leave-one-shift-family-out validation. This reliability question must be addressed before the frozen 16-transfer evaluation, without additional target-specific tuning.

## References

- Christina Baek, Yiding Jiang, Aditi Raghunathan, and J. Zico Kolter. Agreement-on-the-line: Predicting the performance of neural networks under distribution shift. In *Advances in Neural Information Processing Systems*, volume 35, 2022. URL [https://proceedings.neurips.cc/paper\\_files/paper/2022/hash/7a8d388b7a17df480856dff1cc079b08-Abstract-Conference.html](https://proceedings.neurips.cc/paper_files/paper/2022/hash/7a8d388b7a17df480856dff1cc079b08-Abstract-Conference.html).
- Wei Chen, Guo Ye, Yakun Wang, Zhao Zhang, Libang Zhang, Daixin Wang, Zhiqiang Zhang, and Fuzhen Zhuang. Smoothness really matters: A simple yet effective approach for unsupervised graph domain adaptation. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 39, pp. 15875–15883, 2025. doi: 10.1609/aaai.v39i15.33743. URL <https://doi.org/10.1609/aaai.v39i15.33743>.
- Wei Chen, Xingyu Guo, Shuang Li, Zhao Zhang, Yan Zhong, Fuzhen Zhuang, and Deqing Wang. Learning adaptive distribution alignment with neural characteristic function for graph domain adaptation, 2026. URL <https://arxiv.org/abs/2602.10489>.
- Quanyu Dai, Xiao-Ming Wu, Jiaren Xiao, Xiao Shen, and Dan Wang. Graph transfer learning via adversarial domain adaptation with graph convolution. *IEEE Transactions on Knowledge and Data Engineering*, 2022. doi: 10.1109/TKDE.2022.3144250. URL <https://doi.org/10.1109/TKDE.2022.3144250>.
- Michaël Defferrard, Xavier Bresson, and Pierre Vandergheynst. Convolutional neural networks on graphs with fast localized spectral filtering. In *Advances in Neural Information Processing Systems*, volume 29, 2016. URL [https://proceedings.neurips.cc/paper\\_files/paper/2016/hash/04df4d434d481c5bb723be1b6df1ee65-Abstract.html](https://proceedings.neurips.cc/paper_files/paper/2016/hash/04df4d434d481c5bb723be1b6df1ee65-Abstract.html).
- Ruiyi Fang, Bingheng Li, Zhao Kang, Qiuhaio Zeng, Nima Hosseini Dashtbayaz, Ruizhi Pu, Boyu Wang, and Charles Ling. On the benefits of attribute-driven graph domain adaptation, 2025a. URL <https://arxiv.org/abs/2502.06808>. International Conference on Learning Representations.
- Ruiyi Fang, Bingheng Li, Jingyu Zhao, Ruizhi Pu, Qiuhaio Zeng, Gezheng Xu, Charles Ling, and Boyu Wang. Homophily enhanced graph domain adaptation. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pp. 16006–16028. PMLR, 2025b. URL <https://proceedings.mlr.press/v267/fang25g.html>.
- David K. Hammond, Pierre Vandergheynst, and Rémi Gribonval. Wavelets on graphs via spectral graph theory. *Applied and Computational Harmonic Analysis*, 30(2):129–150, 2011. doi: 10.1016/j.acha.2010.04.005. URL <https://doi.org/10.1016/j.acha.2010.04.005>.
- Ariel Jaffe, Boaz Nadler, and Yuval Kluger. Estimating the accuracies of multiple classifiers without labeled data. In *Proceedings of the Eighteenth International Conference on Artificial Intelligence and Statistics*, volume 38 of *Proceedings of Machine Learning Research*, pp. 407–415. PMLR, 2015. URL <https://proceedings.mlr.press/v38/jaffe15.html>.

- Yiding Jiang, Vaishnavh Nagarajan, Christina Baek, and J. Zico Kolter. Assessing generalization of SGD via disagreement, 2021. URL <https://arxiv.org/abs/2106.13799>.
- Meihan Liu, Zeyu Fang, Zhen Zhang, Ming Gu, Sheng Zhou, Xin Wang, and Jiajun Bu. Rethinking propagation for unsupervised graph domain adaptation. In Proceedings of the AAAI Conference on Artificial Intelligence, volume 38, pp. 13963–13971, 2024a. doi: 10.1609/aaai.v38i12.29304. URL <https://doi.org/10.1609/aaai.v38i12.29304>.
- Meihan Liu, Zhen Zhang, Jiachen Tang, Jiajun Bu, Bingsheng He, and Sheng Zhou. Revisiting, benchmarking and understanding unsupervised graph domain adaptation, 2024b. URL <https://arxiv.org/abs/2407.11052>.
- Shikun Liu, Tianchun Li, Yongbin Feng, Nhan Tran, Han Zhao, Qiang Qiu, and Pan Li. Structural re-weighting improves graph domain adaptation. In Proceedings of the 40th International Conference on Machine Learning, volume 202 of Proceedings of Machine Learning Research, pp. 21778–21793. PMLR, 2023. URL <https://proceedings.mlr.press/v202/liu23t.html>.
- Shikun Liu, Deyu Zou, Han Zhao, and Pan Li. Pairwise alignment improves graph domain adaptation, 2024c. URL <https://arxiv.org/abs/2403.01092>.
- Jinhui Pang, Zixuan Wang, Jiliang Tang, Mingyan Xiao, and Nan Yin. SA-GDA: Spectral augmentation for graph domain adaptation. In Proceedings of the 31st ACM International Conference on Multimedia, pp. 309–318, 2023. doi: 10.1145/3581783.3612264. URL <https://doi.org/10.1145/3581783.3612264>.
- Fabio Parisi, Francesco Strino, Boaz Nadler, and Yuval Kluger. Ranking and combining multiple predictors without labeled data. Proceedings of the National Academy of Sciences, 111(4):1253–1258, 2014. doi: 10.1073/pnas.1219097111. URL <https://doi.org/10.1073/pnas.1219097111>.
- Kuniaki Saito, Donghyun Kim, Piotr Teterwak, Stan Sclaroff, Trevor Darrell, and Kate Saenko. Tune it the right way: Unsupervised validation of domain adaptation via soft neighborhood density, 2021. URL <https://arxiv.org/abs/2108.10860>.
- David I. Shuman, Sunil K. Narang, Pascal Frossard, Antonio Ortega, and Pierre Vandergheynst. The emerging field of signal processing on graphs: Extending high-dimensional data analysis to networks and other irregular domains. IEEE Signal Processing Magazine, 30(3):83–98, 2013a. doi: 10.1109/MSP.2012.2235192. URL <https://doi.org/10.1109/MSP.2012.2235192>.
- David I. Shuman, Christoph Wismeyr, Nicki Holighaus, and Pierre Vandergheynst. Spectrum-adapted tight graph wavelet and vertex-frequency frames, 2013b. URL <https://arxiv.org/abs/1311.0897>.
- Jun Wu, Jingrui He, and Elizabeth Ainsworth. Non-iid transfer learning on graphs. In Proceedings of the AAAI Conference on Artificial Intelligence, volume 37, pp. 10342–10350, 2023. doi: 10.1609/aaai.v37i9.26231. URL <https://doi.org/10.1609/aaai.v37i9.26231>.
- Man Wu, Shirui Pan, Chuan Zhou, Xiaojun Chang, and Xingquan Zhu. Unsupervised domain adaptive graph convolutional networks. In Proceedings of The Web Conference 2020, pp. 1457–1467, 2020. doi: 10.1145/3366423.3380219. URL <https://doi.org/10.1145/3366423.3380219>.
- Zhiqing Xiao, Haobo Wang, Ying Jin, Lei Feng, Gang Chen, Fei Huang, and Junbo Zhao. SPA: A graph spectral alignment perspective for domain adaptation. In Advances in Neural Information Processing Systems, volume 36, pp. 37252–37272, 2023. doi: 10.52202/075280-1619. URL [https://proceedings.neurips.cc/paper\\_files/paper/2023/hash/754e80f98b2a141942f45a0eeb258a3c-Abstract-Conference.html](https://proceedings.neurips.cc/paper_files/paper/2023/hash/754e80f98b2a141942f45a0eeb258a3c-Abstract-Conference.html).
- Yiheng Xiong, Luisa Gallée, Daniel Santak Wolf, Heiko Hillenhausen, and Michael Götz. Towards practical algorithm selection for unsupervised domain adaptation in medical imaging, 2026. URL <https://arxiv.org/abs/2607.28125>.

Jianfei Yang, Hanjie Qian, Yuecong Xu, Kai Wang, and Lihua Xie. Can we evaluate domain adaptation models without target-domain labels?, 2023. URL <https://arxiv.org/abs/2305.18712>. International Conference on Learning Representations, 2024.

Liang Yang, Xin Chen, Jiaming Zhuo, Di Jin, Chuan Wang, Xiaochun Cao, Zhen Wang, and Yuanfang Guo. Disentangled graph spectral domain adaptation. In Proceedings of the 42nd International Conference on Machine Learning, volume 267 of Proceedings of Machine Learning Research, pp. 70632–70648. PMLR, 2025. URL <https://proceedings.mlr.press/v267/yang25g.html>.

Kaichao You, Ximei Wang, Mingsheng Long, and Michael I. Jordan. Towards accurate model selection in deep unsupervised domain adaptation. In Proceedings of the 36th International Conference on Machine Learning, volume 97 of Proceedings of Machine Learning Research, pp. 7124–7133. PMLR, 2019. URL <https://proceedings.mlr.press/v97/you19a.html>.

Yizhou Zhang, Guojie Song, Lun Du, Shuwen Yang, and Yilun Jin. DANE: Domain adaptive network embedding. In Proceedings of the Twenty-Eighth International Joint Conference on Artificial Intelligence, pp. 4362–4368, 2019. doi: 10.24963/ijcai.2019/606. URL <https://doi.org/10.24963/ijcai.2019/606>.

## A Additional Theory and Protocol Details

### A.1 Approximate tight-frame error

Let  $F = \sum_b G_b^\top G_b$  and suppose  $\|F - I\|_2 \leq \epsilon_{\text{frame}}$ . Then

$$\left| \sum_b r_{m,b} - \frac{1}{n_T} \|E_m\|_F^2 \right| \leq \epsilon_{\text{frame}} \frac{\|E_m\|_F^2}{n_T}. \quad (21)$$

For hard one-hot predictions,

$$\left| \frac{1}{2} \sum_b r_{m,b} - \text{Err}_T(h_m) \right| \leq \epsilon_{\text{frame}} \text{Err}_T(h_m). \quad (22)$$

This follows by bounding  $n_T^{-1} \text{tr}(E_m^\top (F - I) E_m)$  with the spectral norm.

### A.2 Global equivalence of uncorrected linear recovery

Suppose each band uses the same unconstrained linear operator  $A_{\text{pair}}^+$ , with no band weights, constraints, or calibration. Then

$$\sum_b \hat{\mathbf{r}}_b = A_{\text{pair}}^+ \sum_b \mathbf{d}_b. \quad (23)$$

Tightness gives  $\sum_b d_{mn,b} = n_T^{-1} \|H_m - H_n\|_F^2$ , which is global prediction disagreement. This establishes the equal-information global control required for causal attribution.

### A.3 Sealed-label audit checklist

The frozen protocol verifies: (i) candidate-bank hashes and candidate counts; (ii) absence of target-label fields in public artifacts; (iii) zero selector imports from the sealed evaluator; (iv) complete score coverage and selected index consistency; (v) zero label-access and protocol-violation counters; and (vi) an immutable selector commit before hidden evaluation.

#### A.4 Frozen implementation details

The development configuration uses three Gaussian spectral bands with  $\sigma = 0.55$ , Chebyshev order 8, and hard predictions. Descriptor matching uses regularization 0.1 and a per-coordinate scale floor of 0.05. Recovery uses ridge  $10^{-6}$  and pair-weight power 1. Bootstrap uses 16 samples with uncertainty coefficient  $\beta = 0.25$ .

The controlled refinement augments each base calibration bank with pre-frozen, source-labeled sidecar shifts. Feature-mask sidecars are admitted only when the source node count is at least the candidate count,  $n_S \geq M$ , a source-only identifiability gate that does not depend on the task name or target score. Sidecar manifests record the task, candidate-bank hash, candidate ordering, spectral configuration, parent-calibration hash, and zero target-label/protocol counters.

The four development tasks are ACMv9→Citationv1, Citationv1→ACMv9, USA→BRAZIL, and BRAZIL→USA. Consequently, the present quantitative evidence covers Citation and Airport graphs but not Blog or Twitch; the latter remain part of the planned 16-transfer sealed evaluation.