

GDA-Select: Covariance-Aware Risk Recovery and the Limits of Target-Label-Free Graph Domain Adaptation Selection

Anonymous authors

Paper under double-blind review

Abstract

Unsupervised graph domain adaptation (UGDA) trains without target labels, yet deployment must also choose an algorithm, configuration, seed, and checkpoint without those labels. We introduce GDA-Select, an auditable trajectory benchmark that separates this model-selection problem from adaptation training and seals target labels behind a one-time evaluator. We further study Spectra-DA, a covariance-aware risk-recovery module based on an exact identity: pairwise prediction disagreement equals the sum of individual risks minus cross-model error covariance. A tight target-graph spectral frame decomposes this identity without changing total hard-label risk, and our analysis quantifies how covariance misspecification propagates to recovered risk. On 44 source-simulated development folds with 675 candidates per task, covariance correction reduces mean normalized regret from 0.05057 to 0.01415; the additional gain from spectral conditioning over an equal-information global correction is modest and statistically inconclusive. On four pre-registered real-target open-development tasks, the strongest diagnostic pipeline—Agreement top-20% followed by Transfer Score—reduces mean normalized regret from 0.216807 to 0.087507, but is not a Spectra-DA result and fails the registered robustness criteria: worst-task regret is 0.223881, only 2/4 tasks are non-inferior to Transfer Score, and the source-simulated family-out CVaR guard is unmet. A shortlist-specific decomposition attributes 79.5% of its residual regret to reranking after the oracle trajectory is already represented. We therefore stopped development without freezing a selector or querying the final twelve sealed transfers. The resulting benchmark, recovery theory, and negative audit identify shortlist-internal top-ranking calibration—not candidate coverage—as the central unresolved problem.

1 Introduction

Unsupervised graph domain adaptation (UGDA) transfers a node classifier from a labeled source graph to an unlabeled target graph whose attributes and topology may follow a different distribution (Wu et al., 2020; Dai et al., 2022; Liu et al., 2023). Recent methods address propagation mismatch, conditional structure shift, homophily shift, and composite feature–structure shift with increasingly specialized adaptation objectives (Liu et al., 2023; 2024a;c; Fang et al., 2025a; Yang et al., 2025; Fang et al., 2025b; Chen et al., 2026). These advances primarily answer how a candidate model should be trained. Deployment poses a distinct question: without target labels, which algorithm, hyperparameter setting, random seed, and checkpoint should be used? This paper studies that selection problem rather than proposing another adaptation loss.

This question is obscured when target labels are used after training to select the best checkpoint. For example, our audit of the public ADAlign implementation¹ finds that the training loop computes target Micro- and Macro-F1 at every epoch and reports the maximum target

¹<https://github.com/gxingyu/ADAlign>, audited on August 20, 2026.

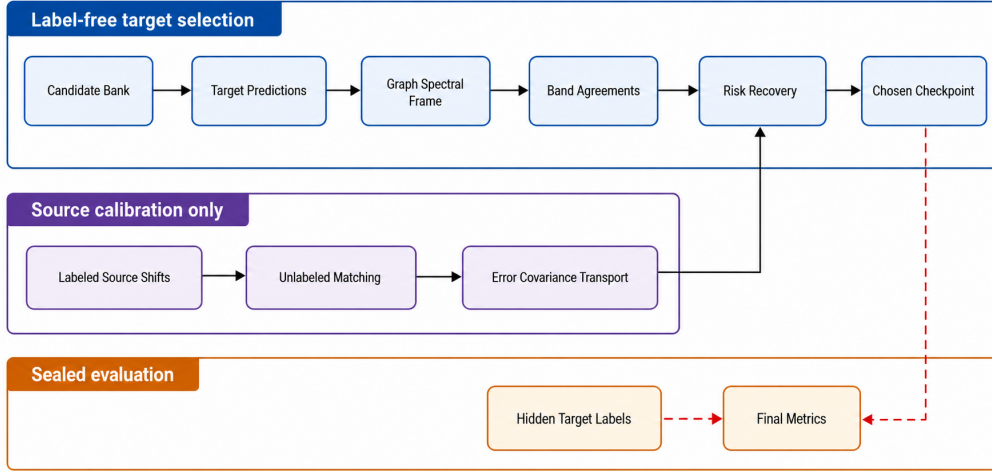


Figure 1: GDA-Select protocol and Spectra-DA research module. The selector sees a frozen candidate bank and unlabeled target predictions. Spectra-DA combines graph-spectral disagreement with covariance estimated from labeled source simulations. Target labels remain isolated in the evaluator. Under the registered audit reported in this paper, no selector passed all promotion guards, so the final twelve sealed transfers were not queried.

score. This procedure does not leak target labels into gradient updates, but it does implement a target-label oracle selector; consequently, the reported model is not available in the intended unlabeled deployment setting. Existing UGDA benchmarks standardize training and transfer tasks (Liu et al., 2024b), whereas general-domain label-free selectors based on embedded validation, neighborhood density, transfer scores, or cross-model agreement do not explicitly model target graph structure (You et al., 2019; Saito et al., 2021; Yang et al., 2023; Jiang et al., 2021; Baek et al., 2022).

Target-label-free UGDA selection is difficult for three reasons. First, agreement is not accuracy: for candidate errors E_m and E_n , observable pairwise disagreement contains the sum of their individual risks minus twice their error covariance. Classical unsupervised classifier evaluation therefore requires identifiable structure in cross-classifier errors (Parisi et al., 2014; Jaffe et al., 2015). Second, trajectory banks violate simple independence intuitions because adjacent checkpoints, seeds, and related GNNs share mistakes. Third, model selection is a top-of-ranking problem: a selector can correlate well with risk over hundreds of candidates and still choose the wrong model among the few best candidates.

We address these issues as an audited study with two technical layers. GDA-Select fixes the information boundary through immutable candidate trajectories, public artifact hashes, zero-access counters, and a sealed evaluator. Within this protocol, Spectra-DA studies what can be recovered from unlabeled predictions. As illustrated in Figure 1, it decomposes candidate predictions over a tight target-graph spectral frame, converts band-wise disagreement into individual risk through a pair-sum system, and estimates the missing covariance from labeled source-simulated graph shifts. The frame gives an exact risk decomposition; the covariance term exposes the assumption on which recovery succeeds or fails. We treat source-to-target covariance transport as a hypothesis to audit, not as a guaranteed deployment solution.

The empirical study follows a pre-registered stopping rule. On 44 source-simulated folds, covariance correction is the dominant source of recovery accuracy, whereas spectral conditioning contributes only a modest, statistically inconclusive increment over global covariance. On four real-target open-development tasks, Agreement top-20% followed by Transfer Score is the strongest diagnostic pipeline, reducing mean normalized regret from 0.216807 to 0.087507. However, this pipeline is not owned by Spectra-DA, remains non-inferior on only 2/4 tasks, and exceeds the worst-task threshold. Five subsequent structural iterations

fail to repair these weaknesses. The registered audit therefore stops development without freezing a selector and leaves the final twelve transfers sealed.

Our contributions are threefold:

- An auditable selection benchmark. GDA-Select jointly evaluates algorithm, configuration, seed, and checkpoint selection under immutable candidate-bank hashes, sealed target labels, and explicit stopping rules.
- Covariance-aware risk-recovery theory. We derive an exact graph-spectral disagreement identity and recovery bounds that make cross-model error covariance, frame approximation, and covariance misspecification explicit.
- A pre-registered negative audit with failure localization. We document which plausible trust, trajectory, coverage, and stability mechanisms fail, and show that 79.5% of the remaining regret arises from shortlist-internal reranking after the oracle trajectory is already covered.

2 Related Work

Unsupervised graph domain adaptation. Early graph-transfer systems learn domain-invariant node representations with adversarial alignment or shared encoders (Zhang et al., 2019; Wu et al., 2020; Dai et al., 2022). Later work makes the shift model more graph-specific: StruRW corrects conditional structure, GRADE measures subtree discrepancy, A2GNN revisits propagation, and PairAlign separates label and conditional-structure effects (Liu et al., 2023; Wu et al., 2023; Liu et al., 2024a;c). Recent methods additionally target smoothing, attribute-driven mismatch, disentangled spectral shift, homophily, or composite distributions (Chen et al., 2025; Fang et al., 2025a; Yang et al., 2025; Fang et al., 2025b; Chen et al., 2026). GDABench consolidates 16 algorithms and 74 transfers for systematic comparison (Liu et al., 2024b). These methods optimize the adapted predictor; Spectra-DA instead holds all candidate predictors fixed and studies how to choose among them without target labels.

Label-free model selection under domain shift. Unsupervised domain adaptation has developed proxy criteria based on target entropy, feature geometry, neighborhood density, transferability, and cross-model agreement. DEV estimates target risk by embedding adapted features into importance-weighted validation (You et al., 2019); SND scores the density of target features in a model-induced neighborhood graph (Saito et al., 2021); and Transfer Score combines transferability and discriminability without target labels (Yang et al., 2023). Agreement-based criteria exploit empirical relations between classifier agreement and accuracy under shift (Jiang et al., 2021; Baek et al., 2022), while recent work combines multiple unsupervised signals for practical algorithm selection (Xiong et al., 2026). Such criteria are relevant baselines, but they treat the target examples as a generic sample set and do not use the observed target adjacency to localize agreement errors by graph frequency. GDA-Select further evaluates one joint candidate bank spanning algorithms, hyperparameters, seeds, and checkpoints under an auditable sealed-label protocol.

Unsupervised classifier accuracy estimation. A complementary literature estimates classifier accuracy from unlabeled prediction agreement. Spectral meta-learning ranks predictors when their off-diagonal covariance has rank-one structure (Parisi et al., 2014), and moment-based estimators recover classifier accuracies under related low-rank or conditional-independence assumptions (Jaffe et al., 2015). UGDA trajectory banks violate the spirit of these assumptions because checkpoints from one run and methods sharing a GNN backbone produce strongly correlated errors. Our disagreement identity makes this dependence explicit through a band-wise error covariance term, and our recovery bound quantifies how covariance misspecification propagates to risk error.

Graph spectral representations. Graph spectral methods decompose signals with functions of the graph Laplacian (Shuman et al., 2013a). Spectral graph wavelets provide localized

multiscale atoms (Hammond et al., 2011); tight graph frames preserve signal energy (Shuman et al., 2013b); and Chebyshev polynomials enable localized filtering without eigendecomposition (Defferrard et al., 2016). Spectral ideas have also been used inside adaptation algorithms to align graph bases, regularize transfer, or augment graph signals (Xiao et al., 2023; Pang et al., 2023; Yang et al., 2025). In contrast, Spectra-DA uses a tight spectral frame after training: it decomposes candidate prediction errors, recovers individual target risk from pairwise disagreement, and calibrates the otherwise hidden covariance separately in each band. This distinction is important because a tight frame alone cannot improve a linear selector; the gain must arise from band-conditioned calibration, reliability, constraints, or uncertainty.

3 Covariance-Aware Spectral Risk Recovery

3.1 Problem setting and sealed selection

We study model selection after UGDA training. Spectra-DA is the paper’s risk-recovery research module within the broader GDA-Select protocol; it is not the promoted outcome of the final audit. Let $\mathcal{G}_S = (A_S, X_S, Y_S)$ be a labeled source graph and $\mathcal{G}_T = (A_T, X_T)$ an unlabeled target graph. A frozen candidate bank $\mathcal{H} = \{h_m\}_{m=1}^M$ contains different adaptation algorithms, hyperparameters, random seeds, and checkpoints. The selector may access source labels, both public graphs, and candidate probabilities P_m and embeddings Z_m , but never target labels Y_T . It outputs

$$\hat{m} = \arg \min_{m \in [M]} \hat{R}_T(h_m). \quad (1)$$

For single-label node classification, Micro-F1 equals accuracy, so true risk is $R_T(h_m) = 1 - \text{MicroF1}_T(h_m)$. Evaluation measures the regret of $h_{\hat{m}}$ relative to the best candidate in the same immutable bank.

GDA-Select enforces this information boundary operationally. Public trajectory artifacts contain source-validation and unlabeled target outputs but no target label field. Candidate-bank hashes bind every score vector to a fixed ordering. The selector process cannot import the sealed evaluator, and access counters record attempted label reads. Only after code, candidates, and scores are frozen does an isolated evaluator load Y_T to compute aggregate metrics. This protocol prevents direct target-oracle selection and repeated feedback from a hidden target leaderboard.

3.2 Tight spectral risk decomposition

Global disagreement cannot distinguish graph-smooth errors from locally oscillatory errors. We therefore decompose predictions over the target graph, following the graph-signal-processing view of Laplacian spectral filters (Shuman et al., 2013a; Hammond et al., 2011). Let

$$L_T = I - D_T^{-1/2} A_T D_T^{-1/2} \quad (2)$$

be the symmetric normalized Laplacian. We define B Gaussian spectral windows $\tilde{g}_b$ and normalize them pointwise,

$$\tilde{g}_b(\lambda) = \exp\left(-\frac{(\lambda - \mu_b)^2}{2\sigma^2}\right), \quad g_b(\lambda) = \frac{\tilde{g}_b(\lambda)}{\sqrt{\sum_j \tilde{g}_j(\lambda)^2}}. \quad (3)$$

The resulting filters $G_b = g_b(L_T)$ satisfy $\sum_b G_b^\top G_b = I$. A Chebyshev approximation applies all filters jointly without eigendecomposition (Defferrard et al., 2016); the implementation rejects configurations whose maximum frame error exceeds the frozen tolerance.

Let $H_m \in \{0, 1\}^{n_T \times C}$ be the hard one-hot prediction of candidate m , and define the unknown error signal $E_m = H_m - Y_T$. Its band risk is

$$r_{m,b} = \frac{1}{n_T} \|G_b E_m\|_F^2. \quad (4)$$

Lemma 1 (Exact hard-error decomposition). If the spectral filter bank is tight, then

$$\text{Err}_T(h_m) = \frac{1}{2} \sum_{b=1}^B r_{m,b}. \quad (5)$$

Proof. Tightness gives $\sum_b r_{m,b} = n_T^{-1} \text{tr}(E_m^\top (\sum_b G_b^\top G_b) E_m) = n_T^{-1} \|E_m\|_F^2$. Two one-hot class vectors have squared distance zero when correct and two when incorrect, hence $\|E_m\|_F^2 = 2n_T \text{Err}_T(h_m)$. $\square$

The same frame identity decomposes Brier risk for soft probabilities P_m , but not classification error exactly. We use hard predictions for the theorem and soft predictions as a smoother empirical signal. An approximate-frame bound is given in Appendix A.1.

3.3 Recovering individual risk from pair disagreement

Although $r_{m,b}$ is hidden, pairwise spectral disagreement is observable:

$$d_{mn,b} = \frac{1}{n_T} \|G_b(H_m - H_n)\|_F^2. \quad (6)$$

Since $H_m - H_n = E_m - E_n$, expansion yields the exact relation

$$d_{mn,b} = r_{m,b} + r_{n,b} - 2c_{mn,b}, \quad c_{mn,b} = \frac{1}{n_T} \langle G_b E_m, G_b E_n \rangle_F. \quad (7)$$

Thus disagreement fails to identify individual risk only through the cross-model error covariance $c_{mn,b}$.

Let $A_{\text{pair}} \in \mathbb{R}^{\binom{M}{2} \times M}$ have one row $e_m + e_n$ per unordered candidate pair. Stacking Equation equation 7 within a band gives

$$\mathbf{d}_b = A_{\text{pair}} \mathbf{r}_b - 2\mathbf{c}_b. \quad (8)$$

For zero covariance, the untruncated complete-pair solution has the closed form

$$\tilde{r}_{m,b} = \frac{s_{m,b} - S_b/(M-1)}{M-2}, \quad (9)$$

where $s_{m,b} = \sum_{n \neq m} d_{mn,b}$ and $S_b = \sum_{i < j} d_{ij,b}$. The practical estimator uses nonnegative least squares because finite-sample and covariance errors can otherwise yield negative risks.

Theorem 1 (Covariance-controlled recovery). For a complete pair graph, $A_{\text{pair}}^\top A_{\text{pair}} = (M-2)I + \mathbf{1}\mathbf{1}^\top$. The unconstrained zero-covariance least-squares estimator satisfies

$$\|\hat{\mathbf{r}}_b - \mathbf{r}_b\|_2 \leq \frac{2}{\sqrt{M-2}} \|\mathbf{c}_b\|_2. \quad (10)$$

Proof. Equation equation 8 gives $\hat{\mathbf{r}}_b - \mathbf{r}_b = -2A_{\text{pair}}^+ \mathbf{c}_b$. The stated Gram matrix has eigenvalue $M-2$ orthogonal to $\mathbf{1}$ and $2(M-1)$ along $\mathbf{1}$, so $\|A_{\text{pair}}^+\|_2 = 1/\sqrt{M-2}$. $\square$

The theorem separates conditioning from systematic shared error. A larger, more diverse committee improves the $1/\sqrt{M-2}$ factor, but adding many correlated checkpoints does not make $\mathbf{c}_b$ vanish.

3.4 Shift-conditioned covariance transport

Target covariance cannot be measured without Y_T , so Spectra-DA estimates it from labeled source simulations. This step is the strongest assumption in the method: the source-simulation bank must contain covariance corrections that are relevant to the real target, and the unlabeled descriptors must identify them reliably. We construct pseudo-target graphs

$$\tilde{\mathcal{G}}_S^{(k)} = \mathcal{T}_{\xi_k}(\mathcal{G}_S, Y_S) \quad (11)$$

that perturb features, topology, homophily, class prior, and conditional structure. Frozen candidates run inference on each graph. Since Y_S remains known, we measure its band risks $r_{m,b}^{(k)}$ and error covariances $c_{mn,b}^{(k)}$ without touching real target labels.

Each simulated graph and the real target is represented by an unlabeled shift descriptor δ containing degree, spectral-moment, feature-smoothness, embedding, and committee-prediction statistics. We match the target to the simulation bank with simplex weights

$$\alpha_T = \arg \min_{\alpha \in \Delta^K} \left\| \Sigma^{-1/2} \left(\sum_k \alpha_k \delta_k - \delta_T \right) \right\|_2^2 + \lambda_\alpha \|\alpha\|_2^2, \quad (12)$$

where $\Delta^K = \{\alpha \geq 0 : \sum_k \alpha_k = 1\}$ and descriptor variances are floored. The transported prior risk and covariance are

$$\tilde{r}_{m,b} = \sum_k \alpha_{T,k} r_{m,b}^{(k)}, \quad \hat{c}_{mn,b} = \sum_k \alpha_{T,k} c_{mn,b}^{(k)}. \quad (13)$$

Corollary 1 (Transport error). If Equation equation 8 is corrected with $\hat{\mathbf{c}}_b$, its unconstrained least-squares solution satisfies

$$\|\hat{\mathbf{r}}_b - \mathbf{r}_b\|_2 \leq \frac{2}{\sqrt{M-2}} \|\hat{\mathbf{c}}_b - \mathbf{c}_b\|_2. \quad (14)$$

Equation equation 14 states the empirical requirement plainly: the unlabeled descriptor geometry must predict the covariance components that matter for recovery. The assumption is testable and can fail under an unseen shift family; Section 4 reports this limitation rather than aggregating it away.

3.5 Practical recovery and reliability accounting

The practical solver combines transported covariance with reliability weights and a support-aware prior:

$$\hat{\mathbf{r}}_b = \arg \min_{\mathbf{r}_b \geq 0} \left\| W_b^{1/2} [A_{\text{pair}} \mathbf{r}_b - (\mathbf{d}_b + 2\hat{\mathbf{c}}_b)] \right\|_2^2 \quad (15)$$

$$+ \lambda_r \|\mathbf{r}_b\|_2^2 + \lambda_p \|\mathbf{r}_b - \tilde{\mathbf{r}}_b\|_2^2. \quad (16)$$

Pairs with high transported error correlation receive less weight, and the prior is disabled when the target descriptor falls outside the pre-registered source-simulation support. The research implementation additionally winsorizes extreme pair observations and performs one Tukey/endpoint-reliability refit. We treat this as a solver detail: Table 2 shows that it does not explain the aggregate gain.

The source-simulated configuration uses a conservative source-only uncertainty term rather than treating transported covariance as always trustworthy. Bootstrap resampling of simulated shifts yields risk estimates $\hat{R}_T^{(q)}(h_m)$ and uncertainty $u_m = \text{Std}_q[\hat{R}_T^{(q)}(h_m)]$. The research score uses

$$\hat{m} = \arg \min_m \left[\frac{1}{2} \sum_b \hat{r}_{m,b} + \beta u_m \right]. \quad (17)$$

All resampling operates on source-simulated calibration data, so the score remains target-label-free. Its empirical contribution is reported separately from covariance transport in Table 2; it is a guardrail, not the dominant source of gain. The subsequent audit tests fixed covariance shrinkage, pair-consistency trust, rank consensus, and bootstrap stability as ways to decide whether this correction should influence real-target selection. None passes all registered promotion conditions. Consequently, Spectra-DA remains a recovery and diagnostic module rather than a frozen deployment selector.

Attribution boundary and complexity. With an exact tight frame, identical linear recovery in every band, and no band-dependent calibration, summing spectral estimates equals applying the same recovery operator to global disagreement. Therefore spectral value must be attributed to band-conditioned covariance, weights, constraints, or uncertainty—not to decomposition alone. Joint Chebyshev filtering costs $O(BK|E_T|MC)$, while band-wise Gram matrices form all pair disagreements in $O(BM^2n_TC)$. Recovery designs are cached by committee size; source-shift calibration requires candidate inference but no GNN retraining.

4 Experiments

The experiments ask six questions: (i) how strong are existing label-free selectors on a shared UGDA candidate bank; (ii) what covariance-aware recovery can explain under source simulation; (iii) whether that correction transfers to real targets; (iv) whether registered structural controls repair the failure; (v) where the remaining regret arises; and (vi) whether any selector qualifies for final sealed evaluation. All real-target numbers below use four explicitly open development tasks. The remaining twelve transfers were never queried.

4.1 Experimental setup

Tasks and candidate bank. The four pre-registered open-development tasks are ACMv9→Citationv1, Citationv1→ACMv9, USA→BRAZIL, and BRAZIL→USA. Each task contains 675 frozen candidates: five method families (SourceOnly, A2GNN, GRADE, PairAlign, and ADAlign), three configurations, three seeds, and 15 checkpoints. Candidate trajectories contain source-validation outputs, unlabeled target predictions, embeddings, losses, runtime, and memory metadata. Candidate-bank hashes fix both membership and ordering. The source-simulated study uses the same candidate schema over 44 leave-one-shift-out development folds.

Selectors. We compare source-validation rules, entropy, information maximization, DEV, SND, Transfer Score, GDE, ALine-S/ALine-D, Agreement Reference, global committee disagreement, and the proposed Spectra-DA risk-recovery module (You et al., 2019; Saito et al., 2021; Yang et al., 2023; Jiang et al., 2021; Baek et al., 2022). We additionally report the strongest open-development diagnostic pipeline, Agreement top-20% followed by Transfer Score reranking. Its provenance is explicit: Agreement owns the shortlist and Transfer Score owns the final ranking; it is not a Spectra-DA variant and is not designated as ours.

Metrics and promotion rules. For task or fold t , normalized regret is

$$\text{NRegret}_t = \frac{R_t(h_{\hat{m}}) - \min_m R_t(h_m)}{\max_m R_t(h_m) - \min_m R_t(h_m) + 10^{-12}}. \quad (18)$$

We report mean and worst normalized regret, selected Micro-F1, rank correlation, shortlist recall, and decomposition terms. Before Stage-C, we registered the following promotion requirements: mean regret at most 0.10, worst regret at most 0.20, non-inferiority to Transfer Score on at least 3/4 tasks, leave-one-task-out mean regret at most 0.15, oracle-trajectory recall at 20% at least 0.75, source-simulated family-out CVaR degradation at most 5%, runtime below 480 seconds, and zero label-access or protocol violations.

4.2 Real-target open-development comparison

The strongest development diagnostic lowers mean normalized regret from Transfer Score’s 0.216807 to 0.087507, a 59.6% relative reduction, and raises selected Micro-F1 from 57.57% to 62.34%. This result should not be read as a promoted method claim. Agreement Reference alone already has lower worst-task regret and slightly higher global rank correlation, while the diagnostic is non-inferior to Transfer Score on only two tasks. The proposed Spectra-DA calibration now performs substantially worse on real targets, confirming that source-simulated covariance correction is not reliably transported by the current descriptor geometry.

Table 1: Target-label-free selection on four open-development transfers with 675 frozen candidates per task. The blue $\star$ marks the best value in each column. The green $\dagger$ identifies the proposed risk-recovery module; the Agreement $\rightarrow$ Transfer Score row is a diagnostic pipeline discovered on these development tasks and was not promoted.

Selector	Mean NRegret $\downarrow$	Worst NRegret $\downarrow$	Median τ $\uparrow$	Micro-F1 (%) $\uparrow$
Source validation	0.1756	0.4030	0.4457	58.31
Last source validation	0.2693	0.8060	0.4327	53.13
Entropy	0.3425	0.5522	0.3727	49.90
Information maximization	0.2568	0.6418	0.4375	56.35
DEV	0.3556	0.5373	0.2827	49.70
SND	0.9245	1.0000	-0.4673	16.51
Transfer Score	0.2168	0.6418	0.2892	57.57
GDE	0.5244	0.8209	0.2008	38.83
ALine-S	0.1756	0.4030	0.4457	58.31
ALine-D	0.2958	0.8209	0.4641	51.62
Agreement Reference	0.1630	0.2226 $\star$	0.6481	59.50
Global disagreement	0.1630	0.2226 $\star$	0.6501 $\star$	59.50
SPECTRA-Static	0.1630	0.2226 $\star$	0.6495	59.50
Spectra-DA calibration $\dagger$	0.3201 $\dagger$	0.5373 $\dagger$	0.3967 $\dagger$	50.07 $\dagger$
Agreement@20% $\rightarrow$ Transfer Score (diagnostic)	0.0875 $\star$	0.2239	0.6416	62.34 $\star$

Table 2: Source-simulated recovery attribution over four development tasks and 44 held-out shifts. Cov. denotes transported covariance and UCB denotes bootstrap uncertainty. The green $\dagger$ marks the proposed pre-registered research configuration; blue $\star$ marks the best value.

Variant	Mean NRegret $\downarrow$	CVaR _{20%} $\downarrow$	Median τ $\uparrow$	Top-5% hit $\uparrow$
Global linear recovery	0.27767	0.62134	0.4814	0.0%
Spectral linear recovery	0.27767	0.62134	0.4813	0.0%
Spectral + prior + UCB, no cov.	0.05057	0.18877	0.8550	72.7%
Global + cov. + UCB	0.01471	0.04886	0.9442 $\star$	95.5% $\star$
Spectral + cov. + UCB, no robust refit	0.01397 $\star$	0.04758 $\star$	0.9398	95.5% $\star$
Spectral + cov., no UCB	0.01452	0.04941	0.9434	95.5% $\star$
Spectra-DA full $\dagger$	0.01415 $\dagger$	0.04793 $\dagger$	0.9424 $\dagger$	95.5% $\star\dagger$

4.3 Source-simulated covariance recovery

Table 2 isolates the risk-recovery mechanism over 44 source-simulated folds. The pre-registered full configuration reaches mean normalized regret 0.01415, CVaR_{20%} = 0.04793, worst-fold regret 0.08388, and a 95.45% top-5% hit rate. Removing covariance increases mean regret to 0.05057; the paired mean-difference bootstrap interval is [0.01583, 0.06026]. Covariance correction is therefore the dominant empirical component when its calibration data match the evaluation regime.

The spectral interpretation is narrower than a top-1 superiority claim. Global and spectral uncorrected recovery are identical, as predicted by Appendix A.2. Band-conditioned covariance improves the full configuration by only 3.83% relative to its equal-information global control, changes four of 44 selections, and has paired interval [-0.00073, 0.00265]. Spectral bands nevertheless expose heterogeneous covariance regimes (Table 3), which is useful for diagnosis even though the incremental selection gain is inconclusive.

4.4 Simulation-to-real transport failure

The source-simulated gain does not survive the real-shift information boundary. A low-rank risk-correction transport variant reaches family-out mean regret 0.06977, while descriptor distance has Spearman correlation -0.04954 with risk-correction distance. On real targets, Spectra-DA calibration reaches 0.32006 mean regret. A task-wise oracle over fixed covariance shrinkage strengths indicates that different tasks prefer different corrections, but label-free pair consistency selects systematically excessive correction and reaches 0.339996.

Table 3: Source-simulated covariance diagnostics. Below global is the fraction of task-shift comparisons whose band correlation is below the corresponding global correlation.

Statistic	Global	Low	Mid	High
Mean error correlation	0.487	0.381*	0.573	0.617
Transport NMAE	0.092	0.227	0.069*	0.186
Below global	–	98.9%*	0.0%	5.1%

Table 4: Representative registered controls from the Stage A/B/C audit. None passes all promotion guards. The first row is the best development diagnostic and is included as a reference, not as a frozen method.

Stage	Control	Mean NRegret ↓	Worst NRegret ↓	Micro-F1 (%) ↑
Reference	Agreement@20% → TS	0.0875*	0.2239	62.34*
A	Fixed covariance shrinkage $\gamma = .25$	0.1403	0.3284	59.15
A	Candidate-pair consistency	0.3400	0.5373	49.56
B	TS@20% → SPECTRA/Agreement consensus	0.1589	0.3134	59.59
C	Leave-one-trajectory-out Agreement	0.1136	0.3284	61.01
C	Leave-one-method-out Agreement	0.1415	0.3433	60.20
C	Best mean coverage floor (trajectory top-1)	0.1190	0.3284	60.65
C	Repeated trajectory evidence ($k = 2$)	0.2018	0.4385	59.24
C	Agreement/ $\gamma = .25$ auxiliary midrank	0.1419	0.3433	60.17
C	Bootstrap-stable Agreement shortlist	0.1136	0.3284	61.01
C	Pre-registered stability router	0.2168	0.6418	57.57

These results localize the failure to deciding when a source-simulated covariance correction is trustworthy, not to solving the pair-sum recovery system once the correction is known.

4.5 Pre-registered Stage A/B/C no-go audit

We allowed only bounded, hypothesis-specific follow-ups. Stage A tested covariance trust and fixed shrinkage; Stage B tested selector consensus; Stage C tested cross-fitting, trajectory evidence, coverage floors, fixed auxiliary signals, and bootstrap stability. Table 4 reports the strongest or decisive control from each family. Every row preserves the same candidate bank and reports zero label accesses and protocol violations.

The negative controls are structurally informative. Cross-fitting does not remove a harmful self-vote effect; requiring repeated checkpoint evidence worsens selection; coverage floors cannot help a shortlist that already contains the relevant trajectories; and stability does not identify the better expert. The parameter-free stability router selects the non-inferior expert on only 2/4 open-development tasks and therefore fails its registered 3/4 qualification.

4.6 Shortlist-specific error decomposition

The final failure analysis distinguishes whether the shortlist misses the right region or the reranker selects poorly within that region. Let S be the Agreement shortlist. We expand trajectories represented in S only for analysis and decompose the selected regret into method coverage, trajectory coverage, checkpoint coverage, and within-shortlist reranking. Table 5 shows that the shortlist represents the global-oracle method and trajectory on all four tasks. The remaining error is therefore concentrated after coverage has already succeeded.

USA→BRAZIL makes the diagnosis especially clear: the global-oracle candidate is already in the shortlist, so its entire 0.223881 regret is created by Transfer Score reranking. This explains why trajectory expansion, coverage floors, and method balancing fail. The unresolved problem is top-of-ranking calibration among shortlisted checkpoints, not finding more trajectories.

Table 5: Exact regret decomposition for Agreement@20% followed by Transfer Score. Shares are relative to total normalized regret 0.087507.

Component	Mean normalized gap	Share
Method coverage	0.000000	0.0%
Trajectory coverage	0.000000	0.0%
Checkpoint coverage	0.017927	20.5%
Transfer Score reranking	0.069580	79.5%*
Total	0.087507	100.0%

Table 6: Pre-registered promotion audit for the strongest development diagnostic. Every condition is required.

Guard	Evidence	Pass
Mean NRegret ≤ 0.10	0.087507	yes
Worst NRegret ≤ 0.20	0.223881	no
Non-inferior to TS on $\geq 3/4$ tasks	2/4	no
LOTO mean NRegret ≤ 0.15	0.087507	yes
Oracle-trajectory recall@20% ≥ 0.75	1.00	yes
Family-out CVaR degradation $\leq 5\%$	not evaluated	no
Runtime < 480 s	449.26 s	yes
Label/protocol counts	0 / 0	yes

4.7 Promotion decision and sealed-label boundary

The authoritative decision is `stop_no_freeze_no_sealed_evaluation`. No selector is frozen as ours, and the final twelve target-label files remain unqueried. This decision is part of the experimental result: the benchmark demonstrates not only how to compare selectors, but also how to stop development when apparent mean gains do not satisfy robustness and cross-task criteria.

5 Conclusion

This paper separates target-label-free model selection from UGDA training. GDA-Select makes algorithm, configuration, seed, and checkpoint selection auditable through immutable candidate trajectories, sealed labels, and pre-registered stopping rules. Within this protocol, Spectra-DA provides a covariance-aware account of what candidate disagreement can reveal about target risk. Its tight graph-spectral frame preserves total hard-label risk, while the recovery analysis identifies cross-model error covariance as the hidden quantity governing identifiability and misspecification.

The experiments support the theory more strongly than they support a deployable selector. On matched source-simulated folds, covariance correction reduces mean normalized regret from 0.05057 to 0.01415, whereas the increment from spectral conditioning over global covariance is modest and statistically inconclusive. On four real-target open-development tasks, the best diagnostic pipeline is Agreement top-20% followed by Transfer Score, with mean regret 0.087507. This gain is not attributable to Spectra-DA and does not satisfy the robustness requirements for promotion.

The audited negative result provides the main empirical insight. The successful shortlist already represents the oracle method and trajectory on every development task; 79.5% of its remaining regret arises from reranking within that shortlist. Cross-fitting, trajectory aggregation, coverage floors, fixed covariance auxiliaries, bootstrap stability, and a parameter-free router all fail to repair this top-of-ranking error. The registered audit therefore records `stop_no_freeze_no_sealed_evaluation`: no selector is declared as a frozen main method, and the final twelve transfers remain sealed.

The present scope covers Citation and Airport development tasks but not Blog or Twitch targets. Any continuation must change the evidence base before changing the claim: either pre-register additional graph families as development data, reducing the final sealed set accordingly, or retain all twelve sealed tasks and develop a shortlist-internal calibration signal using only source-simulated and unlabeled evidence. In either case, the benchmark’s stopping rule should remain part of the method, because reliable model selection requires knowing when not to query the next label.

References

- Christina Baek, Yiding Jiang, Aditi Raghunathan, and J. Zico Kolter. Agreement-on-the-line: Predicting the performance of neural networks under distribution shift. In *Advances in Neural Information Processing Systems*, volume 35, 2022. URL https://proceedings.neurips.cc/paper_files/paper/2022/hash/7a8d388b7a17df480856dff1cc079b08-Abstract-Conference.html.
- Wei Chen, Guo Ye, Yakun Wang, Zhao Zhang, Libang Zhang, Daixin Wang, Zhiqiang Zhang, and Fuzhen Zhuang. Smoothness really matters: A simple yet effective approach for unsupervised graph domain adaptation. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 39, pp. 15875–15883, 2025. doi: 10.1609/aaai.v39i15.33743. URL <https://doi.org/10.1609/aaai.v39i15.33743>.
- Wei Chen, Xingyu Guo, Shuang Li, Zhao Zhang, Yan Zhong, Fuzhen Zhuang, and Deqing Wang. Learning adaptive distribution alignment with neural characteristic function for graph domain adaptation, 2026. URL <https://arxiv.org/abs/2602.10489>.
- Quanyu Dai, Xiao-Ming Wu, Jiaren Xiao, Xiao Shen, and Dan Wang. Graph transfer learning via adversarial domain adaptation with graph convolution. *IEEE Transactions on Knowledge and Data Engineering*, 2022. doi: 10.1109/TKDE.2022.3144250. URL <https://doi.org/10.1109/TKDE.2022.3144250>.
- Michaël Defferrard, Xavier Bresson, and Pierre Vandergheynst. Convolutional neural networks on graphs with fast localized spectral filtering. In *Advances in Neural Information Processing Systems*, volume 29, 2016. URL https://proceedings.neurips.cc/paper_files/paper/2016/hash/04df4d43d481c5bb723be1b6df1ee65-Abstract.html.
- Ruiyi Fang, Bingheng Li, Zhao Kang, Qiuhao Zeng, Nima Hosseini Dashtbayaz, Ruizhi Pu, Boyu Wang, and Charles Ling. On the benefits of attribute-driven graph domain adaptation, 2025a. URL <https://arxiv.org/abs/2502.06808>. *International Conference on Learning Representations*.
- Ruiyi Fang, Bingheng Li, Jingyu Zhao, Ruizhi Pu, Qiuhao Zeng, Gezheng Xu, Charles Ling, and Boyu Wang. Homophily enhanced graph domain adaptation. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pp. 16006–16028. PMLR, 2025b. URL <https://proceedings.mlr.press/v267/fang25g.html>.
- David K. Hammond, Pierre Vandergheynst, and Rémi Gribonval. Wavelets on graphs via spectral graph theory. *Applied and Computational Harmonic Analysis*, 30(2):129–150, 2011. doi: 10.1016/j.acha.2010.04.005. URL <https://doi.org/10.1016/j.acha.2010.04.005>.
- Ariel Jaffe, Boaz Nadler, and Yuval Kluger. Estimating the accuracies of multiple classifiers without labeled data. In *Proceedings of the Eighteenth International Conference on Artificial Intelligence and Statistics*, volume 38 of *Proceedings of Machine Learning Research*, pp. 407–415. PMLR, 2015. URL <https://proceedings.mlr.press/v38/jaffe15.html>.
- Yiding Jiang, Vaishnavh Nagarajan, Christina Baek, and J. Zico Kolter. Assessing generalization of SGD via disagreement, 2021. URL <https://arxiv.org/abs/2106.13799>.
- Meihan Liu, Zeyu Fang, Zhen Zhang, Ming Gu, Sheng Zhou, Xin Wang, and Jiajun Bu. Rethinking propagation for unsupervised graph domain adaptation. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pp. 13963–13971, 2024a. doi: 10.1609/aaai.v38i12.29304. URL <https://doi.org/10.1609/aaai.v38i12.29304>.

- Meihan Liu, Zhen Zhang, Jiachen Tang, Jiajun Bu, Bingsheng He, and Sheng Zhou. Re-visiting, benchmarking and understanding unsupervised graph domain adaptation, 2024b. URL <https://arxiv.org/abs/2407.11052>.
- Shikun Liu, Tianchun Li, Yongbin Feng, Nhan Tran, Han Zhao, Qiang Qiu, and Pan Li. Structural re-weighting improves graph domain adaptation. In Proceedings of the 40th International Conference on Machine Learning, volume 202 of Proceedings of Machine Learning Research, pp. 21778–21793. PMLR, 2023. URL <https://proceedings.mlr.press/v202/liu23t.html>.
- Shikun Liu, Deyu Zou, Han Zhao, and Pan Li. Pairwise alignment improves graph domain adaptation, 2024c. URL <https://arxiv.org/abs/2403.01092>.
- Jinhui Pang, Zixuan Wang, Jiliang Tang, Mingyan Xiao, and Nan Yin. SA-GDA: Spectral augmentation for graph domain adaptation. In Proceedings of the 31st ACM International Conference on Multimedia, pp. 309–318, 2023. doi: 10.1145/3581783.3612264. URL <https://doi.org/10.1145/3581783.3612264>.
- Fabio Parisi, Francesco Strino, Boaz Nadler, and Yuval Kluger. Ranking and combining multiple predictors without labeled data. Proceedings of the National Academy of Sciences, 111(4):1253–1258, 2014. doi: 10.1073/pnas.1219097111. URL <https://doi.org/10.1073/pnas.1219097111>.
- Kuniaki Saito, Donghyun Kim, Piotr Teterwak, Stan Sclaroff, Trevor Darrell, and Kate Saenko. Tune it the right way: Unsupervised validation of domain adaptation via soft neighborhood density, 2021. URL <https://arxiv.org/abs/2108.10860>.
- David I. Shuman, Sunil K. Narang, Pascal Frossard, Antonio Ortega, and Pierre Vandergheynst. The emerging field of signal processing on graphs: Extending high-dimensional data analysis to networks and other irregular domains. IEEE Signal Processing Magazine, 30(3):83–98, 2013a. doi: 10.1109/MSP.2012.2235192. URL <https://doi.org/10.1109/MSP.2012.2235192>.
- David I. Shuman, Christoph Wismeyer, Nicki Holighaus, and Pierre Vandergheynst. Spectrum-adapted tight graph wavelet and vertex-frequency frames, 2013b. URL <https://arxiv.org/abs/1311.0897>.
- Jun Wu, Jingrui He, and Elizabeth Ainsworth. Non-iid transfer learning on graphs. In Proceedings of the AAAI Conference on Artificial Intelligence, volume 37, pp. 10342–10350, 2023. doi: 10.1609/aaai.v37i9.26231. URL <https://doi.org/10.1609/aaai.v37i9.26231>.
- Man Wu, Shirui Pan, Chuan Zhou, Xiaojun Chang, and Xingquan Zhu. Unsupervised domain adaptive graph convolutional networks. In Proceedings of The Web Conference 2020, pp. 1457–1467, 2020. doi: 10.1145/3366423.3380219. URL <https://doi.org/10.1145/3366423.3380219>.
- Zhiqing Xiao, Haobo Wang, Ying Jin, Lei Feng, Gang Chen, Fei Huang, and Junbo Zhao. SPA: A graph spectral alignment perspective for domain adaptation. In Advances in Neural Information Processing Systems, volume 36, pp. 37252–37272, 2023. doi: 10.52202/075280-1619. URL https://proceedings.neurips.cc/paper_files/paper/2023/hash/754e80f98b2a141942f45a0eeb258a3c-Abstract-Conference.html.
- Yiheng Xiong, Luisa Gallée, Daniel Santak Wolf, Heiko Hillenhausen, and Michael Götz. Towards practical algorithm selection for unsupervised domain adaptation in medical imaging, 2026. URL <https://arxiv.org/abs/2607.28125>.
- Jianfei Yang, Hanjie Qian, Yuecong Xu, Kai Wang, and Lihua Xie. Can we evaluate domain adaptation models without target-domain labels?, 2023. URL <https://arxiv.org/abs/2305.18712>. International Conference on Learning Representations, 2024.

Liang Yang, Xin Chen, Jiaming Zhuo, Di Jin, Chuan Wang, Xiaochun Cao, Zhen Wang, and Yuanfang Guo. Disentangled graph spectral domain adaptation. In Proceedings of the 42nd International Conference on Machine Learning, volume 267 of Proceedings of Machine Learning Research, pp. 70632–70648. PMLR, 2025. URL <https://proceedings.mlr.press/v267/yang25g.html>.

Kaichao You, Ximei Wang, Mingsheng Long, and Michael I. Jordan. Towards accurate model selection in deep unsupervised domain adaptation. In Proceedings of the 36th International Conference on Machine Learning, volume 97 of Proceedings of Machine Learning Research, pp. 7124–7133. PMLR, 2019. URL <https://proceedings.mlr.press/v97/you19a.html>.

Yizhou Zhang, Guojie Song, Lun Du, Shuwen Yang, and Yilun Jin. DANE: Domain adaptive network embedding. In Proceedings of the Twenty-Eighth International Joint Conference on Artificial Intelligence, pp. 4362–4368, 2019. doi: 10.24963/ijcai.2019/606. URL <https://doi.org/10.24963/ijcai.2019/606>.

A Additional Theory and Protocol Details

A.1 Approximate tight-frame error

Let $F = \sum_b G_b^\top G_b$ and suppose $\|F - I\|_2 \leq \epsilon_{\text{frame}}$. Then

$$\left| \sum_b r_{m,b} - \frac{1}{n_T} \|E_m\|_F^2 \right| \leq \epsilon_{\text{frame}} \frac{\|E_m\|_F^2}{n_T}. \quad (19)$$

For hard one-hot predictions,

$$\left| \frac{1}{2} \sum_b r_{m,b} - \text{Err}_T(h_m) \right| \leq \epsilon_{\text{frame}} \text{Err}_T(h_m). \quad (20)$$

This follows by bounding $n_T^{-1} \text{tr}(E_m^\top (F - I) E_m)$ with the spectral norm.

A.2 Global equivalence of uncorrected linear recovery

Suppose each band uses the same unconstrained linear operator A_{pair}^+ , with no band weights, constraints, or calibration. Then

$$\sum_b \hat{\mathbf{r}}_b = A_{\text{pair}}^+ \sum_b \mathbf{d}_b. \quad (21)$$

Tightness gives $\sum_b d_{mn,b} = n_T^{-1} \|H_m - H_n\|_F^2$, which is global prediction disagreement. This establishes the equal-information global control required for causal attribution.

A.3 Sealed-label audit checklist

The protocol verifies: (i) candidate-bank hashes and candidate counts; (ii) absence of target-label fields in public artifacts; (iii) zero selector imports from the sealed evaluator; (iv) complete score coverage and selected index consistency; (v) zero label-access and protocol-violation counters; and (vi) an immutable selector commit before hidden evaluation. Stage-C did not satisfy the promotion conditions, so no final selector was frozen and the remaining sealed labels were not loaded.

A.4 Frozen implementation details

The development configuration uses three Gaussian spectral bands with $\sigma = 0.55$, Chebyshev order 8, and hard predictions. Descriptor matching uses regularization 0.1 and a per-coordinate scale floor of 0.05. Recovery uses ridge 10^{-6} and pair-weight power 1. Bootstrap uses 16 samples with uncertainty coefficient $\beta = 0.25$.

The controlled refinement augments each base calibration bank with pre-frozen, source-labeled sidecar shifts. Feature-mask sidecars are admitted only when the source node count is at least the candidate count, $n_S \geq M$, a source-only identifiability gate that does not depend on the task name or target score. Sidecar manifests record the task, candidate-bank hash, candidate ordering, spectral configuration, parent-calibration hash, and zero target-label/protocol counters.

The four open-development tasks are ACMv9→Citationv1, Citationv1→ACMv9, USA→BRAZIL, and BRAZIL→USA. Consequently, the present quantitative evidence covers Citation and Airport graphs but not Blog or Twitch. The latter are among the final twelve sealed transfers, which remain unqueried under the recorded `stop_no_freeze_no_sealed_evaluation` decision.