

Setting up

Supabase and the AI

Every click, in order, assuming nothing — about 30 minutes

Version 3.0 · 19 August 2026 · Updated for Supabase's new API keys

Before you start

Two websites, one browser, nothing to install. You will not touch a command line at any point.


What	Where	Cost
Your app and website	github.com	Free
Database and the AI connection	supabase.com	Free
The AI itself	console.anthropic.com	~£0.05 per contract analysed

Three words that sound like something else

“Edge Functions” has nothing to do with Microsoft Edge — it is Supabase's name for small pieces of server code. Chrome is completely fine. “Vault” is Supabase's built-in secret storage, not an app to install. “Cron” is a scheduler inside the same dashboard. All three are menu items you click, not software you download.

About the pictures

These are illustrations I have drawn, not photographs — I cannot log into your account to capture the real screens. Menu names and button labels match what you will see; the colours will look different.

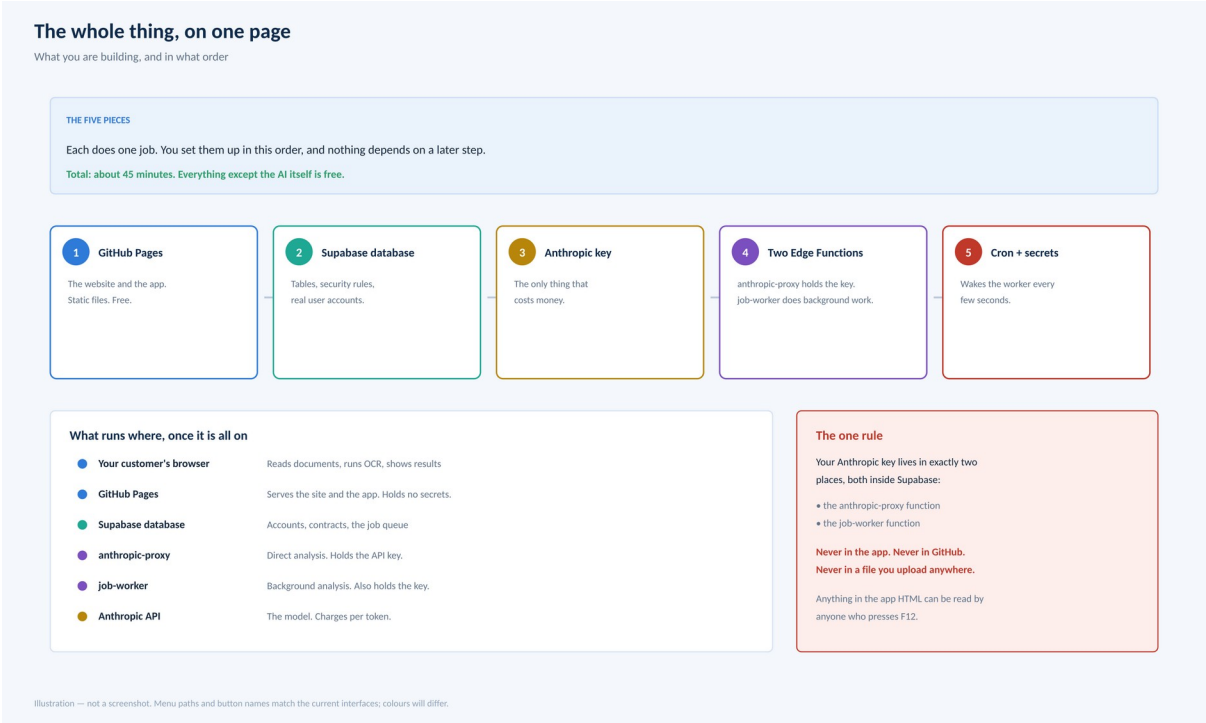

1. Step 1 — Create the database

1. Go to supabase.com and sign in. Click New project.
2. Give it a name, pick a region near you (London if you are UK-based), and set a database password. Save that password in your password manager — there is no recovery.
3. Wait a minute or two while it builds.
4. In the left sidebar click SQL Editor.
5. Open `contractiq_supabase_setup.sql`, select all of it, copy, paste into the editor, and click Run.

How you know it worked


You get a success message rather than a red error. Click Table Editor in the sidebar and you should see `contracts`, `documents`, `data_points`, `profiles`, `jobs` and about a dozen others.

If it errors, nothing was created — Supabase runs the whole script as one transaction, so a failure undoes everything. Send me the error and I will look at it.

2. Step 2 — Get your Claude API key

Step 1 — Get your Anthropic API key

console.anthropic.com · about 3 minutes

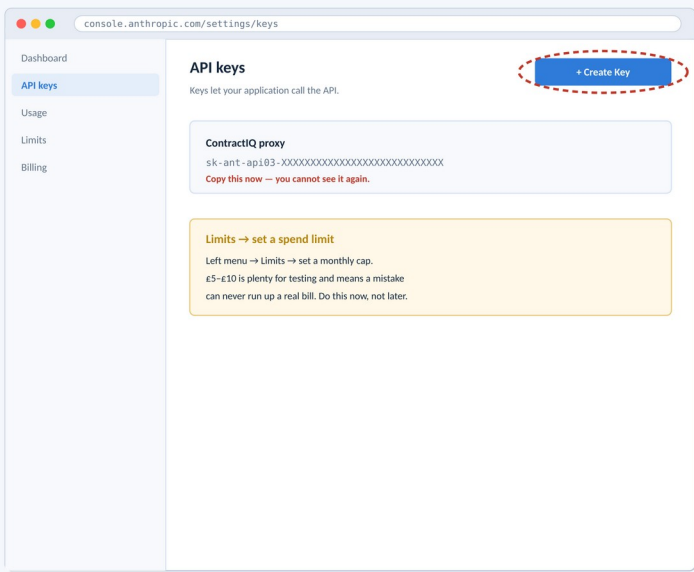

API keys
Keys let your application call the API.

+ Create Key

ContractIQ proxy
sk-ant-ap103-XXXXXXXXXXXXXXXXXXXXXXXXXXXX
Copy this now — you cannot see it again.

Limits → set a spend limit
Left menu → Limits → set a monthly cap.
€5-€10 is plenty for testing and means a mistake can never run up a real bill. Do this now, not later.

1 Create the key
Sign in at console.anthropic.com
Left menu → API keys → Create Key
Name it 'ContractIQ proxy'
COPY IT IMMEDIATELY and paste it somewhere safe — it is shown once and never again.

2 Add credit + a spend limit
Billing → add a small amount (€5 is plenty).
Then Limits → set a monthly cap.
This is the single best five seconds you will spend on this whole setup.

What this key is for
It is the only thing that costs money.
It goes into Supabase in step 4 — never into the app, the website, or GitHub.

Illustration — not a screenshot. Layout and button names match the current Supabase / Anthropic interfaces; colours will differ.

6. Go to console.anthropic.com and sign in.
7. In the left menu click API keys.
8. Click Create Key. Name it 'ContractIQ'.
9. Copy it straight away and paste it somewhere safe. It is shown once and never again. It starts sk-ant-
10. Click Billing and check your \$20 credit is showing.
11. Click Limits and set a monthly spend cap of \$20.


Do the spend limit before you go any further

It takes five seconds. With a cap set, the worst case is that analysis stops working — not that you get an unexpected bill. This is the single cheapest piece of insurance in the whole project.

That key is the only thing in this entire setup that costs money. Everything else is free.

3. Step 3 — Deploy the first function

This is the piece that lets the app talk to Claude. It exists so your API key never has to be in the app, where anyone could read it.

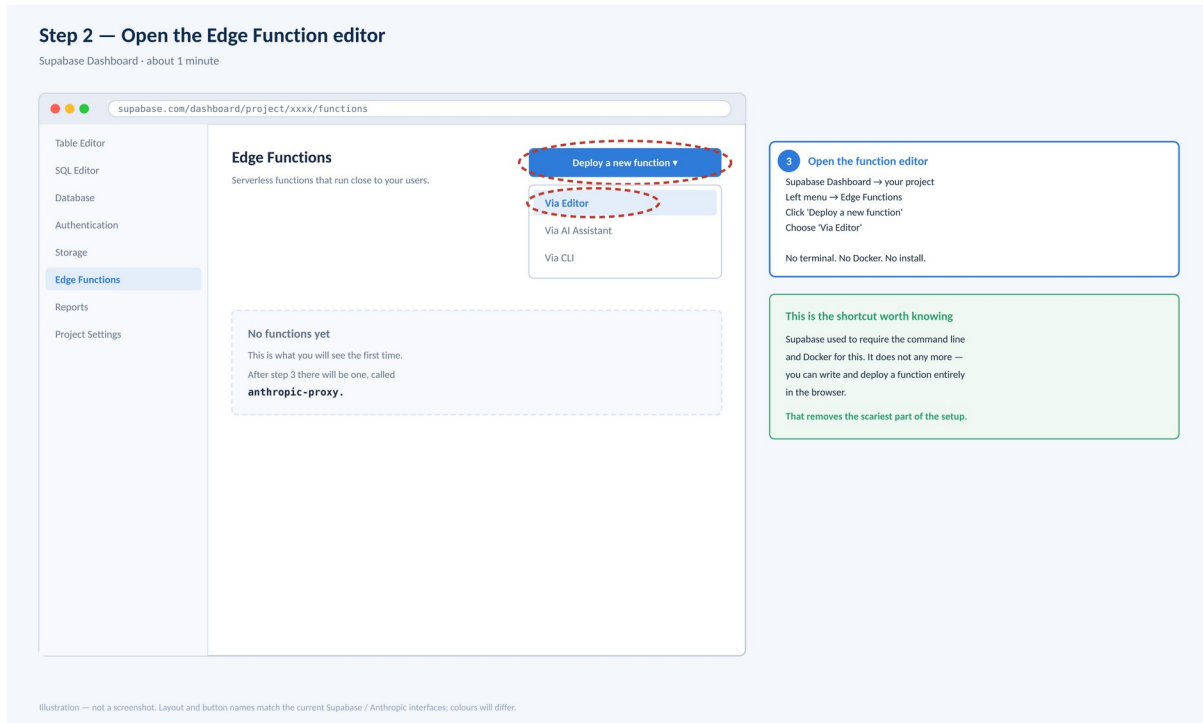

12. Back in Supabase, click Edge Functions in the left sidebar.
13. Click Deploy a new function.
14. Choose Via Editor from the dropdown. A code editor opens in your browser.
15. In the name box type exactly: anthropic-proxy
16. Select all the example code that appeared and delete it.
17. Open supabase_edge_function_anthropic_proxy.ts, select all, copy, and paste it in.
18. Click Deploy function. It takes about twenty seconds.

Step 3 — Paste the code and deploy

Name it anthropic-proxy · about 3 minutes

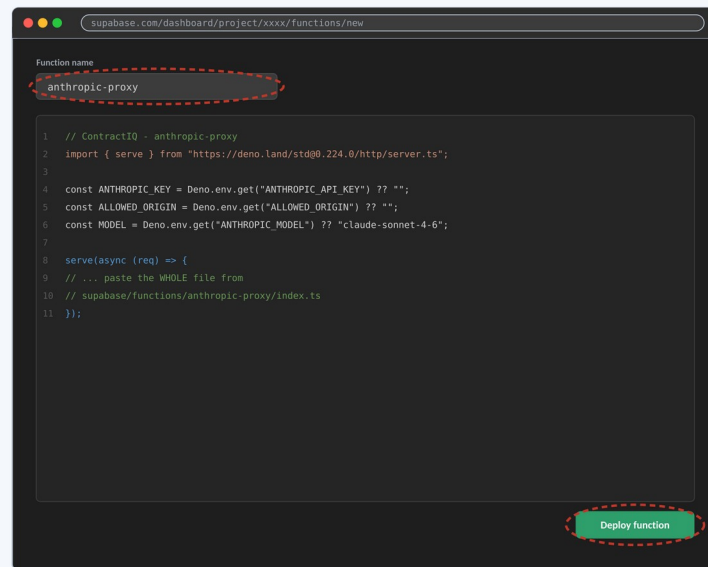


Illustration — not a screenshot. Layout and button names match the current Supabase / Anthropic interfaces; colours will differ.

4 Paste the code, name it, deployName it EXACTLY: anthropic-proxy
(the app builds its URL from this name)Delete the template code that appears.
Paste the whole contents of
supabase/functions/anthropic-proxy/index.ts
Click 'Deploy function'. Takes ~20 seconds.**If you get 401 Unauthorized later**Open the function → its settings → turn OFF
'Verify JWT'. The app calls with the anon key
and no signed-in user, so JWT checking must
be off while you are testing.

This is the most likely thing to trip you up.

3.1 • One more click on this function

19. Click into anthropic-proxy now that it exists.
20. Find its settings or details panel and turn OFF 'Verify JWT'.

The app calls this function from the browser with nobody signed in, so that check has to be off or you will get 401 errors. It is a toggle, not a problem.

The name has to be exact

anthropic-proxy — all lower case, one hyphen, no spaces. The app works out the web address to call from your project URL plus that name, so anthropic_proxy or Anthropic-Proxy simply will not connect.

4. Step 4 — Deploy the second function

This one runs analysis in the background so a long run survives you closing the tab. Strictly optional — but it takes two minutes and you have already learnt the steps.

21. Edge Functions → Deploy a new function → Via Editor.
22. Name it exactly: `job-worker`
23. Delete the example code, paste in `supabase_edge_function_job_worker.ts`, Deploy.
24. LEAVE 'Verify JWT' ON for this one.

Why the opposite setting?

Different callers. `anthropic-proxy` is called by the browser, which has no signed-in user — so the check must be off. `job-worker` is called by your own database, which sends a proper key — so the check stays on. Getting these the wrong way round is the commonest mistake here.

5. Step 5 — Add your three secrets

Step 4 — Add your three secrets

Edge Functions › Secrets › about 3 minutes

5 Add three secrets

Edge Functions → Secrets (left menu)
Add each Key / Value pair, then Save.

ALLOWED_ORIGIN must be exactly where the APP is served from — https://, no path, NO trailing slash.
Get this wrong and every AI call returns 403.

Getting ALLOWED_ORIGIN right

GitHub Pages: <https://ozzyops.github.io>
Your domain: <https://yourdomain.com>
WRONG: .../ContractIQ-app/app/
WRONG: <https://ozzyops.github.io/>

No redeploy needed
Secrets take effect immediately.

Illustration — not a screenshot. Layout and button names match the current Supabase / Anthropic interfaces; colours will differ.

25. In the left sidebar under Edge Functions, click Secrets.
26. Add each of the three below as a Key and a Value.
27. Click Save. They take effect immediately — no need to redeploy anything.

Key (type exactly)	Value	What it does
ANTHROPIC_API_KEY	your sk-ant-... key from step 2	Lets the function call Claude. This is the only place this key should ever exist.
ALLOWED_ORIGIN	https://YOURNAME.github.io	Only your app may use the function. Without it, anyone who finds the address could spend your credit.
MAX_CALLS_PER_HOUR	60	A limit you set yourself, so nothing can run away.

ALLOWED_ORIGIN is where nearly everyone slips

It is the web address the APP is served from — the https:// part ONLY. No folder path. No slash on the end.

RIGHT: <https://ozzyops.github.io>

RIGHT: <https://yourdomain.com>

WRONG: <https://ozzyops.github.io/> (slash on the end)

WRONG: <https://ozzyops.github.io/repo/app/> (has a folder path)

Get it wrong and every analysis fails with a 403 error. If that happens, check this first.

6. Step 6 — Copy your project URL and key

Supabase changed this screen in 2026, so it may not match older guides.

Step 5 — Copy your project URL and publishable key

Project Settings > API Keys · Supabase changed this screen in 2026

Illustration — not a screenshot. Layout and labels match the current Supabase interface; colours differ.

1 Copy two values

Project Settings → API Keys

1. The Publishable key (sb_publishable_...)
2. The Project URL (Data API page, or the Connect button)

Both go into ContractIQ → Settings.

Supabase changed these keys

Older guides mention an 'anon key' starting eyJ... New projects no longer get one — you get sb_publishable_ instead. It does the same job.

If you pasted a secret key, revoke it now.

How to tell them apart

sb_publishable_ → safe in the app

sb_secret_ → server only, never here

28. Left sidebar → Project Settings → API Keys.

29. Under Publishable key, copy the value. It starts sb_publishable_

30. Now go to Project Settings → Data API and copy the Project URL. It looks like https://abcdefghijkl.supabase.co

(You can also get both from the Connect button at the top of the dashboard.)

There is a second key on that page. Do not touch it.

The Publishable key is designed to be public — it is limited by the security rules the SQL script installed, so it is safe in the app. The Secret key on the same page bypasses every one of those rules. It must never go in the app, the repository, a screenshot, or anywhere a browser can reach.

If you have already pasted or shared a secret key: click the ⓘ beside it and revoke it. Takes five seconds, and it invalidates the exposed one.

If a guide mentions an 'anon key' starting eyJ...

That was the old format. New Supabase projects no longer issue one — you get sb_publishable_ instead, and it does exactly the same job. Both work if you have an older project.

7. Step 7 — Connect the app

Step 6 — Connect the app

ContractIQ → Settings · about 1 minute

7 Paste them into the app

Open your app → sign in admin / ContractIQ2026!

Click Settings.
Paste the Project URL and the anon key.
Close Settings. There is no Save button.

Now test it

Load a sample portfolio, open a contract, click 'Run AI analysis'.

If it works, you are done. Real AI, live.

'Sync to Supabase' will NOT work yet

That needs real user accounts, which are not built. The AI does not use the database, so analysis works fine without it.

Illustration — not a screenshot. Layout and button names match the current Supabase / Anthropic interfaces; colours will differ.

31. Open your app: <https://YOURNAME.github.io/YOURREPO/app/>
32. Sign in with admin / ContractIQ2026!
33. Click the round avatar at the top right, then Settings.
34. Paste the Project URL into the first box.
35. Paste the Publishable key into the second box.
36. Close Settings. There is no Save button — it applies as you type.

The app works out the AI address itself from your project URL. There is nothing else to configure.

The two greyed-out Sync buttons

Sync to Supabase and Load from Supabase are deliberately disabled. Saving contracts to the cloud needs real signed-in user accounts, which is a later piece of work. It has nothing to do with your keys, and it does not stop AI analysis — your work simply lives in the browser for now.

7.1 · Now test it

37. On the main page click Load a sample portfolio.
38. Click any contract to open it.
39. Click Run AI analysis — it will be red, which means the documents are ready.
40. Wait about twenty seconds.

If the tabs fill with analysis, you are finished

That is real Claude output, running through your own function, with your key safe on the server. That analysis cost you about five pence.

8. Optional — background processing

Skip this if you like. Without it analysis still works; it just runs in the browser tab and stops if you close it. With it, a forty-contract run finishes whether you are watching or not.

Step 8 — Switch on background processing

SQL Editor · 5 minutes · optional but worth it

```

1 -- 1 · store the two things the dispatcher needs
2 select vault.create_secret(
3   'https://YOUR-PROJECT.supabase.co/functions/v1/job-worker',
4   'job_worker_url');
5
6 select vault.create_secret('YOUR_SERVICE_ROLE_KEY',
7   'service_role_key');
8
9 -- 2 · wake the worker every 10 seconds
10 select cron.schedule('contractiq-dispatch', '10 seconds',
11   $$select dispatch_jobs($$);
12
13 -- 3 · tidy up jobs whose worker died mid-flight
14 select cron.schedule('contractiq-maintenance', '* * * * *',
15   $$select maintenance_tick($$);

```

Run

3 Switch on the background worker

First: Integrations → enable Cron.

Then paste this into the SQL Editor.

The service role key is at Project Settings
→ API Keys. It is safe HERE because it never leaves the database — but never put it in the app.

Check it is actually running

```

select * from cron.job;
select * from cron.job_run_details
order by start_time desc limit 20;

```

You should see runs every few seconds.

Why this exists

Without it, analysis still works — it just runs in the browser and dies if the tab closes.

With it, a 40-contract run survives anything.

Illustration — not a screenshot. Menu paths and button names match the current interfaces; colours will differ.

41. Left sidebar → Integrations → find Cron and enable it.
42. Project Settings → API Keys → copy the Secret key. It is safe here because it never leaves the database.
43. SQL Editor → paste the four statements shown opposite, replacing YOUR-PROJECT and YOUR_SECRET_KEY → Run.
44. Check it is ticking: `select * from cron.job_run_details order by start_time desc limit 20;`

If something does not work

The app tells you the actual problem rather than just failing. Match the message:

What you see	What it means	What to do
No AI endpoint configured	Settings are empty or the URL is wrong	Step 7. The URL must start https:// and end .supabase.co
AI endpoint rejected the request	403 or 401 from Supabase	Two candidates: ALLOWED_ORIGIN does not exactly match your app's address (step 5), or Verify JWT is still on for anthropic-proxy (step 3.1)
Rate limit reached	Your own MAX_CALLS_PER_HOUR	Raise it in Secrets, or wait an hour
Analysis failed — 500	The function cannot find your API key	Check ANTHROPIC_API_KEY is spelled exactly right in Secrets
Analysis failed — 529	Anthropic is busy	Not yours to fix. Wait a minute and retry
Credit balance error	Out of Anthropic credit	Top up at console.anthropic.com
Nothing happens at all	You are on the /demo/ build	Use /app/ — /demo/ never calls a real AI by design

Where to look when the message is not enough

Supabase → Edge Functions → click anthropic-proxy → Logs. Every call is recorded, with its token count and roughly what it cost. If a call never appears there at all, the request is not reaching the function — which points at ALLOWED_ORIGIN or the function name.

What your \$20 buys

	Cost
One contract analysed	about £0.05
One question to Cedric	about £0.01
The whole 38-document stress pack	under £2
Hosting, database, functions	£0

Roughly 300 analyses. Far more than you need to answer the only question that matters: does it read your own contracts well?

Prices and screens were checked on 19 August 2026 and change without notice. ContractIQ is an automated screening aid, not legal advice.