

Getting ContractIQ

up and running

Everything, in order, with nothing assumed — about 45 minutes

Version 2.0 · 13 August 2026 · Supersedes 'Switching on the AI'

Read this bit first


This replaces the earlier guide. It covers everything: the website, the app, the database, real user accounts, the AI, and background processing. If you have already done some of it, skip to the step you are on — nothing later depends on you having done the earlier ones in one sitting.

The good news

None of this needs a command line. Supabase used to require you to install developer tools and Docker; it does not any more. Every step below is clicking things in a browser or pasting text into a box.

About the pictures

The screens on the following pages are illustrations I have drawn, not photographs of the real websites — I cannot log into your accounts to capture them. Menu paths and button names match the current interfaces, so you will recognise everything; the colours will look different.

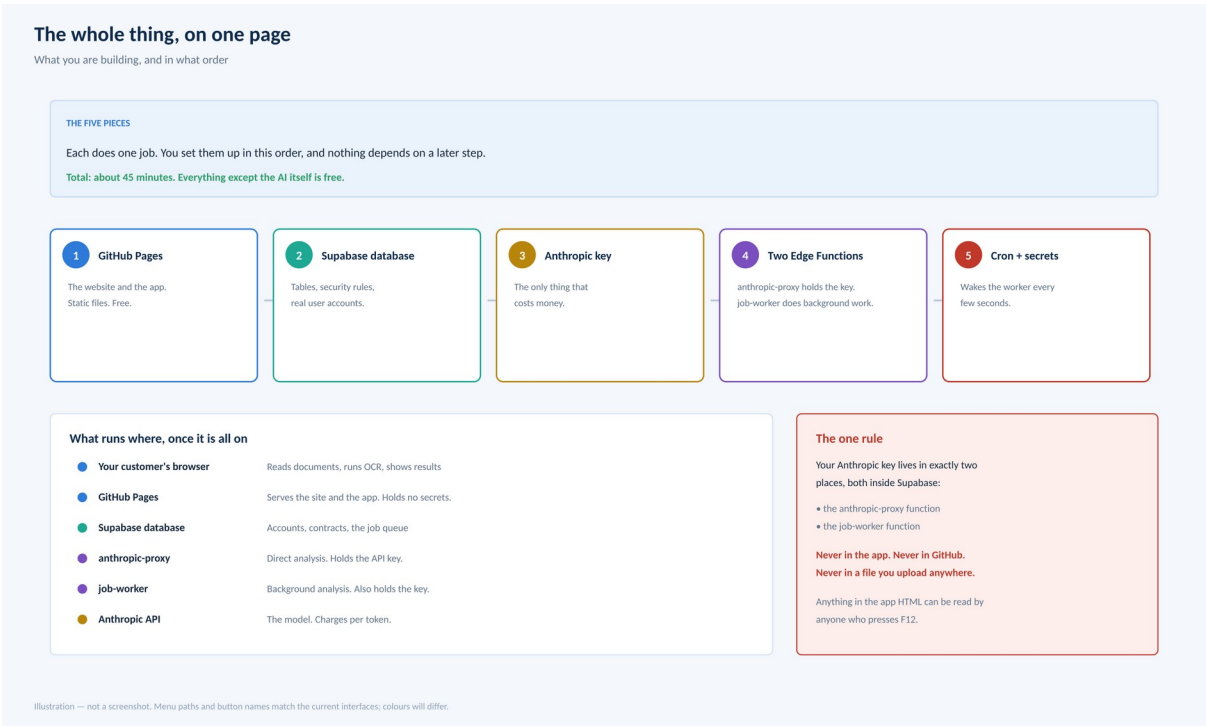

What it costs

Piece	Cost
GitHub Pages (website + app)	Free
Supabase (database, accounts, background worker)	Free tier is enough to test
Anthropic API (the AI itself)	About £0.05 per contract analysed
Your time	About 45 minutes

Testing twenty contracts and asking fifty questions comes to roughly £1.50. That is the entire bill.

Which Claude model to use

You will be asked to pick a model. Set it once as a secret and you can change it later without touching any code. For contract analysis the choice is not close.

Which Claude model to use

Set once, as a secret. Change it any time without touching code.

Anthropic offers four self-serve models. For contract analysis the choice is not close.

Claude Haiku 4.5

\$1 / \$5 per million tokens

Cheapest. Good for classification and short summaries.

Too shallow for clause analysis. It will miss the conflicts that justify the product.

NOT FOR THIS

Claude Sonnet 5

\$2 / \$10* per million tokens

Balanced. Handles long documents and structured JSON.

USE THIS. Cheapest tier that does contract analysis reliably.
*Introductory until 31 Aug 2026, then \$3 / \$15.

RECOMMENDED

Claude Opus 5

\$5 / \$25 per million tokens

More capable. 2.5x the cost of Sonnet 5.

Worth testing later as a premium 'deep review' tier.
Not your default — it would halve your margin.

MAYBE LATER

Claude Fable 5

\$10 / \$50 per million tokens

The most capable self-serve tier.

Not for this. 10x Sonnet's input cost with no evidence it reads contracts better. Some requests fall back to Opus 4.8.

NOT FOR THIS

What this means for your margins

Your pricing was costed at \$3 / \$15. Sonnet 5's introductory rate is cheaper than that, so until 1 September you are better off than modelled. From 1 September it returns to exactly what you budgeted. Nothing to change.

Illustration — not a screenshot. Menu paths and button names match the current interfaces; colours will differ.

The short answer: Claude Sonnet 5

Contract analysis needs three things — reading long documents, following a detailed instruction set, and returning well-formed structured data. Sonnet is the cheapest tier that does all three reliably.

Model	Price per million tokens	For ContractIQ
Claude Haiku 4.5	\$1 in / \$5 out	Too shallow. It will miss the cross-document conflicts that are the product's whole argument.
Claude Sonnet 5	\$2 in / \$10 out (introductory)	Use this. Reverts to \$3 / \$15 on 1 September 2026 — exactly what your pricing was costed at.
Claude Opus 5	\$5 in / \$25 out	2.5x the cost. Worth testing later as a premium 'deep review' tier; not as your default.
Claude Fable 5	\$10 in / \$50 out	No. Ten times Sonnet's input cost with no evidence it reads contracts better.

Why not just use the most capable model?

Because your margins depend on it. At Sonnet 5 an analysis costs you around five pence and you charge in a way that yields 86–90% gross margin. On Fable that same analysis costs roughly ten times as much, and your Growth tier stops making money. The expensive model is only correct if you can show it produces better answers on YOUR documents — and that is exactly what the stress-test pack is for. Run the 38-document pack on Sonnet 5, then on Opus 5, and compare the scores against the answer key. If Opus does not measurably win, Sonnet is the right answer and you have proof.

Setting it

ContractIQ is an automated screening aid, not legal advice.

It is already set to Sonnet 5 by default, so you do not need to do anything. To change it later, add a secret in Supabase called ANTHROPIC_MODEL with one of these values:

```
claude-sonnet-5      # the default, recommended
claude-opus-5        # more capable, 2.5x the cost
claude-haiku-4-5-20251001 # cheapest, not recommended here
```

No redeployment needed — secrets take effect immediately.

1. Step 1 — Put the site and app online

Twenty minutes, free. At the end of this you have a live URL you can send to somebody.

1. Create a repository at github.com. Public is fine — nothing in it is secret.
2. Upload the CONTENTS of ContractIQ_GitHub_FullApp.zip. Drag the files, not the folder, or every address gains an extra level.
3. Settings → Pages → Source: Deploy from a branch. Branch: main. Folder: / (root). Save.
4. Wait about a minute. You are live at <https://YOURNAME.github.io/YOURREPO/>

Check that .nojekyll made it

Browsers hide files whose names start with a dot, and drag-and-drop often skips them silently. Look at your file list — if .nojekyll is not there, click Add file → Create new file, name it .nojekyll, leave it completely empty, and commit. With Git, use 'git add -A' rather than 'git add .'.

Two addresses, and the difference matters

Address	What it is	Needs setup?
/demo/	The full app with sample analysis. Every feature works; the AI returns realistic pre-written output instead of calling a model.	No — works immediately
/app/	The same app with real AI and real accounts.	Yes — steps 2 to 8

Open /demo/ now and have a look around. It costs nothing and it proves the deployment worked before you start connecting things.

If the build fails

Check status.githubstatus.com first. If Actions or Pages show anything other than Operational, it is not your files — wait, then use Re-run jobs. An error saying the job was not acquired by a runner always means this: the job never started, so nothing you uploaded caused it.

2. Step 2 — Create the database

5. Sign up at supabase.com and click New project. No card needed.
6. Pick a region near you — London if you are UK-based. This is also your answer when a customer asks where their data lives.
7. Save the database password in your password manager. There is no recovery.
8. Open the SQL Editor, paste all of `schema_FIXED.sql`, and click Run.
9. Then paste all of `migration_002_auth_and_async.sql` and Run that too.

The first file creates the tables and security rules. The second adds real user accounts and the background job queue. Both are safe to re-run.

How to know it worked

Open Table Editor. You should see accounts, contracts, documents, analyses, `data_points`, jobs, profiles, invitations, `credit_ledger` and others. If the SQL editor reported an error, nothing was created at all — Supabase runs the whole script in one transaction, so a failure rolls everything back.

3. Step 3 — Get your Anthropic key

Step 1 — Get your Anthropic API key

console.anthropic.com · about 3 minutes

The illustration shows the Anthropic console interface. On the left is a sidebar with 'API keys' selected. The main area is titled 'API keys' and contains a 'ContractIQ proxy' key and a 'Limits' section. The 'Create Key' button is highlighted with a red dashed circle. The right-hand panel contains instructions for creating the key, adding credit, and setting a limit.

1 Create the key

Sign in at console.anthropic.com
Left menu → API keys → Create Key
Name it 'ContractIQ proxy'
COPY IT IMMEDIATELY and paste it somewhere safe — it is shown once and never again.

2 Add credit + a spend limit

Billing → add a small amount (£5 is plenty).
Then Limits → set a monthly cap.
This is the single best five seconds you will spend on this whole setup.

What this key is for

It is the only thing that costs money.
It goes into Supabase in step 4 — never into the app, the website, or GitHub.

Illustration — not a screenshot. Layout and button names match the current Supabase / Anthropic interfaces; colours will differ.

10. Go to console.anthropic.com and sign in.
11. Left menu → API keys → Create Key. Name it 'ContractIQ'.
12. Copy it immediately and paste it somewhere safe. It is shown once.
13. Billing → add a small amount of credit. £5 covers a great deal of testing.
14. Limits → set a monthly spend cap.

Do the spend limit now

Five seconds, and it means that if anything ever goes wrong the damage stops at a number you chose. It is the cheapest insurance in this entire project.

4. Step 4 — Deploy the two Edge Functions

These are small pieces of server code. They exist so your API key never has to be in the app, where anyone could read it.

Step 2 — Open the Edge Function editor
Supabase Dashboard · about 1 minute

Edge Functions
Serverless functions that run close to your users.

Deploy a new function ▼

Via Editor

Via AI Assistant

Via CLI

No functions yet
This is what you will see the first time.
After step 3 there will be one, called **anthropic-proxy**.

3 Open the function editor
Supabase Dashboard → your project
Left menu → Edge Functions
Click 'Deploy a new function'
Choose 'Via Editor'
No terminal. No Docker. No install.

This is the shortcut worth knowing
Supabase used to require the command line and Docker for this. It does not any more — you can write and deploy a function entirely in the browser.
That removes the scariest part of the setup.

Illustration — not a screenshot. Layout and button names match the current Supabase / Anthropic interfaces; colours will differ.

4.1 • anthropic-proxy

15. Left menu → Edge Functions → Deploy a new function → Via Editor.
16. Name it exactly: anthropic-proxy
17. Delete the template code. Paste all of supabase/functions/anthropic-proxy/index.ts
18. Click Deploy function. Takes about twenty seconds.

4.2 • job-worker

19. Do it again: Deploy a new function → Via Editor.
20. Name it exactly: job-worker
21. Paste all of supabase/functions/job-worker/index.ts and Deploy.

Step 3 — Paste the code and deploy

Name it anthropic-proxy · about 3 minutes

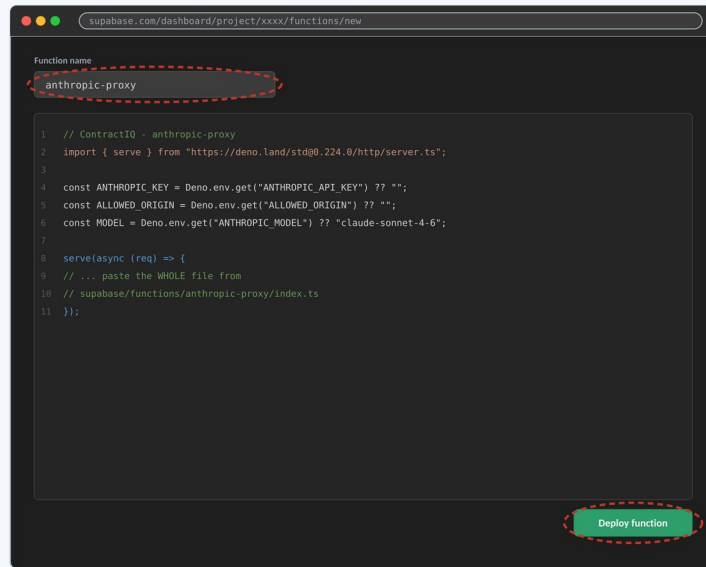


Illustration — not a screenshot. Layout and button names match the current Supabase / Anthropic interfaces; colours will differ.

4 Paste the code, name it, deploy

Name it EXACTLY: anthropic-proxy
(the app builds its URL from this name)

Delete the template code that appears.
Paste the whole contents of
supabase/functions/anthropic-proxy/index.ts
Click 'Deploy function'. Takes ~20 seconds.

If you get 401 Unauthorized later

Open the function → its settings → turn OFF
'Verify JWT'. The app calls with the anon key
and no signed-in user, so JWT checking must
be off while you are testing.

This is the most likely thing to trip you up.

The names must be exact

The app builds the address it calls from your project URL plus the function name. A capital letter, or an underscore instead of a hyphen, and it will not connect.

If you later see 401 Unauthorized

Open anthropic-proxy → its settings → turn OFF 'Verify JWT'. The app calls it with your anon key and no signed-in user, so that check has to be off. Leave it ON for job-worker — that one is called by the database, which sends a service role key.

5. Step 5 — Add your secrets

Step 4 — Add your three secrets

Edge Functions › Secrets › about 3 minutes

5 Add three secrets

Edge Functions → Secrets (left menu)
Add each Key / Value pair, then Save.

ALLOWED_ORIGIN must be exactly where the APP is served from — https://, no path, NO trailing slash.
Get this wrong and every AI call returns 403.

Getting ALLOWED_ORIGIN right

GitHub Pages: `https://ozzyops.github.io`
Your domain: `https://yourdomain.com`
WRONG: `.../ContractIQ-app/app/`
WRONG: `https://ozzyops.github.io/`

No redeploy needed
Secrets take effect immediately.

Illustration — not a screenshot. Layout and button names match the current Supabase / Anthropic interfaces; colours will differ.

Left menu → Edge Functions → Secrets. Add each of these, then Save. They take effect immediately.

Key	Value	Why
ANTHROPIC_API_KEY	your sk-ant-... key from step 3	The only place this key should ever exist.
ALLOWED_ORIGIN	https://YOURNAME.github.io	Only your app may use the function. Without it, anyone who finds the URL can spend your credit.
MAX_CALLS_PER_HOUR	60	A cap you set yourself, so nothing can run away.
ANTHROPIC_MODEL	claude-sonnet-5	Optional — this is already the default.

ALLOWED_ORIGIN is where people come unstuck

It must be exactly the address the APP is served from — the https:// part only, with no folder path and no slash at the end.

RIGHT: `https://ozzyops.github.io`

RIGHT: `https://yourdomain.com`

WRONG: `https://ozzyops.github.io/` (trailing slash)

WRONG: `https://ozzyops.github.io/repo/app/` (has a path)

Get it wrong and every analysis fails with a 403. It is the first thing to check if that happens.

6. Step 6 — Tell Supabase where your app lives

This is new, and skipping it is the commonest reason email verification appears to do nothing.

Step 6 — Tell Supabase where your app lives

Authentication → URL Configuration · 2 minutes

Illustration — not a screenshot. Menu paths and button names match the current interfaces; colours will differ.

22. Left menu → Authentication → URL Configuration.
23. Site URL: the full address of your app, including the folder — for example `https://ozzyops.github.io/ContractIQ-app/app/`
24. Redirect URLs: add that same address, plus the `/demo/` one, plus `http://localhost:*` if you ever open the file locally.
25. Save.

What happens if you skip this

The verification email still sends. The link still looks fine. But clicking it bounces the user to the site root instead of signing them in, with no error message anywhere. It looks like your product is broken and there is nothing in the logs to explain it.

7. Step 7 — Turn on sign-in methods

Step 7 — Turn on sign-in methods

Authentication > Providers · 5 minutes (or 1, for email only)

2 Turn on the sign-in methods
Authentication → Sign In / Providers

Email is on by default — check that 'Confirm email' is ON, or people get in without verifying.

Google and Microsoft each need a Client ID and Secret from that provider's console.

SAML SSO is not on the free tier

Your spec asked for SAML for enterprise customers. Supabase requires the Pro plan (\$25/month) for it. Email, Google and Microsoft all work on free — start there.

The callback URL they ask for

`https://YOUR-PROJECT.supabase.co/auth/v1/callback`

Paste that into Google Cloud / Entra ID.

Illustration — not a screenshot. Menu paths and button names match the current interfaces; colours will differ.

26. Authentication → Sign In / Providers.

27. Email is on by default. Check that 'Confirm email' is ON — otherwise people get in without verifying, which defeats the point.

28. For Google and Microsoft, switch each on and paste the Client ID and Secret from that provider's console. The callback URL they ask for is `https://YOUR-PROJECT.supabase.co/auth/v1/callback`

SAML SSO needs the Pro plan

Your specification asked for SAML 2.0 for enterprise customers. Supabase requires the Pro plan (\$25/month) for that. Email, Google and Microsoft all work on the free tier, so start with those — you can add SAML the day an enterprise customer actually asks for it, which is the right time to pay for it anyway.

Before real signups: connect your own email sender

Supabase's built-in mail is rate-limited and intended for testing. Once real people are signing up, go to Project Settings → Auth and connect your own SMTP, or verification emails will start being throttled and new users will simply not receive them.

8. Step 8 — Switch on background processing

Optional, but it is what stops a long run dying when someone closes their laptop.

Step 8 — Switch on background processing

SQL Editor · 5 minutes · optional but worth it

supabase.com/dashboard/project/xxxx/sql/new

SQL Editor

```
1 -- 1 · store the two things the dispatcher needs
2 select vault.create_secret(
3   'https://YOUR-PROJECT.supabase.co/functions/v1/job-worker',
4   'job_worker_url');
5
6 select vault.create_secret('YOUR_SERVICE_ROLE_KEY',
7   'service_role_key');
8
9 -- 2 · wake the worker every 10 seconds
10 select cron.schedule('contractiq-dispatch', '10 seconds',
11   $$select dispatch_jobs($$);
12
13 -- 3 · tidy up jobs whose worker died mid-flight
14 select cron.schedule('contractiq-maintenance', '* * * * *',
15   $$select maintenance_tick($$);
```

Run

3 Switch on the background worker

First: Integrations → enable Cron.

Then paste this into the SQL Editor.

The service role key is at Project Settings
→ API Keys. It is safe HERE because it never leaves the database — but never put it in the app.

Check it is actually running

```
select * from cron.job;
select * from cron.job_run_details
order by start_time desc limit 20;
```

You should see runs every few seconds.

Why this exists

Without it, analysis still works — it just runs in the browser and dies if the tab closes.

With it, a 40-contract run survives anything.

Illustration — not a screenshot. Menu paths and button names match the current interfaces; colours will differ.

29. Left menu → Integrations → find Cron and enable it.
30. Get your service role key: Project Settings → API Keys. This one is safe here because it never leaves the database — but it must never go into the app.
31. Open the SQL Editor and run the four statements shown opposite, replacing YOUR-PROJECT and YOUR_SERVICE_ROLE_KEY.
32. Check it is running: `select * from cron.job_run_details order by start_time desc limit 20;`

What this actually changes

	Without it	With it
Where analysis runs	In the browser tab	On a background worker
Close the tab mid-run	The work is lost	It finishes anyway
A transient AI failure	You see an error	Retries automatically, then parks in a dead-letter queue
40 contracts at once	Works, but the tab must stay open	Queue it and walk away
Credits	Counted in the browser	Spent server-side, only after the work succeeds

Be clear-eyed about this: at your current scale it does not make anything faster. What it buys you is durability — and the server-side credit accounting, which is the thing that has to be true before you can charge anyone.

ContractIQ is an automated screening aid, not legal advice.

9. Step 9 — Connect the app and test

Step 5 — Copy your project URL and anon key

Project Settings → API Keys · about 1 minute

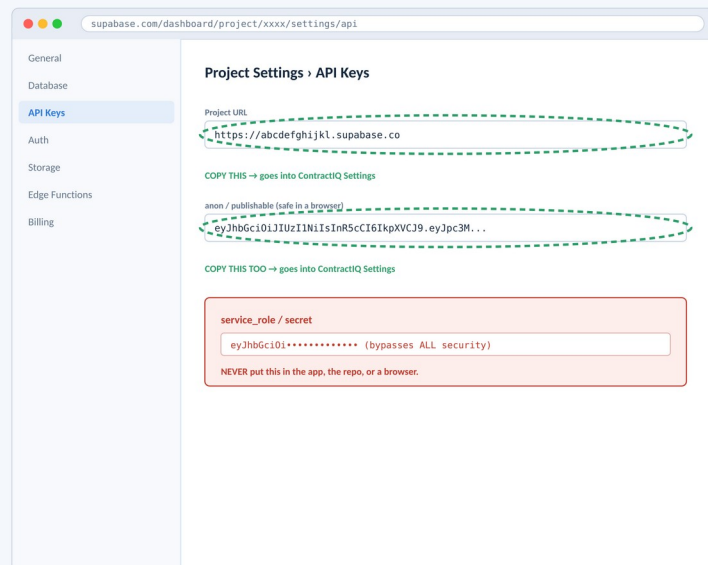


Illustration — not a screenshot. Layout and button names match the current Supabase / Anthropic interfaces; colours will differ.

6 Copy two values

Project Settings → API Keys

1. Project URL
2. The anon / publishable key

Leave the third one alone (see below).

The one dangerous thing on this page

The anon key is DESIGNED to be public. It is limited by your security rules, so it is safe in the app.

The service_role key ignores every one of those rules. If it ever leaks, rotate it on this same page immediately.

33. Project Settings → API Keys. Copy the Project URL and the anon key.
34. Open your app at /app/ and sign in with admin / ContractIQ2026!
35. Settings → paste both values. There is no Save button; it applies as you type.
36. Sign out. You should now see the real sign-in screen with Google and Microsoft buttons.
37. Create an account with your own email. Check the verification email arrives and the link signs you in.

Step 6 — Connect the app

ContractIQ → Settings · about 1 minute

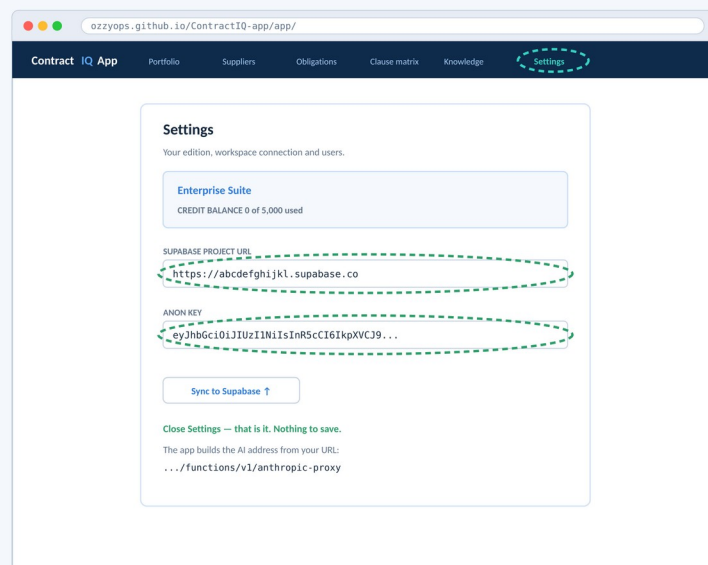


Illustration — not a screenshot. Layout and button names match the current Supabase / Anthropic interfaces; colours will differ.

7 Paste them into the app

Open your app → sign in admin / ContractIQ2026!

Click Settings.
Paste the Project URL and the anon key.
Close Settings. There is no Save button.

Now test it

Load a sample portfolio, open a contract, click 'Run AI analysis'.

If it works, you are done. Real AI, live.

'Sync to Supabase' will NOT work yet

That needs real user accounts, which are not built. The AI does not use the database, so analysis works fine without it.

Then prove the background worker

Step 9 — Check it is all working

The app · 2 minutes

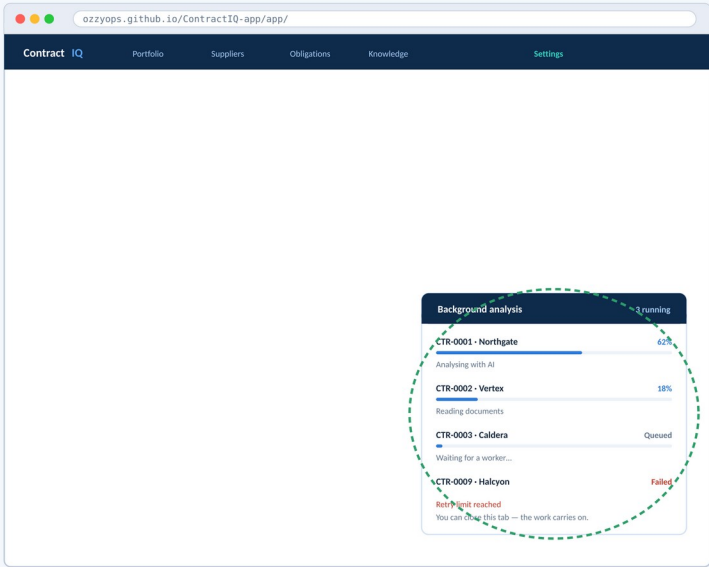


Illustration — not a screenshot. Menu paths and button names match the current interfaces; colours will differ.

4 What you should see

Sign in, load a sample portfolio, select all and analyse.

With the worker running, a tray appears showing live progress. Close the tab, come back, and the results are simply there.

Without it, the same thing works — but the

The proof it is working

Queue an analysis, then close the browser entirely. Wait a minute. Reopen the app.

The analysis will have completed without you.

That is the whole point of the async layer.

A failed job is not lost

After several retries a job moves to the dead-letter queue and shows in red, with the reason. Nothing disappears silently.

Load a sample portfolio, select all, and analyse. A tray appears bottom-right showing live progress. Now close the browser completely, wait a minute, and reopen the app. The analyses will have finished without you. That is the whole point of step 8, and it is worth seeing once.

If something does not work

The app names the actual problem rather than saying 'try again'. Match the message:

What you see	What it means	Fix
No AI endpoint configured	Settings are empty or the URL is wrong	Step 9. The URL must start https:// and end .supabase.co
AI endpoint rejected the request	401 or 403 from Supabase	Either ALLOWED_ORIGIN does not match your app's address (step 5), or Verify JWT is on for anthropic-proxy (step 4)
Rate limit reached	Your own MAX_CALLS_PER_HOUR	Raise it in Secrets, or wait
Analysis failed — 500	The function cannot find the API key	Check ANTHROPIC_API_KEY is spelled exactly right in Secrets
Analysis failed — 529	Anthropic is busy	Not yours to fix. Wait and retry
Verification email never arrives	Redirect URL not allow-listed, or mail throttled	Step 6. Then check spam. Then connect your own SMTP
Verification link goes to a blank page	Site URL is wrong in URL Configuration	Step 6 — it must include the folder path
Jobs stay 'Queued' forever	Cron is not running or the Vault secrets are missing	Step 8. Check cron.job_run_details for errors
Sign in works but no workspace	The account trigger has not run	Sign out and back in; migration_002 creates it on first signup

Where to look when the message is not enough

Supabase → Edge Functions → click the function → Logs. Every call is recorded with its token count and an approximate cost. If a call never appears there at all, the request is not reaching the function — which points at ALLOWED_ORIGIN or the function name.

What is still not done

	Status
Taking payment	Stripe needs PHP hosting; GitHub Pages cannot run it. Use Hostinger when you get there.
SAML SSO	Needs Supabase Pro (\$25/month).
Your own email sender	Needed before real signups, or verification mail gets throttled.
Solicitor review of the legal suite	The Terms, Privacy Policy and DPA still contain bracketed placeholders instead of your registered company.
A measured accuracy figure	Run the 38-document stress pack and score against the answer key. That is how you earn the right to publish a number.

The order that matters

Steps 1 to 3 cost about half an hour and five pounds, and get you a live product with real AI. Step 10 is the one that decides whether any of this was worth doing: put three of your own real contracts through it and read the output carefully. Everything after that is selling. Nothing before it proves anything.

Prices and free-tier limits were checked on 13 August 2026 and change without notice. Verify against the providers' own pages before relying on them commercially. ContractIQ is an automated screening aid, not legal advice.