

public_API

Public API is a basic and easy to use API developed with front-end-development in mind. The API will allow front end developers to test their apps during development phase.

Requirements

NODE.JS

MongoDB

Bash(or any other console that can run Node);

Installing Node.JS, MongoDB and GIT Bash

Git Bash and Node.JS do not require any special configuration to install.

Download and install. (Restart your pc after).

- GIT Bash: <https://gitforwindows.org/>
- Node: <https://nodejs.org/en/> (Download LTS version)

Mongo requires some configuration.

- Download Link: <https://www.mongodb.com/try/download/community> (select your platform and Download)

Suggested videos:

<https://www.youtube.com/watch?v=FwMwO8pXfq0>

<https://www.youtube.com/watch?v=Ph1Z97X6xno>

<https://www.youtube.com/watch?v=BwVOIRX3VXk>

Clone and Initialize the app.

1 - Open Bash on the folder you want to save your repository. Copy the following lines one by one and paste them on Bash("ctrl + v" wont work. You will have to use the right button of the mouse and select paste).

```
$ mkdir public_api
```


```
mkdir public_api
```

```
$ cd public_api
```

```
cd public_api
```

2 - Open the Link: github.com/P-Pimentinha/public_API

3 - Copy the link to clone the repository

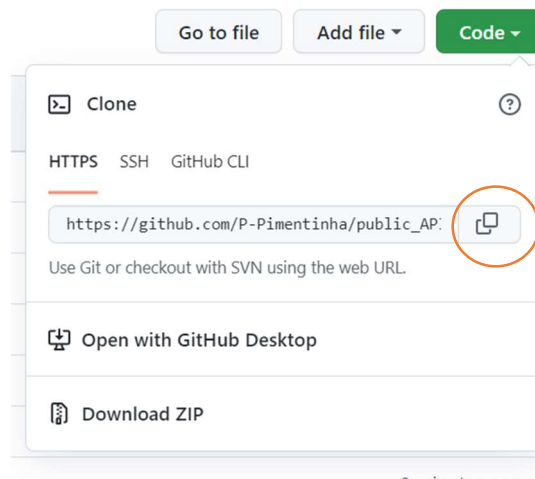

4 - Head to Bash again and paste the following commands, one by one.

```
$ git clone https://github.com/P-Pimentinha/public_API.git
```

```
git clone https://github.com/P-Pimentinha/public\_API.git
```

```
$ cd public_api
```

```
cd public_api
```

```
$ npm install
```

```
npm install
```

5 – Start Server.

```
$ node server.js
```

```
node server.js
```

Your server is now up and running on port 8000;

Routes

Get - <http://localhost:8000/api/users> - returns all the users.

Post(1) - <http://localhost:8000/api/users> - creates a new user.

Put - <http://localhost:8000/api/users/:id> – updates any field of the user object.

Delete - <http://localhost:8000/api/users/:id> – deletes the user with the passed ID

Post(1):

Required:

- user_name (string) // UserNames have Unique values.
- name (string)
- age (number)
- address (string)

Populating Mongo

While the server is running you can use the following objects to populate the database. (You can use Postman).

```
{
  "user_name": "Sakore",
  "name": "noName",
  "age": 21,
  "address": "far far away"
}

{
  "user_name": "Narotu",
  "name": "noName",
  "age": 21,
  "address": "far far away"
}

{
  "user_name": "Sasoki",
  "name": "noName",
  "age": 21,
  "address": "far far away"
}

{
  "user_name": "Etache",
  "name": "noName",
  "age": 21,
  "address": "far far away"
}

{
  "user_name": "Laara",
  "name": "noName",
  "age": 21,
  "address": "far far away"
}

{
  "user_name": "Yoje Etadure",
  "name": "noName",
  "age": 21,
  "address": "far far away"
}
```

Postman

If you have never used Postman before you can check lesson 3 and 4 on the following video:

<https://www.youtube.com/watch?v=VywxIQ2ZXw4>


Populating the database:

While the server is running Open Postman


```
$ node server.js
Server listening on Port 8000
MongoDb connected!!
```

Go to your workspace select post and paste the following url:

<http://localhost:8000/api/users>

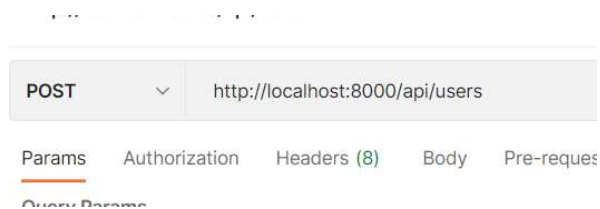

Select Body




Select Raw

Pre-request Sc

ed raw t

Select JSON



Using the objects above populate the database by pasting them one by one and clicking on sending. You are free to choose any values you want. THE USERNAME has a UNIQUE value.

The image shows a REST client interface with the following details:

- Method:** POST
- URL:** http://localhost:8000/api/users
- Tabs:** Params, Authorization, Headers (9), Body (selected), Pre-reqs
- Body Type:** none, form-data, x-www-form-urlencoded, raw (selected)
- Body Content (JSON):**

```
1 {  
2   "user_name": "Sakore",  
3   "name": "noName",  
4   "age": 21,  
5   "address": "far far away"  
6 }  
7
```