

Práctica 1: Recorrido por las DevTools

1. Preparación

The screenshot shows a web browser window with the address bar displaying `localhost:5173/xestion-pacientes`. The page title is "Sanidad Teis". The navigation bar includes links for "Inicio", "Pacientes" (which is underlined), and "Sobre nós". The main content area features a green header for "Xestión de pacientes" and a form for patient registration. The form includes fields for "DNI/CIF", "Nome", "Apellido", "Fecha nacemento" (with a date picker), "Correo", "Telefono", "Dirección", "Provincia" (a dropdown menu), and "Municipio" (a dropdown menu). A blue "Gardar" button is located below the form. Below the form is a green header for "Listaxe de pacientes" and a table with columns for patient information. The DevTools interface is open at the bottom, showing the "Network" tab. The "Headers" sub-tab is selected, displaying the request details for `http://localhost:5173/src/main.js`. The request method is "GET", the status code is "304 Not Modified", and the remote address is "127.0.0.1:5173". The response headers show "Access-Control-Allow-Origin: http://localhost:5173", "Connection: keep-alive", and "Date: Fri, 25 Sep 2026 10:43:38 GMT".

Sanidad Teis

Inicio Pacientes Sobre nós

Xestión de pacientes

DNI/CIF: Nome: Apellido:

Fecha nacemento: Correo: Telefono:

Dirección: Provincia: Municipio:

Gardar

Listaxe de pacientes

Network

Filter

10,000 ms 20,000 ms 30,000 ms 40,000 ms 50,000 ms 60,000 ms 70,000 ms 80,000 ms 90,000 ms 100,000 ms 110,000 ms 120,000 ms 130,000 ms 140,000 ms 150,000 ms 160,000 ms 170,000 ms 180,000 ms 190,000 ms 200,000 ms 210,000 ms

Name

- NavBar.vue?vue&type=styl...
- IniCio.vue?vue&type=styl...
- SobreNos.vue?vue&type=s...
- municipios.js
- XestionPaciente.vue?vue&...
- axios.js?v=eea0f94c
- municipios
- data:image/svg+xml;...
- imgFondo.png
- Favicon.svg
- blob:http://localhost:5173...

32 requests 4.4 kB transferred

Headers

General

Request URL: `http://localhost:5173/src/main.js`

Request Method: `GET`

Status Code: `304 Not Modified`

Remote Address: `127.0.0.1:5173`

Referrer Policy: `strict-origin-when-cross-origin`

Response headers

Access-Control-Allow-Origin: `http://localhost:5173`

Connection: `keep-alive`

Date: `Fri, 25 Sep 2026 10:43:38 GMT`

2. Elements · inspeccionar y editar: Se puede hacer cambios al tiempo real pero se las perdemos al recargar.

The screenshot shows a web browser window with the address bar displaying `localhost:5173/xestion-pacientes`. The page has a teal header with the text "Aquí va mi nombre GREG" and navigation links "Inicio", "Pacientes", and "Sobre nós". Below the header is a green section titled "Xestión de pacientes" containing a form with fields for "DNI/CIF", "Nome", "Apellido", "Fecha nacimiento", "Correo", "Telefono", "Dirección", "Provincia", and "Municipio", along with a "Gardar" button. Below the form is another green section titled "Listaxe de pacientes" with a table.

The browser's DevTools "Elements" panel is open at the bottom, showing the HTML structure. The selected element is the `div` with `data-v-c3ceb15a` class="logo" containing the text "Aquí va mi nombre GREG". The "Styles" panel on the right shows the default user agent styles for the `div` element, including `display: block`, `font-weight: bold`, and `font-size: 1rem`.

4. Elements · Event Listeners

The screenshot displays a web browser window with the address bar showing `localhost:5173/xestion-pacientes`. The page features a green header with the text "Xestión de pacientes". Below the header, there are input fields for "DNI/CIF:" (with a red error message "DNI/NIE non válido"), "Nome:" (containing the letter "v"), and "Apellido:". The browser's developer tools are open, showing the "Elements" panel on the left and the "Event Listeners" panel on the right.

Elements Panel:

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <!-- Aqui se carga el router-view -->
  </head>
  <body>
    <div id="app" data-v-app>
      <div id="app">
        <nav data-v-c3ceb15a class="navbar">
          <!-- Aqui se carga el router-view -->
        </nav>
        <div data-v-651b4f6f class="xestion-pacientes">
          <h4 data-v-651b4f6f> Xestión de pacientes</h4>
          <form data-v-651b4f6f>
            <h4 data-v-651b4f6f> Listaxe de pacientes</h4>
            <table data-v-651b4f6f>
            </table>
          </div>
          <footer data-v-dbd2ae22 class="footer-content footer">
          </footer>
        </div>
      </div>
    </body>
  </html>
```


Event Listeners Panel:

Window `client:936`

- `beforeunload`
 - `useCapture: false`
 - `passive: false`
 - `once: false`
 - `handler: () => { willUnload = true; }`

The "Event Listeners" panel shows the `beforeunload` event listener for the `client:936` window. The handler function is `() => { willUnload = true; }`. The panel also displays the `[[Scopes]]` and `[[Prototype]]` chains for the event listener object.

5.Console: noExiste() nos ayuda a aprender el mensaje de error que aparece cuando intentamos ejecutar una funcion que no esta declarado

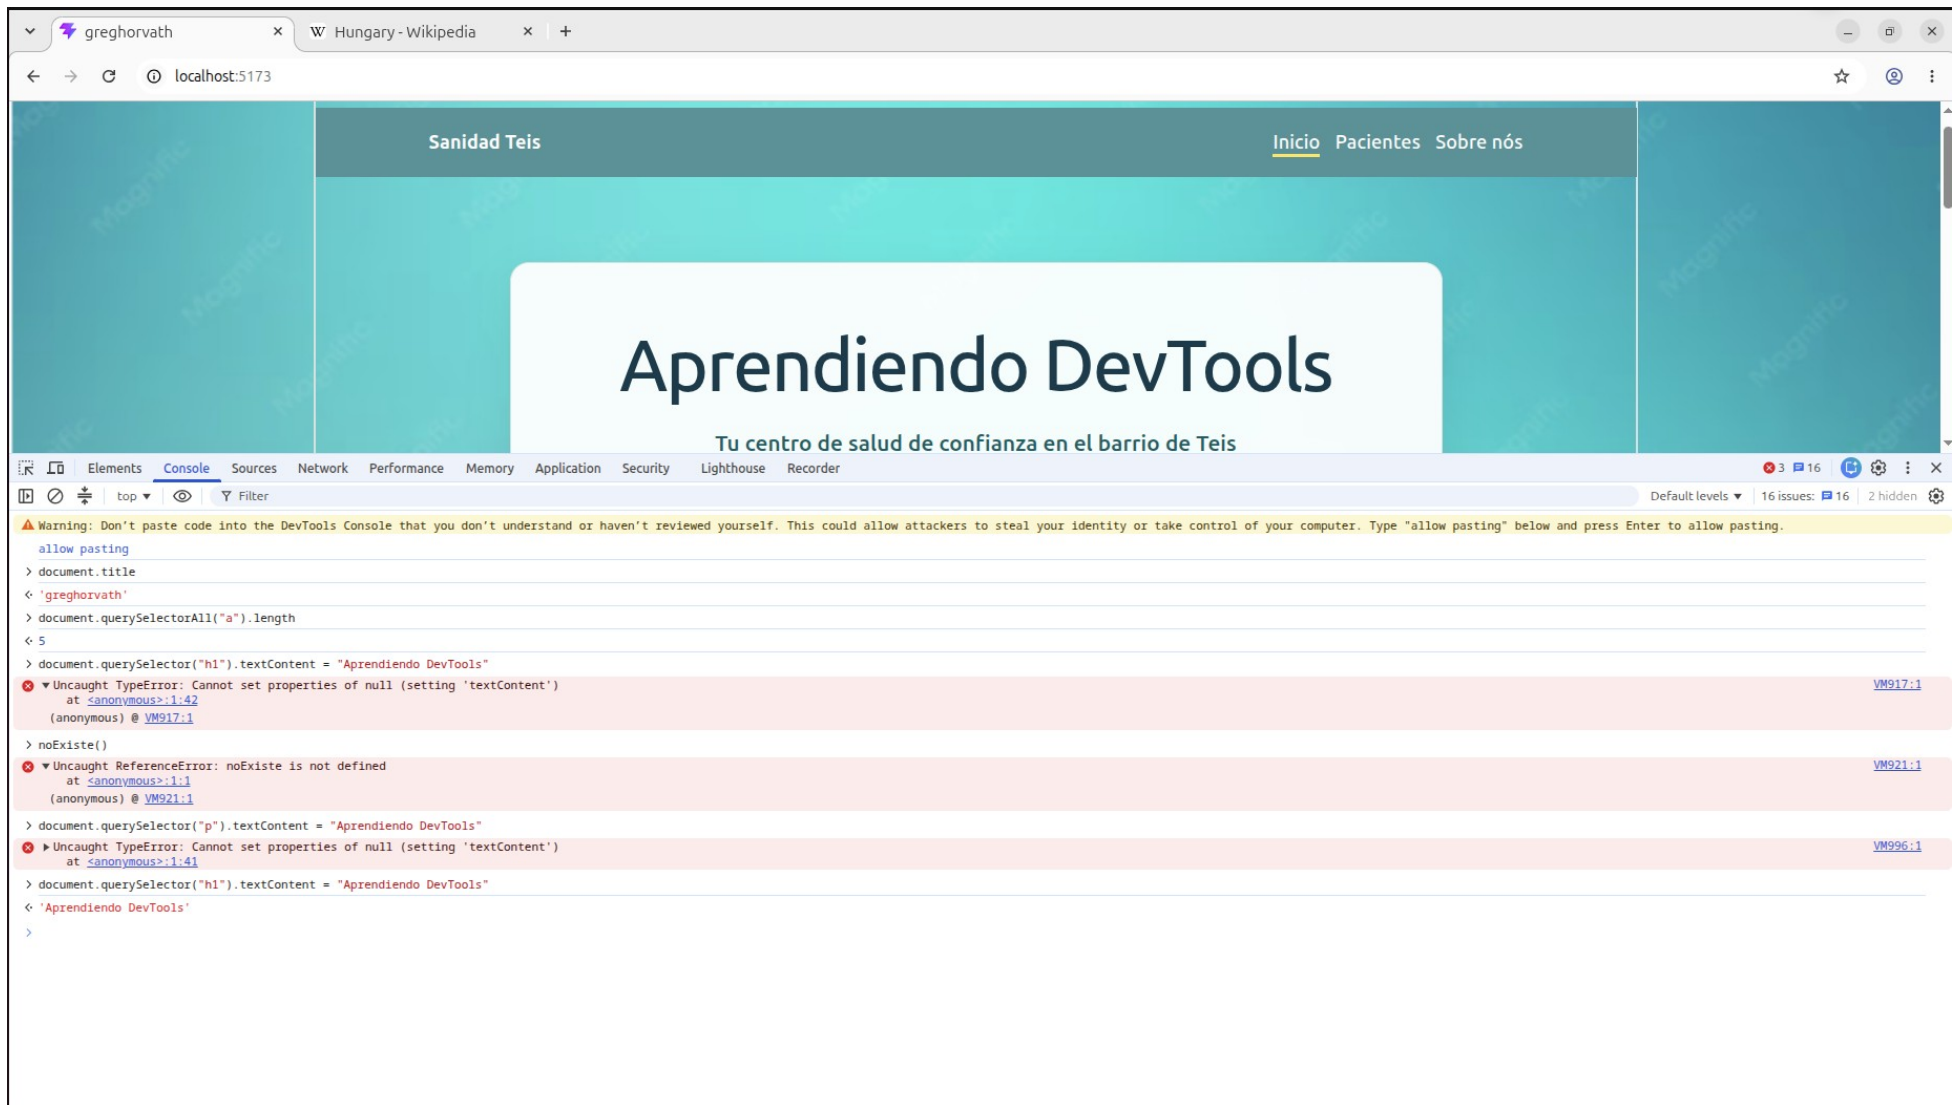

6. Sources

The screenshot shows a web browser at `localhost:5173/xestion-pacientes` displaying a web application titled "Sanidad Teis". The application has a navigation bar with "Inicio", "Pacientes", and "Sobre nós". The main content area is titled "Xestión de pacientes" and contains a form with fields for "DNI/CIF", "Nome", "Apellido", "Fecha nacemento" (with a date picker), "Correo", and "Telefono".

The Vue DevTools interface is open at the bottom, with the "Sources" panel selected. The file explorer on the left shows the project structure, with `src/api/municipios.js` selected. The code editor displays the following JavaScript code:

```
1 import axios from "/node_modules/.vite/deps/axios.js?v=eea0f94c"
2
3 //direccion de nuestra API. this is where the data is coming from
4 const URL = 'http://localhost:3000/api/municipios'
5
6 //obtener todas las provincias
7 export async function obtenerProvincias() {
8   //this line is an async function that will return a promise.
9   //async function definition:
10
11   const respuesta = await axios.get(URL)
12   //here axios goes to the url specified and gets all the data.
13   //The await keyword is used to wait for the promise to resolve before continuing.
14
15   return respuesta.data.provincias
16   // we are only returning the provinces data by selecting the name of that array (.provincias).
17 }
18
19 //obtener los municipios de una provincia
20 export async function obtenerMunicipios(idProvincia) {
21   const respuesta = await axios.get(URL)
22   const municipios = respuesta.data.municipios
23   // aqui el variable municipios contiene todos los municipios del array en el fichero municipio.json
24
25   return municipios.filter(municipio => municipio.id.substring(0, 2) === idProvincia //filtramos los municipios que coinciden los dos primeros numeros de la provin
26 }
```

The right-hand panel of the DevTools shows the "Debugger paused" state. The "Call Stack" is expanded, showing the following frames:

- (anonymous) client:243
- setInterval
- connect client:242
- await in connect
- connect client:902
- connect client:81
- connect client:165
- (anonymous) client:979

The "Watch" panel is empty. The "Scope" panel shows the following variables:

- Local: this: undefined
- Block
- Closure (connect)
- Closure (createWebSocketModuleRunnerTransport)
- Module
- Global
- Window

The "Coverage" panel at the bottom right shows "Coverage: N/A".

7. Network peticiones: 31, Mas peticiones: Vue, mas grande: un archivo de vue con 1.2MB

The screenshot shows a web browser window with the address bar displaying `localhost:5173/xestion-pacientes`. The page content includes a header with "Sanidad Teis" and navigation links "Inicio", "Pacientes", and "Sobre nós". Below the header is a green bar with "Xestión de pacientes" and a form with input fields for "DNI/CIF:", "Nome:", and "Apellido:". The browser's developer console is open, showing the "Network" tab. A timeline at the top of the console shows the sequence of requests. Below the timeline is a table of network requests.

Name	Status	Type	Initiator	Size	Time
vue.runtime.esm-bundler-Bo_ScjpA.js?v=eea0f94c	200	script	vue.js:1	1,203 kB	15.43 s
vue-router.js?v=eea0f94c	200	script	index.js:1	874 kB	13.10 s
axios.js?v=eea0f94c	200	script	municipios.js:1	463 kB	8.29 s
municipios	200	xhr	municipios.js:10	291 kB	3.75 s
imgFondo.png	200	png	xestion-pacientes:16	283 kB	3.71 s
client	200	script	xestion-pacientes:4	211 kB	2.41 s
__x00__plugin-vue:export-helper	200	script	App.vue:49	1.4 kB	2.05 s
XestionPaciente.vue	200	script	index.js:4	75.7 kB	1.81 s
App.vue?vue&type=style&index=0&lang.css	200	script	App.vue:33	1.5 kB	1.67 s
FooTer.vue	200	script	App.vue:2	4.6 kB	1.58 s
NavBar.vue	200	script	App.vue:1	6.9 kB	1.56 s
NotFound.vue	200	script	index.js:7	3.2 kB	1.50 s
SobreNos.vue?vue&type=style&index=0&scoped=1aed9dde&lang.css	200	script	SobreNos.vue:13	3.0 kB	1.47 s
IniCio.vue?vue&type=style&index=0&scoped=46a1e3f1&lang.css	200	script	IniCio.vue:56	3.2 kB	1.39 s
env.mjs	200	script	client:1	4.2 kB	1.31 s
XestionPaciente.vue?vue&type=style&index=0&scoped=651b4f6f&lang.css	200	script	XestionPaciente.vue:440	4.7 kB	1.31 s
FooTer.vue?vue&type=style&index=0&scoped=dbd2ae22&lang.css	200	script	FooTer.vue:31	1.5 kB	1.22 s
municipios.js	200	script	XestionPaciente.vue:2	6.1 kB	1.20 s
NavBar.vue?vue&type=style&index=0&scoped=c3ceb15a&lang.css	200	script	NavBar.vue:58	1.9 kB	1.09 s
vue.js?v=eea0f94c	200	script	main.js:1	26.2 kB	963 ms
AvisoLegal.vue	200	script	index.js:6	2.0 kB	911 ms
SobreNos.vue	200	script	index.js:5	8.2 kB	862 ms
IniCio.vue	200	script	index.js:3	11.1 kB	854 ms

At the bottom of the console, a summary bar shows: 31 requests | 3.5 MB transferred | 3.5 MB resources | Finish: 22.06 s | DOMContentLoaded: 17.73 s | Load: 21.43 s

8. Performance

The screenshot shows a web browser with two tabs: 'gregorvath' and 'W Hungary - Wikipedia'. The active tab is 'localhost:5173/xestion-pacientes'. The page displays a patient registration form with the following fields:

- Fecha nacimiento: mm/dd/yyyy
- Correo: (empty) with a red error message 'Correo non válido'.
- Telefono: (empty) with a red error message 'Telefono non válido'.
- Dirección: (empty)
- Provincia: Almeria (dropdown menu)
- Municipio: Alcudia de Monteagud (dropdown menu)
- Gardar (button)

Below the form is a green bar with the text 'Listaxe de pacientes'.

The Chrome DevTools Performance tab is open, showing the following metrics:

- Local metrics:
 - Largest Contentful Paint (LCP): 17.78 s. Your local LCP value of 17.78 s is poor. LCP element: h4.
 - Cumulative Layout Shift (CLS): 0. Your local CLS value of 0 is good.
 - Interaction to Next Paint (INP): 48 ms. Your local INP value of 48 ms is good. INP interaction: pointer.

Below the metrics is a table of interactions:

Interactions	Layout shifts
pointer	<node>
pointer	<node>
pointer	select#provincia
pointer INP	<node>
pointer	<node>
pointer	select#municipio
pointer	<node>
keyboard	input
keyboard	input
pointer	<node>
keyboard	input
keyboard	input

The right sidebar shows the 'Next steps' section with the following options:

- Field metrics: See how your local metrics compare to real user data in the [Chrome UX Report](#). Set up
- Environment settings: Use the [device toolbar](#) and configure throttling to simulate real user environments and identify more performance issues. CPU: No throttling. Network: Slow 4G. Disable network cache.
- Record: Ctrl+E
- Record and reload: Ctrl+Shift+E

9. Memory: El heap es la zona de memoria donde JavaScript almacena los objetos — esto incluye objetos literales ({}), arrays, funciones, y en general cualquier estructura de datos compleja o de tamaño variable.

The screenshot shows a web browser with a patient registration form and the Chrome DevTools Memory tab open.

Formulario de Registro de Pacientes:

- Fecha nacimiento:
- Correo: (Correo non válido)
- Telefono: (Telefono non válido)
- Dirección:
- Provincia:
- Municipio:
-

Chrome DevTools Memory Tab:


Summary: 77,913 objects (11.4 MB)

Constructor

	Distance	Shallow size	Retained size
▶ (compiled code) ×16,462	3	1,346 kB 12 %	8,187 kB 72 %
▶ (string) ×7,900	3	2,386 kB 21 %	6,966 kB 61 %
▶ system / ExternalStringData ×612	5	4,579 kB 40 %	4,579 kB 40 %
▶ Function ×7,348	3	211 kB 2 %	835 kB 7 %
▶ system / FunctionTemplateInfo ×5,254	3	336 kB 3 %	437 kB 4 %
▶ (array) ×1,279	3	284 kB 2 %	410 kB 4 %
▶ (object shape) ×6,560	4	372 kB 3 %	382 kB 3 %
▶ <option> ×157	7	22.6 kB 0 %	306 kB 3 %
▶ system / SourceTextModule ×25	7	1.9 kB 0 %	259 kB 2 %
▶ system / NativeContext ×3	3	3.7 kB 0 %	222 kB 2 %
▶ blink::StyleRule ×531	5	50.4 kB 0 %	162 kB 1 %
▶ system / ObjectTemplateInfo ×357	3	10.0 kB 0 %	146 kB 1 %
▶ system / ArrayList ×202	3	79.6 kB 1 %	145 kB 1 %
▶ Object ×279	5	8.6 kB 0 %	136 kB 1 %
▶ system / FunctionTemplateRareData ×204	4	8.2 kB 0 %	128 kB 1 %
▶ system / NativeContext / http://localhost:5173 ×2	3	2.5 kB 0 %	120 kB 1 %
▶ blink::ImmutableCSSPropertyValueSet ×560	6	54.9 kB 0 %	117 kB 1 %
▶ system / Context / scope @67247	8	2.1 kB 0 %	110 kB 1 %
▶ Window [JSGlobalObject] / http://localhost:5173 ×2	4	0.0 kB 0 %	107 kB 1 %

Retainers

Object	Distance	Shallow size	Retained size
--------	----------	--------------	---------------

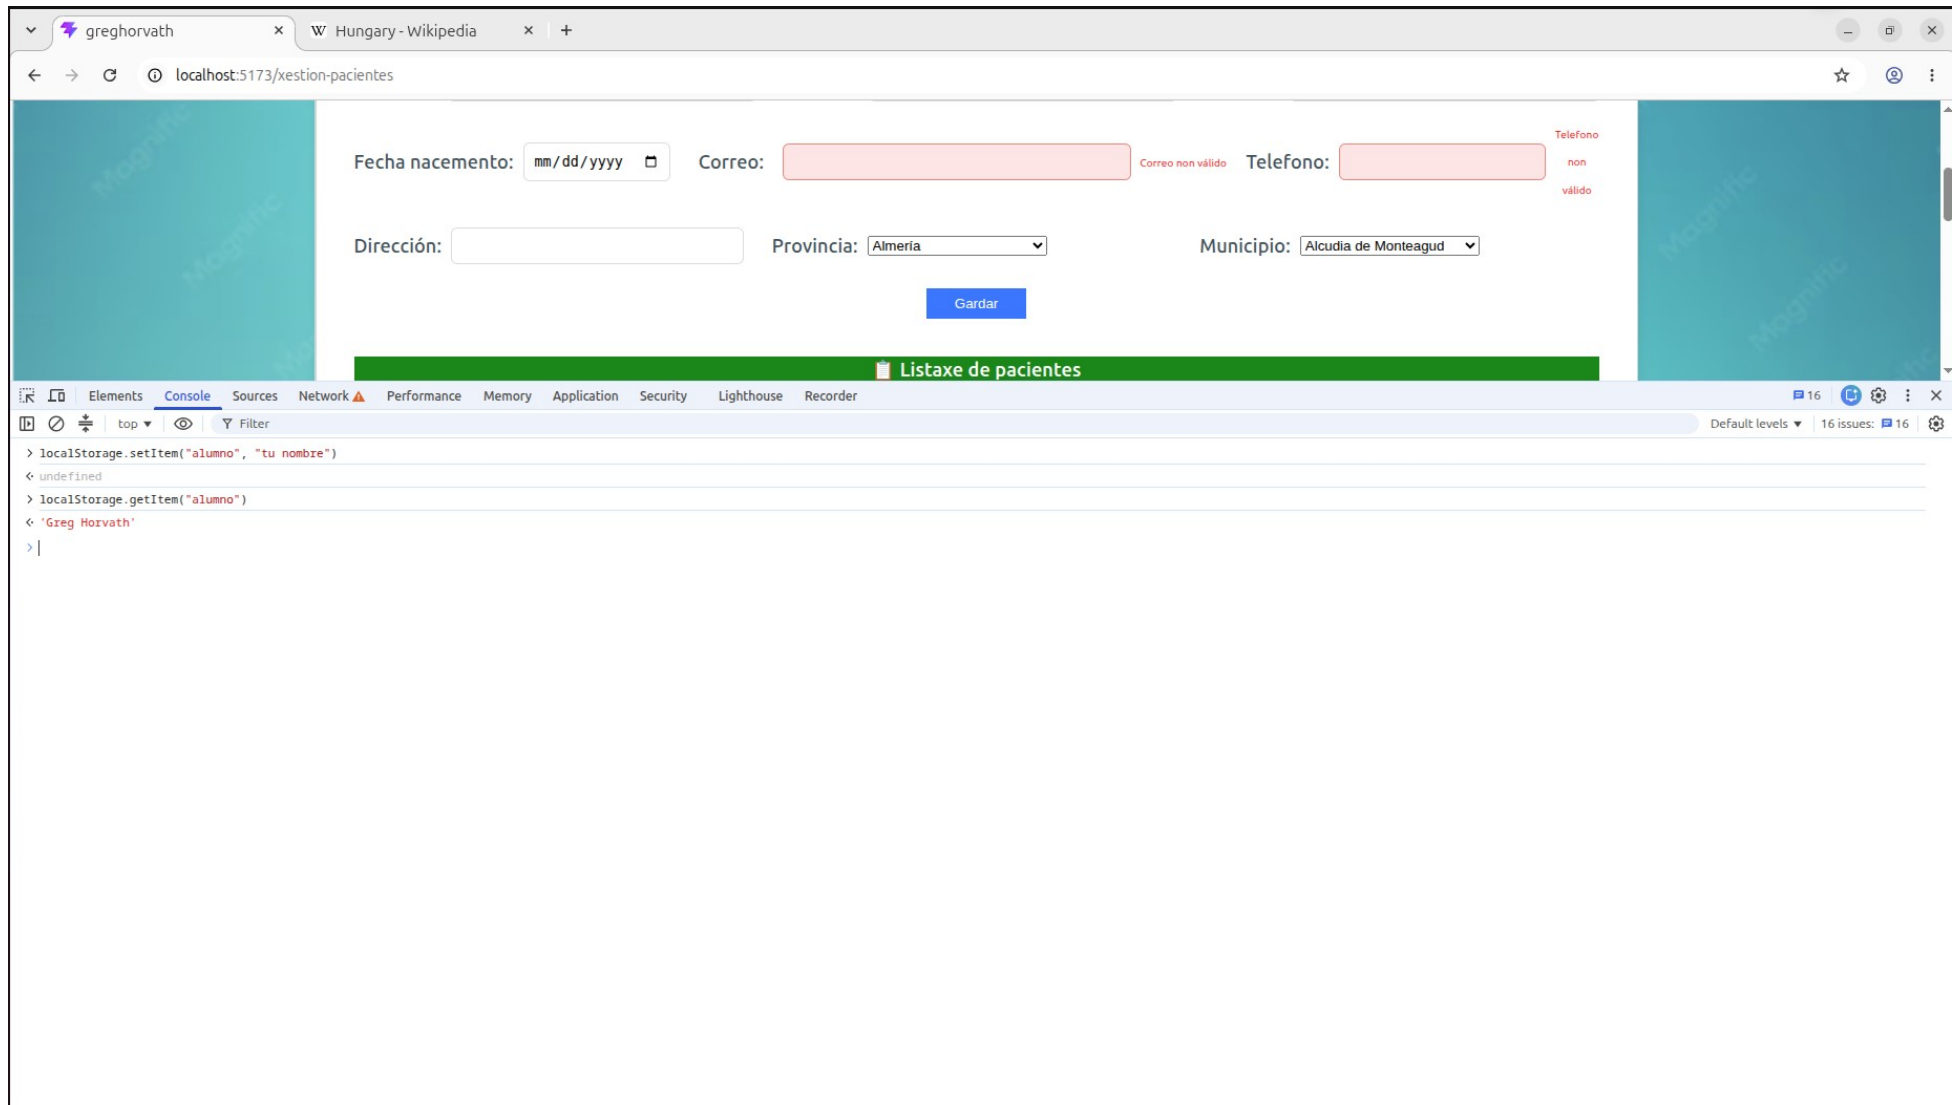

10. Application.