

Sharing EarthRanger events with CMORE

A field guide to setting up the sync — no code required

Rhino Carcass, from a ranger's report to your partners' map, automatically.


What you're building

EarthRanger → Gundi → CMORE
(rangers report events) (routes and translates) (partners see the event, tagged, on their map)

- **EarthRanger** — where events are reported
- **Gundi** (gundiservice.org) — polls ER, translates, delivers
- **CMORE** — where events land, in your **share group**, classified with a **tag**

Configure each piece once. Then it runs by itself.

The result, up front

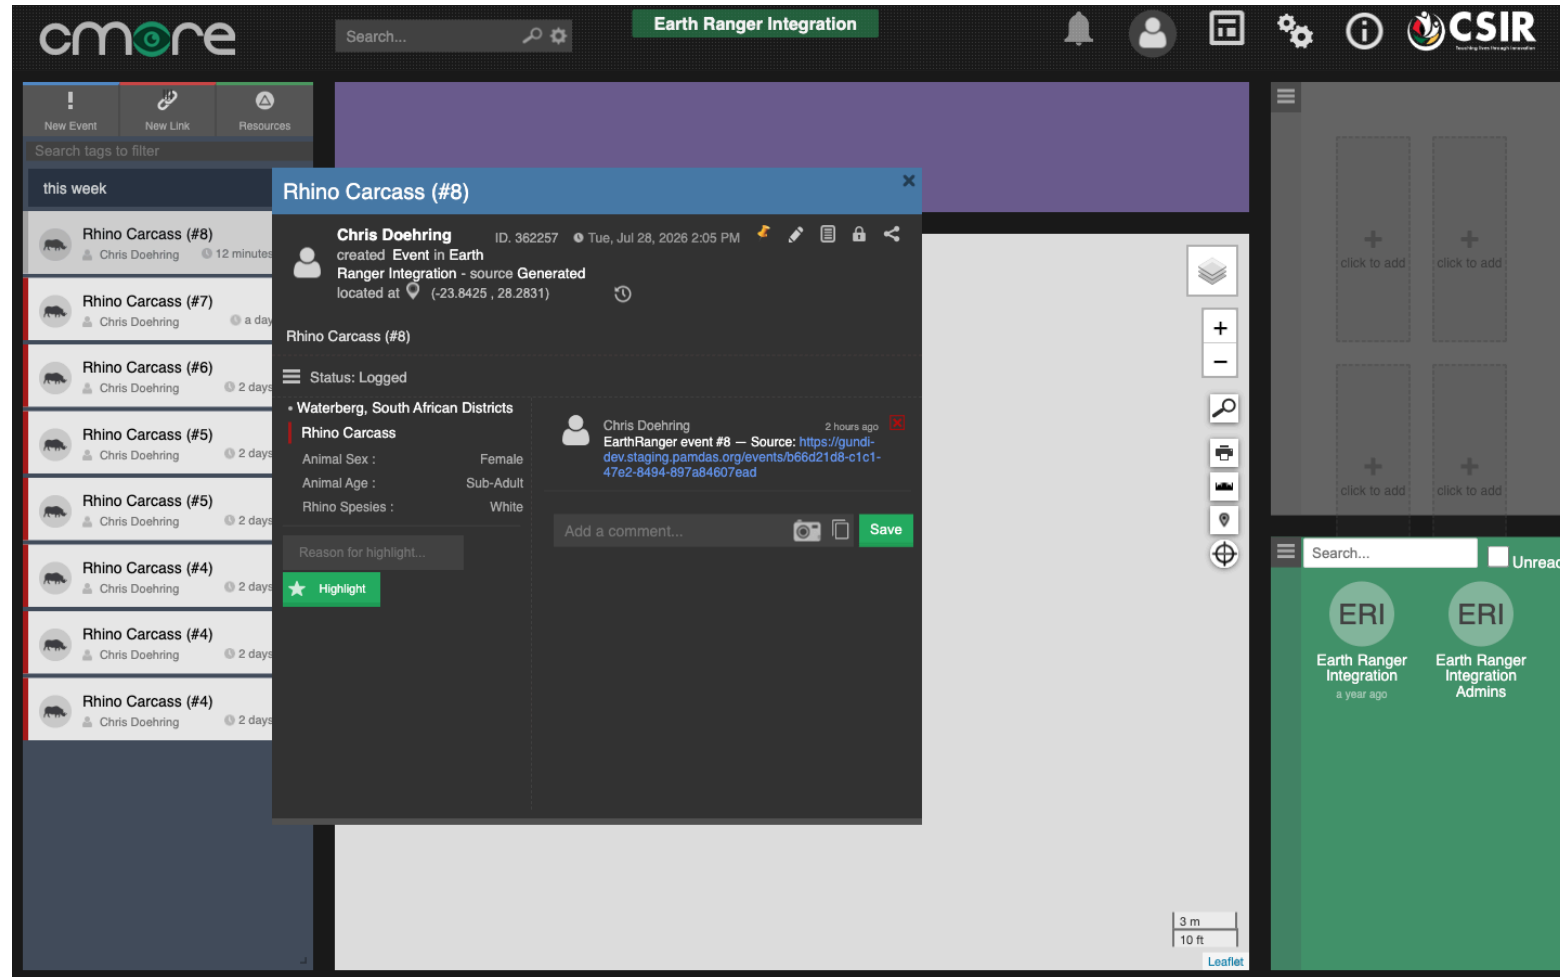

A ranger's Rhino Carcass report — tag fields filled, linked back to EarthRanger.

Before you start: what to ask the CMORE team

Not self-service — request from your CMORE (CSIR) administrator:

1. An **organisation (share group)** on the CMORE instance, with your user in it
2. **Tag domain access** — e.g. the *Wildlife* domain (Rhino Carcass + 16 more).

Domains you don't have simply don't appear. Some are restricted IP, granted case-by-case. Say **which tags** and **which share group**.

Everything else in this deck you can do yourself.

Part 1 — CMORE: two web interfaces


The screenshot shows the 'Manage Users' page of the CMORE Admin Site. The interface includes a dark sidebar with navigation links: Home, About, User Profile, T&C, Manage Users, Manage Tag Shortcuts, Manage Tags, Service, and Log. The main content area has a header with the CMORE logo, a user greeting 'Hello, chris.doehring', and a 'Log off' button. Below the header is a search bar and buttons for 'Register new User' and 'Export Users (Excel)'. A table lists four users with columns for Username, Name, Email, Organisation, Last Activity, Locked, and Approved. The footer contains the CSIR logo, copyright information '© 2026 - Cmore Admin Site', and the version '2021.2.22.0'.

Username	Name	Email	Organisation	Last Activity	Locked	Approved
chris.doehring	Chris Doehring	chrisdo@earthranger.com	Earth Ranger Integration	2 hours ago	No	Yes
chrisdoehring2	Chris Doehring (2)	chrisdoehring@gmail.com	Earth Ranger Integration	Never	No	Yes
phindulo.mulaudzi.test	Phindulo Mulaudzi	po.mulaudzi@gmail.com	Earth Ranger Integration	Never	No	Yes
victor.lujan	victor lujan	victori@earthranger.com	Earth Ranger Integration	9 months ago	No	Yes

(Showing 4 of 4 users)

The **Web Portal** (map view) — and the **Cmore Admin Site**, opened via the **gears icon** in the portal toolbar. Setup happens in the Admin Site.

Create a service, get the API token

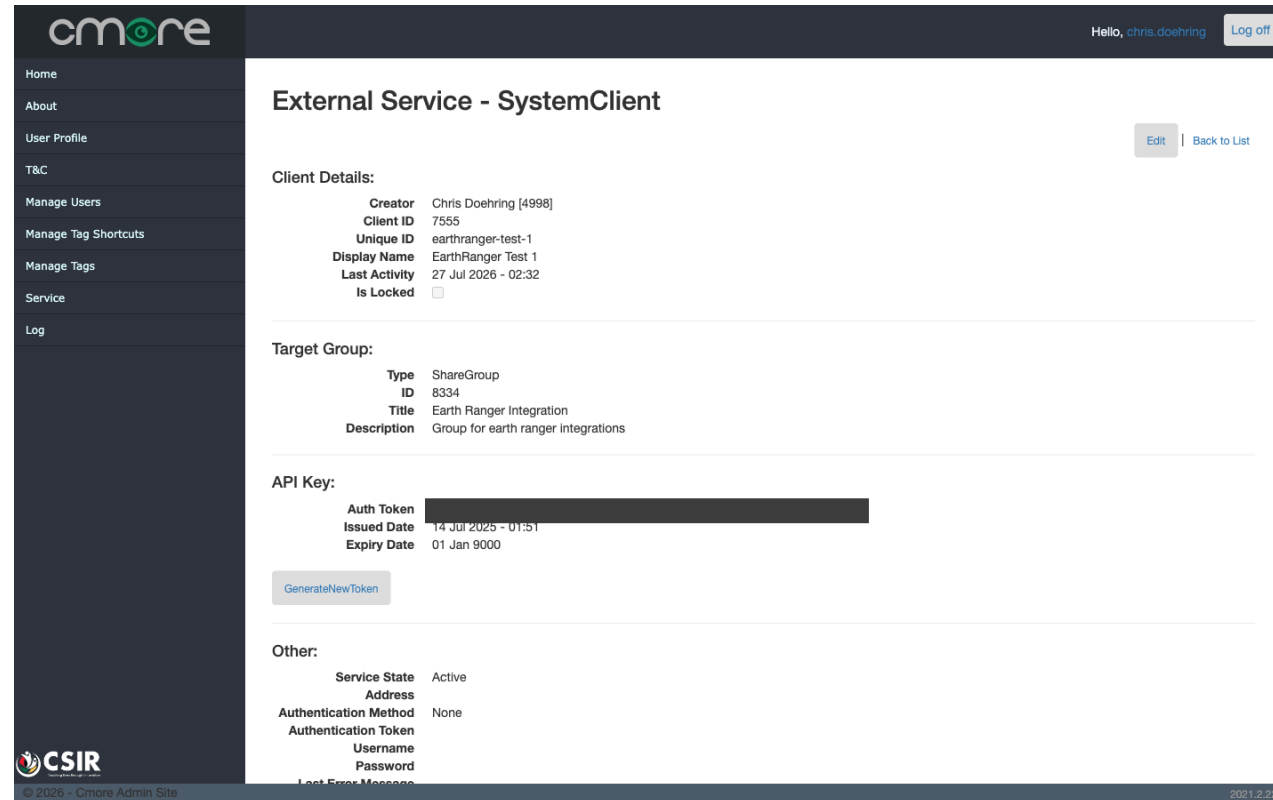

The screenshot shows the 'cmore' admin interface. The left sidebar contains navigation links: Home, About, User Profile, T&C, Manage Users, Manage Tag Shortcuts, Manage Tags, Service, and Log. The main content area is titled 'External Service - SystemClient'. It displays client details, target group information, an API key with an 'Auth Token' (redacted), and other service settings. A 'GenerateNewToken' button is visible below the API key section.

External Service - SystemClient

[Edit](#) | [Back to List](#)

Client Details:

Creator	Chris Doebling [4998]
Client ID	7555
Unique ID	earthranger-test-1
Display Name	EarthRanger Test 1
Last Activity	27 Jul 2026 - 02:32
Is Locked	☐

Target Group:

Type	ShareGroup
ID	8334
Title	Earth Ranger Integration
Description	Group for earth ranger integrations

API Key:

Auth Token	[REDACTED]
Issued Date	14 Jul 2025 - 01:51
Expiry Date	01 Jan 9000

[GenerateNewToken](#)


Other:

Service State	Active
Address	
Authentication Method	None
Authentication Token	
Username	
Password	
Last Error Message	

© 2026 - Cmore Admin Site 2021.2.22.0

Service → Create New Service, then View: the Auth Token is your API key. (GenerateNewToken rotates it if it ever leaks.)

Link the service to your share group

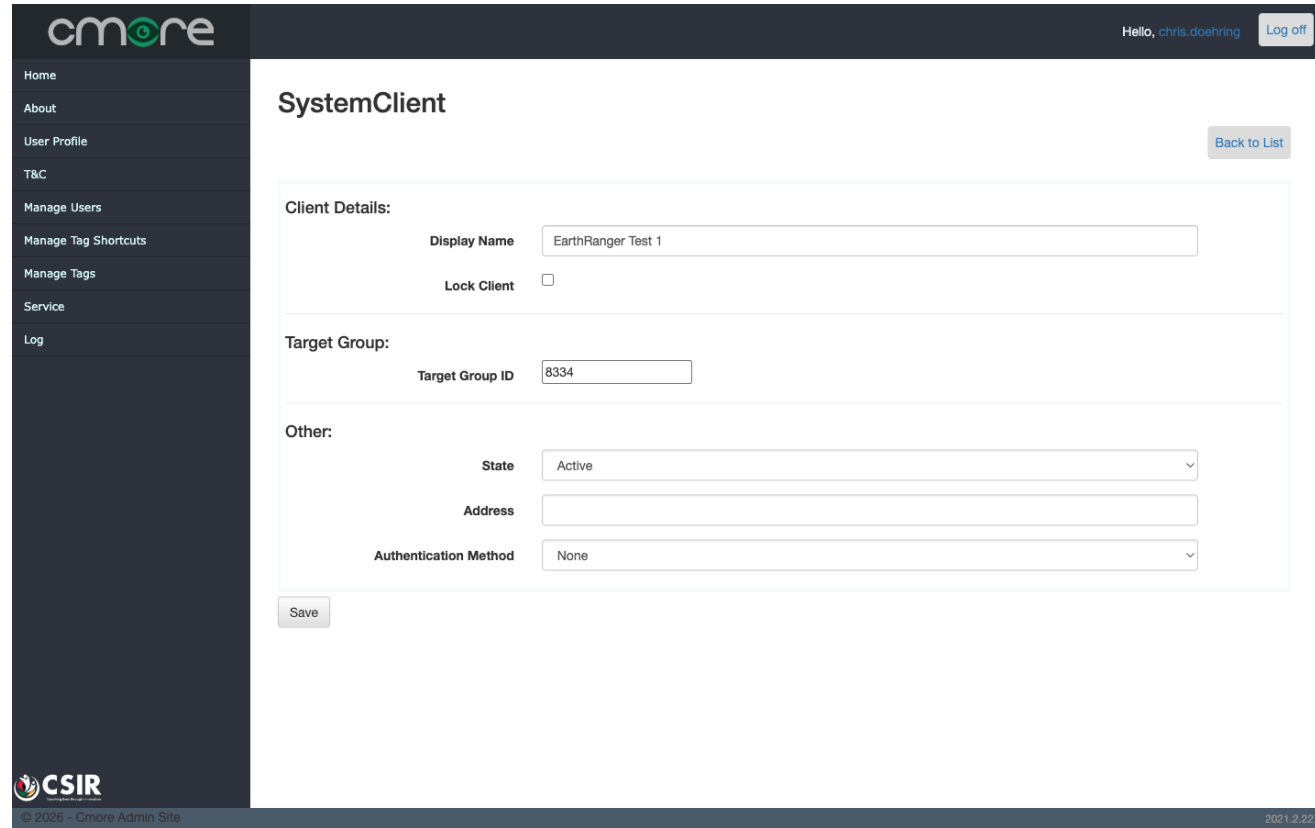

The screenshot shows the Cmore Admin Site interface. On the left is a dark sidebar with a menu containing: Home, About, User Profile, T&C, Manage Users, Manage Tag Shortcuts, Manage Tags, Service, and Log. The main content area is titled "SystemClient" and includes a "Back to List" button in the top right. The form is divided into three sections: "Client Details" with fields for "Display Name" (EarthRanger Test 1) and "Lock Client" (checkbox); "Target Group:" with a "Target Group ID" field (8334); and "Other:" with fields for "State" (Active), "Address", and "Authentication Method" (None). A "Save" button is at the bottom left of the form. The footer shows the CSIR logo, "© 2026 - Cmore Admin Site", and the version "2021.2.22.0".

cmore

Hello, [chris.doehring](#) [Log off](#)

SystemClient

[Back to List](#)

Client Details:

Display Name:

Lock Client: ☐

Target Group:

Target Group ID:

Other:

State:

Address:

Authentication Method:


[Save](#)

 CSIR

© 2026 - Cmore Admin Site 2021.2.22.0

Edit the service: Target Group ID = your share group's number (here **8334**) and **State = Active**. That number is also Gundi's **Owner Group ID**.

Check your tags are visible

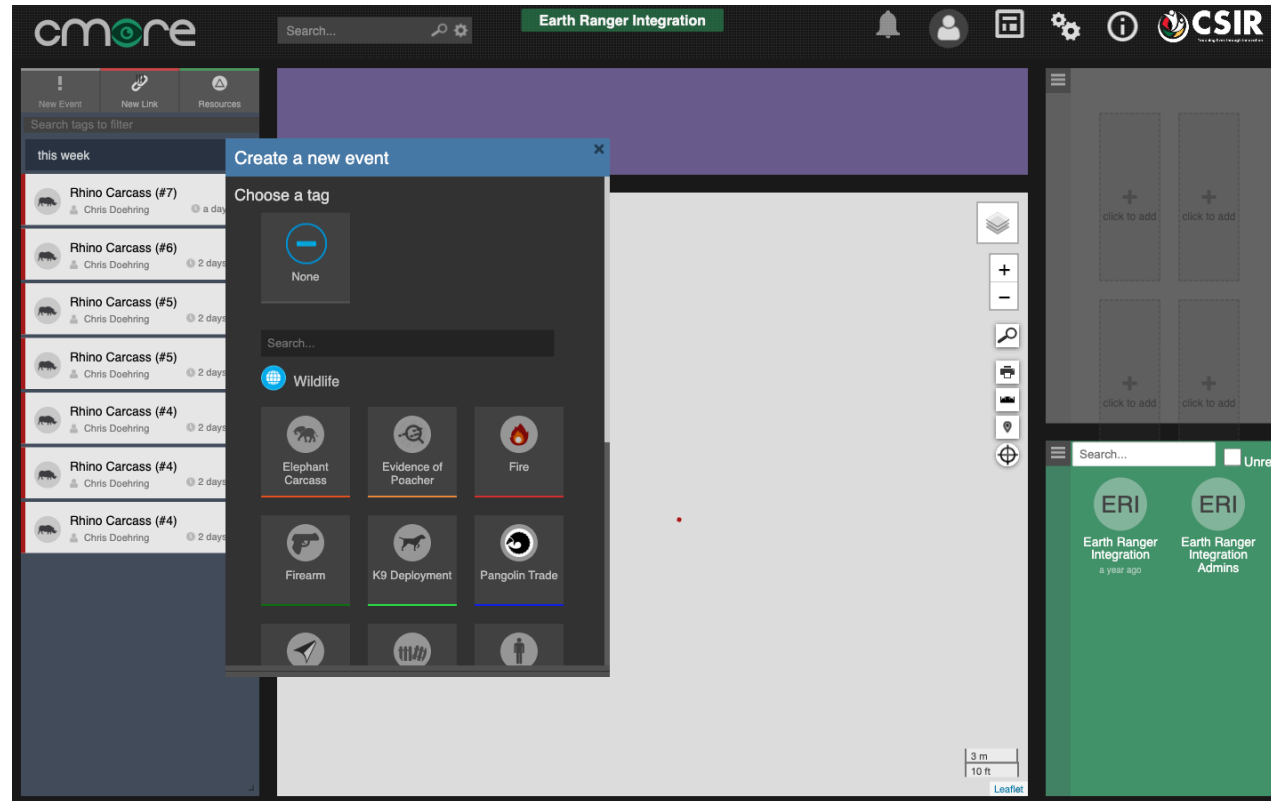

Portal → **New Event**: your domain's tags must appear (here **Wildlife** → Rhino Carcass etc.). Missing tags are silently dropped from delivered events.

Part 2 — Gundi: open your connection

The screenshot shows the Gundi web interface. At the top, there's a navigation bar with the Gundi logo and links for Connections, Destinations, Sources, and Workspaces. On the right, there's a user profile for 'Chris Doeiring' and a time zone selector set to 'UTC'. Below the navigation bar, the main heading is 'Gundi DEV ER to CMORE' with a 'Healthy' status indicator. To the right of this heading is a 'Connection Enabled' toggle switch, which is currently turned on. Below the heading, there are tabs for 'General', 'Provider', 'Destinations', 'Sources', and 'Logs'. The 'Destinations' tab is selected. The content area shows a message: 'Data from the provider are sent to the following destinations.' Below this message are two buttons: '+ New Destination' and '+ Existing Destination'. Underneath these buttons, it says 'Connected destinations: 1'. A table follows, listing the connected destinations. The table has four columns: 'Name', 'Destination', 'Workspace', and 'Technology'. The first row shows 'CMORE (test) group 8334' as the name, 'cmorewc1.chpc.ac.za' as the destination, 'Gundi Team' as the workspace, and 'Cmore' as the technology. A help icon (?) is visible in the bottom right corner of the interface.

Gundi

Connections Destinations Sources Workspaces

UTC Chris Doeiring

Gundi DEV ER to CMORE Healthy

EarthRanger Gundi Team

General Provider Destinations Sources Logs

Data from the provider are sent to the following destinations.

+ New Destination + Existing Destination

Connected destinations: 1

Name	Destination	Workspace	Technology
CMORE (test) group 8334	cmorewc1.chpc.ac.za	Gundi Team	Cmore

Connections → your connection → **Destinations** tab → the CMORE destination.

Enter the three CMORE values

The screenshot shows the 'Configuration' tab in the Gundi application. The top navigation bar includes 'Gundi', 'Connections', 'Destinations', 'Sources', and 'Workspaces'. The user is logged in as 'Chris Doebling' with a 'UTC' time zone. The 'Configuration' tab is active, and the 'Connections' sub-tab is selected. The form contains the following fields:

- Name ***: A descriptive name for this destination. Value: CMORE (test) group 8334
- Workspace ***: The workspace this destination belongs to. Value: Gundi Team
- URL ***: The base URL of the destination. Value: https://cmorewc1.chpc.ac.za
- Auth**: A section with a 'Test Connection' button.
 - API Base URL**: Base URL for the C-more API. Value: https://cmorewc1.chpc.ac.za/za/WebAPI/api
 - API Token ***: C-more API token (raw value, without the 'Token ' prefix). The client adds the 'Token ' prefix to the Authorization header automatically. Value:
 - Owner Group ID ***: ShareGroupId linked to this token. Events will be posted to this group. Value: 8334

At the bottom, there are buttons for 'Save', 'Save and Close', and 'Cancel'. A help icon (?) is located in the bottom right corner.

API Base URL (ends in `/za/WebAPI/api`) · API Token · Owner Group ID

Test before any data flows

Gundi Connections Destinations Sources Workspaces UTC Chris Doebling

Configuration Connections

Name *
A descriptive name for this destination. CMORE (test) group 8334

Workspace *
The workspace this destination belongs to. Gundi Team

URL *
The base URL of the destination. https://cmorewc1.chpc.ac.za

Auth **Test Connection** **Valid Credentials**

✓ View Details

```
{  
  "valid_credentials": true  
}
```

API Base URL
Base URL for the C-more API. https://cmorewc1.chpc.ac.za/WebAPI/api

API Token *
C-more API token (raw value, without the 'Token ' prefix). The client adds the 'Token ' prefix to the Authorization header automatically.

Owner Group ID *

Save Save and Close Cancel

Click **Test Connection** — you want the green **Valid Credentials**.

Map the event type to a CMORE tag

The screenshot shows the Gundi Configuration interface. At the top, there's a navigation bar with 'Gundi' logo and links for 'Connections', 'Destinations', 'Sources', and 'Workspaces'. On the right, there's a dropdown for 'UTC' and a user profile 'Chris Doebling'. Below the navigation bar, there's a 'Configuration' tab and a 'Connections' sub-tab. The main content area is titled 'Deliver' and contains a description: 'Combined config for the single action_deliver handler. Collapses the previous PushObservationsConfig (empty) and PushEventsConfig into one config since one handler now dispatches on payload type internally.' Below this, there's a section titled 'Event type → CMORE tag' with a description: 'Optional list of mappings from Gundi event_type to a CMORE tag + field mappings. Events whose event_type is not in this list are still posted to CMORE with description + location, but without a structured tag attached.' The configuration is shown in a table-like structure with three rows. The first row is 'CmoreTagMapping' with a description 'Map a Gundi event_type to a CMORE tag (by name) and its fields.' and a trash icon. The second row is 'Gundi event_type' with a description 'The event_type string on incoming Gundi events.' and a text input field containing 'rhino_carcass'. The third row is 'CMORE Tag Name' with a description 'Name of the CMORE tag to attach to events of this type (e.g., 'Poacher Sighting'). Resolved to a tagid at runtime via CMORE's /v2/tags/getfull endpoint.' and a text input field containing 'Rhino Carcass'. Below the table, there's a section titled 'Field Mappings' with a description: 'Map Gundi event_details keys to CMORE field names within the chosen tag. Values are coerced per the CMORE field's data type: Lookup/FixedLookup values are resolved to a valid option (using the optional value mappings, then a case/punctuation-insensitive match); Number/Boolean values are validated; everything else is sent as a string.' At the bottom, there are buttons for 'Save', 'Save and Close', and 'Cancel'. On the right side of the configuration area, there are up and down arrows and a trash icon. A circular help icon with a question mark is visible on the far right.

Event type → CMORE tag	
CmoreTagMapping Map a Gundi event_type to a CMORE tag (by name) and its fields.	
Gundi event_type The event_type string on incoming Gundi events.	rhino_carcass
CMORE Tag Name Name of the CMORE tag to attach to events of this type (e.g., 'Poacher Sighting'). Resolved to a tagid at runtime via CMORE's /v2/tags/getfull endpoint.	Rhino Carcass

Field Mappings
Map Gundi event_details keys to CMORE field names within the chosen tag. Values are coerced per the CMORE field's data type: Lookup/FixedLookup values are resolved to a valid option (using the optional value mappings, then a case/punctuation-insensitive match); Number/Boolean values are validated; everything else is sent as a string.

Deliver → Event type → CMORE tag: rhino_carcass → Rhino Carcass,
then one row per field (animal_sex → Animal Sex , ...).

Value Mappings: translating vocabularies

The screenshot shows the Gundi Configuration interface. At the top, there's a navigation bar with 'Gundi' logo, 'Connections', 'Destinations', 'Sources', and 'Workspaces'. On the right, there's a user dropdown showing 'UTC' and 'Chris Doebling'. Below the navigation bar, there's a tabbed interface with 'Configuration' and 'Connections'. The 'Configuration' tab is active, showing a form for 'CmoreFieldMapping'. The form has two main sections: 'Gundi event_details key' and 'CMORE field name'. The 'Gundi event_details key' section has a text input field containing 'age_of_carcass'. The 'CMORE field name' section has a text input field containing 'Carcass Age'. Below these sections is the 'Value Mappings' section, which contains a list of 'CmoreValueMapping' entries. The first entry has a 'Source value' of 'very_fresh' and a 'CMORE value' of 'Today'. The second entry has a 'Source value' of 'frach'. At the bottom of the form, there are three buttons: 'Save', 'Save and Close', and 'Cancel'. A help icon (?) is visible in the bottom right corner.

Gundi Connections Destinations Sources Workspaces UTC Chris Doebling

Configuration Connections

CmoreFieldMapping

One Gundi event_details key → one CMORE field name (within a tag).

Gundi event_details key

Key inside the Gundi event's event_details dict.

age_of_carcass

CMORE field name

Field name within the chosen CMORE tag.

Carcass Age

Value Mappings

Optional source→CMORE value translations, mainly for Lookup fields whose allowed options differ from the source values. Unmapped values are matched against the field's options case/punctuation-insensitively; anything that still doesn't match a valid option is dropped (and logged).

CmoreValueMapping

Translate one source (ER) value into the CMORE value to send. Required for Lookup/FixedLookup fields whenever the source vocabulary differs from CMORE's allowed options (e.g. ER 'b_3_months1_year' → CMORE 'Calf', ER 'Black Rhino' → CMORE 'Black'). Values that already match a CMORE option (case/punctuation-insensitively, e.g. 'male' → 'Male') do NOT need an entry.

Source value

The value as it appears in the Gundi event_details (from ER).

very_fresh

CMORE value

The value to send to CMORE (must be a valid option for the field).

Today

CmoreValueMapping

Translate one source (ER) value into the CMORE value to send. Required for Lookup/FixedLookup fields whenever the source vocabulary differs from CMORE's allowed options (e.g. ER 'b_3_months1_year' → CMORE 'Calf', ER 'Black Rhino' → CMORE 'Black'). Values that already match a CMORE option (case/punctuation-insensitively, e.g. 'male' → 'Male') do NOT need an entry.

Source value

frach

Save Save and Close Cancel

male → Male matches by itself. But a_0-3_months → Calf needs a row.
Unmatched values are dropped and logged — never sent as garbage.

Part 3 — Choose what leaves EarthRanger

The screenshot shows the Gundi web interface with a top navigation bar containing 'Connections', 'Destinations', 'Sources', and 'Workspaces'. The user is logged in as 'Chris Doebling' in 'UTC' time. The main content area is titled 'Pull Observations' and contains several configuration sections:

- Event Types:** A text input field contains 'rhino_carcass'. Below it is an 'Add Item' button.
- Event Categories:** A text input field is empty. Below it is an 'Add Item' button.
- Force Run From Start Datetime:** A toggle switch is currently turned off.
- Run On Schedule:** A toggle switch is currently turned on.

At the bottom, there is a 'Start Datetime' field with a calendar icon, showing '06/01/2026, 09:57 AM'. Below this are 'Save' and 'Cancel' buttons.

Connection → **Provider** tab → **Pull Events: Event Types** must include `rhino_carcass` ; **Run On Schedule** on. This filter is why an event type can work in ER yet never reach CMORE.

Part 4 — Prove it: report in EarthRanger...


The screenshot displays the EarthRanger web application interface. On the left is a dark sidebar with navigation icons for Events, Patrols, Map Layers, and Settings. The main content area is titled 'Events' and shows the details for a 'Rhino Carcass' event. The form includes the following fields:

- Age of Animal:** Sub-adult
- Animal Common Name:** White Rhino
- Animal Sex:** Female

Below these fields is an 'Activity' section with a text area containing the note: 'TEST — tutorial walkthrough for the CMORE integration guide. Safe to ignore.' At the bottom of the form are buttons for 'Note', 'Attachment', 'Event', 'Cancel', and 'Save'. To the right of the form is a map of North and Central America, showing the event location in the United States. The top of the interface shows the 'Earth' logo, a status indicator 'Unhealthy', a notification bell with '10 unread notifications', and a user profile for 'chrisd'.

A test Rhino Carcass: **Sub-adult / White Rhino / Female**, location set.

...and watch it arrive in CMORE

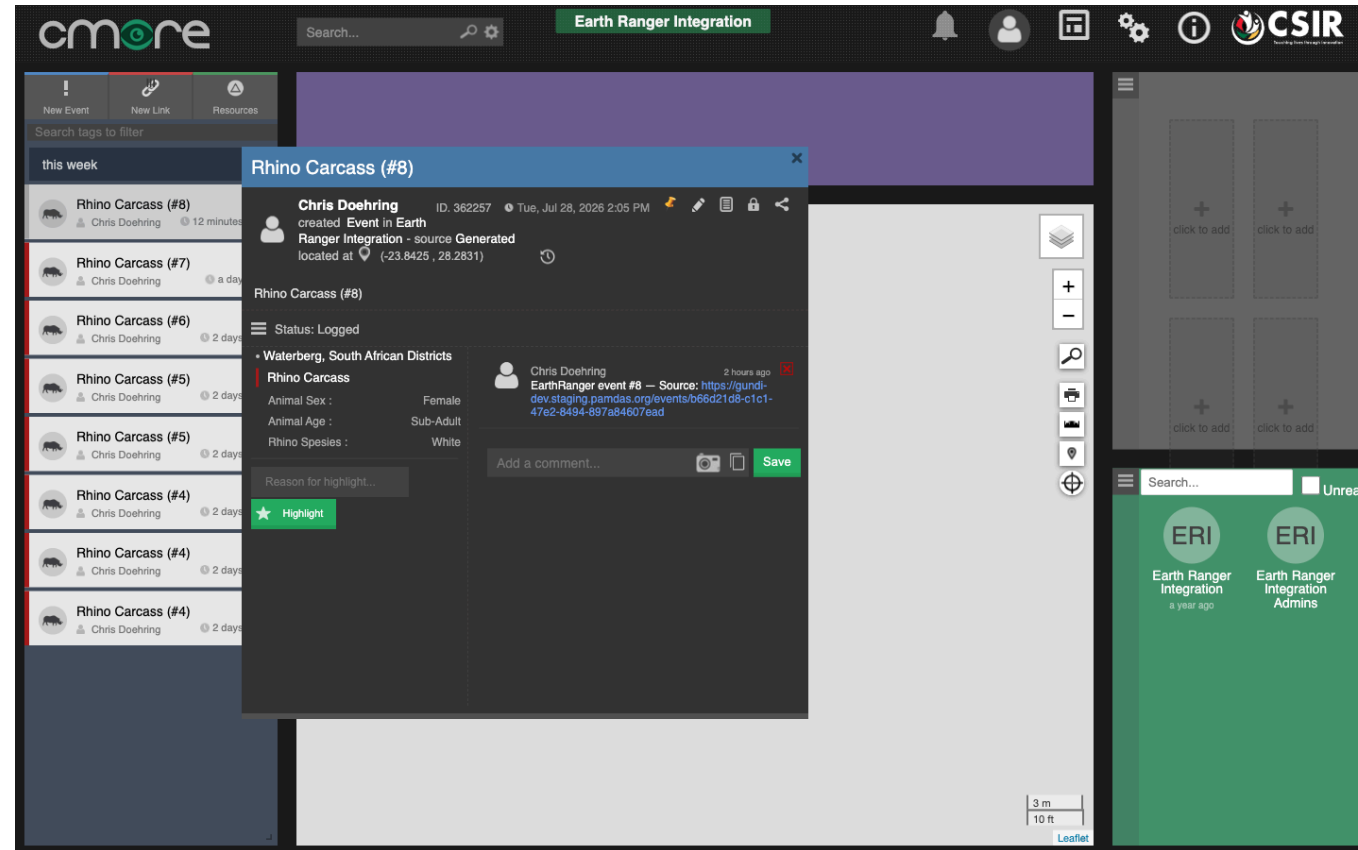

Minutes later: tag populated (**Sub-Adult / White / Female**), plus a comment linking back to the EarthRanger event.

If something doesn't look right

Symptom	First place to look
Event arrives without the tag	Tag name spelling; tag-domain access for your group
Tag there, one field empty	That value needs a Value Mapping
Nothing arrives	Event Types filter (Part 3); connection logs in Gundi
Test Connection fails	Token, base URL (<code>.../za/WebAPI/api</code>), service Active + linked
No link back to ER	See the troubleshooting guide

Where to get help

Step-by-step tutorial (this walkthrough, with every screenshot):

the *Tutorial: sync an event type* page in the integration docs

Deeper reference: *Configuration* and *Troubleshooting* pages

Gundi questions: support.earthranger.com · **CMORE access:** your CSIR contact