

Sharing EarthRanger events with CMORE

A field guide to setting up the sync — no code required

Rhino Carcass, from a ranger's report to your partners' map, automatically.


What you're building

EarthRanger → Gundi → CMORE
(rangers report events) (routes and translates) (partners see the event, tagged, on their map)

- **EarthRanger** — where events are reported
- **Gundi** (gundiservice.org) — polls ER, translates, delivers
- **CMORE** — where events land, in your **share group**, classified with a **tag**

Configure each piece once. Then it runs by itself.

The result, up front

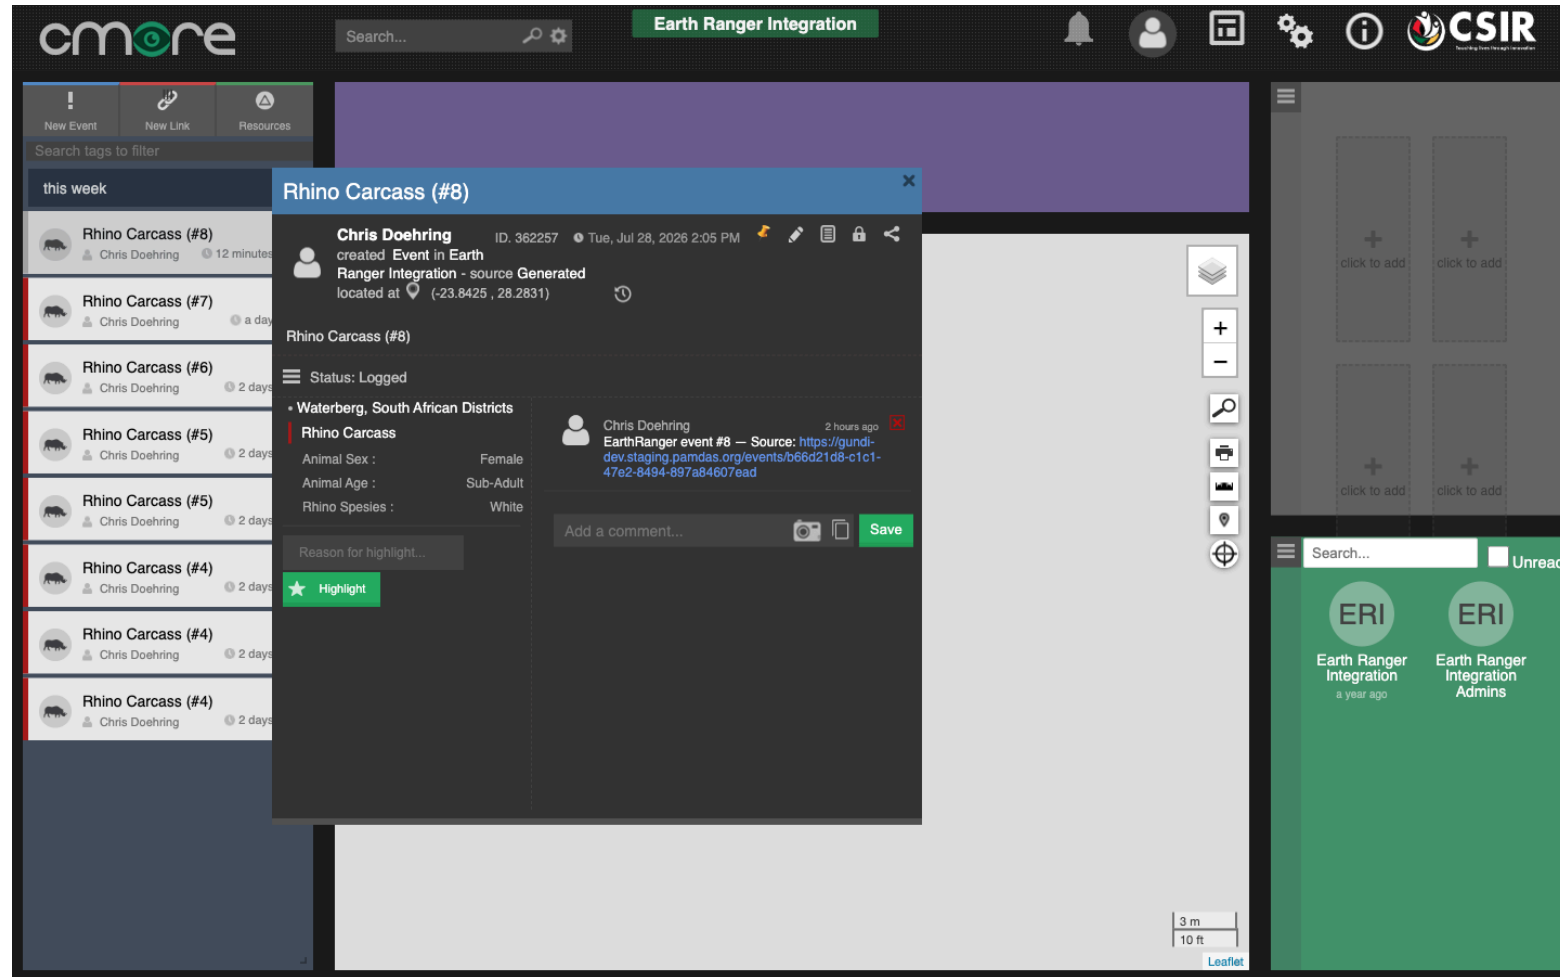

A ranger's Rhino Carcass report — tag fields filled, linked back to EarthRanger.

Before you start: CMORE-side prerequisites

Your reserve's CMORE Organisation Admin does these first:

1. Creates a **dedicated CMORE account** for the integration (e.g. `lapalala.earthranger`) — not an individual staff member's login
2. Assigns the **Integration permission** to that account

Then request from the CMORE team (CSIR) — not self-service:

3. An **organisation (share group)** on the instance, with that account in it
4. **Tag domain access** — e.g. *Wildlife* (Rhino Carcass + 16 more). Some domains are restricted IP, granted case-by-case. Say **which tags** and **which share group**.

Use the dedicated account for the rest of Part 1. Everything else you can do yourself.

Part 1 — CMORE: two web interfaces


The screenshot shows the 'Manage Users' page of the CMORE Admin Site. The interface has a dark sidebar on the left with navigation links: Home, About, User Profile, T&C, Manage Users (selected), Manage Tag Shortcuts, Manage Tags, Service, and Log. The main content area is titled 'Manage Users' and includes a search bar, a 'Register new User' link, and an 'Export Users (Excel)' button. Below this is a table of users with columns: Username, Name, Email, Organisation, Last Activity, Locked, and Approved. The table lists four users, with the last one being 'victor.lujan' from 'Earth Ranger Integration' who was last active '9 months ago'. The footer shows the CSIR logo, '© 2026 - Cmore Admin Site', and the version '2021.2.22.0'.

Username	Name	Email	Organisation	Last Activity	Locked	Approved
chris.doehring	Chris Doehring	chrisdo@earthranger.com	Earth Ranger Integration	2 hours ago	No	Yes
chrisdoehring2	Chris Doehring (2)	chrisdoehring@gmail.com	Earth Ranger Integration	Never	No	Yes
phindulo.mulaudzi.test	Phindulo Mulaudzi	po.mulaudzi@gmail.com	Earth Ranger Integration	Never	No	Yes
victor.lujan	victor lujan	victorl@earthranger.com	Earth Ranger Integration	9 months ago	No	Yes

(Showing 4 of 4 users)

The **Web Portal** (map view) — and the **Cmore Admin Site**, opened via the **gears icon** in the portal toolbar. Setup happens in the Admin Site.

Create a service, get the API token

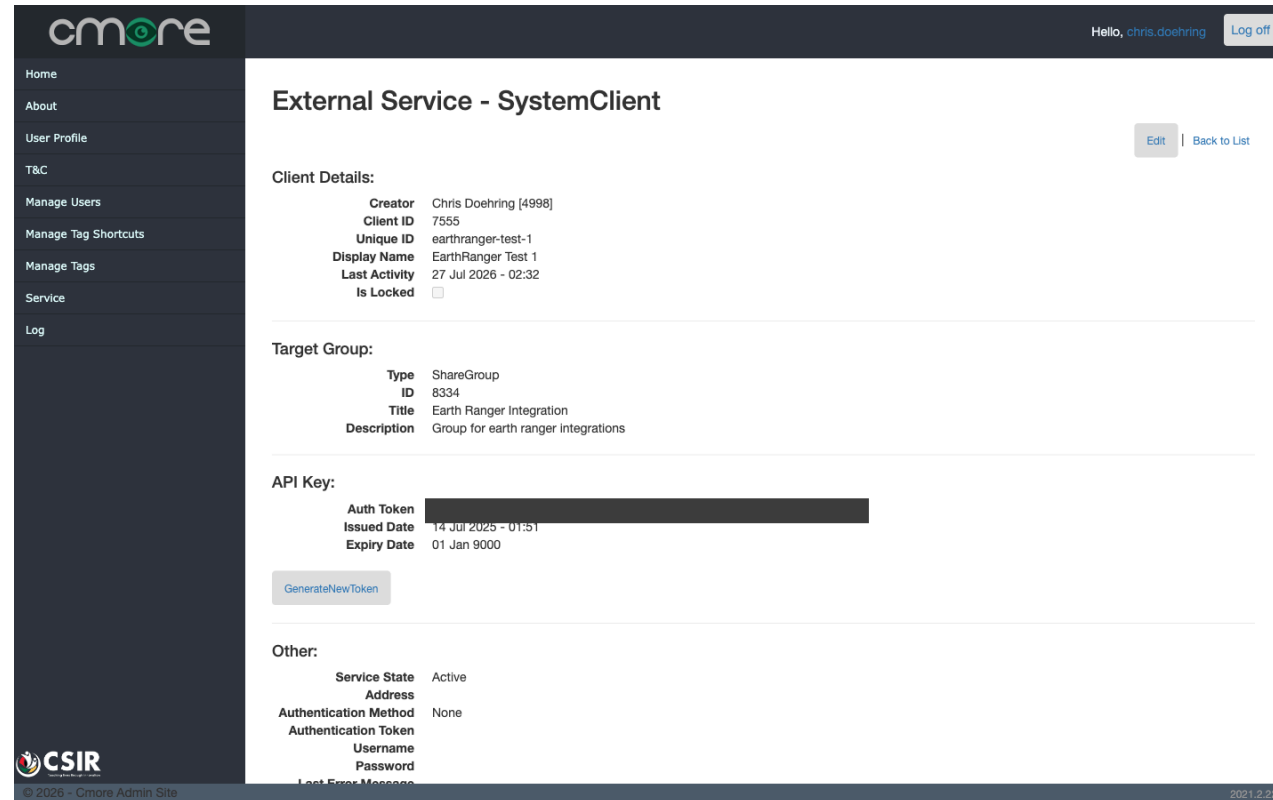

The screenshot shows the 'cmore' admin interface. On the left is a dark sidebar with navigation links: Home, About, User Profile, T&C, Manage Users, Manage Tag Shortcuts, Manage Tags, Service, and Log. The main content area is titled 'External Service - SystemClient' and includes an 'Edit' button and a 'Back to List' link. The 'Client Details' section lists: Creator (Chris Doebling [4998]), Client ID (7555), Unique ID (earthranger-test-1), Display Name (EarthRanger Test 1), Last Activity (27 Jul 2026 - 02:32), and Is Locked (checkbox). The 'Target Group' section lists: Type (ShareGroup), ID (8334), Title (Earth Ranger Integration), and Description (Group for earth ranger integrations). The 'API Key' section shows: Auth Token (redacted), Issued Date (14 Jul 2025 - 01:51), and Expiry Date (01 Jan 9000), with a 'GenerateNewToken' button below. The 'Other' section lists: Service State (Active), Address, Authentication Method (None), Authentication Token, Username, Password, and Last Error Message. The footer includes the CSIR logo, '© 2026 - Cmore Admin Site', and the version '2021.2.22.0'.

cmore Hello, chris.doebling Log off

External Service - SystemClient

[Edit](#) | [Back to List](#)

Client Details:

Creator	Chris Doebling [4998]
Client ID	7555
Unique ID	earthranger-test-1
Display Name	EarthRanger Test 1
Last Activity	27 Jul 2026 - 02:32
Is Locked	☐

Target Group:

Type	ShareGroup
ID	8334
Title	Earth Ranger Integration
Description	Group for earth ranger integrations

API Key:

Auth Token	[REDACTED]
Issued Date	14 Jul 2025 - 01:51
Expiry Date	01 Jan 9000

[GenerateNewToken](#)


Other:

Service State	Active
Address	
Authentication Method	None
Authentication Token	
Username	
Password	
Last Error Message	

© 2026 - Cmore Admin Site 2021.2.22.0

Service → Create New Service, then View: the Auth Token is your API key. (GenerateNewToken rotates it if it ever leaks.)

Link the service to your share group

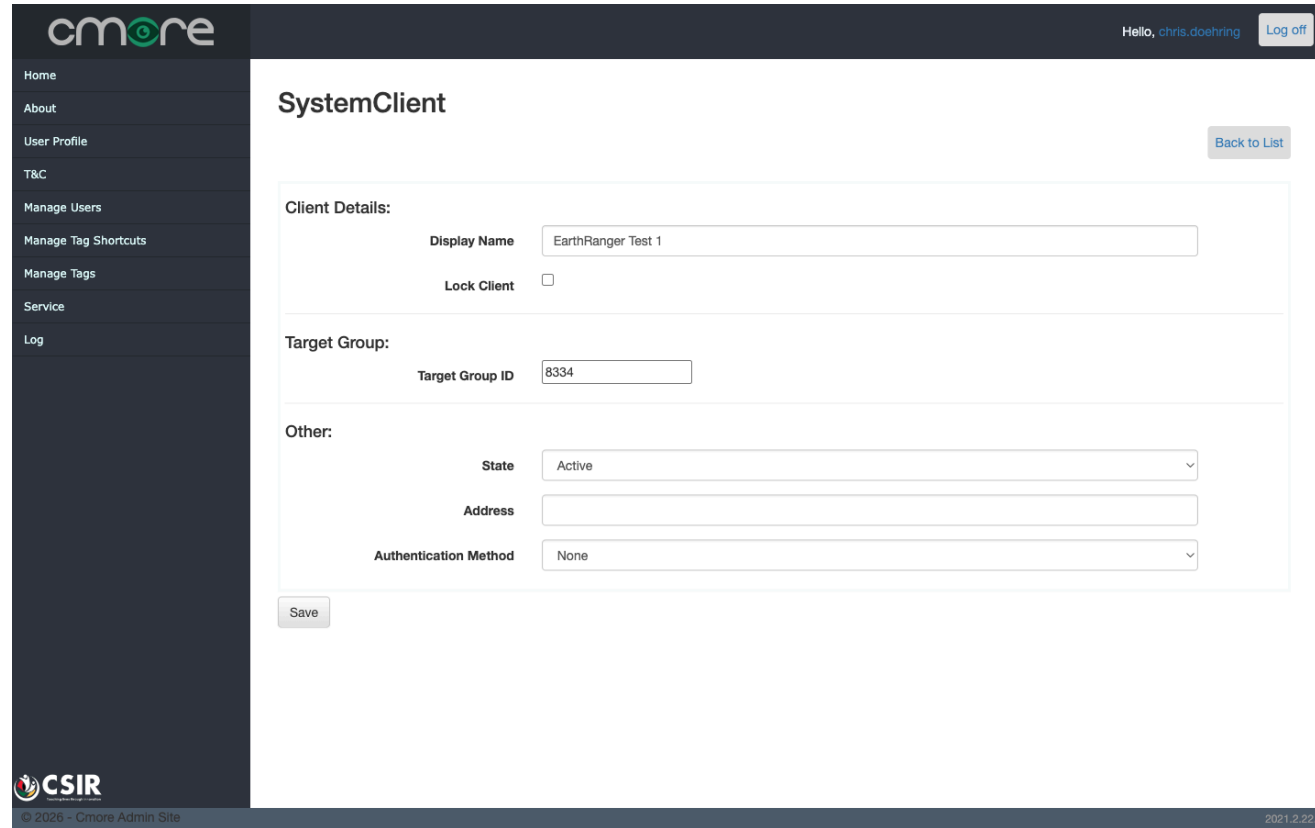

The screenshot shows the Cmore Admin Site interface. On the left is a dark sidebar with navigation links: Home, About, User Profile, T&C, Manage Users, Manage Tag Shortcuts, Manage Tags, Service, and Log. The main content area is titled "SystemClient" and includes a "Back to List" button. The form is divided into three sections: "Client Details" with fields for "Display Name" (EarthRanger Test 1) and "Lock Client" (checkbox); "Target Group:" with a "Target Group ID" field (8334); and "Other:" with fields for "State" (Active), "Address", and "Authentication Method" (None). A "Save" button is at the bottom left. The footer shows the CSIR logo, copyright information, and version 2021.2.22.0.

cmore

Hello, [chris.doehring](#) [Log off](#)

SystemClient

[Back to List](#)

Client Details:

Display Name

Lock Client ☐

Target Group:

Target Group ID

Other:

State

Address

Authentication Method


[Save](#)

 CSIR

© 2026 - Cmore Admin Site 2021.2.22.0

Edit the service: Target Group ID = your share group's number (here **8334**) and **State = Active**. That number is also Gundi's **Owner Group ID**.

Check your tags are visible

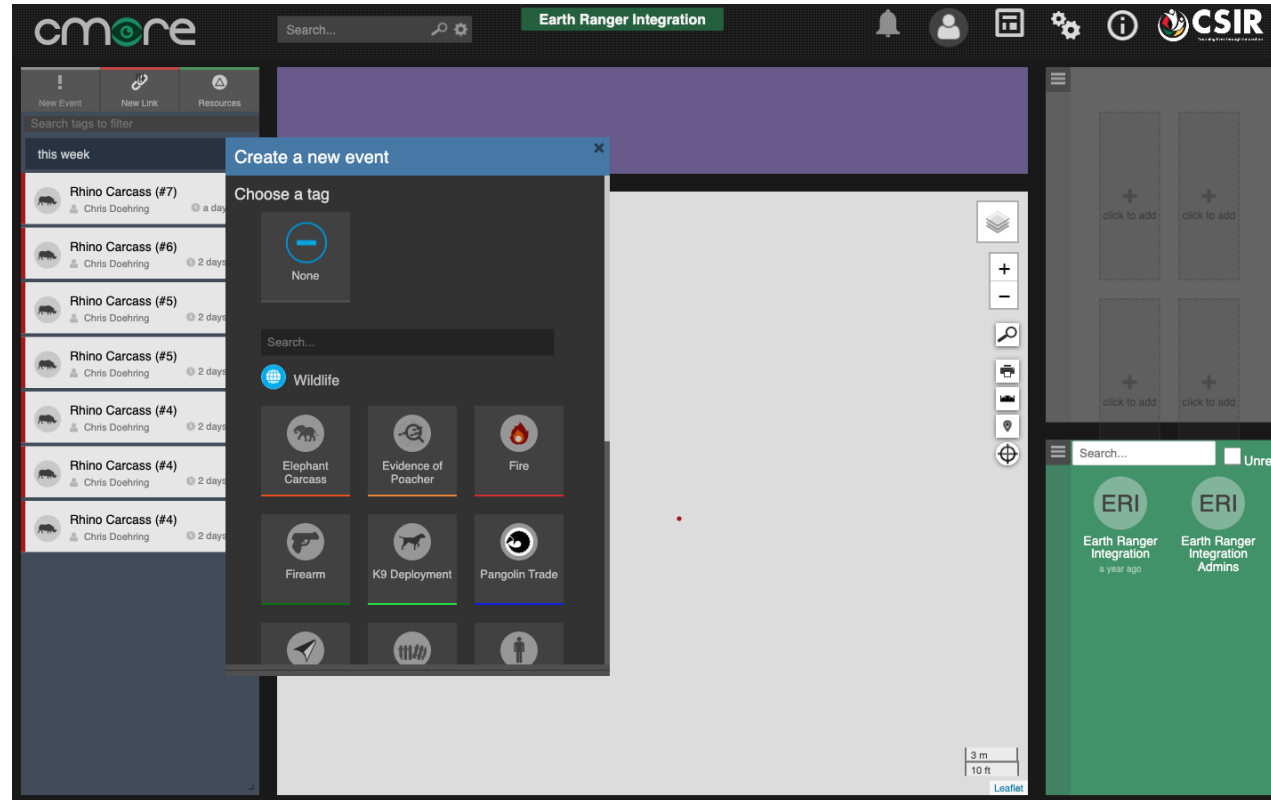

Portal → **New Event**: your domain's tags must appear (here **Wildlife** → Rhino Carcass etc.). Missing tags are silently dropped from delivered events.

Part 2 — Gundi: open your connection

The screenshot shows the Gundi web interface. At the top, there's a navigation bar with the Gundi logo and links for Connections, Destinations, Sources, and Workspaces. On the right, there's a user profile for 'Chris Doeiring' and a time zone selector set to 'UTC'. Below the navigation bar, the main heading is 'Gundi DEV ER to CMORE' with a 'Healthy' status indicator. To the right of the heading is a 'Connection Enabled' toggle switch, which is currently turned on. Below the heading, there are tabs for 'General', 'Provider', 'Destinations', 'Sources', and 'Logs'. The 'Destinations' tab is selected. The content area shows a message: 'Data from the provider are sent to the following destinations.' Below this message are two buttons: '+ New Destination' and '+ Existing Destination'. Underneath these buttons, it says 'Connected destinations: 1'. A table follows, listing the connected destinations. The table has four columns: 'Name', 'Destination', 'Workspace', and 'Technology'. The first row shows 'CMORE (test) group 8334' as the name, 'cmorewc1.chpc.ac.za' as the destination, 'Gundi Team' as the workspace, and 'Cmore' as the technology. A help icon (?) is visible in the bottom right corner of the interface.

Gundi Connections Destinations Sources Workspaces UTC Chris Doeiring

Gundi DEV ER to CMORE Healthy

EarthRanger Gundi Team

General Provider **Destinations** Sources Logs

Data from the provider are sent to the following destinations.

+ New Destination + Existing Destination

Connected destinations: 1

Name	Destination	Workspace	Technology
CMORE (test) group 8334	cmorewc1.chpc.ac.za	Gundi Team	Cmore

Connections → your connection → **Destinations** tab → the CMORE destination.

Enter the three CMORE values

The screenshot shows the Gundi web interface. At the top, there's a navigation bar with 'Gundi' logo and links for 'Connections', 'Destinations', 'Sources', and 'Workspaces'. On the right, there are dropdowns for 'UTC' and 'Chris Doebling'. Below this, a sub-header shows 'Configuration' and 'Connections'. The main form is divided into two sections: 'Configuration' and 'Auth'. The 'Configuration' section has three fields: 'Name *' (with a descriptive note) containing 'CMORE (test) group 8334', 'Workspace *' (with a note) containing 'Gundi Team', and 'URL *' (with a note) containing 'https://cmorewc1.chpc.ac.za'. The 'Auth' section has three fields: 'API Base URL' (with a note) containing 'https://cmorewc1.chpc.ac.za/za/WebAPI/api', 'API Token *' (with a note) containing a masked token, and 'Owner Group ID *' (with a note) containing '8334'. A 'Test Connection' button is located to the right of the 'Auth' section. At the bottom, there are 'Save', 'Save and Close', and 'Cancel' buttons. A help icon (?) is in the bottom right corner.

Configuration

Name *
A descriptive name for this destination.

Workspace *
The workspace this destination belongs to.

URL *
The base URL of the destination.

Auth

API Base URL
Base URL for the C-more API.

API Token *
C-more API token (raw value, without the 'Token ' prefix). The client adds the 'Token ' prefix to the Authorization header automatically.

Owner Group ID *
ShareGroupId linked to this token. Events will be posted to this group.

Test Connection

Save **Save and Close** **Cancel**

API Base URL (ends in `/za/WebAPI/api`) · API Token · Owner Group ID

Test before any data flows

Gundi Connections Destinations Sources Workspaces UTC Chris Doebling

Configuration Connections

Name *
A descriptive name for this destination.
CMORE (test) group 8334

Workspace *
The workspace this destination belongs to.
Gundi Team

URL *
The base URL of the destination.
https://cmorewc1.chpc.ac.za

Auth **Test Connection** **Valid Credentials**

✓ View Details

```
{  
  "valid_credentials": true  
}
```

API Base URL
Base URL for the C-more API.
https://cmorewc1.chpc.ac.za/WebAPI/api

API Token *
C-more API token (raw value, without the 'Token ' prefix). The client adds the 'Token ' prefix to the Authorization header automatically.
.....

Owner Group ID *

Save Save and Close Cancel

Click **Test Connection** — you want the green **Valid Credentials**.

Map the event type to a CMORE tag

The screenshot shows the Gundi Configuration interface. At the top, there's a navigation bar with 'Gundi' logo and links for 'Connections', 'Destinations', 'Sources', and 'Workspaces'. On the right, there's a dropdown for 'UTC' and a user profile 'Chris Doebling'. Below the navigation bar, there's a 'Configuration' tab and a 'Connections' sub-tab. The main content area is titled 'Deliver' and contains a description: 'Combined config for the single action_deliver handler. Collapses the previous PushObservationsConfig (empty) and PushEventsConfig into one config since one handler now dispatches on payload type internally.' Below this, there's a section titled 'Event type → CMORE tag' with a description: 'Optional list of mappings from Gundi event_type to a CMORE tag + field mappings. Events whose event_type is not in this list are still posted to CMORE with description + location, but without a structured tag attached.' The configuration is shown in a table-like structure with three rows. The first row is titled 'CmoreTagMapping' and has a description 'Map a Gundi event_type to a CMORE tag (by name) and its fields.' The second row is titled 'Gundi event_type' and has a description 'The event_type string on incoming Gundi events.' The third row is titled 'CMORE Tag Name' and has a description 'Name of the CMORE tag to attach to events of this type (e.g., 'Poacher Sighting'). Resolved to a tagid at runtime via CMORE's /v2/tags/getfull endpoint.' The fourth row is titled 'Field Mappings' and has a description 'Map Gundi event_details keys to CMORE field names within the chosen tag. Values are coerced per the CMORE field's data type: Lookup/FixedLookup values are resolved to a valid option (using the optional value mappings, then a case/punctuation-insensitive match); Number/Boolean values are validated; everything else is sent as a string.' The configuration is shown in a table-like structure with three rows. The first row is titled 'CmoreTagMapping' and has a description 'Map a Gundi event_type to a CMORE tag (by name) and its fields.' The second row is titled 'Gundi event_type' and has a description 'The event_type string on incoming Gundi events.' The third row is titled 'CMORE Tag Name' and has a description 'Name of the CMORE tag to attach to events of this type (e.g., 'Poacher Sighting'). Resolved to a tagid at runtime via CMORE's /v2/tags/getfull endpoint.' The fourth row is titled 'Field Mappings' and has a description 'Map Gundi event_details keys to CMORE field names within the chosen tag. Values are coerced per the CMORE field's data type: Lookup/FixedLookup values are resolved to a valid option (using the optional value mappings, then a case/punctuation-insensitive match); Number/Boolean values are validated; everything else is sent as a string.'

Gundi event_type	CMORE Tag Name	Field Mappings
rhino_carcass	Rhino Carcass	

Buttons: Save, Save and Close, Cancel

Deliver → Event type → CMORE tag: rhino_carcass → Rhino Carcass,
then one row per field (animal_sex → Animal Sex , ...).

Value Mappings: translating vocabularies

The screenshot shows the Gundi Configuration interface. At the top, there's a navigation bar with 'Gundi', 'Connections', 'Destinations', 'Sources', and 'Workspaces'. On the right, there's a user dropdown showing 'UTC' and 'Chris Doebling'. Below the navigation bar, there's a tabbed interface with 'Configuration' and 'Connections'. The 'Configuration' tab is active, showing a form for 'CmoreFieldMapping'. The form has two main sections: 'Gundi event_details key' and 'CMORE field name'. The 'Gundi event_details key' is set to 'age_of_carcass'. The 'CMORE field name' is set to 'Carcass Age'. Below these, there's a 'Value Mappings' section. It contains a description: 'Optional source→CMORE value translations, mainly for Lookup fields whose allowed options differ from the source values. Unmapped values are matched against the field's options case/punctuation-insensitively; anything that still doesn't match a valid option is dropped (and logged)'. There are two 'CmoreValueMapping' entries. The first entry has a 'Source value' of 'very_fresh' and a 'CMORE value' of 'Today'. The second entry has a 'Source value' of 'frach'. At the bottom of the form, there are three buttons: 'Save', 'Save and Close', and 'Cancel'. A help icon (?) is visible in the bottom right corner.

Gundi Connections Destinations Sources Workspaces UTC Chris Doebling

Configuration Connections

CmoreFieldMapping

One Gundi event_details key → one CMORE field name (within a tag).

Gundi event_details key
Key inside the Gundi event's event_details dict.

CMORE field name
Field name within the chosen CMORE tag.

Value Mappings
Optional source→CMORE value translations, mainly for Lookup fields whose allowed options differ from the source values. Unmapped values are matched against the field's options case/punctuation-insensitively; anything that still doesn't match a valid option is dropped (and logged).

CmoreValueMapping

Translate one source (ER) value into the CMORE value to send. Required for Lookup/FixedLookup fields whenever the source vocabulary differs from CMORE's allowed options (e.g. ER 'b_3_months1_year' → CMORE 'Calf', ER 'Black Rhino' → CMORE 'Black'). Values that already match a CMORE option (case/punctuation-insensitively, e.g. 'male' → 'Male') do NOT need an entry.

Source value
The value as it appears in the Gundi event_details (from ER).

CMORE value
The value to send to CMORE (must be a valid option for the field).

CmoreValueMapping

Translate one source (ER) value into the CMORE value to send. Required for Lookup/FixedLookup fields whenever the source vocabulary differs from CMORE's allowed options (e.g. ER 'b_3_months1_year' → CMORE 'Calf', ER 'Black Rhino' → CMORE 'Black'). Values that already match a CMORE option (case/punctuation-insensitively, e.g. 'male' → 'Male') do NOT need an entry.

Source value

Save Save and Close Cancel

male → Male matches by itself. But a_0–3_months → Calf needs a row.

Unmatched values are dropped and logged — never sent as garbage.

Part 3 — Choose what leaves EarthRanger

The screenshot shows the Gundi web interface. At the top, there's a navigation bar with 'Gundi' logo and links for 'Connections', 'Destinations', 'Sources', and 'Workspaces'. On the right, there's a user dropdown showing 'UTC' and 'Chris Doebling'. The main content area is titled 'Pull Observations' and contains several sections:

- Event Types**: A text input field contains 'rhino_carcass'. To its right is a trash icon and an 'Add Item' button.
- Event Categories**: A text input field is empty. To its right is an 'Add Item' button.
- Force Run From Start Datetime**: A toggle switch is currently turned off.
- Run On Schedule**: A toggle switch is currently turned on.

At the bottom, there's a 'Start Datetime *' field with a calendar icon, showing '06/01/2026, 09:57 AM'. Below this are 'Save' and 'Cancel' buttons. A help icon (?) is visible in the bottom right corner.

Connection → **Provider** tab → **Pull Events: Event Types** must include `rhino_carcass` ; **Run On Schedule** on. This filter is why an event type can work in ER yet never reach CMORE.

Part 4 — Prove it: report in EarthRanger...


The screenshot displays the EarthRanger web application interface. On the left is a dark sidebar with navigation icons for Events, Patrols, Map Layers, and Settings. The main content area is titled 'Events' and shows the details for a 'Rhino Carcass' event. The form includes the following fields:

- Age of Animal:** Sub-adult
- Animal Common Name:** White Rhino
- Animal Sex:** Female

Below these fields is an 'Activity' section with a text area containing the note: 'TEST — tutorial walkthrough for the CMORE integration guide. Safe to ignore.' At the bottom of the form are buttons for 'Note', 'Attachment', 'Event', 'Cancel', and 'Save'. To the right of the form is a map of North and Central America, showing the event location in the United States. The map includes a scale bar (500 km) and a copyright notice for Mapbox and OpenStreetMap.

A test Rhino Carcass: **Sub-adult / White Rhino / Female**, location set.

...and watch it arrive in CMORE

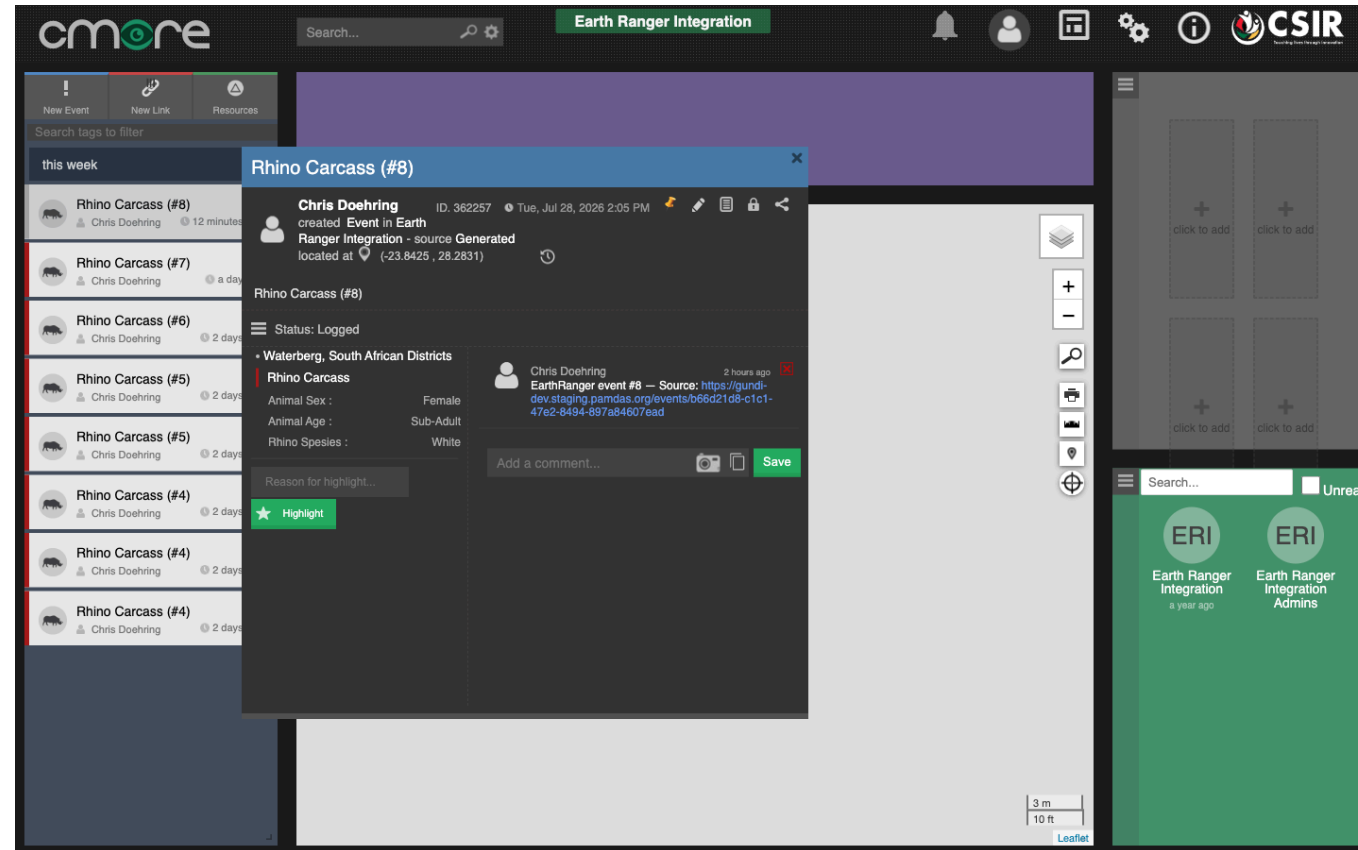

Minutes later: tag populated (**Sub-Adult / White / Female**), plus a comment linking back to the EarthRanger event.

If something doesn't look right

Symptom	First place to look
Event arrives without the tag	Tag name spelling; tag-domain access for your group
Tag there, one field empty	That value needs a Value Mapping
Nothing arrives	Event Types filter (Part 3); connection logs in Gundi
Test Connection fails	Token, base URL (<code>.../za/WebAPI/api</code>), service Active + linked
No link back to ER	See the troubleshooting guide

Where to get help

Step-by-step tutorial (this walkthrough, with every screenshot):

the *Tutorial: sync an event type* page in the integration docs

Deeper reference: *Configuration* and *Troubleshooting* pages

Gundi questions: support.earthranger.com · **CMORE access:** your CSIR contact