



Claude Code Quickstart


Li-Tal Mashiach

Anthropic · Aug 2026

TIP 01

Ask Claude

If you get stuck, “Ask Claude” within code.claude.com/docs, or simply ask Claude Code directly.

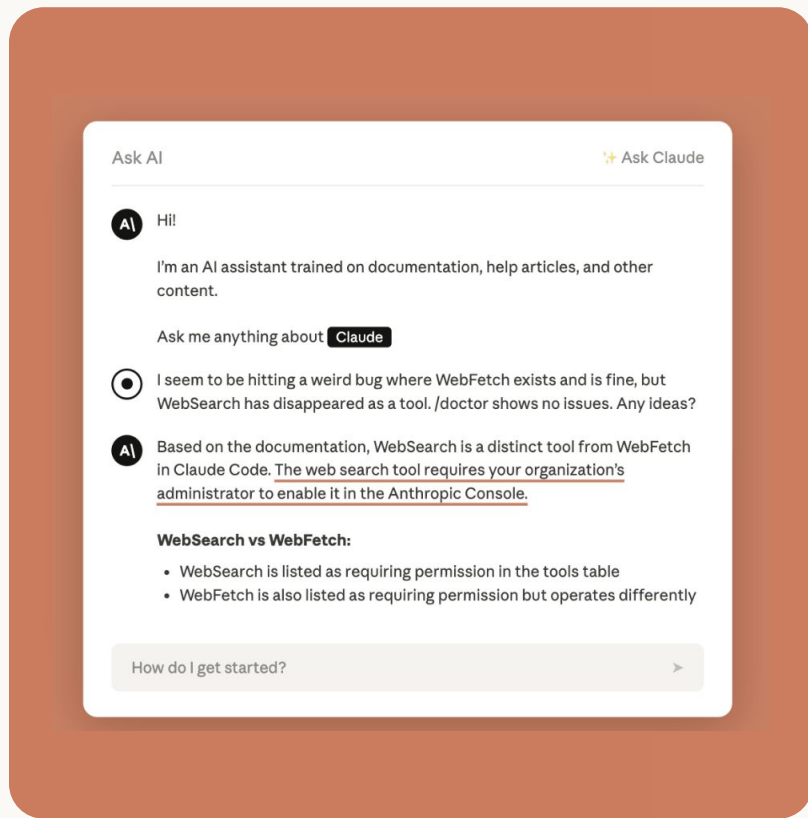

AGENDA

What we'll cover

- | | | |
|----|-------------------------|---------|
| 01 | History of agents | 5 mins |
| 02 | Introducing Claude Code | 10 mins |
| 03 | Best practices | 10 mins |
| 04 | Live demo | 5 mins |
| 05 | Q&A and takeaways | 5 mins |

YOUR HOSTS

Who you're learning with



Li-Tal Mashiach

Anthropic Coding Apps, Engineering Lead



Kashyap Murali

Claude Code, member of technical staff

Claude Code Docs

code.claude.com/docs read setup guidance and Ask Claude anytime.

Anthropic Academy

<https://academy.claude.com/code> Asynchronous courses covering Code, Cowork, AI Fluency, and more.



PART ONE · 5 MINS

A history of agents

Claude Code Quickstart

DEFINITION

What are agents?

Agents are AI systems where LLMs dynamically direct their own processes and tool usage, maintaining control over how they accomplish tasks.




With a goal



Using tools




In a loop

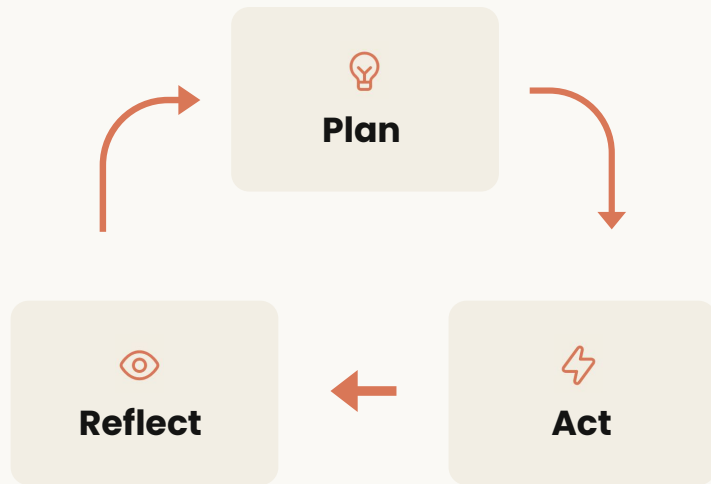

HOW WE GOT HERE

Agentic evolution

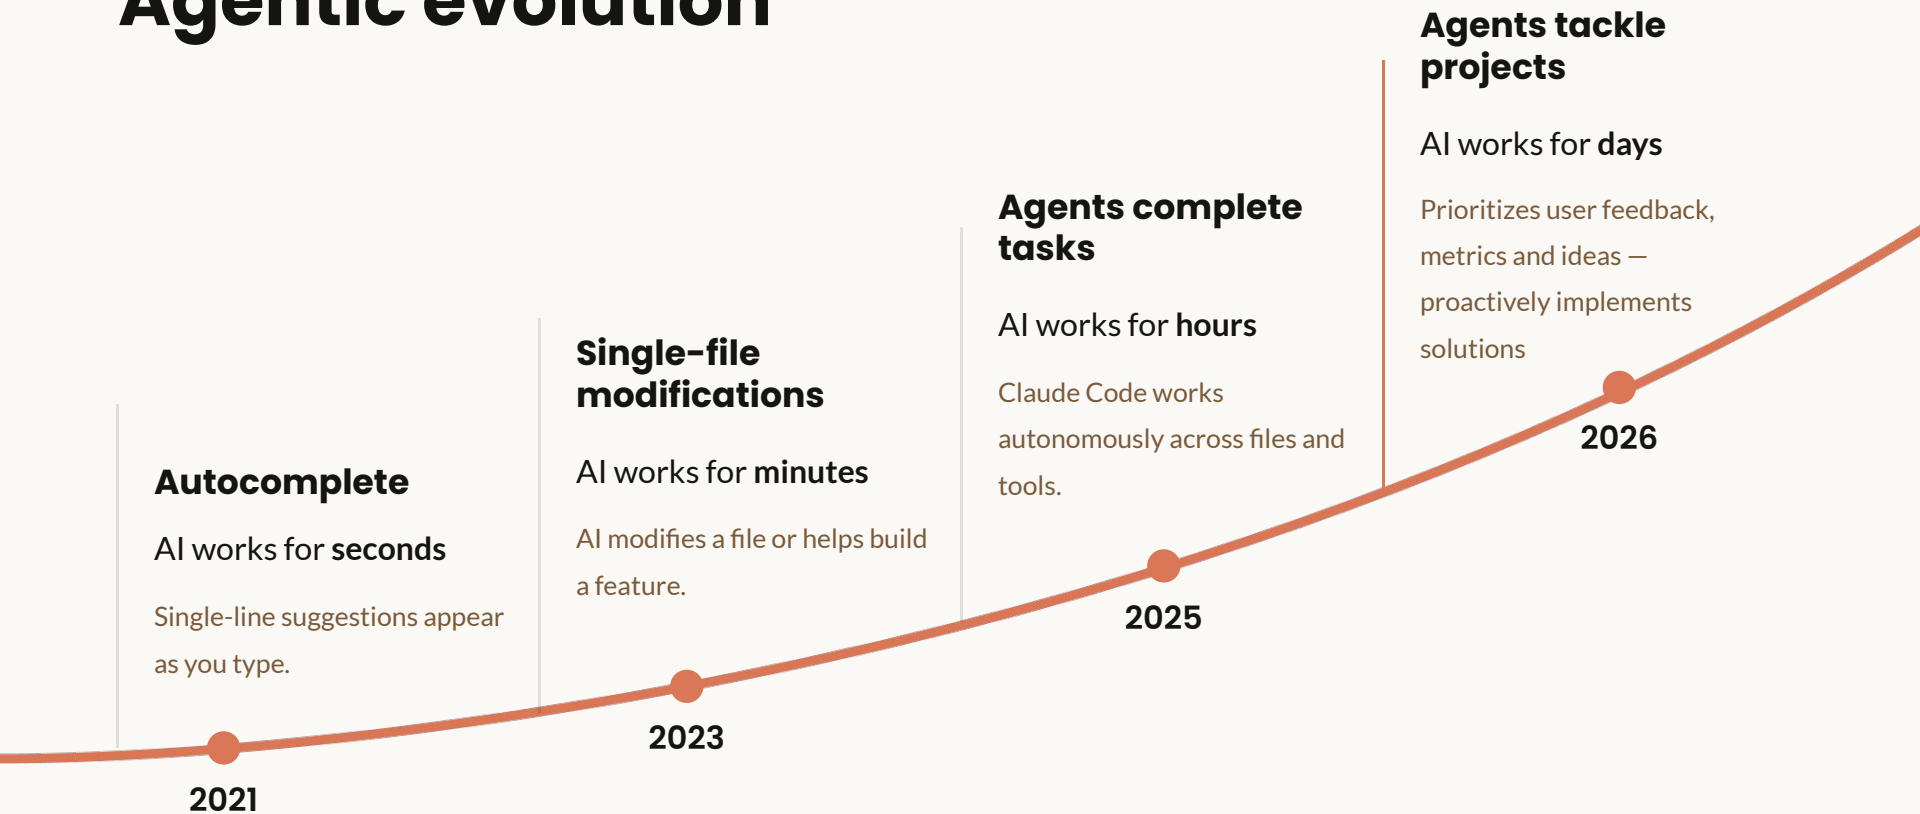



PART TWO • 10 MINS

Introducing Claude Code

Claude Code Quickstart

SAME LLM, FOUR SURFACES

Four ways to use Claude



Claude Code

Delegate coding tasks

In your terminal, IDE, or
desktop app



Claude.ai

Chat with Claude

In your browser or the
desktop/mobile app



Cowork

Delegate knowledge
work

In the desktop/mobile app



Claude API

Integrated in your
application

In a Claude console org

GET SET UP


Install Claude Code

An agentic command-line tool that lets you delegate complex tasks using natural language, while maintaining transparency and control.

Run this in your terminal to install (macOS):

```
curl -fsSL https://claude.ai/install.sh | bash
```

```
cd <your-project>  
claude
```

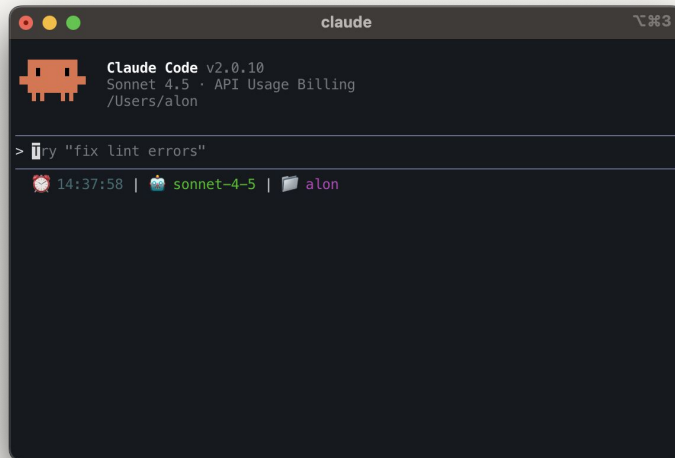

Claude Code runs wherever you work



Claude Code CLI

Bring Claude directly into your terminal



Web + Desktop

Run Claude Code in the Claude app.



Mobile

Dispatch and monitor sessions from your phone



IDE extensions

Integrate with VS Code and JetBrains




Claude Agent SDK

Work in Slack, GitHub, and more

IN AN IDE

Claude in VS Code

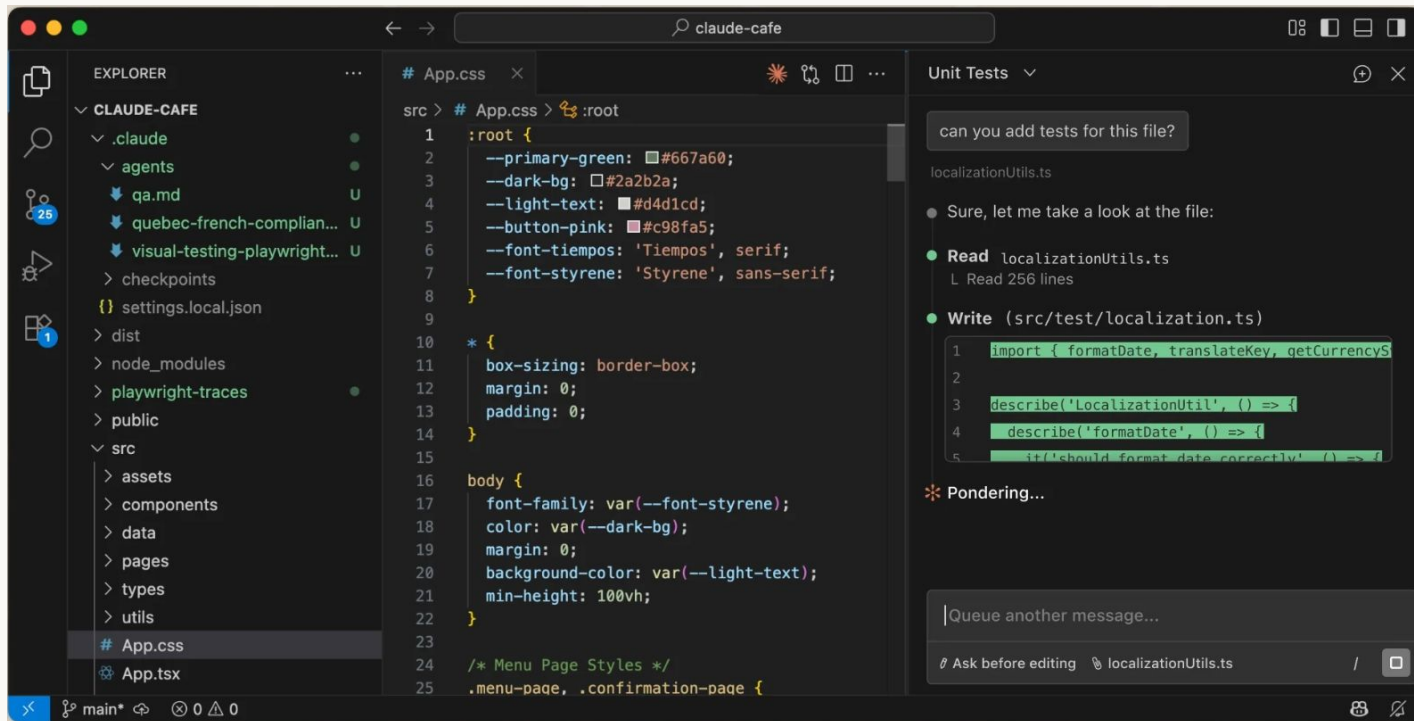



Claude Code augments your entire software development lifecycle



Discover



Design



Build



Deploy



Support

From exploring a new codebase to deploying and monitoring in production

Claude Code across your development lifecycle

1. Discover

Explore codebase and history

Search documentation

Onboard & Setup

2. Design

Plan project

Develop tech specs

Define architecture

3. Build

Implement code

Write and execute tests

Create commits and PRs

4. Deploy

Automate CI/CD

Configure environments

Manage deployments

5. Support & Scale

Debug errors

Large-scale refactor

Monitor usage & performance

Claude Code can use all of your team's CLI tools (e.g., git, docker, bq) so you can focus on solutions and strategy.



Discover



Design





Build



Deploy



Support

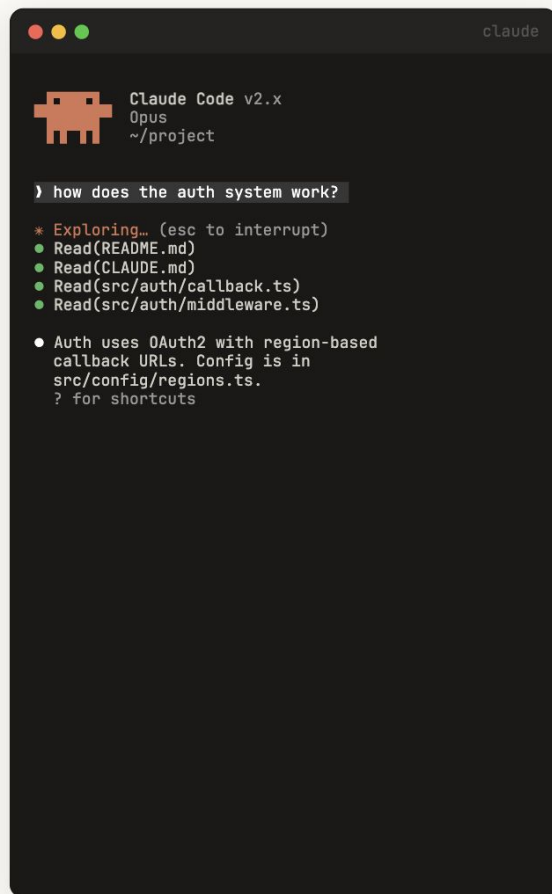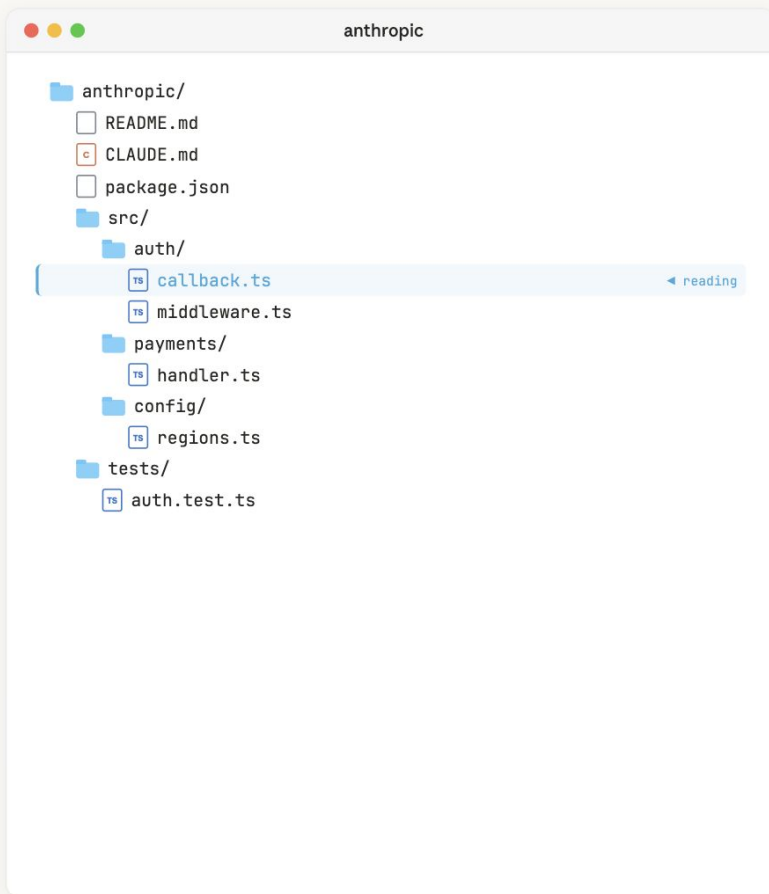



Discover



Design



Build



Deploy



Support

RFC-2025-003.md

RFC: OAuth2 Callback Refactor

Status: Draft · Author: Claude · Date: Feb 2025

Problem

EU users are redirected to US callback endpoint. The redirect_uri is hardcoded to AUTH_BASE_URL instead of using the region config.

Proposed Solution

- Replace AUTH_BASE_URL with config.baseUrl per region
- Add URL validation via isValidCallbackUrl()
- Add error handling for invalid redirects

API Changes

```
// Before
const redirectUri = AUTH_BASE_URL + "/callback";

// After
const redirectUri = config.baseUrl + "/callback";
if (!isValidCallbackUrl(redirectUri)) {
  throw new InvalidRedirectError(redirectUri);
}
```



Claude Code v2.x

Opus

~/project

› write an RFC for fixing the callback

- Read(src/auth/callback.ts)
- Read(src/config/regions.ts)
- └ Write(docs/RFC-2025-003.md)
- Drafted RFC with problem statement, proposed solution, and rollout plan. ? for shortcuts


```
callback.ts

41 const config = getRegionConfig(user);
42 const callbackUrl = config.authEndpoint;
43
44 // Redirect to OAuth provider
45 -- const redirectUri = AUTH_BASE_URL + "/callback";
46 ++ const redirectUri = config.baseUrl + "/callback";
47 ++ if (!isValidCallbackUrl(redirectUri)) {
48 ++   throw new InvalidRedirectError(redirectUri);
49 ++ }
50
51 return oauth.authorize({ redirectUri });
```

claude

 Claude Code v2.x
Opus
~/project

- Read(src/auth/callback.ts)
 - └ Write(src/auth/callback.ts)
 - + Use config.baseUrl instead of AUTH_BASE_URL
 - + Add URL validation
 - └ Write(src/utils/validation.ts)

✓ Fixed 2 files, +47 -12 lines
? for shortcuts



anthropics / anthropic Private

Code Issues 345 **Pull requests** 5k+ Actions Security

 **Fix OAuth callback URL mismatch #847**

Open sarah-chen wants to merge 3 commits into `main` from `fix/oauth-callback`

Conversation 3 Commits 3 **Checks** 4 Files changed 3

✓ **Build & Compile** Successful in 12s

✓ **Tests (23/23)** Successful in 20s

✓ **Lint & Format** Successful in 28s

✓ **claude-review** Successful in 36s

✓ **All checks have passed**
4 successful checks

Merge pull request

 Claude Code v2.x
Opus
~/project

/pr-prep

- ✓ PR #847 created
- CI checks running...
- ✓ Build passed
- ✓ Tests passed (23/23)
- ✓ claude-review: approved
- ✓ Deployed to staging
- ? for shortcuts

Pro

Iss

Dis

Per

Ale

Rel

JS

Issues > TypeError

ERROR · JAVASCRIPT

TypeError: Cannot read properties of undefined (reading 'url')

847 events 312 users First seen 2h ago Last seen 3m ago

Details Activity User Feedback Tags

EVENTS



24h ago now

Exception

Most recent call first

processTicksAndRejections node:internal/process:82

Router.handle express/router:174

handleOAuthCallback src/auth/callback.ts line 47

44 // Redirect to OAuth provider

45 const config = getRegionConfig(user);

46 const callbackUrl = config.authEndpoint;

47 const redirectUri = AUTH_BASE_URL +

"/callback";

48 return oauth.authorize({ redirectUri });

STATUS

Unresolved

PRIORITY

Critical

ASSIGNEE

Sarah C.

TAG SUMMARY

browser Chrome

region eu-west-1

release v2.1.0

claude

 Claude Code v2.x
Opus
~/project

▲ TypeError at callback.ts:47 (847 events)

● Read(src/auth/callback.ts:47)

● Root cause: AUTH_BASE_URL hardcoded
This was fixed in PR #847

✓ Hotfix deployed
? for shortcuts



PART THREE · 10 MINS

Best practices

Claude Code Quickstart

BEST PRACTICE

Plan Mode

Think before you act. Review the approach before any files change.

How to activate


Press `shift+tab` to cycle modes — twice lands on Plan. Or type `/plan` before any prompt. Works mid-session: you can plan one task and execute the next.

When to use it

- Architectural changes
- Multi-file refactors
- Unfamiliar codebases
- Any task where mistakes are costly to undo

The value

You review the approach before any files are touched. Ask follow-ups, challenge assumptions, refine iteratively — then execute once, with confidence. The plan itself becomes documentation of *why*.

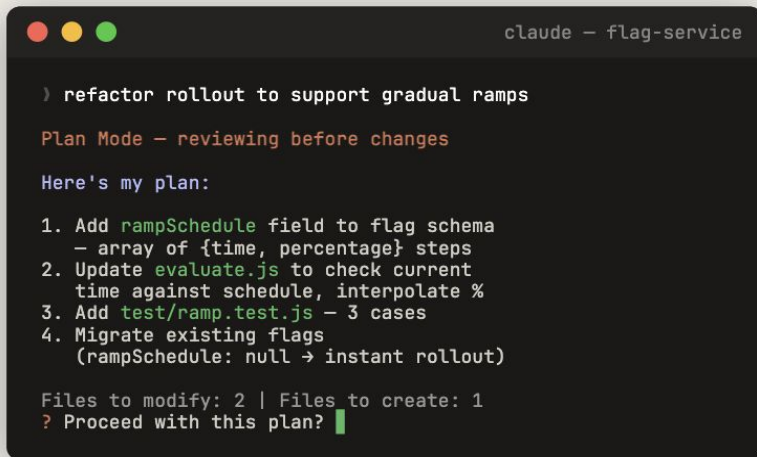

```
claude - flag-service

> refactor rollout to support gradual ramps

Plan Mode - reviewing before changes

Here's my plan:

1. Add rampSchedule field to flag schema
   - array of {time, percentage} steps
2. Update evaluate.js to check current
   time against schedule, interpolate %
3. Add test/ramp.test.js - 3 cases
4. Migrate existing flags
   (rampSchedule: null → instant rollout)

Files to modify: 2 | Files to create: 1
? Proceed with this plan? █
```

LIVE DEMO 1

Have Claude plan a project

Prompt A

I'm a district health supervisor coordinating community health workers for August. I need a portal that schedules home visits across our 12 villages: Kesa, Maro, Doba, Tulin, Baru, Nyala, Soro, Wani, Peka, Lian, Garu, and Fola. Each village needs at least 2 CHW visits per week; Kesa, Maro, and Doba have expectant mothers and need 3. Here's a CSV of my CHWs with their home village, transport (bicycle CHWs can reach any village; on-foot CHWs only their own), and available days. Cap each CHW at 6 visits per week. **Without building anything, tell me your plan. Ask me about any additional context you need.**

Claude Code is as good as the
context you give it

What keeps Claude running smoothly

Automatic features

Auto-memory

Context accumulates automatically during your session. Run `/memory` to manage it.

Auto-compaction

Claude periodically summarizes your context.

Proactive steps

CLAUDE.md

An onboarding doc for your project.

Claude Code toolkit

Skills

Codified workflows Claude can reuse.

MCPs

Connectors to other systems.

Slash commands

`/context`

`/compact`

`/clear`

`/resume`

PROACTIVE CONTEXT MANAGEMENT

CLAUDE.md

Similar to a README, but for Claude. It holds instructions on project structure, common commands, personal styling tips, and more.



Tips


Use `/init` to draft a CLAUDE.md from your repo anytime. Include things not present in the code itself and aim for under 200 lines.

CLAUDE.md

```
1 # flag-service
2
3 ## What the code can't tell you
4 Hash bucketing uses `% 100`, not `% 101`. The off-by-one
5 means a "100%" rollout misses ~1% of users. It's a bug.
6
7 ## Constraints
8 - NEVER auto-enable a flag in prod. Use `/rollout`.
9   We took down checkout for 40min in Jan. The skill has guards.
10 - Flags older than 90 days with 100% rollout: delete the flag,
11   inline the code path. Don't let them accumulate.
12
13 ## Who to ask
14 Rollout policy: #platform-eng. Flag store schema: @priya.s
```

Hierarchical CLAUDE.md

Updatable instruction
management across codebases
and users

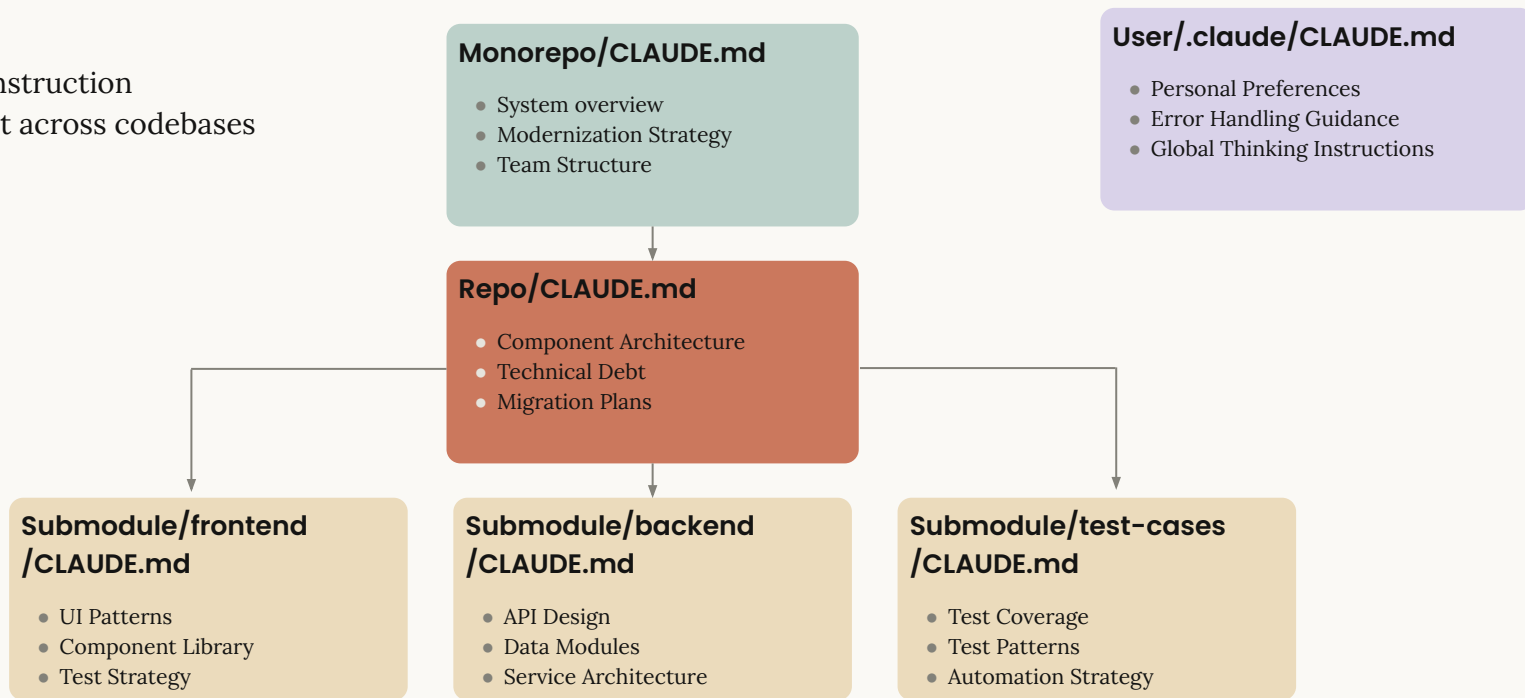

Tools to help manage context

Automatic

Auto-memory

Context accumulates as you work on a project.

Auto-compaction

Claude periodically summarizes your context.

Proactive setup

CLAUDE.md

An onboarding doc for your project.

Claude Code toolkit

Skills

Progressively disclose the context you need.

MCPs

“Connectors” between Claude and other systems.

Slash commands

`/context`

Visualize your context.

`/compact`

Condense context anytime.

`/clear`

Clear context for a new task.

POWER FEATURE

Anatomy of a Skill

Domain expertise, codified — not a prompt you keep retyping.

What is a Skill?

A structured instruction set that teaches Claude a workflow. Carries context, decision logic, and multi-step processes.

Reusable

Shareable

Composable

When to create one?

- You've typed the same prompt three times
- Tribal knowledge lives in one person's head
- Consistency matters more than flexibility
- A workflow has compliance steps that can't be skipped

.claude/skills/promote-flag/SKILL.md

```
1  ---
2  name: promote-flag
3  description: Promote a flag from staging to prod
4  ---
5
6  ## Preconditions
7  - Staging at target % for 48h minimum
8  - No open incidents tagged with this flag
9
10 ## Steps
11 1. Query staging metrics via flag-store MCP
12 2. Check incident API for the flag key
13 3. Diff staging % vs prod %, show the gap
14 4. Bump prod by same delta. Snapshot first.
15 5. Emit rollback command in the summary
16
17 ## Constraints
18 - Never exceed 50% in one step
19 - Prod changes require @mention confirmation
20
21 ## References
22 - lib/flags.js
23 - docs/rollout-policy.md
```

POWER FEATURE

MCPs (“Connectors”)

“Model context protocol” is a way for Claude to read and write to other tools.


Skills don't have to involve MCPs, but they often do. Use this instead of adding all of your context manually.

 Google Drive

 Slack

 GitHub

 Salesforce

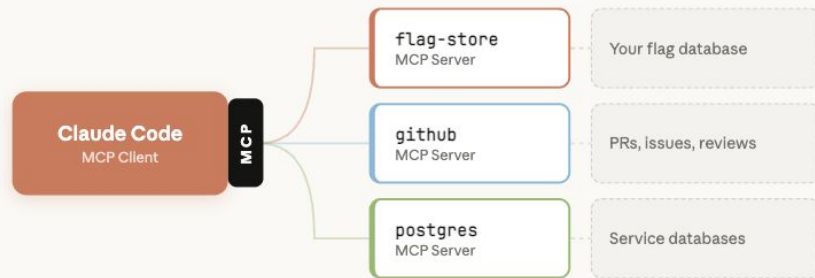

SLASH COMMANDS


Manage context on demand

/context Visualize what's in your context window, including available MCPs.

/compact Summarize current context to a smaller size before Claude auto-compacts.

/clear Start with a clean slate when shifting to a new task.

Note: some models have a 1M context window, which requires less compaction.

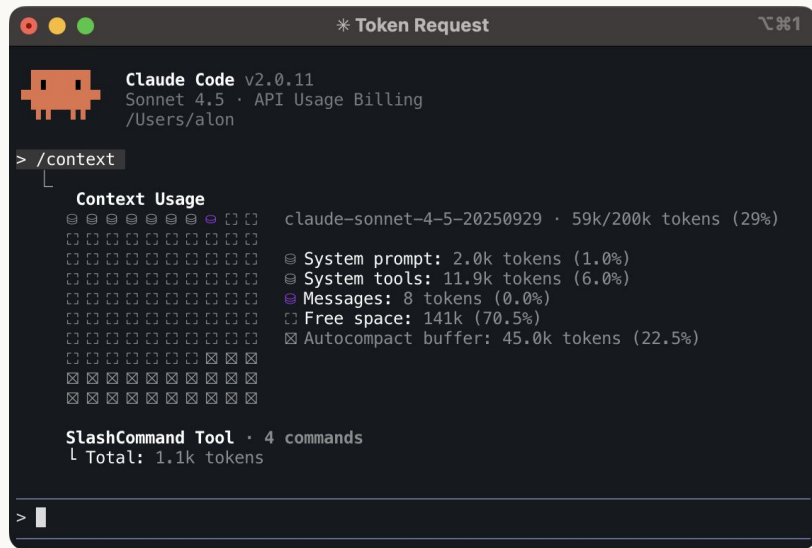

The screenshot shows the Claude Code v2.0.11 interface. At the top, it says "Sonnet 4.5 · API Usage Billing" and the user path "/Users/alon". The command prompt shows "> /context" followed by a sub-prompt "Context Usage". The output displays a bar chart and a table of token usage:

Context	Usage
claude-sonnet-4-5-20250929	59k/200k tokens (29%)
System prompt	2.0k tokens (1.0%)
System tools	11.9k tokens (6.0%)
Messages	8 tokens (0.0%)
Free space	141k (70.5%)
Autocompact buffer	45.0k tokens (22.5%)

At the bottom, it shows "SlashCommand Tool · 4 commands" and "Total: 1.1k tokens".

INPUT

Tips for managing Claude-versations

Esc Interrupt the agent

Give Claude Code more context or steer in a new direction.

/rewind Jump back

Undo typos or experiment with different approaches in the conversation and code.

/btw Chat without interrupting

Ask Claude something without interrupting its work.

/resume Pick up where you left off

Continue from a previous Claude Code session.

Paste Show, don't tell


Drop a screenshot into the prompt so Claude sees exactly what you see.

REMEMBER

Ask Claude

If you get stuck, “Ask Claude” within code.claude.com/docs, or simply ask Claude Code directly.

Want developer updates? Sign up for the [Anthropic Developer Newsletter](#)

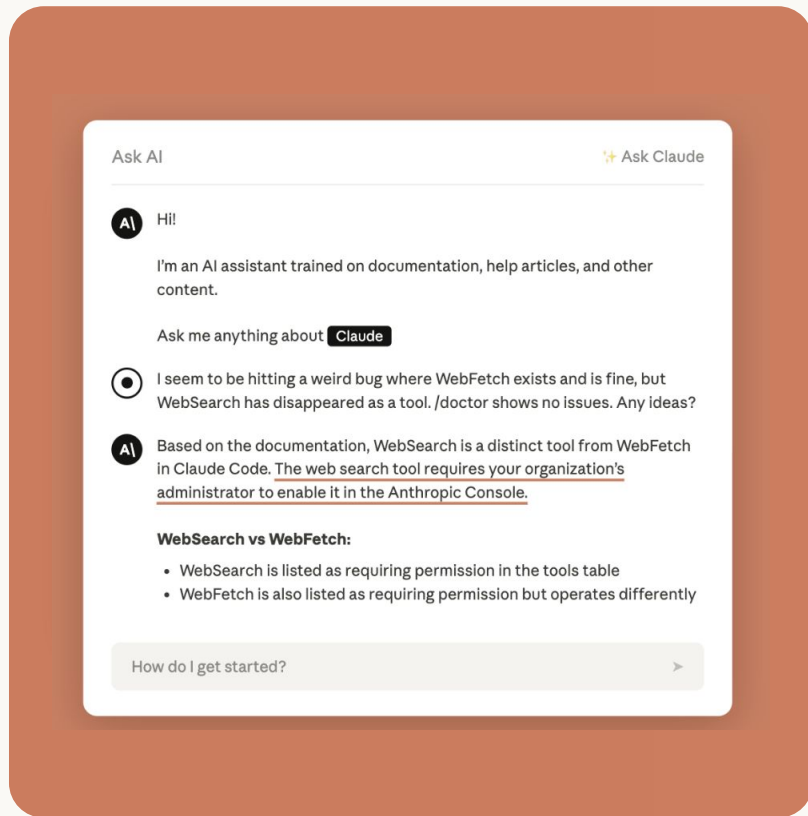

First-time user checklist



Install and launch Claude

Launch Claude directly from your terminal, desktop app, or IDE.



Use `/plan` for plan mode

Have Claude propose a plan for fixing a bug or building a dashboard.



Run `/context` and `/compact` if needed

Keep an eye on context and token use for a productive, cost-effective session.



Run `/init` to start a `CLAUDE.md` file

Review your `CLAUDE.md` and add 3-4 things Claude couldn't figure out.



Questions?

UNLOCKING VALUE FROM AGENTS

How Anthropic uses Claude Code

Product Development

Fast prototyping, test generation, bug fixes

Data Science

Dashboard apps, zero-dependency task delegation

Inference

Codebase comprehension, cross-language translation

Security Engineering

Infrastructure debugging, documentation & runbooks

Product Design

Rapid interactive prototyping, compliance copy

Legal

Workflow automation, team coordination tools

RL Engineering


Test generation, code review, K8s operations

Growth Marketing

Automated ad generation, prompt engineering

API

Workflow planning, model iteration testing

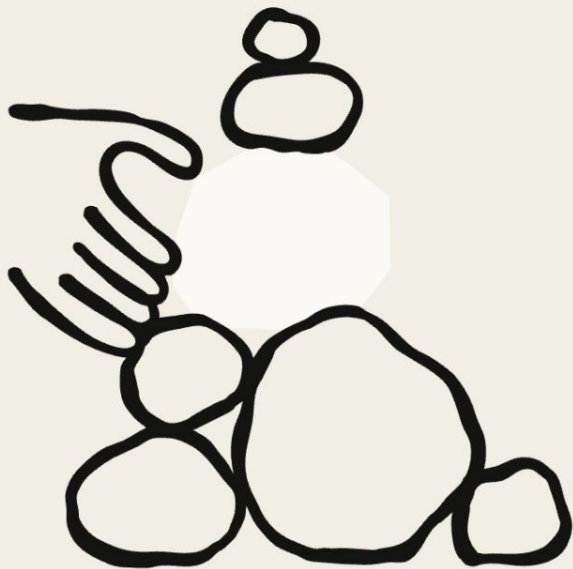

MODELS

Pick the right brain for the job

- **Opus** Most capable
Architecture, gnarly refactors, unfamiliar codebases. Slower, more expensive, worth it.
- **Sonnet** Balanced
Most edits, most debugging, most everything. The default for a reason.
- **Haiku** Fastest
Quick lookups, formatting, background subagent work. Cheap and fast.

Switch models inside Claude Code with `/model`. It lists what's available on your account — no need to memorize IDs.

Which Model Do I Use When?

	Opus 4.8	Sonnet 4.6	Haiku 4.5
Description	The world's best model for coding, enterprise agents, and professional work.	Approaches Opus levels of intelligence, enabling scalable, high-quality task completion, making it ideal for scaled use cases.	Most efficient model delivering near-frontier performance at accessible cost and speed.
Recommended for	The hardest, most complex work — problems that need peak intelligence and sustained autonomy.	High-volume workloads where you need near-Opus intelligence at scale.	Use cases where you need to balance performance with cost and speed.
Best for / when to use	• Long-horizon agent tasks • Deep, complex coding • Precision enterprise workflows (finance, legal) • Computer use automation • Cybersecurity	• High-volume production deployments • Agentic workflows and tool use • Fast iteration and prototyping • Cost-sensitive workloads + strong intelligence • Computer use automation • Cybersecurity	• Powering free tier user experiences • Latency-sensitive experiences • Executing tasks planned by more capable models • Efficient research
Cost	\$5.00 / \$25.00 per MTok	\$3.00 / \$15.00 per MTok	\$1.00 / \$5.00 per MTok
Context	1M	1M	200K

PROACTIVE CONTEXT MANAGEMENT

@-file mentions

@-mentioned file contents are automatically provided to Claude at message send time.

Alternatively, “Hey can you tell me how Foo.tsx works” means the agent has to call the Read(Foo.tsx) tool itself.



Tip

@ a specific file in your CLAUDE.md to have Claude reference it at the start of each session.



PART FOUR · 20 MINS · LIVE DEMO

Build a CHW visit scheduling portal

Try some of the new commands

LIVE DEMO 2

Run it yourself

1. Open the terminal and type **claude** to start your session
2. Run **/model** to select a model
3. Run **/mcp** to see your available connectors
4. Hit **Shift + Tab** to select plan mode
5. Give Claude prompt A → review the plan, answer questions, approve
6. Once built, give Claude prompt B (a screenshot can help debugging)
7. Run **/frontend-design**, **/rewind**, **/btw**, **/context**, and **/compact** as needed
8. Run **/init** to draft your CLAUDE.md
9. Ask Claude to turn the scheduling process into a Skill

Prompt A

I'm a district health supervisor coordinating community health workers for August. I need a portal that schedules home visits across our 12 villages: Kesa, Maro, Doba, Tulin, Baru, Nyala, Soro, Wani, Peka, Lian, Garu, and Fola. Each village needs at least 2 CHW visits per week; Kesa, Maro, and Doba have expectant mothers and need 3. Here's a CSV of my CHWs with their home village, transport (bicycle CHWs can reach any village; on-foot CHWs only their own), and available days. Cap each CHW at 6 visits per week. Without building anything, tell me your plan. Ask me about any additional context you need.

Prompt B

Amina Bello's bicycle is out for repair this week, so she's on foot and can only cover Kesa. (1) Remove her from all other village assignments. (2) Backfill those visits from CHWs still under their 6-visit cap. (3) Add a highlighted 'Coverage gaps — visits needed' section for any village that drops below its minimum. Update the branding to match the fonts and colors from <https://www.gatesfoundation.org>.

Shortcuts worth muscle memory

Keystrokes and prompt-box prefixes you'll reach for every session.

! Bash mode

Run a shell command directly. Output lands in the conversation — no copy-paste.

```
!npm test !git log --oneline -5
```

@ Reference a file or agent

Pull a file into the prompt — or invoke a named subagent. Same key, typeahead picks.

```
why is @lib/evaluate.js excluding user...
```

^V Paste a screenshot

Drag or paste an image. Claude sees it. Good for error dialogs, mockups, diagrams.

```
[screenshot] make the header match this
```

^B Background a task

Long-running command? ctrl+b sends it to the background. Keep working, get notified when done.

```
npm run build [ctrl+b] → continues in ...
```

esc² Rewind the conversation

esc esc jumps back to an earlier turn. Undo a direction that went sideways without /clear.

```
[esc][esc] → pick a prior message to r...
```

⇧⇨ Toggle plan mode

Shift+Tab cycles auto → plan → auto. Plan mode reads everything, proposes changes, edits nothing.

```
[shift+tab] → plan indicator appears →...
```

^O / Search the transcript

ctrl+o opens transcript view. / to search, n/N to step, { } to jump between your prompts.

```
[ctrl+o] /useEffect [n] · { } jump pro...
```

^X^E External editor

Open the prompt in \$EDITOR. Readline-standard — write a long prompt in vim, save, it sends.

```
[ctrl+x ctrl+e] → vim → :wq
```

v / V Vim visual mode

Select text in the prompt with vim motions. Yank, delete, or change on a selection — full visual + visual-line.

```
V j j d → delete three lines
```

Bonus: **^R** searches prompt history across *all* projects · hold **space** to dictate (voice push-to-talk, 20 languages). All remappable — `~/claude/keybindings.json`.

BUILD ALONG

Run it yourself

1. Open the terminal and type **claude** to start your session
2. Run **/model** to select Sonnet 5
3. Run **/mcp** to see your available connectors
4. Hit **Shift + Tab** to select plan mode
5. Give Claude prompt A → review the plan, answer questions, approve
6. Once built, give Claude prompt B (a screenshot can help debugging)
7. Run **/frontend-design**, **/rewind**, **/btw**, **/context**, and **/compact** as needed
8. Run **/init** to draft your CLAUDE.md
9. Ask Claude to turn the scheduling process into a Skill

Prompt A

I've shared a volunteers.csv with our roster. We're Bright Futures Food Bank — 3 shifts per week: Tuesday evening, Saturday morning, Saturday afternoon. Each shift needs at least 1 coordinator, 2 drivers, and 3 packagers. No volunteer should exceed 8 hours/month. (1) Propose a plan first — no code yet. (2) Once I approve, build a visual HTML schedule showing who's assigned to each shift. (3) Flag any shifts that can't be fully staffed.

Prompt B

Lavender Brown can't make any Saturday shifts this month. (1) Remove her from all Saturday assignments. (2) Backfill her spots using available volunteers still under their 8-hour limit. (3) Add a highlighted 'Open shifts — volunteers needed' section for anything you can't fill. (4) Draft a quick thank-you note I can send Lavender for her service this month.

KEEP LEARNING

Resources



Claude Code Quickstart

code.claude.com/docs/en/quickstart ↗



Claude Code CLI reference

code.claude.com/docs/en/cli-reference ↗



Anthropic Skills Repository

github.com/anthropics/skills ↗



Claude Cowork Quickstart

support.claude.com/en/articles/13345-190-getting-started-with-cowork ↗



How Anthropic uses Claude Code

claude.com/blog/how-anthropic-teams-use-claude-code ↗



Connectors Directory

claude.com/connectors#connectors ↗