

int_payone_commerce

Version 26.2.0



[Table of Contents](#)

1. Summary	5
2. Component Overview	6
<i>Functional Overview</i>	6
<i>Use Cases</i>	7
<i>Limitations, Constraints</i>	8
General Scope Limitations	8
SFCC Order Number Restrictions for PAYONE Merchant References	8
Payment Method Country, Currency, And Amount Restrictions	8
<i>Compatibility</i>	9
<i>Privacy, Payment</i>	9
3. Implementation Guide	10
<i>Setup of Business Manager</i>	10
Upload Cartridges	10
Setup Cartridge Path	10
Enable Customer Service Center Permissions	12
Import Metadata	14
<i>Configuration</i>	18
PAYONE Commerce Portal Configuration	18
API Authentication	18
Webhook Configuration	19
SFCC Jobs Configuration	20
PAYONE Process Webhook Events	20
SFCC Custom Site Preferences Configuration	22
	3

SFCC Apple Pay Configuration	24
<i>Custom Code</i>	27
<i>External Interfaces</i>	27
<i>Firewall Requirements</i>	27
4. Testing	28
5. Operations, Maintenance	29
<i>Data Storage</i>	29
<i>Availability</i>	29
<i>Failover/Recovery Process</i>	29
<i>Support</i>	30
6. User Guide	30
7. Known Issues	30
<i>Rounding differences between SFCC and PAYONE checkout totals</i>	30
<i>Concurrent Use of the BM CSC PAYONE Extension and PAYONE Portal for the Same Order</i>	30
<i>Repeated Capture and Refund Attempts on the Same Checkout</i>	31
8. Release History	31

1. Summary

The PAYONE integration is a self-contained cartridge set that enables the integration of the PAYONE Commerce Platform into a Salesforce Commerce Cloud SFRA storefront. The cartridge extends the standard SFRA checkout flow with PAYONE payment methods and adds Business Manager functionality for post-order payment operations such as capture, refund, and cancellation.

The integration is installed in Salesforce Commerce Cloud through cartridge path configuration, metadata import, and Business Manager setup. The solution introduces storefront checkout changes, custom site preferences, custom attributes for payment tracking, PAYONE service integration, and a Business Manager Customer Service Center extension.

The cartridge requires a direct contractual relationship with PAYONE and the corresponding payment methods to be enabled for the merchant account. Merchants must configure PAYONE Merchant ID, API Key, API Secret, environment, and any payment-method-specific identifiers required by the selected payment methods. Any PAYONE transaction fees, wallet-provider fees, or other commercial terms remain part of the merchant's agreement with PAYONE and the relevant payment providers.

The integration is composed of three cartridges:

- *int_payone_commerce* for storefront integration, payment hooks, models, and PAYONE service communication
- *payone_commerce_sfra_changes* for SFRA base checkout template and controller changes
- *bm_payone_commerce* for Business Manager / Customer Service Center functionality

The solution scope includes deployment of the PAYONE cartridges, SFRA storefront integration, Business Manager configuration, custom metadata import, webhook-based payment status synchronization, and Customer Service Center payment operations.

2. Component Overview

Functional Overview

The PAYONE cartridge integrates into the standard SFRA checkout flow and extends it with PAYONE payment processing capabilities. Depending on the selected payment method, the cartridge uses PAYONE-hosted card tokenization, wallet approval flows, or storefront payment forms to collect the required payment information and complete the authorization during the standard Place Order step.

After a shopper places the order, the cartridge creates or completes the PAYONE checkout, stores the relevant PAYONE identifiers on the Salesforce Commerce Cloud payment transaction, and handles redirect-based flows where applicable. For payment methods that require an external step, such as 3-D Secure or wallet redirection, the shopper is returned to the storefront, and the order is finalized after the PAYONE response is validated.

The cartridge also includes a Business Manager Customer Service Center extension. This extension allows customer service users to perform post-order payment actions directly from Salesforce Commerce Cloud, including capture, refund, and cancel operations at order level and, where applicable, item level.

The cartridge features the following:

- Standard SFRA checkout integration for PAYONE payment processing
- Hosted card tokenization for credit card payments
- Wallet integrations for PayPal, Google Pay, and Apple Pay
- Support for SEPA Direct Debit, PAYONE Secured Invoice, PAYONE Secured Installment, PAYONE Secured Direct Debit, Store Pay / Pay in Store, and Wero
- Business Manager / Customer Service Center support for capture, refund, and cancel operations
- Webhook and order update support for asynchronous payment status handling
- Configuration through Business Manager site preferences and imported metadata
- Adaptability for multi-locale storefront implementations

Supported payment methods are:

- Credit Card
- PayPal
- Google Pay
- Apple Pay
- SEPA Direct Debit
- PAYONE Secured Invoice
- PAYONE Secured Installment

- PAYONE Secured Direct Debit
- Store Pay / Pay in Store
- Wero

The cartridge is designed for SFRA storefronts. It supports the storefront locales configured in Salesforce Commerce Cloud. Localized storefront texts and payment-method labels can be adapted as part of the implementation project to align with the merchant's locale strategy.

Use Cases

The PAYONE cartridge supports shopper checkout use cases, merchant post-order payment operations, and asynchronous payment-status synchronization.

Shopper checkout use cases (for both registered and unregistered customers):

- Complete the standard SFRA checkout flow using PAYONE payment processing.
- Pay with one of the following methods:
 - Credit card using PAYONE-hosted card fields and tokenization
 - PayPal through the PAYONE PayPal JavaScript SDK flow
 - Google Pay
 - Apple Pay
 - SEPA Direct Debit
 - PAYONE Secured Invoice
 - PAYONE Secured Installment
 - PAYONE Secured Direct Debit
 - Store Pay / Pay in Store
 - Wero through the PAYONE redirect flow
- Complete redirect or 3-D Secure return flows and finalize the order on the storefront.

Merchant use cases (post-order):

Perform post-order payment operations from the BM Customer Service Center PAYONE extension, including:

- Capture payments
- Refund payments
- Cancel payments

Operational use cases:

- Synchronize pending or asynchronous payment updates through webhook and order-update processing

Limitations, Constraints

General Scope Limitations

The cartridge requires an active PAYONE merchant account with valid API credentials. Each PAYONE payment method used on the storefront must also be enabled for the merchant account by PAYONE.

This cartridge is intended for Salesforce Commerce Cloud B2C storefront use. B2B scope and Salesforce Order Management are not part of the target scope for this integration.

This cartridge is built for SFRA only. SiteGenesis is not supported.

Saving customer payment methods for reuse in checkout or account is not supported.

SFCC Order Number Restrictions for PAYONE Merchant References

PAYONE Commerce API limits certain merchant reference fields to a maximum of 20 characters. The cartridge generates SFCC order-number-based PAYONE references by adding a 3-digit numeric reference type prefix to the SFCC order number. Therefore, SFCC order numbers (*orderNo*) must not exceed 17 characters. If SFCC order numbers are longer than 17 characters, PAYONE API validation errors may occur and affected checkout or payment operations may fail.

For wider omnichannel and POS compatibility, merchants should configure SFCC order numbers as numeric-only and avoid letters or special characters.

Payment Method Country, Currency, And Amount Restrictions

The imported site metadata applies currency and country restrictions for certain payment methods:

- *SEPA Direct Debit* is restricted to Euro currency ([EUR](#))
- *PAYONE Secured Invoice* is restricted to Germany ([DE](#)) and Austria ([AT](#)), and Euro currency ([EUR](#))
- *PAYONE Secured Installment* is restricted to Germany ([DE](#)) and Austria ([AT](#)), and Euro currency ([EUR](#))
- *PAYONE Secured Direct Debit* is restricted to Germany ([DE](#)) and Austria ([AT](#)), and Euro currency ([EUR](#))

The imported site metadata applies default minimum and maximum order amount restrictions for certain PAYONE secured payment methods. These ranges control when the payment methods are available in the SFRA checkout payment step, depending on the current basket total.

- *PAYONE Secured Invoice*: minimum 10 EUR, maximum 1500 EUR
- *PAYONE Secured Direct Debit*: minimum 10 EUR, maximum 1500 EUR
- *PAYONE Secured Installment*: minimum 200 EUR, maximum 3500 EUR

These are default values and may differ. Merchants should contact PAYONE support if different amount limits are required.

Compatibility

This cartridge is designed as an SFRA integration.

The cartridge has been tested with:

- SFRA version 7.0.1 and later
- SFCC Compatibility Mode 22.7

SiteGenesis is not supported.

Privacy, Payment

The cartridge accesses customer and order data required for payment processing, including shopper name, email address, billing address, shipping address, phone number, cart/order line items, and order totals. For certain PAYONE payment methods, additional information such as date of birth or bank-account data is also used when required by the payment method. The cartridge does not store shopper personal data in PAYONE-specific custom objects or customer profile custom attributes.

Salesforce Commerce Cloud does not process or store raw credit card details in server-side code. Credit card information is entered through PAYONE-hosted card fields, and only tokenized payment data is used by the cartridge for authorization.

During checkout, certain payment-method-specific payloads are stored temporarily on the payment instrument in order to complete the payment flow. For methods such as SEPA Direct Debit and secured direct debit/installment flows, this temporary data can include IBAN and account-holder information. The cartridge clears transient checkout payloads after successful authorization, failed authorization, or rejected payment handling where applicable. Stale PayPal and PAYONE Secured Installment checkout contexts are also cleaned by the checkout flow.

Persistent PAYONE-related storage in Salesforce Commerce Cloud is limited to payment identifiers and status-related metadata, such as commerce case ID, checkout ID, payment execution ID, payment status, merchant reference, and Customer Service Center tracking data required for post-order operations. The PAYONE redirect URL may be stored temporarily during redirect or 3-D Secure flows and is cleared after the return flow is completed or rejected.

3. Implementation Guide

Setup of Business Manager

Upload Cartridges

As the first step of installation of PAYONE cartridge set, it's required to install the dependencies and compile the front-end code in cartridges. Since the PAYONE cartridge set is compatible with node v18 and later, firstly please make sure that you have a node version compatible (node v18.17.0 is recommended). Then run the commands `npm install` and `npm run build` respectively on terminal for the PAYONE cartridge set at root level. After running these 2 commands, PAYONE cartridges will be ready to upload to the WebDAV code version on Business Manager (BM).

Then, upload PAYONE cartridges `int_payone_commerce`, `bm_payone_commerce`, and `payone_commerce_sfra_changes` using the upload method of your choice to WebDAV (If you are using VS Code, the extension *Prophet* is recommended to upload the cartridges for its ease of use). Please note that Salesforce's storefront base cartridge `app_storefront_base` must be present in your code version as well, to be able to use the PAYONE cartridge set.

The `payone_commerce_sfra_changes` cartridge overrides files from `app_storefront_base`. If you already have a storefront customization cartridge you can copy the functionality/file from `payone_commerce_sfra_changes` to your storefront customization cartridge.

Setup Cartridge Path

- On SFCC Business Manager (BM), go to **Administration -> Sites -> Manage Sites** and choose your site.
- Click on the **Settings** tab.
- Add the `payone_commerce_sfra_changes` and `int_payone_commerce` cartridges **before** `app_storefront_base` in the cartridge path.

Example:

`payone_commerce_sfra_changes:int_payone_commerce:app_storefront_base`

Administration > Sites > Manage Sites > Example Site - Settings

General Settings Cache Site Status Page Meta Tag Rules

Example Site - Settings

Click Apply to save the details. Click Reset to revert to the last saved state.

Instance Type: Sandbox/Development

Deprecated: The preferred way of configuring HTTP and HTTPS hostnames is by using new features of the site aliases configuration ("SEO > Aliases Configuration"). The HTTP/HTTPS hostname values set in this section will be used if no hostnames are defined by aliases configuration and are intended only to support an older configuration style.

HTTP Hostname:

HTTPS Hostname:

Instance Type: All

Cartridges: payone_commerce_sfra_changes:int_payone_commerce:app_storefront_base 1

Effective Cartridge Path:

- payone_commerce_sfra_changes
- int_payone_commerce
- app_storefront_base
- plugin_apple_pay
- plugin_facebook
- plugin_payments
- plugin_pinterest_commerce
- plugin_web_payments
- bc_content
- core

Session Timeout: Minutes

Apply Reset 2

[<< Back to List](#)

- Go to **Administration -> Sites -> Manage Sites -> Business Manager Site** and click on **Manage the Business Manager site**
- Add `bm_payone_commerce` and `int_payone_commerce` cartridges at the beginning of the cartridge path.

Example:

`bm_payone_commerce:int_payone_commerce:bm_app_storefront_base`

Administration > Sites > Manage Sites > Business Manager - Settings

Settings Cache Hostnames

Business Manager - Settings

Click Apply to save the details. Click Reset to revert to the last saved state.

Instance Type: Sandbox/Development

Deprecated. Up to two instance specific hostname aliases for Business Manager can be configured here.
 ⚠ Setting a different hostname here will make some Business Manager modules unreachable. Manage additional hostnames in the 'Hostnames' tab instead.

HTTP Hostname:

HTTPS Hostname:

Instance Type: All

Cartridges: bm_payone_commerce:int_payone_commercebm_app_storefront_base:bm_ 1

Effective Cartridge Path:

- app_business_manager
- plugin_apple_pay
- plugin_facebook
- plugin_payments
- plugin_pinterest_commerce
- plugin_web_payments
- bc_impex
- bc_search
- bc_analytics
- bc_transaction
- bc_catalog
- bc_content
- core
- bm_payone_commerce
- int_payone_commerce
- bm_app_storefront_base
- bm_custom_plugin
- customization_defaults

2 Apply Reset

Enable Customer Service Center Permissions

- Go to **Business Manager -> Administration -> Organization -> Roles & Permissions**.
- Choose **Administrator** role.

Administration > Organization > Roles & Permissions

Roles

The page shows all roles in this organization.

Roles marked with ⚠ have permission to view or manage users, access roles or access keys. They are therefore security-sensitive roles. Please be careful when changing these roles so as not to unintentionally give access privileges to certain users.

Select All	ID	Description
☐	⚠ Administrator	The administrator has the rights to perform tasks related to the overall administration of the merchant organization and its users and roles. This access role is not site-specific and will grant the user access to the entire organization.

New Delete

- Go to the **Customer Service Center Permissions** tab.

Administration > Organization > Roles > Administrator - General

General Users Business Manager Modules Functional Permissions WebDAV Permissions Locale Permissions Price Adjustment Limits **Customer Service Center Permissions**

Administrator

This page shows the details of the selected access role. The ID of the access role is read-only and can't be changed. To change the description just edit it in the text box below. Click **Apply** to commit the changed description. Click **Delete** to remove this access role.

⚠ This role has permission to view or manage users or access roles or both. It's therefore a security-sensitive role. Please be careful when changing such a role so as not to unintentionally give access privileges to certain users.

ID: Administrator

Description: The administrator has the rights to perform tasks related to the overall administration of the merchant organization and its users and roles. This access role is not site-specific and will grant the user access to the entire organization.

[diff](#)

[Apply](#) [Delete](#)

[<< Back to List](#)

- Select your site name in the **Select Context** popup.
- Click **Apply**.

Administration > Organization > Roles > Administrator

General Users Business Manager Modules

Administrator - Customer Service Center

This list shows all Customer Service Center permissions which are available for the selected context. Select the checkboxes and use the Update button at the bottom. When multiple contexts are selected with different permissions, the permissions will be applied to the selected context.

Selected Context: None [Select Context](#)

Customer Service Center Module	Module Description
Select Context	

[Reset](#) [Update](#)

[<< Back to List](#)

Select Context

Select a context to view and edit permissions. Organization and Sites can't be selected at the same time.

☐ Organization


☒ Sites

☒ RefArch

☐ RefArchGlobal


[Cancel](#) [Apply](#)

- Click the checkbox for **PAYONE Customer Service Center** and click **Update** button.

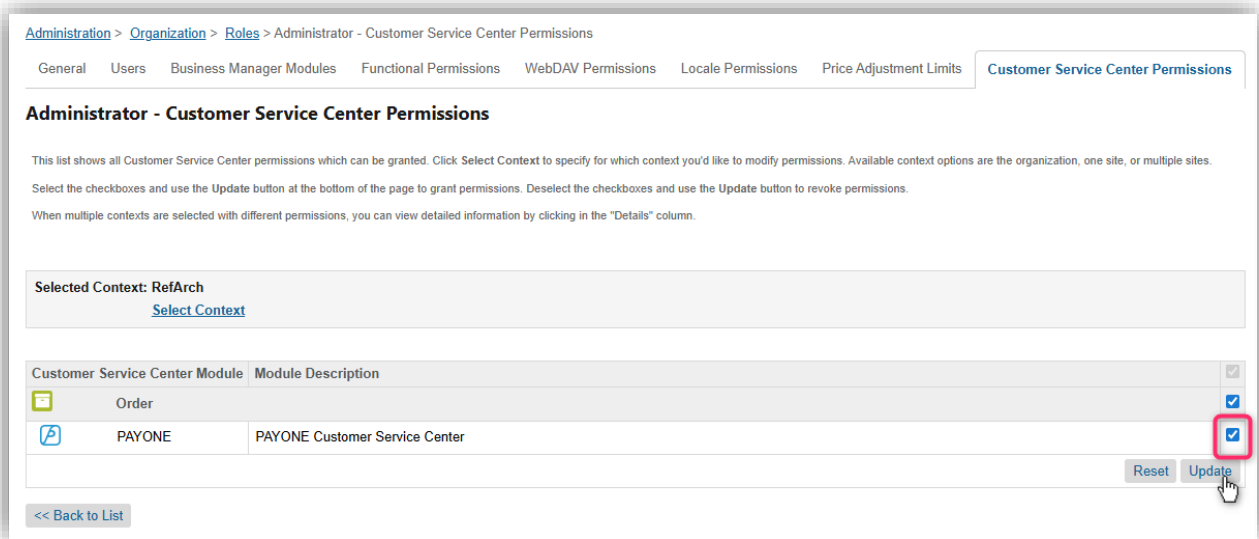

Import Metadata

- On BM, go to **Administration > Sites > Manage Sites**, find your site's ID, and write it down for later use.

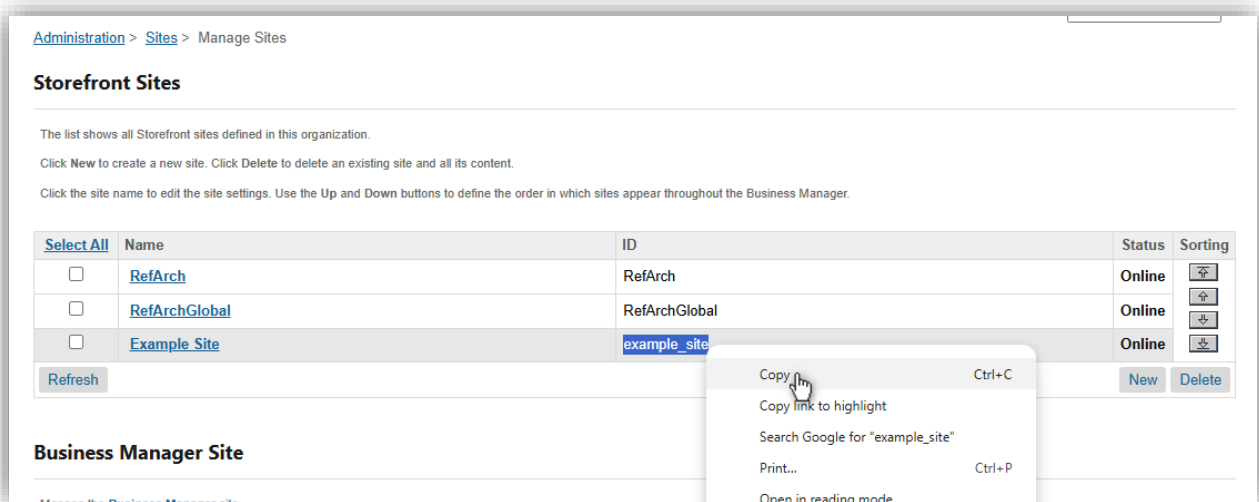

- Go to **Merchant Tools > Content > Libraries**, and in the table check whether your site is assigned to a Private or Shared library (under the Type column). If it's assigned to a shared library, write down the shared library ID for later use.

Libraries

Salesforce CMS Status:

The list below contains all libraries defined by your organization, along with some statistical information about the library content.

- Libraries of the type "Private" are owned by a site, can only be used by that site, and can't be deleted.
- Libraries of the type "Shared" are owned by the organization, can be shared by multiple sites, and can be deleted by the user.

The administration of content libraries, including the ability to create new ones, is located [here](#).



ID	Type	Site Assignments	Salesforce CMS Channel Assignment	Folders	Content Assets	Status
Library - RefArch	Private			1	1	Online
Library - RefArchGlobal	Private			1	0	Online
Library - example_site	Private			1	0	Online
RefArchSharedLibrary	Shared	RefArch RefArchGlobal		28	173	Online
exampleSharedLibrary	Shared	Example Site		1	0	Online

- Copy Ctrl+C
- Copy link to highlight
- Search Google for "exampleSharedLibrary"
- Print... Ctrl+P
- Open in reading mode


- Skip this step if your site is assigned to a private library and continue with the next step. In the PAYONE integration cartridge package, go to the **metadata/libraries** folder and locate the subfolder named **RefArchSharedLibrary**. If your site is using a shared library, rename this subfolder to the ID of the shared library your site is assigned to. Then open this newly renamed subfolder and locate the **library.xml** file inside. In this file, you will see on line 2 that the **library-id** attribute is set to **RefArchSharedLibrary**. Change it to your shared library's ID and save the changes.

Example:


```
<library xmlns="http://www.demandware.com/xml/impex/library/2006-10-31"
library-id="exampleSharedLibrary">
```

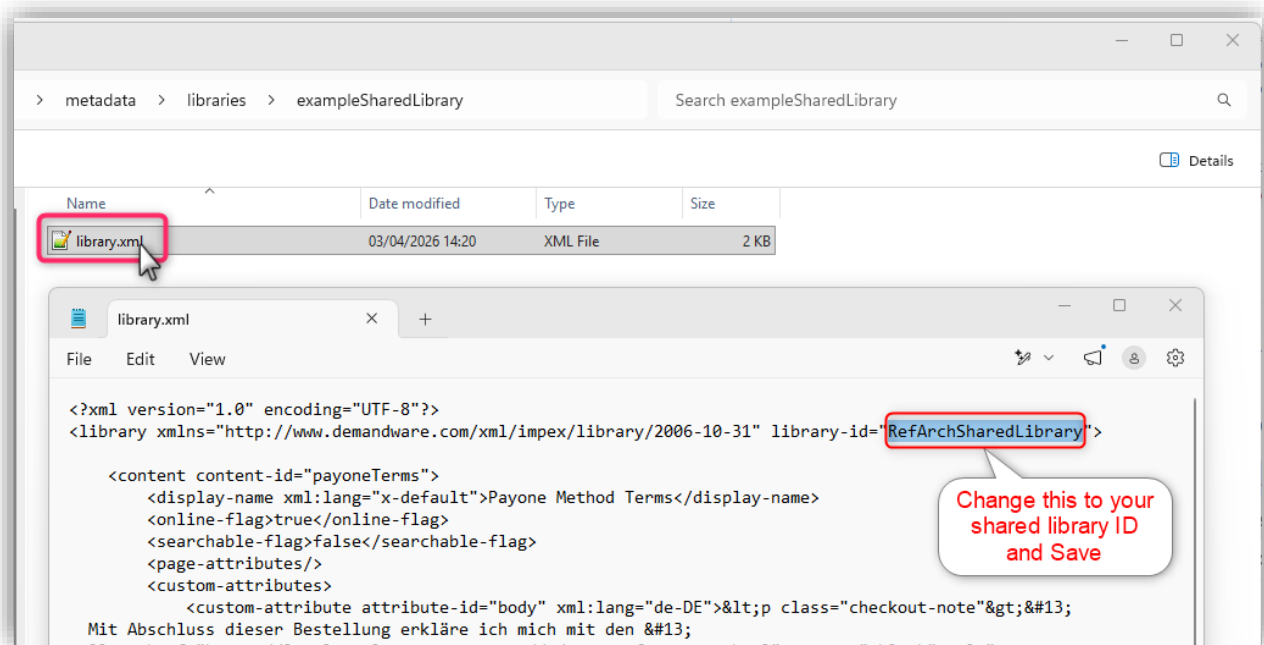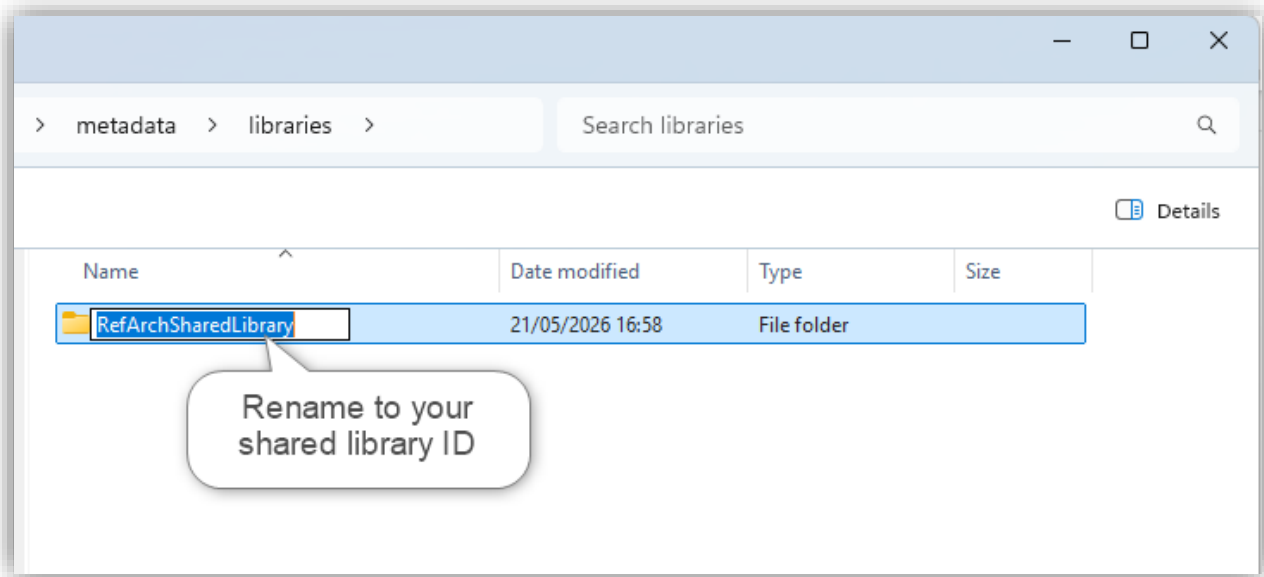


- In the PAYONE integration cartridge package, go to **metadata/sites** folder and locate the subfolder named **RefArch**. Rename this subfolder to your site's ID.

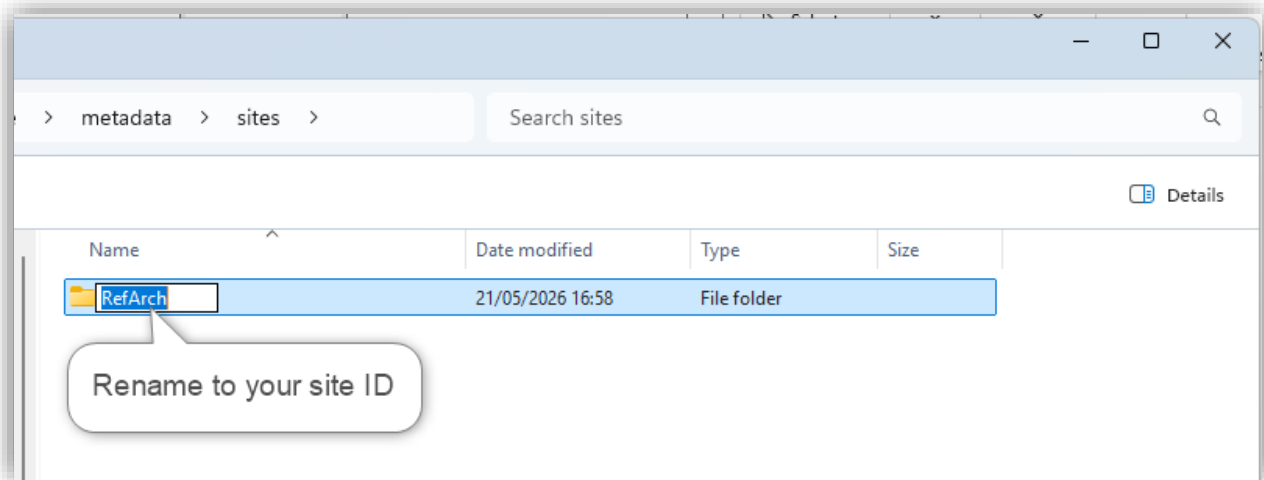

- Create a zip archive of the **metadata** folder in the cartridge package.
- On BM, go to **Administration -> Site Development -> Site Import & Export**.
- Click the **Choose File** button under the Import section.
- **Upload** the metadata archive that you have created in the first step.

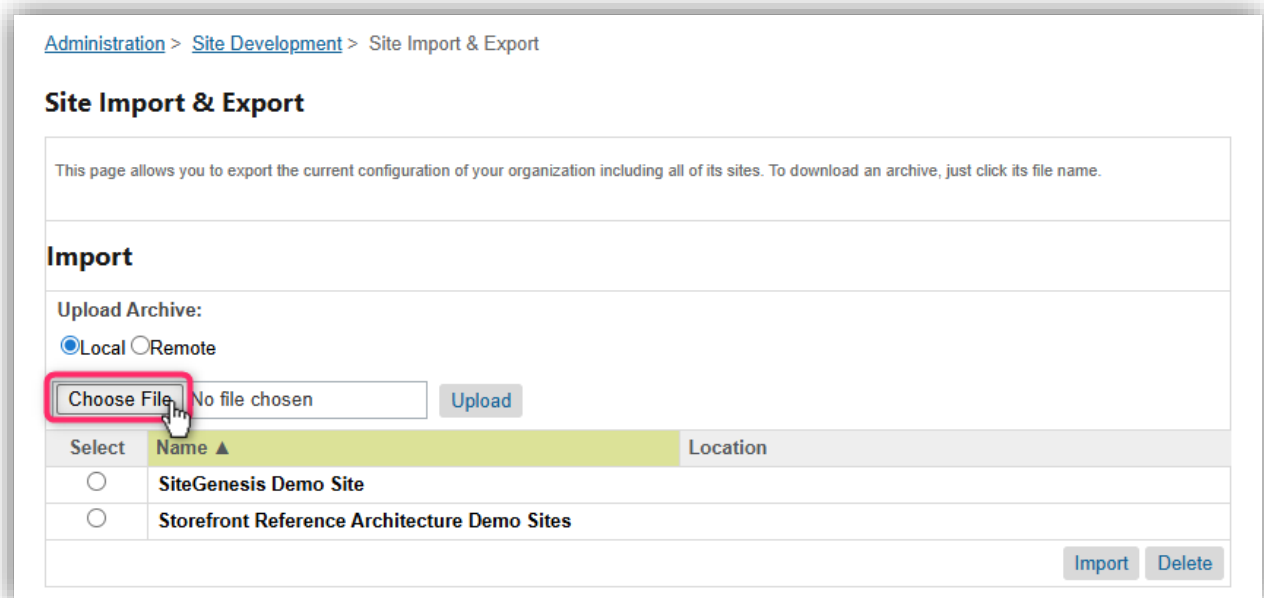

- **Import** the metadata which has just been uploaded.

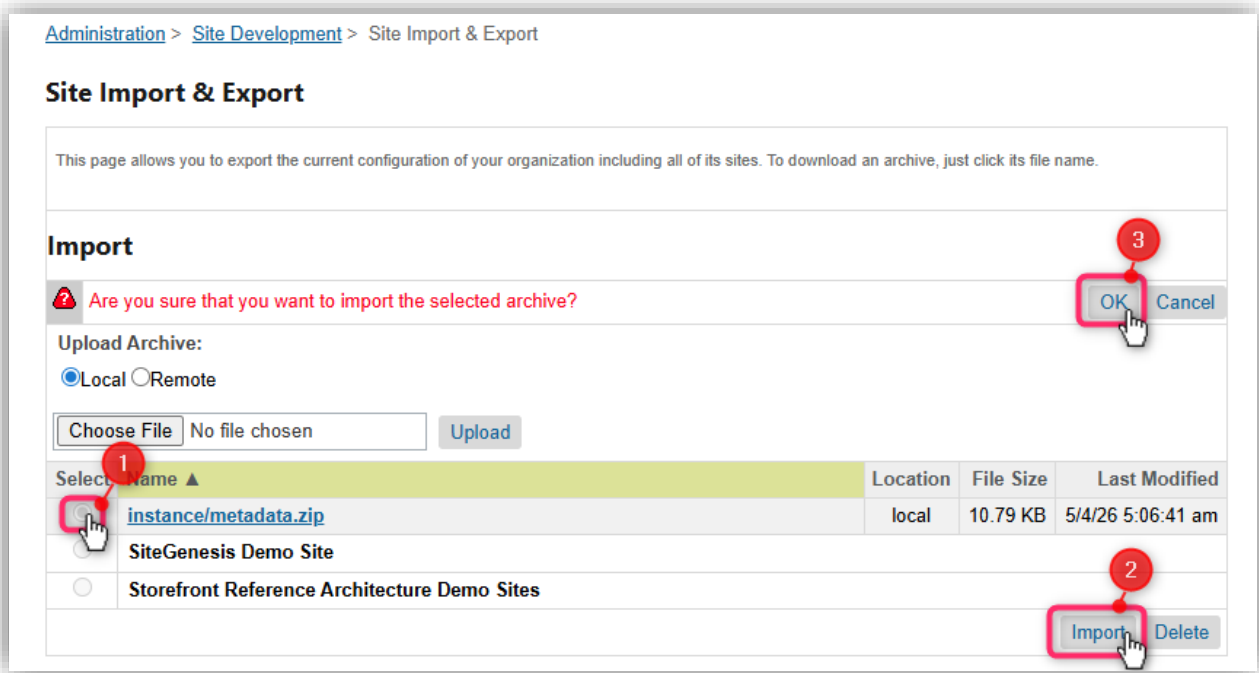

Known Issue: If you encounter data errors related to job steps after importing metadata, we recommend switching to a different code version (under **BM > Administration > Site Development > Code Deployment**) and then switching back to the original code version that you are using to install the product. This workaround has been found to resolve the issue effectively.

Configuration



PAYONE Commerce Portal Configuration

Before configuring the PAYONE cartridge in Salesforce Commerce Cloud, the required PAYONE Commerce Portal settings must be prepared.

API Authentication

To configure API authentication, log in to the PAYONE Commerce Portal and go to **Configuration > API Authentication**.

Click **New Key Pair** to create a new key pair. In the popup, select an expiration date for the key pair and check **Primary Key** if the new key pair should be used as the primary key pair. Then click **Create**.

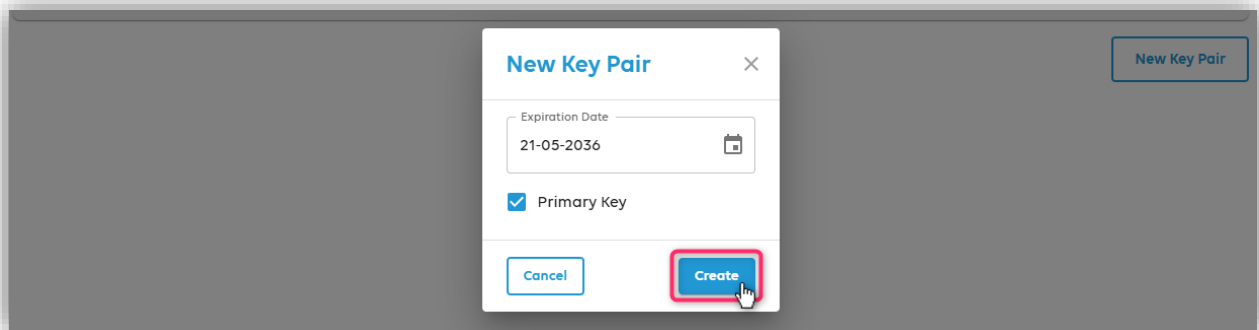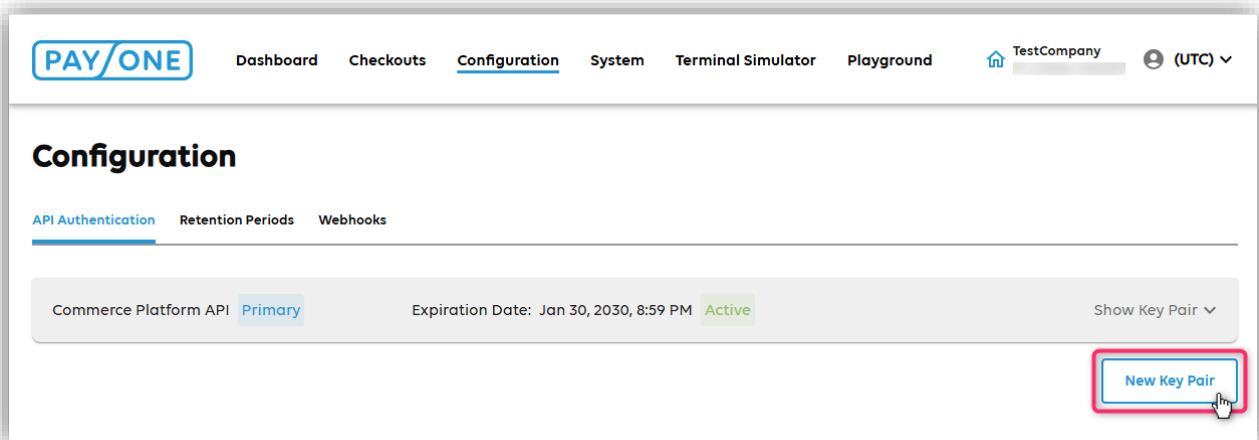

After the key pair is created, copy the generated API Key and API Secret values. These values will be used to configure Salesforce Commerce Cloud Business Manager under **Merchant Tools > Site Preferences > Site Custom Preferences > PAYONE Configurations** for the following site preferences:

- Payone API Key (*payoneApiKey*)
- Payone API Secret (*payoneApiSecret*)

Webhook Configuration

To configure webhook notifications, log in to the PAYONE Commerce Portal and go to **Configuration > Webhooks**.

Click **Add new webhook** and enter the public webhook URL of the target Salesforce Commerce Cloud storefront site. The URL must point to the cartridge webhook endpoint for the storefront site, which is handled by the **PayoneCommerce-Webhook** controller route.


Example Webhook URL:

```
https://abcd-001.my.commercecloud.salesforce.com/on/demandware.store/Sites-RefArch-Site/de_DE/PayoneCommerce-Webhook
```

Then, select the following event types:

- **Payments**
- **Payment Execution**

After selecting the required event types, click **Submit**.

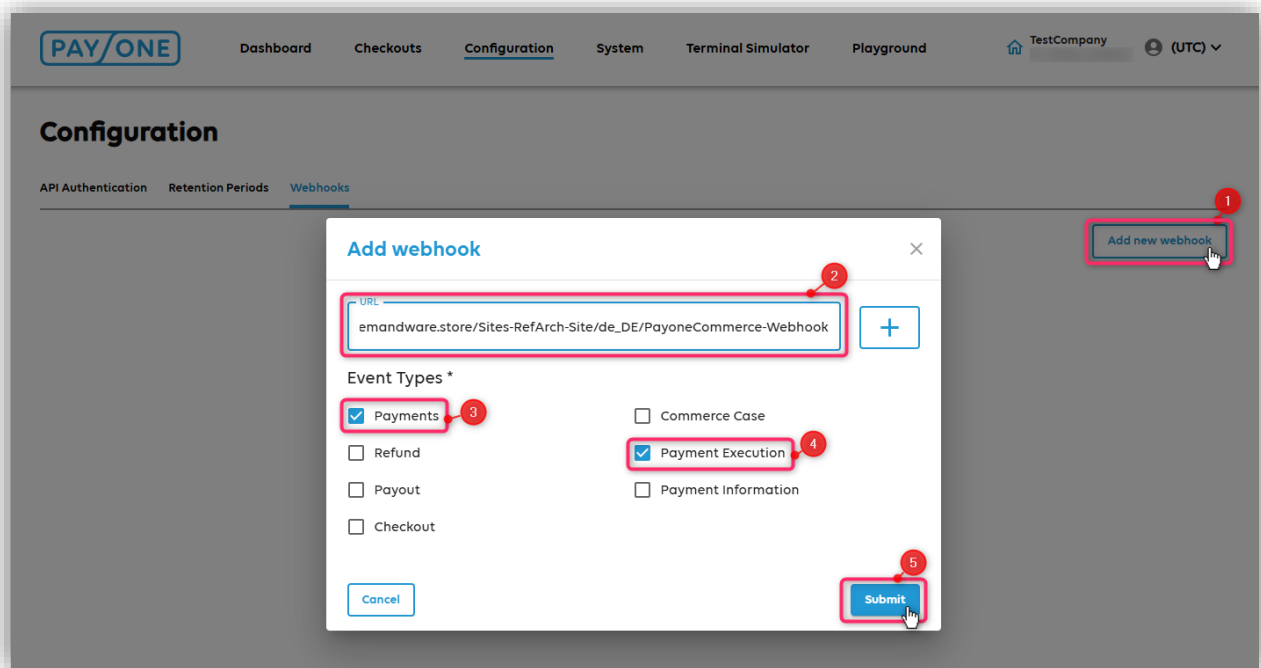

Once configured, PAYONE sends webhook notifications to the SFCC webhook endpoint when the selected payment events occur. The received webhook events are stored in SFCC custom objects and processed by the **PAYONE Process Webhook Events** job.

SFCC Jobs Configuration

PAYONE Process Webhook Events

PAYONE Process Webhook Events is a job that processes PAYONE webhook events received through the cartridge's webhook endpoint and stored in SFCC custom objects of type *PayoneWebhookEvent*. The job

reads pending webhook event records, identifies the related SFCC order, evaluates the payment status from the webhook payload, and updates the SFCC order flow where applicable. This job helps keep Salesforce Commerce Cloud orders synchronized with PAYONE when payment status changes occur in PAYONE after the order has already been created in SFCC.

To configure this job:

- On BM, go to **Administration > Operations > Jobs** and click on *PAYONE Process Webhook Events*.
- In the **Schedule and History** tab enable job scheduling and set the recurring interval to the desired schedule.

Administration / Operations / Jobs /

PAYONE Process Webhook Events

Run Now

General Schedule and History Resources Job Steps Failure Handling Notification

Scheduling Of Custom Jobs Disabled
Automatic time-based execution (scheduling) of this custom job is disabled.

☒ Enabled

Active

Trigger

Recurring Interval

From* 5/20/2026 12:00:00 am To


Run Time

Every

Amount* 5 Interval* Minutes

Run Only On These Days:
☐ Monday ☐ Tuesday ☐ Wednesday ☐ Thursday ☐ Friday ☐ Saturday ☐ Sunday

- Go to **Job Steps** tab and change the scope of the job flow from *RefArch* to your site ID. To do this, click on *RefArch* scope, in the opening popup window uncheck *RefArch* and choose your site ID instead.

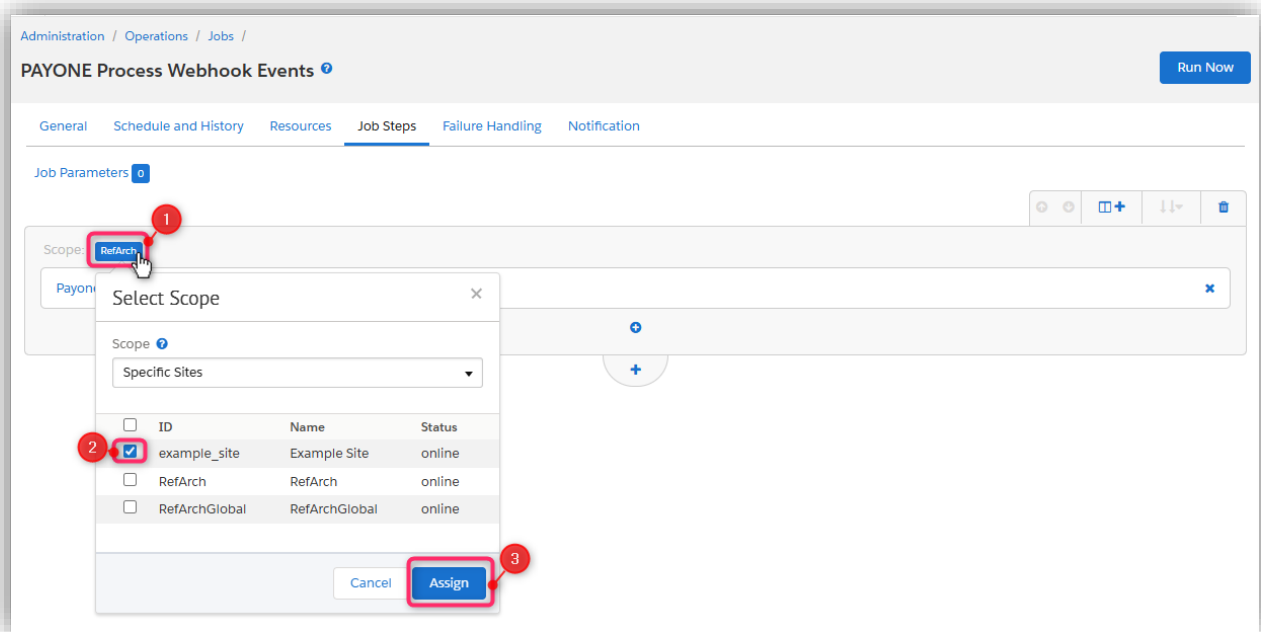

- **Note:** If cartridges aren't uploaded and added to the respective cartridge paths (as described in the previous installation steps), **PAYONE Process Webhook Events** job will not function due to missing job step definition file (*cartridges/int_payone_commerce/steptypes.json*).
- **Note:** If you encounter errors related to job steps even after completing the previous installation steps, we recommend following these steps below to resolve the issue effectively:
 1. On BM go to **Administration > Site Development > Code Deployment**.
 2. Switch to **(Activate)** a different code version.
 3. Switch back to your original code version.

SFCC Custom Site Preferences Configuration

In order to configure the site custom preferences for PAYONE, on BM go to **Merchant Tools > Site Preferences > Site Custom Preferences**. On the page that opens, locate the custom site preference group named **PAYONE Configurations (payoneConfigurations)**.

- **Payone Enabled (payoneEnabled):** Enables or disables the PAYONE storefront integration. When enabled, the cartridge replaces the default SFRA payment-options rendering with the PAYONE payment-options flow and injects the required PAYONE checkout assets into the storefront.
- **Payone Environment (payoneEnvironment):** Defines the active PAYONE environment. Supported values are *development* and *production*. This preference controls whether the cartridge calls the PAYONE pre-production or production Commerce Platform API endpoint. It also determines the

runtime mode used for hosted card tokenization, the PAYONE PayPal JavaScript SDK client configuration, and the Payla device-fingerprinting environment.

- **Payone Merchant ID (payoneMerchantId):** Stores your unique PAYONE Merchant ID used in Commerce Platform API requests and in the PAYONE Google Pay gateway configuration. You can find this value in the top-right corner of the PAYONE Merchant Interface (PMI) after login. It is also used as a reference for service requests.
- **Payone API Key (payoneApiKey):** Stores the PAYONE API Key used for authenticated server-to-server requests to the PAYONE Commerce Platform. The API Key and API Secret are required for successful request authentication and can be retrieved and managed in the Commerce Portal under [Configuration > API Authentication](#).
- **Payone API Secret (payoneApiSecret):** Stores the PAYONE API Secret paired with the API Key. The cartridge uses this value together with the API Key to sign outgoing Commerce Platform API requests. Manage this value together with the API Key in the Commerce Portal under [Configuration > API Authentication](#).
- **PAYONE SEPA Creditor ID (payoneSepaCreditorId):** Stores the creditor identifier used when the cartridge creates SEPA Direct Debit mandates. This preference is required for the SEPA Direct Debit payment method.
- **PAYONE Apple Pay - Integration Type (payoneApplePayIntegrationType):** Defines which Apple Pay integration mode is used for PAYONE Apple Pay authorization. Supported values are *MERCHANT_CERTIFICATE* and *MASS_ENABLEMENT*. *MERCHANT_CERTIFICATE* uses the merchant's own Apple Pay merchant certificate. *MASS_ENABLEMENT* uses the PAYONE certificate setup. The selected value is sent to PAYONE during Apple Pay payment authorization.
- **PAYONE Apple Pay - Use Shipping Address From Checkout Form (payoneApplePayUseShippingAddressFromCheckoutForm):** Controls whether the Apple Pay flow uses the shipping address already entered in the SFRA checkout form instead of the shipping address provided by the Apple Pay interface. When enabled, the storefront checkout shipping address is used as the source of truth.
- **PAYONE Apple Pay - Use Billing Address From Checkout Form (payoneApplePayUseBillingAddressFromCheckoutForm):** Controls whether the Apple Pay flow uses the billing address already entered in the SFRA checkout form instead of the billing address provided by the Apple Pay interface. When enabled, the storefront checkout billing address is used as the source of truth.

- **PAYONE Apple Pay - Use Shipping Method From Checkout Form (`payoneApplePayUseShippingMethodFromCheckoutForm`):** Controls whether the Apple Pay flow uses the shipping method already selected in the SFRA checkout form instead of the shipping method provided by the Apple Pay interface. When enabled, the storefront checkout shipping method is kept during the Apple Pay flow.
- **Payla Merchant ID (`payonePaylaId`):** Stores the Payla *partner_merchant_id* used for the PAYONE Secured Installment device-fingerprinting integration. This identifier is provided as part of the Payla onboarding process and identifies the merchant or shop in the fingerprinting setup.
- **PayPal Merchant ID (`payonePayPalMerchantId`):** Stores the PayPal Merchant ID passed as the *merchant-id* parameter to the PayPal JavaScript SDK used for PAYONE PayPal checkout. Use the Merchant ID from the *Business Information* section of the PayPal account.
- **Google Merchant ID (`payoneGoogleMerchantId`):** Stores the Google Merchant ID used in the Google Pay storefront configuration as *merchantInfo.merchantId*. This value is separate from the PAYONE Merchant ID, which the cartridge uses as *gatewayMerchantId* for the PAYONE Google Pay gateway integration.
- **Payone Error Mapping Override (`payoneErrorCodeMappingOverride`):** Optional JSON object used to override the default PAYONE error-code-to-message-key mapping. JSON keys must be PAYONE error codes as strings. JSON values must be message keys from *payoneError.properties* or its localized variants, if available. This allows merchants to replace the default shopper-facing message for specific PAYONE error codes without changing cartridge logic.

Example:

```
{
  "50305001": "payone.error.invalid_request",
  "50090002": "payone.error.payment_declined",
  "6000400": "payone.error.your_custom_error_message"
}
```

SFCC Apple Pay Configuration

Apple Pay must be configured directly in Salesforce Commerce Cloud Business Manager by using Salesforce's native Apple Pay integration. The PAYONE cartridge uses the Salesforce Apple Pay hook flow for Apple Pay authorization.

Before configuring Apple Pay in SFCC Business Manager, complete the *Apple Developer Account* and *Payment Processing Certificate* steps described in the [PAYONE Apple Pay documentation](#). Manual Apple domain verification steps from the Apple Developer Portal (**Add New Domain** and **Download And Verify**) are not required for this SFCC setup and can be skipped, because domain registration is handled through Salesforce Commerce Cloud Business Manager. The payment processing certificate is associated with the Apple Merchant Identifier and is used for Apple Pay payment data encryption/decryption during payment processing. The payment processing certificate expires every **25 months** and must be renewed before expiration.

To configure Apple Pay in SFCC Business Manager, go to **Merchant Tools > Site Preferences > Apple Pay** and configure the following:

- **Apple Pay Enabled?:** Select the checkbox.
- **Apple Merchant ID:** Enter the Apple Merchant Identifier.
- **Apple Merchant Name:** Enter the business name. This name will be displayed in the Apple Pay payment sheet.
- **Country Code:** Enter the primary country code.
- **Merchant Capabilities:** Select **3DS**.
- **Supported Networks:** Select **Amex**, **Mastercard** and **Visa**
- **Payment Integration > Use Basic Authorization:** Select the checkbox.

[Merchant Tools](#) > [Site Preferences](#) > Apple Pay

Apple Pay

Please enter your site information below. Fields marked with an asterisk (*) are mandatory. Click Submit when you've finished updating your configuration.

Instance Type: Sandbox/Development

Onboarding

Apple Pay Enabled? ☒

Apple Merchant ID: *

Apple Merchant Name: *

Country Code: DE

Merchant Capabilities: * ☒ 3DS | ☐ EMV | ☐ Credit | ☐ Debit

Supported Networks: * ☒ Amex | ☐ China UnionPay | ☐ Discover | ☐ Interac | ☒ Mastercard | ☐ Private Label | ☒ Visa

Required Shipping Address Fields: ☒ Email | ☒ Name | ☒ Phone | ☒ Postal Address

Required Billing Address Fields: ☒ Name | ☒ Postal Address

Storefront Injection

Inject Apple Pay Button on Mini Cart? ☐

Inject Apple Pay Button on Cart Page? ☐

Redirect Pages to HTTPS? ☐

Payment Integration

Use Commerce Cloud Apple Pay Payment API? ☐

Payment Provider URL: *

Payment Provider Merchant ID: *

API Version: v1

Use Basic Authorization? ☒

Payment Provider User: *

On the same page, under the **Domain Registration** section:

- Click **Register Apple Sandbox** to register the SFCC domain with Apple Sandbox account.
- Click **Register Apple Production** to register the SFCC domain with Apple Production account.

Domain Registration

You must register the domain for your site with Apple in order to use Apple Pay.

The currently configured domain for this site is `abcd-001.dx.commercecloud.salesforce.com`.

Apple Sandbox

Registered Sandbox Domains `abcd-001.dx.commercecloud.salesforce.com`

`abcd-002.dx.commercecloud.salesforce.com`

`abcd-003.dx.commercecloud.salesforce.com`

[Unregister Apple Sandbox](#) [Register Apple Sandbox](#)

Apple Production

No domains are registered for the Apple Production environment.

[Unregister Apple Production](#) [Register Apple Production](#)

For more details, refer to Salesforce documentation for [Apple Pay configuration in B2C Commerce](#).

Custom Code

The PAYONE cartridge package includes an SFRA storefront customization cartridge named *payone_commerce_sfra_changes*. This cartridge contains the storefront changes required to integrate PAYONE payment methods into the standard SFRA checkout flow.

The *payone_commerce_sfra_changes* cartridge can be added to the cartridge path directly or used as a reference cartridge to merge the required changes into the merchant's existing storefront customization cartridge. Note that the storefront changes are provided for SFRA 7.0.1 and later. SiteGenesis is not supported.

If the merchant already has a custom storefront cartridge, the common files from *payone_commerce_sfra_changes* must be compared against the merchant's storefront customization cartridge and merged manually. No direct changes should be made to *app_storefront_base*.

External Interfaces

The cartridge communicates with the PAYONE Commerce Platform by using the *payone.commerce.api* SFCC HTTP service. This service is used for storefront checkout payment processing and for PAYONE post-order actions in Business Manager Customer Service Center. The service sends and receives JSON payloads over HTTPS and is used for creating and retrieving commerce cases and checkouts, completing payment flows, requesting hosted-tokenization authentication tokens, and performing capture, refund, and cancel operations.

The cartridge also uses payment-method-specific storefront interfaces: PAYONE hosted tokenization for credit card payments, PayPal JavaScript SDK for PayPal, Google Pay for Google Pay, Salesforce Commerce Cloud Apple Pay hooks for Apple Pay, and Payla device-fingerprinting resources for PAYONE Secured Installment.

PAYONE webhook requests are used for asynchronous payment-status updates. Webhook payloads contain payment, checkout, payment execution, or refund status information and are processed to keep the related SFCC order/payment status aligned with PAYONE.

Firewall Requirements

The PAYONE integration cartridge does not require any special firewall rules or open ports.

4. Testing

To verify that the cartridge is installed and configured correctly, open the storefront, add one or more products to the cart, and proceed to checkout. Confirm that the PAYONE payment methods configured for the site are displayed in the payment step. Then place test orders for each enabled PAYONE payment method and verify that the orders are created successfully and that the payment flows are completed correctly. For payment methods that include redirect or additional authentication steps, verify that the shopper is returned to the storefront and that the order is finalized successfully.

After placing the test orders, verify both sides of the transaction. In Salesforce Commerce Cloud, confirm that the orders are created and have the expected order and payment statuses. In the PAYONE Commerce Portal, verify that the corresponding PAYONE checkouts or payment transactions are created and that their statuses match the expected result for the tested payment method.

To test PAYONE's CSC extension, on BM go to **Merchant Tools > Ordering > Customer Service Center**. Click on *Find Order*. Choose a test order from the list. On the opening page, click on the *More* button on the top right of the screen. Choose PAYONE option. On the opening sidebar, verify that the relevant PAYONE post-order actions, such as capture, refund, or cancel, are available and work as expected. For a successfully captured Wero order, verify that refund actions are available for captured actionable items.

To run unit tests, run the following command from the cartridge package root: `npm run test`

5. Operations, Maintenance

Data Storage

The PAYONE cartridge stores PAYONE transaction references and statuses on SFCC Order, Order Payment Instrument, and Payment Transaction custom attributes. This data remains stored with the SFCC order according to the merchant's standard SFCC order retention process.

The cartridge uses the *PayoneWebhookEvent* custom object to queue PAYONE webhook events received by the cartridge. The *PAYONE Process Webhook Events* job processes these records and removes successfully processed records. Failed records are kept with error details for retry or review. The custom object is site-scoped and configured with a 30-day retention period.

No separate cartridge-managed database or file storage outside Salesforce Commerce Cloud is used. PAYONE transaction records are stored in the PAYONE Commerce Platform and can be reviewed in the PAYONE Commerce Portal.

Availability

The availability of the cartridge depends on the availability of Salesforce Commerce Cloud, the PAYONE Commerce Platform, and the external payment-method services used by the selected payment methods, such as PayPal, Google Pay, Apple Pay, and Payla.

If the PAYONE Commerce Platform or a required external payment service is unavailable, the affected payment flow cannot be completed and the shopper receives the configured checkout error message. The cartridge does not provide an offline payment fallback for PAYONE payment methods.

The PAYONE Commerce Platform connection is configured through the *payone.commerce.api* SFCC HTTP service. Service timeout, circuit breaker, and logging configuration can be monitored and adjusted in Business Manager.

Failover/Recovery Process

This integration is dependent on PAYONE Commerce Platform availability and on the availability of the external services used by the selected payment methods. If PAYONE or a required payment-method service is unavailable, the affected PAYONE payment method cannot be used during checkout.

In this case, shoppers should select another available payment method, if one is configured for the storefront. Merchants should verify the PAYONE service status, review SFCC service logs for *payone.commerce.api*, and contact PAYONE support according to their PAYONE service agreement if the issue persists.

Support

Please contact PAYONE support for support requests related to the PAYONE cartridge.

6. User Guide

The User Guide is provided in the **documentation** folder inside the cartridge package.

7. Known Issues

Rounding differences between SFCC and PAYONE checkout totals

In some baskets, the SFCC basket/order total can differ from the PAYONE checkout total by a small amount, typically a few cents. This can happen especially when the basket contains multiple quantities, discounts, or line items where calculated unit prices include fractional cent values.

The difference is caused by rounding at different calculation levels. SFCC calculates the final basket total using its own pricing and rounding logic, while PAYONE expects the submitted checkout amount to match the sum of the rounded line-item amounts sent in the PAYONE shopping cart.

Merchants should be aware that the SFCC order total and the PAYONE checkout total may differ by a small rounding amount in edge cases. No manual workaround is required. The cartridge handles this by aligning the PAYONE checkout amount with the PAYONE line-item total instead of relying on the total calculated by SFCC, to avoid inconsistencies.

Concurrent Use of the BM CSC PAYONE Extension and PAYONE Portal for the Same Order

The merchant should not use both the **BM CSC PAYONE Extension** (present under **BM -> Merchant Tools -> Ordering -> Customer Service Center -> Find Order -> select any order -> click on “More” button on the top right -> choose “PAYONE”**) and the **PAYONE Commerce Portal** to perform capture or refund operations for the same order.

The BM CSC PAYONE extension stores and displays local processing state for capture and refund quantities/amounts. If capture or refund operations are also performed directly in the PAYONE Commerce Portal for the same order, the local CSC view may not reflect the full external processing history accurately.

This is a known architectural limitation. For a given order, merchants should perform post-order payment operations either through the BM CSC PAYONE extension or through the PAYONE Commerce Portal, but not through both at the same time.

Repeated Capture and Refund Attempts on the Same Checkout

After multiple capture and refund operations are performed on the same PAYONE checkout, the PAYONE Commerce API may stop accepting additional capture or refund requests for the full remaining amount. In such cases, PAYONE may only accept a smaller amount than the amount currently shown as available for capture or refund.

This behavior can occur both from the BM CSC PAYONE extension and directly from the PAYONE Commerce Portal. It is caused by PAYONE Commerce API behavior and is outside the cartridge scope.

If this occurs, merchants should retry the operation with a smaller amount accepted by PAYONE or handle the remaining payment operation directly according to PAYONE support guidance.

8. Release History

Version	Date	Changes
26.2.0	08.2026	Added Wero payment method support.
26.1.0	06.2026	Initial release