

Symbolic Music Data Analysis Engine

Robert Cai: x48cai@uwaterloo.ca¹,
Dr. Chuck-jee Chau: chuckjee@cse.cuhk.edu.hk²

¹Faculty of Mathematics
University of Waterloo

²Department of Computer Science
Chinese University of Hong Kong

May 2024

Table of Contents

- 1 Introduction and Motivation
- 2 Our Approach
- 3 Algorithm
- 4 Results and Demo
- 5 Analysis
- 6 Generalization on Conductor Annotation
- 7 Future Improvements and Limitations
- 8 References and Music Credit

Table of Contents

- 1 Introduction and Motivation
- 2 Our Approach
- 3 Algorithm
- 4 Results and Demo
- 5 Analysis
- 6 Generalization on Conductor Annotation
- 7 Future Improvements and Limitations
- 8 References and Music Credit

Original Goal: Identify the melodies of a polyphonic music piece with heuristics.

Current Approaches:

- Skyline: Find Highest Pitch (G. Ozcan, C. Isikhan, A. Alpkocak, 2005)

Original Goal: Identify the melodies of a polyphonic music piece with heuristics.


Current Approaches:

- Skyline: Find Highest Pitch (G. Ozcan, C. Isikhan, A. Alpkocak, 2005)
- Deep Learning (Y. Chou, I. Chen, C. Chang, J. Ching and Y. Yang, 2021)



Figure 1. Illustration of our baselines. a) Input example, b) Output of skyline algorithm, c) Output of skyline variation algorithm.

Neural Network

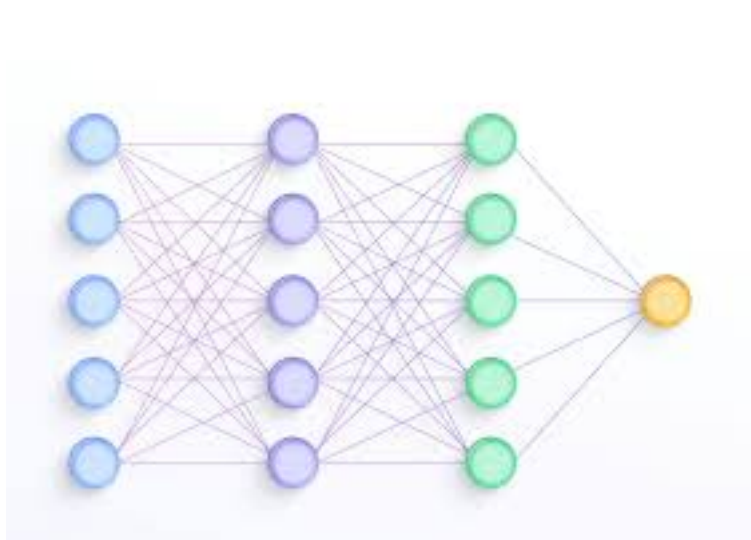

After further analysis of this engine, we realized that a generic heuristics-based approach is capable of many more tasks than simple melody identification.

As a result, one other use we identified, with a separate set of heuristics, is to identify, measure by measure, which measures deserve the attention of the conductor.

We believe that many more uses and many more heuristics can be encoded, as such this tool could be a much more generalized tool than currently shown.

Table of Contents

- 1 Introduction and Motivation
- 2 Our Approach
- 3 Algorithm
- 4 Results and Demo
- 5 Analysis
- 6 Generalization on Conductor Annotation
- 7 Future Improvements and Limitations
- 8 References and Music Credit

Heuristics Identified (Melody Extraction)

Pre-processing

Remove all chords and all percussion first.

- Loudest Dynamic
- Highest Pitch
- Significant Pitch Delta
- Short Rhythm
- Articulation Marks
- Continuity

With these heuristics we are able to assign a score to each of the measures.

Example

B

solo

f

The image displays a musical score for a solo section, marked with a box containing the letter 'B'. The score is written on four staves. The first staff begins with a treble clef and a key signature of one flat (B-flat). It starts with a forte (*f*) dynamic and a 'solo' marking. The melody consists of a series of eighth notes and a dotted quarter note, all beamed together. The second staff is empty. The third staff also begins with a treble clef and a key signature of one flat. It starts with a forte (*f*) dynamic and a 'solo' marking. The melody consists of a series of eighth notes and a dotted quarter note, all beamed together. The fourth staff is empty. The score is presented in a clean, black-and-white format.

Table of Contents

- 1 Introduction and Motivation
- 2 Our Approach
- 3 Algorithm**
- 4 Results and Demo
- 5 Analysis
- 6 Generalization on Conductor Annotation
- 7 Future Improvements and Limitations
- 8 References and Music Credit

Overview

The algorithm iterates through the symbolic music measure by measure. For each measure, it looks at each instrument at that measure. Suppose we have at measure i , instruments $[m_1, m_2, \dots, m_k]$.

For each instrument m at measure i , we extract its features and evaluate based on the weights we provide, and a "likelihood value" is obtained that shows how likely it is to be melody.

Then, for measure i , we sort the "likelihood value" to determine which instrument(s) is most likely to be melody and for that particular measure, we make that instrument to be melody. Repeat this for every measure.

Psuedocode

```
k := number of parts we keep
K_i := the symbolic music (i.e. the measure) we intend to keep
W := weights for each heuristic
S_im := vector of extracted heuristic values at measure i for
S_i := vector storing the weight, dot product each S_im, that
R := new score used to store the extracted music
```

```
-----

for each measure i in the piece:
    S_i = []
    for each instrument m in measure:
        S_im = extract_heuristic()
        S_i.append(W @ S_im) # S_i = [S_i, W@S_im]
    K_i = sorted(S_i)[1:k]
    R.append(K_i)
return R
```

Feature Extraction

We want to normalize each of the heuristics to a 0-1 value.

Recall that articulation, rhythm shortness and continuity are already normalized as they are True/False values.

Thus, we can either normalize with a discrete continuous function.

$$f(\text{pitch}) = \begin{cases} 1 & \text{if pitch} > \text{mode or pitch} = \text{max} \\ 0 & \text{otherwise} \end{cases}$$

Or

$$f(p\delta_i) = \frac{p\delta_i}{\operatorname{argmax}_{instruments}(p\delta)}$$

We use Multiplicative Weight Update method, a method widely used in Machine Learning and Game Theory, to train our weights.

We update the weight of each wrong heuristic w_i at each iteration to be

$$w_i^{t+1} = w_i^t(1 - \lambda)$$

where λ is a fixed constant. We then normalize all the weights such that they sum to 1.

This gives us a guarantee in expectation polynomially bound by m^* minimum error and n number of heuristics. (S. Arora, E. Hazan, S. Kale, 2012)

Table of Contents

- 1 Introduction and Motivation
- 2 Our Approach
- 3 Algorithm
- 4 Results and Demo**
- 5 Analysis
- 6 Generalization on Conductor Annotation
- 7 Future Improvements and Limitations
- 8 References and Music Credit

Results

We tested this algorithm on a section Dvorak's New World Symphony Movement IV. The accuracy score for our method is filled in from this test.

Heuristic	Skyline	CNN
88.9%	78.7%	91.7%

Table of Contents

- 1 Introduction and Motivation
- 2 Our Approach
- 3 Algorithm
- 4 Results and Demo
- 5 Analysis**
- 6 Generalization on Conductor Annotation
- 7 Future Improvements and Limitations
- 8 References and Music Credit

We find that while such an expert system is generally better than the single heuristic Skyline, it has the following weaknesses.

- Missing Pickups (Fixed in Demo.)
- Long Ending Notes
- Counter-melody
- Absolute Volume

Additionally, some finer grained control could be introduced in place of coarse heuristics such as pitch delta. Some additional heuristics such as sectional similarity can also be employed.

Table of Contents

- 1 Introduction and Motivation
- 2 Our Approach
- 3 Algorithm
- 4 Results and Demo
- 5 Analysis
- 6 Generalization on Conductor Annotation**
- 7 Future Improvements and Limitations
- 8 References and Music Credit

Approach

For this task, we note that for a conductor, as opposed to the fixed number of melodies expected in a piece, a measure deserves attention from the conductor *as soon as one particular feature is prominent*.

As such, we still employ the heuristics-based approach, however, as soon as one of the heuristics is triggered, we mark the measure for the conductor.

We first acknowledge that this list of potential heuristics is far from comprehensive. However, we attempt to identify measures that have

- Changing Time or Key Signature
- Difficult Ranges of Pitches
- Difficult Rhythm
- Accidentals

Annotation Demo

Table of Contents

- 1 Introduction and Motivation
- 2 Our Approach
- 3 Algorithm
- 4 Results and Demo
- 5 Analysis
- 6 Generalization on Conductor Annotation
- 7 Future Improvements and Limitations**
- 8 References and Music Credit

Future Improvements

We note that the weaknesses previously mentioned is more prominent in the Annotation task.

We note that as an example, the problem of lack of fine grained note-by-note control significantly limits the effectiveness of some features that could be implemented, such as dissonance analysis.

Limitations

Furthermore, there may be further limitations with the heuristics approach, mainly that many important but more complex features are difficult to identify.

One example of such a feature would be the idea of a "call and response", or "duet". It is very difficult to define a set of criteria to identify this feature, yet this feature would be very useful for both melody detection and annotation.

We suggest that some of these heuristics could be identified with either a set of simpler heuristics or machine learning methods. It deserves more discussion on this topic, however.

Table of Contents

- 1 Introduction and Motivation
- 2 Our Approach
- 3 Algorithm
- 4 Results and Demo
- 5 Analysis
- 6 Generalization on Conductor Annotation
- 7 Future Improvements and Limitations
- 8 References and Music Credit**

Acknowledgements

I'd like to graciously acknowledge the guidance from Dr. Chuck-jee Chau of the Chinese University of Hong Kong throughout this project, as I complete my exchange term in Hong Kong this Winter term.

References

G. Ozcan, C. Isikhan and A. Alpkocak, "Melody extraction on MIDI music files," Seventh IEEE International Symposium on Multimedia (ISM'05), Irvine, CA, USA, 2005, pp. 8 pp.-, doi: 10.1109/ISM.2005.77.

K. Katerina, L. Wei Tsung, M. Gabriele, C. Pierre, "A deep learning method for melody extraction from a polyphonic symbolic music representation", ISMIR 2012, 2012.

S. Arora, E. Hazan, S. Kale, "The Multiplicative Weights Update Method: a Meta-Algorithm and Applications." Theory of Computing, 2012.

Y. Chou, I. Chen, C. Chang, J. Ching, Y. Yang, MidiBERT-Piano: Large-scale Pre-training for Symbolic Music Understanding, arXiv, 2021, 2107.05223

Liz and the Blue Bird, Movement III and IV, Akito Matsuda, Arranged by ilovebees, <https://musescore.com/ilovebees/liz-and-the-blue-bird>

The Symphony No. 9 in E minor, "From the New World", Op. 95, B. 178, Movement IV, Antonín Dvořák, IMSLP