



UniFi Identity Enterprise API Documentation

Leverage the power of the Identity Enterprise API



Version: 20250207

Getting Started

The UniFi Identity Enterprise API lets developers manage workspace users, visitors, and door access credentials, locations, and more as needed.


Submit Application

You need an API token to request access to the UniFi Identity API. Since API tokens are not yet available for all workspaces, please contact us at uid.support@ui.com to apply. Provide your workspace domain and a clear explanation of why you are applying.

Create an API Token

We will notify you via email once your application is approved, and after that, you can follow the steps below to create an API token:

1. Go to your **Identity Enterprise Manager (New User Interface) > Lab > Integration > API Token > New API Token**.

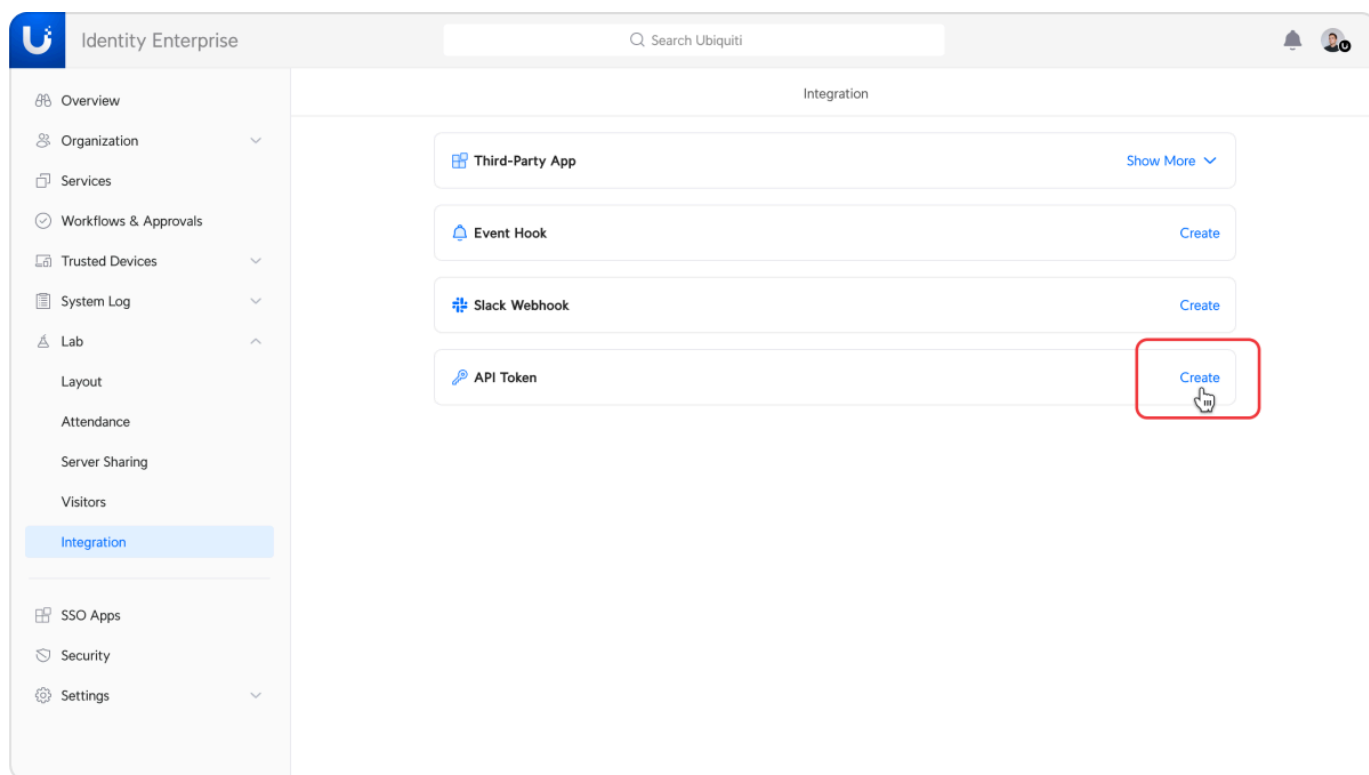

2. Specify the required fields and the token's permission scope, and click **Create**.

The screenshot shows the 'Create API Token' window in the UID Identity Enterprise interface. The left sidebar contains navigation links: Overview, Organization, Services, Workflows & Approvals, Trusted Devices, System Log, Lab, Layout, Attendance, Server Sharing, Visitors, Integration (selected), SSO Apps, Security, and Settings. The main content area is titled 'Create API Token' and includes the following fields:

- Name:** A text input field with the placeholder 'Enter API token name'.
- Add Description:** A link to add a description.
- Apply to:** A dropdown menu currently set to 'Entire Workspace'.
- Trusted Network:** A dropdown menu currently set to 'Anywhere'.
- Manage Network Zone:** A link to manage the network zone.
- Permission Management:** A table with columns for permission categories and their status (None, Read, Write).

Permission Category	None	Read	Write
Members	☐	☐	☐
Lifecycle	☐	☐	☐
Users and Groups	☐	☐	☐
MFA Challenge	☐	☐	☐
Workflows & Approvals	☐	☐	☐
Door Access	☐	☐	☐
All Permissions	☐	☐	☐
User Credential Management	☐	☐	☐
Visitor Management	☐	☐	☐
Location Management	☐	☐	☐
System Log	☐	☐	☐

At the bottom right, there are 'Cancel' and 'Create' buttons. The 'Create' button is highlighted with a red box.

3. Make sure to either copy or write down the created API token, as it will be visible to you only once. Once you click **Done**, the API token will be hashed and stored for security purposes and will no longer be visible.

Use the API Token

Combine your workspace domain and the API token to generate the Authorization header. See the code block below for formatting instructions on the header, and replace YOUR-DOMAIN with your workspace domain and YOUR-TOKEN with the API token.

```
curl -X GET
'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/permission/api/developer/access_policies?page_num=1&page_size=15'
-H 'Authorization: Bearer {API_TOKEN}' \
-H 'Accept: application/json'
```

Error Codes

The Identity Enterprise API returns the following error codes.

Client Error

Error Code	Meaning
E_C_PARAMS_INVALID	The client provided invalid parameters when calling the API.

Parameter Error

Error Code	Meaning
E_U_UNAUTHORIZED	The token is not authorized to perform certain actions.

Server Error

Error Code	Meaning
E_S_ERROR	There was a problem with our internal server. Please try again later.

1. Users > The APIs here are designed for creating, deactivating, fetching, and updating users.

1.1 Create User

This API enables you to create a new user.

- Request URL: `/directory/api/developer/users`
- Method: `POST`
- Permission: `user.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Body

Parameter	Required	Type	Description
profile	True	object	
profile.alias	False	string	Alias of the user.
profile.area_code	False	string	Phone area code of the user.
profile.email	True	string	Email of the user. It is the same as their sign-in username and cannot be edited.
profile.first_name	True	string	First name of the user.
profile.last_name	True	string	Last name of the user.
profile.mobile_phone	False	string	Phone number of the user.

Response Body

Parameter	Required	Type	Description
data.id	True	string	Unique ID of the user.
data.profile	True	object	
data.profile.alias	True	string	Alias of the user.
data.profile.area_code	True	string	Phone area code of the user.
data.profile.email	True	string	Email of the user. It is the same as their sign-in username and cannot be edited.

Parameter	Required	Type	Description
data.profile.first_name	True	string	First name of the user.
data.profile.last_name	True	string	Last name of the user.
data.profile.login	True	string	
data.profile.mobile_phone	True	string	Phone number of the user.
data.status	True	string	Lifecycle status of the user.
data.status_changed	True	string	The time when the user's lifecycle status was last changed.

Request Sample

```
curl -X POST
'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/directory/api/developer/users'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
--data-raw '{"profile": {"alias": "JD", "area_code": "12", "email":
"user@ui.com", "first_name": "John", "last_name": "Doe", "mobile_phone":
"123456789"}}'
```

Response Sample

```
{
  "code": "SUCCESS",
  "data": {
    "id": "037b0684-c05d-4c57-9c94-bdca3761ce1b",
    "profile": {
      "alias": "JD",
      "area_code": "12",
      "email": "user@ui.com",
      "first_name": "John",
      "last_name": "Doe",
      "mobile_phone": "123456789"
    }
  }
}
```

```
    "last_name": "Doe",
    "login": "user@ui.com",
    "mobile_phone": "123456789"
  },
  "status": "ACTIVED",
  "status_changed": "2024-01-01T00:00:00Z"
},
"error_params": {},
"msg": "success"
}
```

1.2 Deactivate User

This API enables you to deactivate a user.

- Request URL: `/directory/api/developer/users/{user_id}/lifecycle/deactivate`
- Method: `POST`
- Permission: `user.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
user_id	path	True	string	user id

Request Sample

```
curl -X POST
'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/directory/api/developer/users/{user_id}/lifecycle/deactivate'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
```

```
-H 'content-type: application/json'
```

Response Sample

```
{
  "code": "SUCCESS",
  "error_params": {},
  "msg": "success"
}
```

json

1.3 Fetch User

This API enables you to fetch a user by their ID.

- Request URL: `/directory/api/developer/users/{user_id}`
- Method: `GET`
- Permission: `user.view`, `user.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
user_id	path	True	string	user id

Response Body

Parameter	Required	Type	Description
data.id	True	string	Unique ID of the user.
data.profile	True	object	
data.profile.alias	True	string	Alias of the user.
data.profile.area_code	True	string	Phone area code of the user.
data.profile.email	True	string	Email of the user. It is the same as their sign-in username and cannot be edited.
data.profile.first_name	True	string	First name of the user.
data.profile.last_name	True	string	Last name of the user.
data.profile.login	True	string	
data.profile.mobile_phone	True	string	Phone number of the user.
data.status	True	string	Lifecycle status of the user.
data.status_changed	True	string	The time when the user's lifecycle status was last changed.

Request Sample

```
curl -X GET
'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/directory/api/developer/users/{user_id}'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
```

```
-H 'content-type: application/json'
```

Response Sample

```
{
  "code": "SUCCESS",
  "data": {
    "id": "037b0684-c05d-4c57-9c94-bdca3761ce1b",
    "profile": {
      "alias": "JD",
      "area_code": "12",
      "email": "user@ui.com",
      "first_name": "John",
      "last_name": "Doe",
      "login": "user@ui.com",
      "mobile_phone": "123456789"
    },
    "status": "ACTIVED",
    "status_changed": "2024-01-01T00:00:00Z"
  },
  "error_params": {},
  "msg": "success"
}
```

json

1.4 Update User

This API enables you to update a user’s profile.

- Request URL: `/directory/api/developer/users/{user_id}/profile`
- Method: `PUT`
- Permission: `user.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
user_id	path	True	string	user id

Request Body

Parameter	Required	Type	Description
profile	True	object	
profile.alias	False	string	Alias of the user.
profile.area_code	False	string	Phone area code of the user.
profile.first_name	True	string	First name of the user.
profile.last_name	True	string	Last name of the user.
profile.mobile_phone	False	string	Phone number of the user.

Response Body

Parameter	Required	Type	Description
data.id	True	string	Unique ID of the user.
data.profile	True	object	
data.profile.alias	True	string	Alias of the user.
data.profile.area_code	True	string	Phone area code of the user.

Parameter	Required	Type	Description
data.profile.email	True	string	Email of the user. It is the same as their sign-in username and cannot be edited.
data.profile.first_name	True	string	First name of the user.
data.profile.last_name	True	string	Last name of the user.
data.profile.login	True	string	
data.profile.mobile_phone	True	string	Phone number of the user.
data.status	True	string	Lifecycle status of the user.
data.status_changed	True	string	The time when the user's lifecycle status was last changed.

Request Sample

```
curl -X PUT
'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/directory/api/developer/users/{user_id}/profile'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
--data-raw '{"profile": {"alias": "JD", "area_code": "12", "first_name": "John", "last_name": "Doe", "mobile_phone": "123456789"}}'
```

Response Sample

```
{
  "code": "SUCCESS",
  "data": {
    json
```

```
"id": "037b0684-c05d-4c57-9c94-bdca3761ce1b",
"profile": {
  "alias": "JD",
  "area_code": "12",
  "email": "user@ui.com",
  "first_name": "John",
  "last_name": "Doe",
  "login": "user@ui.com",
  "mobile_phone": "123456789"
},
"status": "ACTIVED",
"status_changed": "2024-01-01T00:00:00Z"
},
"error_params": {},
"msg": "success"
}
```

2. Visitors

The APIs here are designed for managing visitors, including creating and removing visitors. They also enable the assigning of NFC cards and PIN codes to visitors.

2.1 Assign NFC Card to Visitor

This API enables you to assign an NFC card to a visitor.

- Request URL: `/door-access/api/developer/visitors/{visitor_id}/nfc_cards`
- Method: `PUT`
- Permission: `access_credentials.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
visitor_id	path	True	string	Identity of visitor

Request Body

Parameter	Required	Type	Description
force_add	False	boolean	Determine whether to overwrite an NFC card that has already been assigned to someone.
token	False	string	Token of the NFC card.

Request Sample

```
curl -X PUT 'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/door-access/api/developer/visitors/{visitor_id}/nfc_cards'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
--data-raw '{"force_add": true, "token": "d92245ed-5395-4c61-81f1-746c99386220"}'
```

Response Sample

```
{
  "code": "SUCCESS",
  "error_params": {},
  "msg": "success"
}
```

json

2.2 Assign PIN Code to Visitor

This API enables you to assign a PIN code to a visitor.

- Request URL: `/door-access/api/developer/visitors/{visitor_id}/pin_codes`
- Method: `PUT`
- Permission: `access_credentials.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
visitor_id	path	True	string	Identity of visitor

Request Body

Parameter	Required	Type	Description
pin_code	False	string	Generate a PIN code for the visitor to unlock doors.

Request Sample

```
curl -X PUT 'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/door-access/api/developer/visitors/{visitor_id}/pin_codes'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
--data-raw '{"pin_code": 15476458.0}'
```

Response Sample

json

```
{
  "code": "SUCCESS",
  "error_params": {},
  "msg": "success"
}
```

2.3 Create Visitor

This API enables you to create a visitor.

- Request URL: `/door-access/api/developer/visitors`
- Method: `POST`
- Permission: `visitor.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Body

Parameter	Required	Type	Description
company	False	string	Company of the visitor.
email	False	string	Email of the visitor.
end_time	False	integer	End time of the visit.
first_name	False	string	First name of the visitor.
last_name	False	string	Last name of the visitor.
mobile_phone	False	object	
mobile_phone.are_a_code	False	string	

Parameter	Required	Type	Description
mobile_phone.phone	False	string	Contact phone number of the visitor.
reason	False	string	Visit reason: <code>enum reason {Interview,Business,Cooperation,Others}</code>
remarks	False	string	Remarks of the visitor.
resources	False	array	The locations that the visitor can access.
resources[].id	False	string	Identity ID of the resource.
resources[].type	False	string	Resource type: <code>enum type {door,door_group,doors_under_site}</code>
schedule_id	False	string	Identity ID of the schedule.
site_id	False	string	Identity ID of the site.
start_time	False	integer	Start time of the visit.

Response Body

Parameter	Required	Type	Description
data.company	True	string	Company of the visitor.
data.created	True	string	The time when the visitor was created.
data.email	True	string	Email of the visitor.
data.end_time	True	integer	End time of the visit.

Parameter	Required	Type	Description
data.first_name	True	string	First name of the visitor.
data.id	True	string	Identity ID of the visitor.
data.last_name	True	string	Last name of the visitor.
data.mobile_phone	True	object	
data.mobile_phone.area_code	True	string	
data.mobile_phone.phone	True	string	Contact phone number of the visitor.
data.reason	True	string	Visit reason: enum reason {Interview,Business,Cooperation,Others}
data.remarks	True	string	Remarks of the visitor.
data.resources	True	array	The locations that the visitor can access.
data.resources[].id	True	string	Identity ID of the resource.
data.resources[].name	True	string	Name of the resource.
data.resources[].type	True	string	Resource type: enum type {door,door_group,doors_under_site}
data.schedule_id	True	string	Identity ID of the schedule.
data.site_id	True	string	Identity ID of the site.

Parameter	Required	Type	Description
data.start_time	True	integer	Start time of the visit.
data.status	True	string	

Request Sample

```
curl -X POST 'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/door-
access/api/developer/visitors'
  -H 'Authorization: Bearer {API_TOKEN}'
  -H 'accept: application/json'
  -H 'content-type: application/json'
  --data-raw '{"company": "OpenAPILab", "email": "visitor_1@example.com",
"end_time": 1721210087.0, "first_name": "Example", "last_name": "Example
Lastname", "mobile_phone": {"area_code": 1, "phone": 18746842.0}, "reason":
"Interview", "remarks": "This object will be used create/update visitor",
"resources": [{"id": "0527a5bb-ea9f-480c-9e34-4d1ab12c1f7b", "name": "Main
Door", "type": "door"}], "schedule_id": "70a1acf1-1bee-474a-8ba1-d1f7434ff14d",
"site_id": "875ff361-3b12-4d68-bf28-8bb2efd7bb2f", "start_time": 1721200450.0}'
```

Response Sample

```
{
  "code": "SUCCESS",
  "data": {
    "company": "OpenAPILab",
    "created": "2024-05-02T15:04:05.000Z",
    "email": "visitor_1@example.com",
    "end_time": 1721210087.0,
    "first_name": "Example",
    "id": "b4c04e5e-5619-430b-a72e-8217b1513d0c",
    "last_name": "Example Lastname",
    "mobile_phone": {
      "area_code": 1,
      "phone": 18746842.0
    },
    "reason": "Interview",
    "remarks": "This object will be used create/update visitor",
    "resources": [
      {
        "id": "0527a5bb-ea9f-480c-9e34-4d1ab12c1f7b",
        "name": "Main Door",
```

```
        "type": "door"
      },
    ],
    "schedule_id": "70a1acf1-1bee-474a-8ba1-d1f7434ff14d",
    "site_id": "875ff361-3b12-4d68-bf28-8bb2efd7bb2f",
    "start_time": 1721200450.0,
    "status": "UPCOMING"
  },
  "error_params": {},
  "msg": "success"
}
```

2.4 Fetch All Visitors

This API enables you to fetch a list of all visitors.

- Request URL: `/door-access/api/developer/visitors`
- Method: `GET`
- Permission: `visitor.view`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
keyword	query	False	string	Support matching first name last name
page_num	query	False	integer	Page index starting

Parameter	In	Required	Type	Description
page_size	query	False	integer	Number records page
site_id	query	True	string	Identity site

Response Body

Parameter	Required	Type	Description
data[].company	True	string	Company of the visitor.
data[].created	True	string	The time when the visitor was created.
data[].email	True	string	Email of the visitor.
data[].end_time	True	integer	End time of the visit.
data[].first_name	True	string	First name of the visitor.
data[].id	True	string	Identity ID of the visitor.
data[].last_name	True	string	Last name of the visitor.
data[].mobile_phone	True	object	
data[].mobile_phone.area_code	True	string	
data[].mobile_phone.phone	True	string	Contact phone number of the visitor.
data[].reason	True	string	Visit reason: <code>enum reason {Interview,Business,Cooperation,Others}</code>

Parameter	Required	Type	Description
data[].remarks	True	string	Remarks of the visitor.
data[].resources	True	array	The locations that the visitor can access.
data[].resources[].id	True	string	Identity ID of the resource.
data[].resources[].name	True	string	Name of the resource.
data[].resources[].type	True	string	Resource type: <code>enum type {door,door_group,doors_under_site}</code>
data[].schedule_id	True	string	Identity ID of the schedule.
data[].site_id	True	string	Identity ID of the site.
data[].start_time	True	integer	Start time of the visit.
data[].status	True	string	

Request Sample

```
curl -X GET 'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/door-access/api/developer/visitors?site_id={site_id}'  
  -H 'Authorization: Bearer {API_TOKEN}'  
  -H 'accept: application/json'  
  -H 'content-type: application/json'
```

Response Sample

```
{  
  "code": "SUCCESS",  
  "data": [  
    ]  
  ]  
}
```

json

```

{
  "company": "OpenAPILab",
  "created": "2024-05-02T15:04:05.000Z",
  "email": "visitor_1@example.com",
  "end_time": 1721210087.0,
  "first_name": "Example",
  "id": "b4c04e5e-5619-430b-a72e-8217b1513d0c",
  "last_name": "Example Lastname",
  "mobile_phone": {
    "area_code": 1,
    "phone": 18746842.0
  },
  "reason": "Interview",
  "remarks": "This object will be used create/update visitor",
  "resources": [
    {
      "id": "0527a5bb-ea9f-480c-9e34-4d1ab12c1f7b",
      "name": "Main Door",
      "type": "door"
    }
  ],
  "schedule_id": "70a1acf1-1bee-474a-8ba1-d1f7434ff14d",
  "site_id": "875ff361-3b12-4d68-bf28-8bb2efd7bb2f",
  "start_time": 1721200450.0,
  "status": "UPCOMING"
}
],
"error_params": {},
"msg": "success",
"pagination": {
  "page_num": 1,
  "page_size": 25,
  "total": 125
}
}

```

2.5 Remove Visitor

This API enables you to remove a visitor.

- Request URL: `/door-access/api/developer/visitors/{visitor_id}`
- Method: `DELETE`
- Permission: `visitor.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
visitor_id	path	True	string	Identity of visitor

Response Body

Parameter	Required	Type	Description
data.company	True	string	Company of the visitor.
data.created	True	string	The time when the visitor was created.
data.email	True	string	Email of the visitor.
data.end_time	True	integer	End time of the visit.
data.first_name	True	string	First name of the visitor.
data.id	True	string	Identity ID of the visitor.
data.last_name	True	string	Last name of the visitor.
data.mobile_phone	True	object	
data.mobile_phone.area_code	True	string	

Parameter	Required	Type	Description
data.mobile_phone.phone	True	string	Contact phone number of the visitor.
data.reason	True	string	Visit reason: <code>enum reason {Interview,Business,Cooperation,Others}</code>
data.remarks	True	string	Remarks of the visitor.
data.resources	True	array	The locations that the visitor can access.
data.resources[].id	True	string	Identity ID of the resource.
data.resources[].name	True	string	Name of the resource.
data.resources[].type	True	string	Resource type: <code>enum type {door,door_group,doors_under_site}</code>
data.schedule_id	True	string	Identity ID of the schedule.
data.site_id	True	string	Identity ID of the site.
data.start_time	True	integer	Start time of the visit.
data.status	True	string	

Request Sample

```
curl -X DELETE 'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/door-access/api/developer/visitors/{visitor_id}'  
  -H 'Authorization: Bearer {API_TOKEN}'  
  -H 'accept: application/json'
```

```
-H 'content-type: application/json'
```

Response Sample

json

```
{
  "code": "SUCCESS",
  "data": {
    "company": "OpenAPILab",
    "created": "2024-05-02T15:04:05.000Z",
    "email": "visitor_1@example.com",
    "end_time": 1721210087.0,
    "first_name": "Example",
    "id": "b4c04e5e-5619-430b-a72e-8217b1513d0c",
    "last_name": "Example Lastname",
    "mobile_phone": {
      "area_code": 1,
      "phone": 18746842.0
    },
    "reason": "Interview",
    "remarks": "This object will be used create/update visitor",
    "resources": [
      {
        "id": "0527a5bb-ea9f-480c-9e34-4d1ab12c1f7b",
        "name": "Main Door",
        "type": "door"
      }
    ],
    "schedule_id": "70a1acf1-1bee-474a-8ba1-d1f7434ff14d",
    "site_id": "875ff361-3b12-4d68-bf28-8bb2efd7bb2f",
    "start_time": 1721200450.0,
    "status": "UPCOMING"
  },
  "error_params": {},
  "msg": "success"
}
```

2.6 Unassign NFC Card from Visitor

This API enables you to unassign an NFC card from a visitor.

- Request URL: `/door-access/api/developer/visitors/{visitor_id}/nfc_cards/delete`
- Method: `PUT`

- Permission: `access_credentials.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
visitor_id	path	True	string	Identity of visitor

Request Body

Parameter	Required	Type	Description
force_add	False	boolean	Determine whether to overwrite an NFC card that has already been assigned to someone.
token	False	string	Token of the NFC card.

Request Sample

```
curl -X PUT 'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/door-access/api/developer/visitors/{visitor_id}/nfc_cards/delete'  
  -H 'Authorization: Bearer {API_TOKEN}'  
  -H 'accept: application/json'  
  -H 'content-type: application/json'  
  --data-raw '{"force_add": true, "token": "d92245ed-5395-4c61-81f1-746c99386220"}'
```

Response Sample

```
{
  "code": "SUCCESS",
  "error_params": {},
  "msg": "success"
}
```

2.7 Unassign PIN Code from Visitor

This API enables you to unassign a PIN code from a visitor.

- Request URL: `/door-access/api/developer/visitors/{visitor_id}/pin_codes`
- Method: `DELETE`
- Permission: `access_credentials.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
visitor_id	path	True	string	Identity of visitor

Request Sample

```
curl -X DELETE 'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/door-access/api/developer/visitors/{visitor_id}/pin_codes'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
```

Response Sample

```
{  
  "code": "SUCCESS",  
  "error_params": {},  
  "msg": "success"  
}
```

json

2.8 Update Visitor

This API enables you to update a visitor.

- Request URL: `/door-access/api/developer/visitors/{visitor_id}`
- Method: `PUT`
- Permission: `visitor.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
visitor_id	path	True	string	Identity of the visitor.

Request Body

Parameter	Required	Type	Description
company	False	string	Company of the visitor.
email	False	string	Email of the visitor.

Parameter	Required	Type	Description
end_time	False	integer	End time of the visit.
first_name	False	string	First name of the visitor.
last_name	False	string	Last name of the visitor.
mobile_phone	False	object	
mobile_phone.are a_code	False	string	
mobile_phone.ph one	False	string	Contact phone number of the visitor.
reason	False	string	Visit reason: <code>enum reason {Interview,Business,Co operation,Others}</code>
remarks	False	string	Remarks of the visitor.
resources	False	array	The locations that the visitor can access.
resources[].id	False	string	Identity ID of the resource.
resources[].type	False	string	Resource type: <code>enum type {door,door_group,doors _under_site}</code>
schedule_id	False	string	Identity ID of the schedule.
site_id	False	string	Identity ID of the site.
start_time	False	integer	Start time of the visit.

Response Body

Parameter	Required	Type	Description
data.company	True	string	Company of the visitor.
data.created	True	string	The time when the visitor was created.
data.email	True	string	Email of the visitor.
data.end_time	True	integer	End time of the visit.
data.first_name	True	string	First name of the visitor.
data.id	True	string	Identity ID of the visitor.
data.last_name	True	string	Last name of the visitor.
data.mobile_phone	True	object	
data.mobile_phone.area_code	True	string	
data.mobile_phone.phone	True	string	Contact phone number of the visitor.
data.reason	True	string	Visit reason: enum reason {Interview,Business,Cooperation,Others}
data.remarks	True	string	Remarks of the visitor.
data.resources	True	array	The locations that the visitor can access.
data.resources[].id	True	string	Identity ID of the resource.
data.resources[].name	True	string	Name of the resource.

Parameter	Required	Type	Description
data.resources[].type	True	string	Resource type: <code>enum type {door,door_group,doors_under_site}</code>
data.schedule_id	True	string	Identity ID of the schedule.
data.site_id	True	string	Identity ID of the site.
data.start_time	True	integer	Start time of the visit.
data.status	True	string	

Request Sample

```
curl -X PUT 'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/door-access/api/developer/visitors/{visitor_id}'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
--data-raw '{"company": "OpenAPILab", "email": "visitor_1@example.com", "end_time": 1721210087.0, "first_name": "Example", "last_name": "Example Lastname", "mobile_phone": {"area_code": 1, "phone": 18746842.0}, "reason": "Interview", "remarks": "This object will be used create/update visitor", "resources": [{"id": "0527a5bb-ea9f-480c-9e34-4d1ab12c1f7b", "name": "Main Door", "type": "door"}], "schedule_id": "70a1acf1-1bee-474a-8ba1-d1f7434ff14d", "site_id": "875ff361-3b12-4d68-bf28-8bb2efd7bb2f", "start_time": 1721200450.0}'
```

Response Sample

```
{
  "code": "SUCCESS",
  "data": {
    "company": "OpenAPILab",
    "created": "2024-05-02T15:04:05.000Z",
    "email": "visitor_1@example.com",
    "end_time": 1721210087.0,
    "first_name": "Example",
    "id": "b4c04e5e-5619-430b-a72e-8217b1513d0c",
```

json


```
"last_name": "Example Lastname",
"mobile_phone": {
  "area_code": 1,
  "phone": 18746842.0
},
"reason": "Interview",
"remarks": "This object will be used create/update visitor",
"resources": [
  {
    "id": "0527a5bb-ea9f-480c-9e34-4d1ab12c1f7b",
    "name": "Main Door",
    "type": "door"
  }
],
"schedule_id": "70a1acf1-1bee-474a-8ba1-d1f7434ff14d",
"site_id": "875ff361-3b12-4d68-bf28-8bb2efd7bb2f",
"start_time": 1721200450.0,
"status": "UPCOMING"
},
"error_params": {},
"msg": "success"
}
```

3. Access Policies

The APIs here are designed for creating door access policies and managing door access resources.

3.1 Create Access Policy

This API enables you to create an access policy.

- Request URL: `/permission/api/developer/access_policies`
- Method: `POST`
- Permission: `access_policy.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Body

Parameter	Required	Type	Description
active	False	boolean	Indicates whether the access policy is active.
name	True	string	Name of the access policy.
resources	False	array	Locations or resources assigned to the access policy.
resources[].id	False	string	Identity ID of the resource.
resources[].type	False	string	Resource type: door=Door, door_group=Door group, doors_under_site=Doors under site, all_doors=All doors
schedule_id	False	string	Identity ID of the schedule.
site_id	False	string	Identity ID of the site.
type	True	string	Type of the access policy: access =Access policy, visitor_access=Visitor access policy, access_unlock_schedule=Access unlock schedule
users	False	array	Users or user groups assigned to the access policy.

Parameter	Required	Type	Description
users[].id	False	string	Identity ID of the user or user group.
users[].type	False	string	Type of the user. <code>user=User</code> , <code>user_of_group=User group</code>

Response Body

Parameter	Required	Type	Description
data.active	True	boolean	Indicates whether the access policy is active.
data.created	True	string	The time when the access policy was created.
data.id	True	string	Identity ID of the access policy.
data.is_default	True	boolean	Indicates whether the access policy is a default policy.
data.name	True	string	Name of the access policy.
data.resources	True	array	Locations or resources assigned to the access policy.
data.resources[].id	True	string	Identity ID of the resource.
data.resources[].type	True	string	Resource type: <code>door=Door</code> , <code>door_group=Door group</code> , <code>doors_under_site=Doors</code>

Parameter	Required	Type	Description
			<code>under site,</code> <code>all_doors=All doors</code>
<code>data.schedule_id</code>	True	string	Identity ID of the schedule.
<code>data.site_id</code>	True	string	Identity ID of the site.
<code>data.timerange_id</code>	True	string	Identity ID of the time-range.
<code>data.type</code>	True	string	Type of the access policy: <code>access =Access policy,</code> <code>visitor_access=Visitor access policy,</code> <code>access_unlock_schedule=Access unlock schedule</code>
<code>data.users</code>	True	array	Users or user groups assigned to the access policy.
<code>data.users[].id</code>	True	string	Identity ID of the user or user group.
<code>data.users[].type</code>	True	string	Type of the user. <code>user=User,</code> <code>user_of_group=User group</code>

Request Sample

```
curl -X POST
'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/permission/api/developer/access_policies'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
--data-raw '{"active": true, "name": "Example Access Policy", "resources": [{"id": "a1f2a27f-865c-4a81-91bc-4cb39d58336a", "type": "door"}], "schedule_id": "5852b2b5-39d9-4461-9427-2af1270f80cd", "site_id": "d96d83ea-
```

```
f479-4d9d-a8fc-50ada96037db", "type": "access", "users": [{"id": "4b906b78-2e9c-483a-8141-a343a54462de", "type": "user"}]}'
```

Response Sample

json

```
{
  "code": "SUCCESS",
  "data": {
    "active": true,
    "created": "2024-05-02T15:04:05.000Z",
    "id": "d844b529-dd4b-4bcb-88eb-fe9fab507c05",
    "is_default": true,
    "name": "Example Access Policy",
    "resources": [
      {
        "id": "a1f2a27f-865c-4a81-91bc-4cb39d58336a",
        "type": "door"
      }
    ],
    "schedule_id": "5852b2b5-39d9-4461-9427-2af1270f80cd",
    "site_id": "d96d83ea-f479-4d9d-a8fc-50ada96037db",
    "timerange_id": "ignore",
    "type": "access",
    "users": [
      {
        "id": "4b906b78-2e9c-483a-8141-a343a54462de",
        "type": "user"
      }
    ]
  },
  "error_params": {},
  "msg": "success"
}
```

3.2 Create Holiday Group

This API enables you to create a holiday group.

- Request URL: `/permission/api/developer/access_policies/holiday_groups`
- Method: `POST`
- Permission: `access_policy.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Body

Parameter	Required	Type	Description
calendar_id	False	string	Identity ID of the calendar.
description	False	string	Description of the holiday group.
holidays	False	array	Holidays managed by the holiday group.
holidays[].description	False	string	Description of the holiday.
holidays[].end_time	False	string	End time of the holiday.
holidays[].id	False	string	Identity ID of the holiday.
holidays[].name	False	string	Name of the holiday.
holidays[].repeat	False	boolean	Indicates whether the holiday repeats every year.
holidays[].start_time	False	string	Start time of the holiday.
holidays[].system	False	boolean	Indicates whether the holiday is created by Google Calendar by default.

Parameter	Required	Type	Description
name	False	string	Name of the holiday group.
site_id	False	string	Identity ID of the site.

Response Body

Parameter	Required	Type	Description
data.calendar_id	True	string	Identity ID of the calendar.
data.description	True	string	Description of the holiday group.
data.holidays	True	array	Holidays managed by the holiday group.
data.holidays[].description	True	string	Description of the holiday.
data.holidays[].end_time	True	string	End time of the holiday.
data.holidays[].id	True	string	Identity ID of the holiday.
data.holidays[].name	True	string	Name of the holiday.
data.holidays[].repeat	True	boolean	Indicates whether the holiday repeats every year.
data.holidays[].start_time	True	string	Start time of the holiday.

Parameter	Required	Type	Description
data.holidays[].system	True	boolean	Indicates whether the holiday is created by Google Calendar by default.
data.id	True	string	Identity ID of the holiday group.
data.is_site_default	True	boolean	Indicates whether the holiday group is a default group.
data.name	True	string	Name of the holiday group.
data.site_id	True	string	Identity ID of the site.

Request Sample

```
curl -X POST
'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/permission/api/developer/access_policies/holiday_groups'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
--data-raw '{"calendar_id": "2698fedb-cbcc-4826-b4c0-9e2d22db921b",
"description": "string", "holidays": [{"description": "string", "end_time":
"2024-05-02T00:00:05.000Z", "id": "7b93d5da-261d-4023-ba51-c6f782b98e83",
"name": "International Workers' Day", "repeat": true, "start_time": "2024-05-
01T00:00:05.000Z", "system": true}], "name": "HolidayGroupExample", "site_id":
"c17e999d-10af-4c8a-b390-68220bb69dfd"}'
```

Response Sample

```
{
  "code": "SUCCESS",
  "data": {
    "calendar_id": "2698fedb-cbcc-4826-b4c0-9e2d22db921b",
    "description": "string",
    "holidays": [

```

json


```
{
  "description": "string",
  "end_time": "2024-05-02T00:00:05.000Z",
  "id": "7b93d5da-261d-4023-ba51-c6f782b98e83",
  "name": "International Workers' Day",
  "repeat": true,
  "start_time": "2024-05-01T00:00:05.000Z",
  "system": true
},
{
  "id": "2698fedb-cbcc-4826-b4c0-9e2d22db921b",
  "is_site_default": true,
  "name": "HolidayGroupExample",
  "site_id": "c17e999d-10af-4c8a-b390-68220bb69dfd"
},
{
  "error_params": {},
  "msg": "success"
}
```

3.3 Create Schedule

This API enables you to create a schedule.

- Request URL: `/permission/api/developer/access_policies/schedules`
- Method: `POST`
- Permission: `access_policy.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Body

Parameter	Required	Type	Description
holiday_group_id	False	string	Identity ID of the holiday group.

Parameter	Required	Type	Description
holiday_schedule	False	array	The scheduled time for the holiday.
holiday_schedule[].end_time	False	string	End time of the schedule.
holiday_schedule[].start_time	False	string	Start time of the schedule.
name	True	string	Name of the schedule.
site_id	False	string	Identity ID of the site.
week_schedule	False	object	

Response Body

Parameter	Required	Type	Description
data.holiday_group_id	True	string	Identity ID of the holiday group.
data.holiday_schedule	True	array	The scheduled time for the holiday.
data.holiday_schedule[].end_time	True	string	End time of the schedule.
data.holiday_schedule[].start_time	True	string	Start time of the schedule.
data.id	True	string	Identity ID of the schedule.
data.name	True	string	Name of the schedule.
data.site_id	True	string	Identity ID of the site.
data.week_schedule	True	object	

Request Sample

```
curl -X POST
'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/permission/api/developer/access_policies/schedules'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
--data-raw '{"holiday_group_id": "1adfddee3-2062-469d-83da-a1e778e1f9fa",
"holiday_schedule": [{"end_time": "23:00", "start_time": "15:15"}], "name":
"Example Schedule", "site_id": "9bd4401c-ef34-4f65-9af4-10fef32f7f01",
"week_schedule": {}}'
```

Response Sample

```
{
  "code": "SUCCESS",
  "data": {
    "holiday_group_id": "1adfddee3-2062-469d-83da-a1e778e1f9fa",
    "holiday_schedule": [
      {
        "end_time": "23:00",
        "start_time": "15:15"
      }
    ],
    "id": "f8fae22d-96c7-4be8-b84e-67bf0d3e8619",
    "name": "Example Schedule",
    "site_id": "9bd4401c-ef34-4f65-9af4-10fef32f7f01",
    "week_schedule": {}
  },
  "error_params": {},
  "msg": "success"
}
```

json

3.4 Fetch Access Policy

This API enables you to fetch an access policy by its ID.

- Request URL: `/permission/api/developer/access_policies/{access_policy_id}`
- Method: `GET`
- Permission: `access_policy.view`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
access_policy_id	path	True	string	Identity ID of the access policy.

Response Body

Parameter	Required	Type	Description
data.active	True	boolean	Indicates whether the access policy is active.
data.created	True	string	The time when the access policy was created.
data.id	True	string	Identity ID of the access policy.
data.is_default	True	boolean	Indicates whether the access policy is a default policy.
data.name	True	string	Name of the access policy.
data.resources	True	array	Locations or resources assigned to the access policy.
data.resources[].id	True	string	Identity ID of the resource.

Parameter	Required	Type	Description
data.resources[].type	True	string	Resource type: door=Door, door_group=Door group, doors_under_site=Doors under site, all_doors=All doors
data.schedule_id	True	string	Identity ID of the schedule.
data.site_id	True	string	Identity ID of the site.
data.timerange_id	True	string	Identity ID of the time-range.
data.type	True	string	Type of the access policy: access =Access policy, visitor_access=Visitor access policy, access_unlock_schedule=Access unlock schedule
data.users	True	array	Users or user groups assigned to the access policy.
data.users[].id	True	string	Identity ID of the user or user group.
data.users[].type	True	string	Type of the user. user=User, user_of_group=User group

Request Sample

```
curl -X GET  
'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/permission/api/developer/access_policies/{access_policy_id}'  
-H 'Authorization: Bearer {API_TOKEN}'
```

```
-H 'accept: application/json'
-H 'content-type: application/json'
```

Response Sample

json

```
{
  "code": "SUCCESS",
  "data": {
    "active": true,
    "created": "2024-05-02T15:04:05.000Z",
    "id": "d844b529-dd4b-4bcb-88eb-fe9fab507c05",
    "is_default": true,
    "name": "Example Access Policy",
    "resources": [
      {
        "id": "a1f2a27f-865c-4a81-91bc-4cb39d58336a",
        "type": "door"
      }
    ],
    "schedule_id": "5852b2b5-39d9-4461-9427-2af1270f80cd",
    "site_id": "d96d83ea-f479-4d9d-a8fc-50ada96037db",
    "timerange_id": "ignore",
    "type": "access",
    "users": [
      {
        "id": "4b906b78-2e9c-483a-8141-a343a54462de",
        "type": "user"
      }
    ]
  },
  "error_params": {},
  "msg": "success"
}
```

3.5 Fetch All Access Policies

This API enables you to fetch a list of all policies.

- Request URL: `/permission/api/developer/access_policies`
- Method: `GET`
- Permission: `access_policy.view`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
order	query	False	string	order
page_num	query	False	integer	Page index starting
page_size	query	False	integer	Number records per page
site_id	query	False	string	Identity ID of the site

Response Body

Parameter	Required	Type	Description
data[].active	True	boolean	Indicates whether the access policy is active.
data[].created	True	string	The time when the access policy was created.
data[].id	True	string	Identity ID of the access policy.
data[].is_default	True	boolean	Indicates whether the access policy is a default policy.

Parameter	Required	Type	Description
data[].name	True	string	Name of the access policy.
data[].resources	True	array	Locations or resources assigned to the access policy.
data[].resources[].id	True	string	Identity ID of the resource.
data[].resources[].type	True	string	Resource type: door=Door, door_group=Door group, doors_under_site=Doors under site, all_doors=All doors
data[].schedule_id	True	string	Identity ID of the schedule.
data[].site_id	True	string	Identity ID of the site.
data[].timerange_id	True	string	Identity ID of the time-range.
data[].type	True	string	Type of the access policy: access =Access policy, visitor_access=Visitor access policy, access_unlock_schedule=Access unlock schedule
data[].users	True	array	Users or user groups assigned to the access policy.
data[].users[].id	True	string	Identity ID of the user or user group.
data[].users[].type	True	string	Type of the user. user=User,

Parameter	Required	Type	Description
			user_of_group=User group

Request Sample

```
curl -X GET
'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/permission/api/developer/access_policies'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
```

Response Sample

```
{
  "code": "SUCCESS",
  "data": [
    {
      "active": true,
      "created": "2024-05-02T15:04:05.000Z",
      "id": "d844b529-dd4b-4bcb-88eb-fe9fab507c05",
      "is_default": true,
      "name": "Example Access Policy",
      "resources": [
        {
          "id": "a1f2a27f-865c-4a81-91bc-4cb39d58336a",
          "type": "door"
        }
      ],
      "schedule_id": "5852b2b5-39d9-4461-9427-2af1270f80cd",
      "site_id": "d96d83ea-f479-4d9d-a8fc-50ada96037db",
      "timerange_id": "ignore",
      "type": "access",
      "users": [
        {
          "id": "4b906b78-2e9c-483a-8141-a343a54462de",
          "type": "user"
        }
      ]
    }
  ]
}
```

```
    ],
    "error_params": {},
    "msg": "success",
    "pagination": {
      "page_num": 1,
      "page_size": 25,
      "total": 125
    }
  }
```

3.6 Fetch All Holiday Groups

This API enables you to fetch a list of all holiday groups.

- Request URL: `/permission/api/developer/access_policies/holiday_groups`
- Method: `GET`
- Permission: ``

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
site_id	query	True	string	Identity ID of the site

Response Body

Parameter	Required	Type	Description
data[].calendar_id	True	string	Identity ID of the calendar.

Parameter	Required	Type	Description
data[].description	True	string	Description of the holiday group.
data[].holidays	True	array	Holidays managed by the holiday group.
data[].holidays[].description	True	string	Description of the holiday.
data[].holidays[].end_time	True	string	End time of the holiday.
data[].holidays[].id	True	string	Identity ID of the holiday.
data[].holidays[].name	True	string	Name of the holiday.
data[].holidays[].repeat	True	boolean	Indicates whether the holiday repeats every year.
data[].holidays[].start_time	True	string	Start time of the holiday.
data[].holidays[].system	True	boolean	Indicates whether the holiday is created by Google Calendar by default.
data[].id	True	string	Identity ID of the holiday group.
data[].is_site_default	True	boolean	Indicates whether the holiday group is a default group.
data[].name	True	string	Name of the holiday group.

Parameter	Required	Type	Description
data[].site_id	True	string	Identity ID of the site.

Request Sample

```
curl -X GET
'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/permission/api/developer/access_policies/holiday_groups?site_id={site_id}'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
```

Response Sample

```
{
  "code": "SUCCESS",
  "data": [
    {
      "calendar_id": "2698fedb-cbcc-4826-b4c0-9e2d22db921b",
      "description": "string",
      "holidays": [
        {
          "description": "string",
          "end_time": "2024-05-02T00:00:05.000Z",
          "id": "7b93d5da-261d-4023-ba51-c6f782b98e83",
          "name": "International Workers' Day",
          "repeat": true,
          "start_time": "2024-05-01T00:00:05.000Z",
          "system": true
        }
      ],
      "id": "2698fedb-cbcc-4826-b4c0-9e2d22db921b",
      "is_site_default": true,
      "name": "HolidayGroupExample",
      "site_id": "c17e999d-10af-4c8a-b390-68220bb69dfd"
    }
  ],
  "error_params": {},
  "msg": "success"
}
```

3.7 Fetch All Schedules

This API enables you to fetch a list of all schedules.

- Request URL: `/permission/api/developer/access_policies/schedules`
- Method: `GET`
- Permission: `access_policy.view`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
order	query	False	string	order
page_num	query	False	integer	Page index starting
page_size	query	False	integer	Number records per page
site_id	query	False	string	Identity of site

Response Body

Parameter	Required	Type	Description
<code>data[].holiday_group_id</code>	True	string	Identity ID of the holiday group.

Parameter	Required	Type	Description
data[].holiday_schedule	True	array	The scheduled time for the holiday.
data[].holiday_schedule[].end_time	True	string	End time of the schedule.
data[].holiday_schedule[].start_time	True	string	Start time of the schedule.
data[].id	True	string	Identity ID of the schedule.
data[].name	True	string	Name of the schedule.
data[].site_id	True	string	Identity ID of the site.
data[].week_schedule	True	object	

Request Sample

```
curl -X GET
'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/permission/api/developer/access_policies/schedules'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
```

Response Sample

```
{
  "code": "SUCCESS",
  "data": [
    {
      "holiday_group_id": "1adfdee3-2062-469d-83da-a1e778e1f9fa",
      "holiday_schedule": [
        {
          "end_time": "23:00",
          "start_time": "15:15"
        }
      ]
    }
  ]
}
```

```
    }
  ],
  "id": "f8fae22d-96c7-4be8-b84e-67bf0d3e8619",
  "name": "Example Schedule",
  "site_id": "9bd4401c-ef34-4f65-9af4-10fef32f7f01",
  "week_schedule": {}
}
],
"error_params": {},
"msg": "success",
"pagination": {
  "page_num": 1,
  "page_size": 25,
  "total": 125
}
}
```

3.8 Fetch Schedule

This API enables you to fetch a schedule by its ID.

- Request URL: `/permission/api/developer/access_policies/schedules/{schedule_id}`
- Method: `GET`
- Permission: `access_policy.view`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
schedule_id	path	True	string	Identity of the schedule

Response Body

Parameter	Required	Type	Description
data.holiday_group_id	True	string	Identity ID of the holiday group.
data.holiday_schedule	True	array	The scheduled time for the holiday.
data.holiday_schedule[].end_time	True	string	End time of the schedule.
data.holiday_schedule[].start_time	True	string	Start time of the schedule.
data.id	True	string	Identity ID of the schedule.
data.name	True	string	Name of the schedule.
data.site_id	True	string	Identity ID of the site.
data.week_schedule	True	object	

Request Sample

```
curl -X GET
'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/permission/api/developer/access_policies/schedules/{schedule_id}'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
```

Response Sample

```
{
  "code": "SUCCESS",
  "data": {
    "holiday_group_id": "1adfdee3-2062-469d-83da-a1e778e1f9fa",
    "name": "2025-02-07",
    "start_time": "2025-02-07 00:00:00",
    "end_time": "2025-02-07 23:59:59",
    "week_schedule": [
      {
        "start_time": "2025-02-07 00:00:00",
        "end_time": "2025-02-07 23:59:59",
        "site_id": "1adfdee3-2062-469d-83da-a1e778e1f9fa"
      }
    ]
  }
}
```



```
"holiday_schedule": [
  {
    "end_time": "23:00",
    "start_time": "15:15"
  }
],
"id": "f8fae22d-96c7-4be8-b84e-67bf0d3e8619",
"name": "Example Schedule",
"site_id": "9bd4401c-ef34-4f65-9af4-10fef32f7f01",
"week_schedule": {}
},
"error_params": {},
"msg": "success"
}
```

3.9 Remove Access Policy

This API enables you to remove an access policy.

- Request URL: `/permission/api/developer/access_policies/{access_policy_id}`
- Method: `DELETE`
- Permission: `access_policy.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
access_policy_id	path	True	string	Identity of access policy

Response Body

Parameter	Required	Type	Description
data.active	True	boolean	Indicates whether the access policy is active.
data.created	True	string	The time when the access policy was created.
data.id	True	string	Identity ID of the access policy.
data.is_default	True	boolean	Indicates whether the access policy is a default policy.
data.name	True	string	Name of the access policy.
data.resources	True	array	Locations or resources assigned to the access policy.
data.resources[].id	True	string	Identity ID of the resource.
data.resources[].type	True	string	Resource type: <code>door=Door,</code> <code>door_group=Door group,</code> <code>doors_under_site=Doors under site,</code> <code>all_doors=All doors</code>
data.schedule_id	True	string	Identity ID of the schedule.
data.site_id	True	string	Identity ID of the site.
data.timerange_id	True	string	Identity ID of the time-range.
data.type	True	string	Type of the access policy: <code>access =Access policy,</code> <code>visitor_access=Visitor access policy,</code>

Parameter	Required	Type	Description
			<code>access_unlock_schedule=</code> Access unlock schedule
<code>data.users</code>	True	array	Users or user groups assigned to the access policy.
<code>data.users[].id</code>	True	string	Identity ID of the user or user group.
<code>data.users[].type</code>	True	string	Type of the user. <code>user=User,</code> <code>user_of_group=User group</code>

Request Sample

```
curl -X DELETE
'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/permission/api/developer/access_policies/{access_policy_id}'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
```

Response Sample

```
{
  "code": "SUCCESS",
  "data": {
    "active": true,
    "created": "2024-05-02T15:04:05.000Z",
    "id": "d844b529-dd4b-4bcb-88eb-fe9fab507c05",
    "is_default": true,
    "name": "Example Access Policy",
    "resources": [
      {
        "id": "a1f2a27f-865c-4a81-91bc-4cb39d58336a",
        "type": "door"
      }
    ]
  }
}
```

```
    ],
    "schedule_id": "5852b2b5-39d9-4461-9427-2af1270f80cd",
    "site_id": "d96d83ea-f479-4d9d-a8fc-50ada96037db",
    "timerange_id": "ignore",
    "type": "access",
    "users": [
      {
        "id": "4b906b78-2e9c-483a-8141-a343a54462de",
        "type": "user"
      }
    ]
  },
  "error_params": {},
  "msg": "success"
}
```

3.10 Remove Holiday Group

This API enables you to remove a holiday group.

- Request URL: `/permission/api/developer/access_policies/holiday_groups/{id}`
- Method: `DELETE`
- Permission: `access_policy.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
id	path	True	string	Identity of holiday group

Response Body

Parameter	Required	Type	Description
data.calendar_id	True	string	Identity ID of the calendar.
data.description	True	string	Description of the holiday group.
data.holidays	True	array	Holidays managed by the holiday group.
data.holidays[].description	True	string	Description of the holiday.
data.holidays[].end_time	True	string	End time of the holiday.
data.holidays[].id	True	string	Identity ID of the holiday.
data.holidays[].name	True	string	Name of the holiday.
data.holidays[].repeat	True	boolean	Indicates whether the holiday repeats every year.
data.holidays[].start_time	True	string	Start time of the holiday.
data.holidays[].system	True	boolean	Indicates whether the holiday is created by Google Calendar by default.
data.id	True	string	Identity ID of the holiday group.
data.is_site_default	True	boolean	Indicates whether the holiday group is a default group.

Parameter	Required	Type	Description
data.name	True	string	Name of the holiday group.
data.site_id	True	string	Identity ID of the site.

Request Sample

```
curl -X DELETE
'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/permission/api/developer/access_policies/holiday_groups/{id}'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
```

Response Sample

```
{
  "code": "SUCCESS",
  "data": {
    "calendar_id": "2698fedb-cbcc-4826-b4c0-9e2d22db921b",
    "description": "string",
    "holidays": [
      {
        "description": "string",
        "end_time": "2024-05-02T00:00:05.000Z",
        "id": "7b93d5da-261d-4023-ba51-c6f782b98e83",
        "name": "International Workers' Day",
        "repeat": true,
        "start_time": "2024-05-01T00:00:05.000Z",
        "system": true
      }
    ],
    "id": "2698fedb-cbcc-4826-b4c0-9e2d22db921b",
    "is_site_default": true,
    "name": "HolidayGroupExample",
    "site_id": "c17e999d-10af-4c8a-b390-68220bb69dfd"
  },
  "error_params": {}
}
```

```
"msg": "success"
}
```

3.11 Remove Schedule

This API enables you to remove a schedule.

- Request URL: `/permission/api/developer/access_policies/schedules/{schedule_id}`
- Method: `DELETE`
- Permission: `access_policy.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
schedule_id	path	True	string	Identity of the schedule.

Response Body

Parameter	Required	Type	Description
data.holiday_group_id	True	string	Identity ID of the holiday group.
data.holiday_schedule	True	array	The scheduled time for the holiday.
data.holiday_schedule[].end_time	True	string	End time of the schedule.

Parameter	Required	Type	Description
data.holiday_schedule[].start_time	True	string	Start time of the schedule.
data.id	True	string	Identity ID of the schedule.
data.name	True	string	Name of the schedule.
data.site_id	True	string	Identity ID of the site.
data.week_schedule	True	object	

Request Sample

```
curl -X DELETE
'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/permission/api/developer/access_policies/schedules/{schedule_id}'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
```

Response Sample

```
{
  "code": "SUCCESS",
  "data": {
    "holiday_group_id": "1adfdee3-2062-469d-83da-a1e778e1f9fa",
    "holiday_schedule": [
      {
        "end_time": "23:00",
        "start_time": "15:15"
      }
    ],
    "id": "f8fae22d-96c7-4be8-b84e-67bf0d3e8619",
    "name": "Example Schedule",
    "site_id": "9bd4401c-ef34-4f65-9af4-10fef32f7f01",
    "week_schedule": {}
  },
}
```

json


```
"error_params": {},
"msg": "success"
}
```

3.12 Update Access Policy

This API enables you to update an access policy.

- Request URL: `/permission/api/developer/access_policies/{access_policy_id}`
- Method: `PUT`
- Permission: `access_policy.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
access_policy_id	path	True	string	Identity ID of the access policy.

Request Body

Parameter	Required	Type	Description
active	False	boolean	Indicates whether the access policy is active.
id	False	string	Identity ID of the access policy.
name	True	string	Name of the access policy.

Parameter	Required	Type	Description
resources	False	array	Locations or resources assigned to the access policy.
resources[].id	False	string	Identity ID of the resource.
resources[].type	False	string	Resource type: door=Door, door_group=Door group, doors_under_site=Doors under site, all_doors=All doors
schedule_id	False	string	Identity ID of the schedule.
type	True	string	Type of the access policy: access =Access policy, visitor_access=Visitor access policy, access_unlock_schedule=Access unlock schedule
users	False	array	Users or user groups assigned to the access policy.
users[].id	False	string	Identity ID of the user or user group.
users[].type	False	string	Type of the user. user=User, user_of_group=User group

Response Body

Parameter	Required	Type	Description
data.active	True	boolean	Indicates whether the access policy is active.
data.created	True	string	The time when the access policy was created.
data.id	True	string	Identity ID of the access policy.
data.is_default	True	boolean	Indicates whether the access policy is a default policy.
data.name	True	string	Name of the access policy.
data.resources	True	array	Locations or resources assigned to the access policy.
data.resources[].id	True	string	Identity ID of the resource.
data.resources[].type	True	string	Resource type: <code>door=Door,</code> <code>door_group=Door group,</code> <code>doors_under_site=Doors under site,</code> <code>all_doors=All doors</code>
data.schedule_id	True	string	Identity ID of the schedule.
data.site_id	True	string	Identity ID of the site.
data.timerange_id	True	string	Identity ID of the time-range.
data.type	True	string	Type of the access policy: <code>access =Access policy,</code> <code>visitor_access=Visitor access policy,</code>

Parameter	Required	Type	Description
			<code>access_unlock_schedule=</code> Access unlock schedule
<code>data.users</code>	True	array	Users or user groups assigned to the access policy.
<code>data.users[].id</code>	True	string	Identity ID of the user or user group.
<code>data.users[].type</code>	True	string	Type of the user. <code>user=User,</code> <code>user_of_group=User group</code>

Request Sample

```
curl -X PUT
'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/permission/api/developer/access_policies/{access_policy_id}'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
--data-raw '{"active": true, "id": "d844b529-dd4b-4bcb-88eb-fe9fab507c05", "name": "Example Access Policy", "resources": [{"id": "a1f2a27f-865c-4a81-91bc-4cb39d58336a", "type": "door"}], "schedule_id": "5852b2b5-39d9-4461-9427-2af1270f80cd", "type": "access", "users": [{"id": "4b906b78-2e9c-483a-8141-a343a54462de", "type": "user"}]}'
```

Response Sample

```
{
  "code": "SUCCESS",
  "data": {
    "active": true,
    "created": "2024-05-02T15:04:05.000Z",
    "id": "d844b529-dd4b-4bcb-88eb-fe9fab507c05",
    "is_default": true,
    "name": "Example Access Policy",
    "resources": [
      json
```

```
{
  "id": "a1f2a27f-865c-4a81-91bc-4cb39d58336a",
  "type": "door"
},
{
  "schedule_id": "5852b2b5-39d9-4461-9427-2af1270f80cd",
  "site_id": "d96d83ea-f479-4d9d-a8fc-50ada96037db",
  "timerange_id": "ignore",
  "type": "access",
  "users": [
    {
      "id": "4b906b78-2e9c-483a-8141-a343a54462de",
      "type": "user"
    }
  ]
},
{
  "error_params": {},
  "msg": "success"
}
```

3.13 Update Holiday Group

This API enables you to update a holiday group.

- Request URL: `/permission/api/developer/access_policies/holiday_groups/{id}`
- Method: `PUT`
- Permission: `access_policy.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
id	path	True	string	Identity ID of the holiday group.

Request Body

Parameter	Required	Type	Description
calendar_id	False	string	Identity ID of the calendar.
description	False	string	Description of the holiday group.
holidays	False	array	Holidays managed by the holiday group.
holidays[].description	False	string	Description of the holiday.
holidays[].end_time	False	string	End time of the holiday.
holidays[].id	False	string	Identity ID of the holiday.
holidays[].name	False	string	Name of the holiday.
holidays[].repeat	False	boolean	Indicates whether the holiday repeats every year.
holidays[].start_time	False	string	Start time of the holiday.
holidays[].system	False	boolean	Indicates whether the holiday is created by Google Calendar by default.
id	False	string	Identity ID of the holiday group.

Parameter	Required	Type	Description
name	False	string	Name of the holiday group.

Response Body

Parameter	Required	Type	Description
data.calendar_id	True	string	Identity ID of the calendar.
data.description	True	string	Description of the holiday group.
data.holidays	True	array	Holidays managed by the holiday group.
data.holidays[].description	True	string	Description of the holiday.
data.holidays[].end_time	True	string	End time of the holiday.
data.holidays[].id	True	string	Identity ID of the holiday.
data.holidays[].name	True	string	Name of the holiday.
data.holidays[].repeat	True	boolean	Indicates whether the holiday repeats every year.
data.holidays[].start_time	True	string	Start time of the holiday.
data.holidays[].system	True	boolean	Indicates whether the holiday is created by Google Calendar by default.

Parameter	Required	Type	Description
data.id	True	string	Identity ID of the holiday group.
data.is_site_default	True	boolean	Indicates whether the holiday group is a default group.
data.name	True	string	Name of the holiday group.
data.site_id	True	string	Identity ID of the site.

Request Sample

```
curl -X PUT
'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/permission/api/developer/access_policies/holiday_groups/{id}'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
--data-raw '{"calendar_id": "2698fedb-cbcc-4826-b4c0-9e2d22db921b",
"description": "string", "holidays": [{"description": "string", "end_time":
"2024-05-02T00:00:05.000Z", "id": "7b93d5da-261d-4023-ba51-c6f782b98e83",
"name": "International Workers' Day", "repeat": true, "start_time": "2024-05-
01T00:00:05.000Z", "system": true}], "id": "2698fedb-cbcc-4826-b4c0-
9e2d22db921b", "name": "HolidayGroupExample"}'
```

Response Sample

```
{
  "code": "SUCCESS",
  "data": {
    "calendar_id": "2698fedb-cbcc-4826-b4c0-9e2d22db921b",
    "description": "string",
    "holidays": [
      {
        "description": "string",
        "end_time": "2024-05-02T00:00:05.000Z",
        "id": "7b93d5da-261d-4023-ba51-c6f782b98e83",
        "name": "International Workers' Day",
```



```
        "repeat": true,
        "start_time": "2024-05-01T00:00:05.000Z",
        "system": true
    },
    ],
    "id": "2698fedb-cbcc-4826-b4c0-9e2d22db921b",
    "is_site_default": true,
    "name": "HolidayGroupExample",
    "site_id": "c17e999d-10af-4c8a-b390-68220bb69dfd"
},
"error_params": {},
"msg": "success"
}
```

3.14 Update Schedule

This API enables you to update a schedule.

- Request URL: `/permission/api/developer/access_policies/schedules/{schedule_id}`
- Method: `PUT`
- Permission: `access_policy.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
schedule_id	path	True	string	Identity of the schedule.

Request Body

Parameter	Required	Type	Description
holiday_group_id	False	string	Identity ID of the holiday group.
holiday_schedule	False	array	The scheduled time for the holiday.
holiday_schedule[].end_time	False	string	End time of the schedule.
holiday_schedule[].start_time	False	string	Start time of the schedule.
name	True	string	Name of the schedule.
week_schedule	False	object	

Response Body

Parameter	Required	Type	Description
data.holiday_group_id	True	string	Identity ID of the holiday group.
data.holiday_schedule	True	array	The scheduled time for the holiday.
data.holiday_schedule[].end_time	True	string	End time of the schedule.
data.holiday_schedule[].start_time	True	string	Start time of the schedule.
data.id	True	string	Identity ID of the schedule.
data.name	True	string	Name of the schedule.
data.site_id	True	string	Identity ID of the site.

Parameter	Required	Type	Description
data.week_schedule	True	object	

Request Sample

```
curl -X PUT
'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/permission/api/developer/access_policies/schedules/{schedule_id}'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
--data-raw '{"holiday_group_id": "1adfdde3-2062-469d-83da-a1e778e1f9fa",
"holiday_schedule": [{"end_time": "23:00", "start_time": "15:15"}], "name":
"Example Schedule", "week_schedule": {}}'
```

Response Sample

```
{
  "code": "SUCCESS",
  "data": {
    "holiday_group_id": "1adfdde3-2062-469d-83da-a1e778e1f9fa",
    "holiday_schedule": [
      {
        "end_time": "23:00",
        "start_time": "15:15"
      }
    ],
    "id": "f8fae22d-96c7-4be8-b84e-67bf0d3e8619",
    "name": "Example Schedule",
    "site_id": "9bd4401c-ef34-4f65-9af4-10fef32f7f01",
    "week_schedule": {}
  },
  "error_params": {},
  "msg": "success"
}
```

json

4. Credentials

The APIs here are designed for managing PIN codes and NFC cards.

4.1 Assign NFC Card to User

This API enables you to assign an NFC card to a user.

- Request URL: `/door-access/api/developer/credentials/nfc_cards`
- Method: `POST`
- Permission: `access_credential.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Body

Parameter	Required	Type	Description
credential_id	False	string	Identity id of credential.
credential_type	False	string	type of credential <code>enum type {nfc,pin_code}</code>
user_id	False	string	Owner ID of the NFC card.
user_type	False	string	Owner type: <code>enum user_type {user,visitor}</code>

Response Body

Parameter	Required	Type	Description
data.credential_id	True	string	Identity id of credential.
data.credential_type	True	string	type of credential <code>enum type {nfc,pin_code}</code>

Parameter	Required	Type	Description
data.credential_value	True	string	Value of credential
data.id	True	string	Identity id of credential assignment.
data.user_id	True	string	Owner ID of the NFC card.
data.user_type	True	string	Owner type: <code>enum user_type {user,visitor}</code>

Request Sample

```
curl -X POST 'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/door-access/api/developer/credentials/nfc_cards'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
--data-raw '{"credential_id": "f5097f83-1d0c-4f2e-be97-2567e0f70976",
"credential_type": "nfc", "user_id": "37240a31-2b6d-42dc-8c13-95b8a2754a0d",
"user_type": "user"}'
```

Response Sample

```
{
  "code": "SUCCESS",
  "data": {
    "credential_id": "f5097f83-1d0c-4f2e-be97-2567e0f70976",
    "credential_type": "nfc",
    "credential_value": 19987452.0,
    "id": "7f8ef4bf-ff74-4780-82f3-25957c4f3dc5",
    "user_id": "37240a31-2b6d-42dc-8c13-95b8a2754a0d",
    "user_type": "user"
  },
  "error_params": {},
  "msg": "success"
}
```

4.2 Assign PIN Code to User

This API enables you to assign a PIN code to a user.

- Request URL: `/door-access/api/developer/credentials/pin_codes/{user_type}/{user_id}`
- Method: `POST`
- Permission: `access_credential.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
user_id	path	True	string	Identity of user
user_type	path	True	string	Type of owner. <code>user_type</code> {user, visitor}

Request Body

Parameter	Required	Type	Description
value	False	string	Generate a PIN code for the user to unlock doors.

Response Body

Parameter	Required	Type	Description
data.id	True	string	Identity ID of the PIN code.
data.value	True	string	Generate a PIN code for the user to unlock doors.

Request Sample

```
curl -X POST 'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/door-access/api/developer/credentials/pin_codes/{user_type}/{user_id}'  
  -H 'Authorization: Bearer {API_TOKEN}'  
  -H 'accept: application/json'  
  -H 'content-type: application/json'  
  --data-raw '{"value": "string"}'
```

Response Sample

```
{  
  "code": "SUCCESS",  
  "data": {  
    "id": "string",  
    "value": "string"  
  },  
  "error_params": {},  
  "msg": "success"  
}
```

json

4.3 Remove NFC Card

This API enables you to remove an NFC card.

- Request URL: `/door-access/api/developer/credentials/nfc_cards/{id}`
- Method: `DELETE`
- Permission: `access_credential.edit`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
id	path	True	string	Identity ID of the NFC card.

Response Body

Parameter	Required	Type	Description
data.card_id	True	string	
data.id	True	string	Identity ID of the NFC card.
data.note	True	string	Preferred name of the NFC card.
data.session_id	True	string	Identity ID of the session.
data.site_id	True	string	Identity ID of the site.
data.token	True	string	Identity token of the NFC card.
data.type	True	string	NFC card type: <code>enum type{normal_card,ua_card,ua_fob}</code>
data.ua_card_id	True	string	Identity ID of the UA Card.

Request Sample


```
curl -X DELETE 'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/door-  
access/api/developer/credentials/nfc_cards/{id}'  
-H 'Authorization: Bearer {API_TOKEN}'  
-H 'accept: application/json'  
-H 'content-type: application/json'
```

Response Sample

```
{  
  "code": "SUCCESS",  
  "data": {  
    "card_id": "AE74CF68",  
    "id": "148c00ba-9ff2-4710-b3e7-215629c74292",  
    "note": "AE74",  
    "session_id": "544d87ff-488c-4b00-aab6-d1fe26e29c7a",  
    "site_id": "46a638ab-2927-4ddd-8072-355640573fe4",  
    "token":  
"af98d2b66020d7cd03543da31ade60d349d707e1644e730d2256cf538b0ad130",  
    "type": "ua_card",  
    "ua_card_id": "EFFC7456"  
  },  
  "error_params": {},  
  "msg": "success"  
}
```

json

5. Locations

The APIs here are designed for managing locations, including door groups, doors, and sites.

5.1 Fetch All Door Groups

This API enables you to fetch a list of all door groups.

- Request URL: `/door-access/api/developer/door_groups`
- Method: `GET`
- Permission: `location_space.view`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
site_id	query	True	string	Identity ID of the site.

Response Body

Parameter	Required	Type	Description
data[].created	True	string	The time when the door group was created.
data[].id	True	string	Identity ID of the door group.
data[].name	True	string	Name of the door group.

Request Sample

```
curl -X GET 'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/door-access/api/developer/door_groups?site_id={site_id}'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
```

Response Sample

```
{
  "code": "SUCCESS",
  "data": [
    {
      "id": "1",
      "name": "Door Group 1",
      "created": "2025-02-07T15:21:00Z"
    },
    {
      "id": "2",
      "name": "Door Group 2",
      "created": "2025-02-07T15:21:00Z"
    }
  ]
}
```

```
{
  "created": "2024-05-02T15:04:05.000Z",
  "id": "ddc15029-3bcd-43ab-91ae-6b6688df82a8",
  "name": "Example Group"
},
"error_params": {},
"msg": "success"
}
```

5.2 Fetch All Doors

This API enables you to fetch a list of all doors.

- Request URL: `/door-access/api/developer/doors`
- Method: `GET`
- Permission: `location_space.view`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
site_id	query	True	string	Identity of the site

Response Body

Parameter	Required	Type	Description
data[].created	True	string	The time when the door was created.

Parameter	Required	Type	Description
data[].id	True	string	Identity ID of the door.
data[].name	True	string	Name of the door.

Request Sample

```
curl -X GET 'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/door-access/api/developer/doors?site_id={site_id}'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
```

Response Sample

```
{
  "code": "SUCCESS",
  "data": [
    {
      "created": "2024-05-02T15:04:05.000Z",
      "id": "0e97abe3-8896-4637-a56b-8a98fef28c8d",
      "name": "Example Door1"
    }
  ],
  "error_params": {},
  "msg": "success"
}
```

json

5.3 Fetch All Sites

This API enables you to fetch a list of all sites.

- Request URL: `/door-access/api/developer/sites`
- Method: `GET`
- Permission: `location_space.view`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Response Body

Parameter	Required	Type	Description
data[].created	True	string	The time when the site was created.
data[].id	True	string	Identity ID of the site.
data[].name	True	string	Name of the site.

Request Sample

```
curl -X GET 'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/door-access/api/developer/sites'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
```

Response Sample

```
{
  "code": "SUCCESS",
  "data": [
    {
      "created": "2024-05-02T15:04:05.000Z",
      "id": "11372160-1447-4941-b0ad-6f656785397c",
      "name": "HomeLab"
    }
  ],
  "error_params": {},
  "msg": "success"
}
```

json

6. Devices

The APIs here are designed for device management.

6.1 Activate/Deactivate Site-Level Emergency Evacuation

This API enables you to activate or deactivate emergency evacuation for all doors at the site.

- Request URL: `/door-access/api/developer/device/advance_setting/doors_evacuation`
- Method: `PUT`
- Permission: `['location_space.edit', 'access.edit']`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Body

Parameter	Required	Type	Description
enable	False	boolean	
site_id	False	string	Activate, deactivate, or reset the emergency evacuation or lockdown for all doors at the site.

Request Sample

```
curl -X PUT 'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/door-access/api/developer/device/advance_setting/doors_evacuation'  
  -H 'Authorization: Bearer {API_TOKEN}'  
  -H 'accept: application/json'
```

```
-H 'content-type: application/json'
--data-raw '{"enable": true, "site_id": "string"}'
```

Response Sample

```
{
  "code": "SUCCESS",
  "error_params": {},
  "msg": "success"
}
```

json

6.2 Activate/Deactivate Site-Level Emergency Lockdown

This API enables you to activate or deactivate emergency lockdown for all doors at the site.

- Request URL: `/door-access/api/developer/device/advance_setting/doors_lockdown`
- Method: `PUT`
- Permission: `['location_space.edit', 'access.edit']`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Body

Parameter	Required	Type	Description
enable	False	boolean	
site_id	False	string	Activate, deactivate, or reset the emergency evacuation or lockdown for all doors at the site.

Request Sample

```
curl -X PUT 'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/door-access/api/developer/device/advance_setting/doors_lockdown'
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
--data-raw '{"enable": true, "site_id": "string"}'
```

Response Sample

```
{
  "code": "SUCCESS",
  "error_params": {},
  "msg": "success"
}
```

json

6.3 Fetch All Access Devices

This API enables you to fetch a list of all Access devices.

- Request URL: `/door-access/api/developer/devices`
- Method: `GET`
- Permission: `access.ua_device.view`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
site_id	query	True	string	Identity of site

Response Body

Parameter	Required	Type	Description
data[].agent_id	True	string	Identity ID of the Identity Enterprise Agent.
data[].dps	True	string	Indicates the door position sensor (DPS) status, where the value "closed" or "open" is allowed.
data[].firmware	True	string	Firmware of the device.
data[].full_name	True	string	Full name of the device.
data[].hub_id	True	string	The Access Control Hub to which the access device is connected.
data[].id	True	string	Identity ID of the door group.
data[].ip	True	string	IP address of the device.
data[].location_id	True	string	Identity ID of the door, floor, and building.
data[].mac	True	string	MAC address of the device.
data[].name	True	string	Name of the device.
data[].online	True	boolean	Indicates whether the device is online.
data[].revision	True	string	The time when the access device data was last updated.
data[].site_id	True	string	Identity ID of the site.

Parameter	Required	Type	Description
data[].type	True	string	Device type.
data[].uptime	True	integer	Uptime of the device.
data[].version	True	string	Version of the device.

Request Sample

```
curl -X GET 'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/door-  
access/api/developer/devices?site_id={site_id}'  
  -H 'Authorization: Bearer {API_TOKEN}'  
  -H 'accept: application/json'  
  -H 'content-type: application/json'
```

Response Sample

```
{  
  "code": "SUCCESS",  
  "data": [  
    {  
      "agent_id": "39089234-7c6b-499c-8355-7d473bd8ee12",  
      "dps": "open",  
      "firmware": "v2.4.5",  
      "full_name": "HUB-Door1",  
      "hub_id": "e063dac24638",  
      "id": "43339074-4cc1-4262-9294-556ba51b63e6",  
      "ip": "192.168.1.24",  
      "location_id": "37f934b0-a8d9-4de6-8daa-3362bb8ca4de",  
      "mac": "84:14:4d:ba:2f:98",  
      "name": "HUB-Door1",  
      "online": true,  
      "revision": 1721205519.0,  
      "site_id": "42d458cd-ab7d-4555-afdc-68c530b74e3c",  
      "type": "UA-Hub",  
      "uptime": 0,  
      "version": "string"  
    }  
  ],  
  "error_params": {},  
}
```

json

```
  "msg": "success"
}
```

6.4 Fetch Door Lock/Unlock Status

This API enables you to fetch the lock/unlock status of a door using a Door Position Sensor (DPS).

- Request URL: `/door-access/api/developer/device/dps/{device_id}`
- Method: `GET`
- Permission: ``

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Parameters

Parameter	In	Required	Type	Description
device_id	path	True	string	
site_id	query	True	string	

Response Body

Parameter	Required	Type	Description
data.dps_status	True	string	

Request Sample

```
curl -X GET 'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/door-access/api/developer/device/dps/{device_id}?site_id={site_id}'
```

```
-H 'Authorization: Bearer {API_TOKEN}'
-H 'accept: application/json'
-H 'content-type: application/json'
```

Response Sample

```
{
  "code": "SUCCESS",
  "data": {
    "dps_status": "string"
  },
  "error_params": {},
  "msg": "success"
}
```

json

6.5 Reset Site-Level Emergency Evacuation/Lockdown Mode

This API enables you to reset the emergency evacuation or lockdown mode for all doors at the site.

- Request URL: `/door-access/api/developer/device/advance_setting/doors_reset`
- Method: `PUT`
- Permission: `['location_space.edit', 'access.edit']`

Request Header

Parameter	Required	Type	Description
Authorization	True	string	Required for authentication and access control.

Request Body

Parameter	Required	Type	Description
enable	False	boolean	

Parameter	Required	Type	Description
site_id	False	string	Activate, deactivate, or reset the emergency evacuation or lockdown for all doors at the site.

Request Sample

```
curl -X PUT 'https://{YOUR_WORKSPACE_DOMAIN}.ui.com/gw/door-  
access/api/developer/device/advance_setting/doors_reset'  
  -H 'Authorization: Bearer {API_TOKEN}'  
  -H 'accept: application/json'  
  -H 'content-type: application/json'  
  --data-raw '{"enable": true, "site_id": "string"}'
```

Response Sample

```
{  
  "code": "SUCCESS",  
  "error_params": {},  
  "msg": "success"  
}
```

json