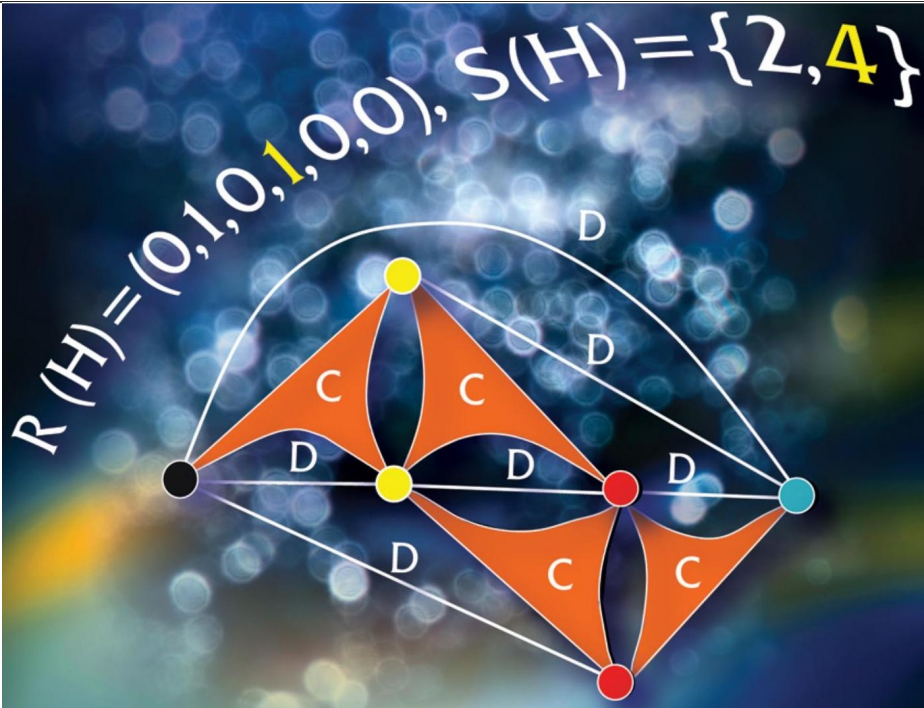
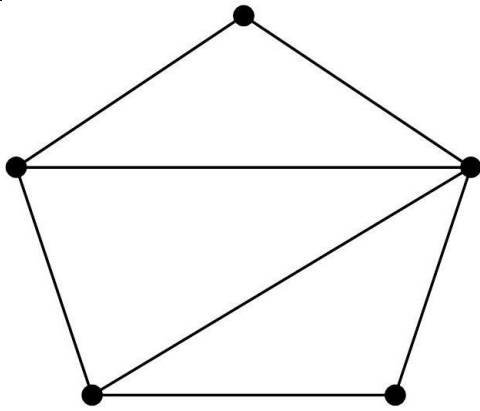
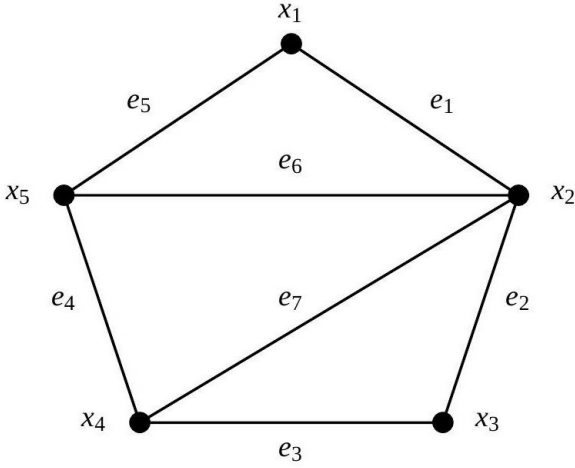
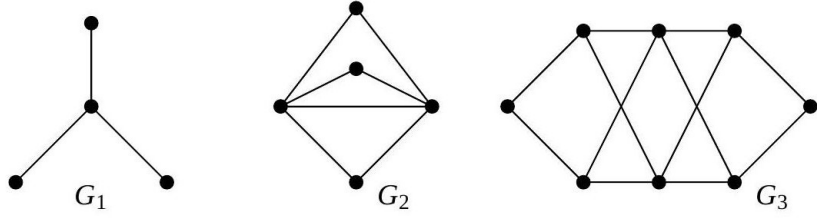
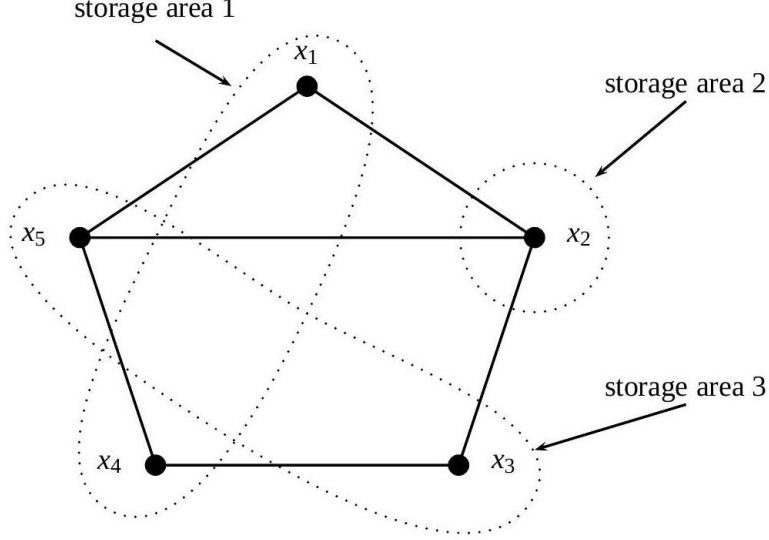
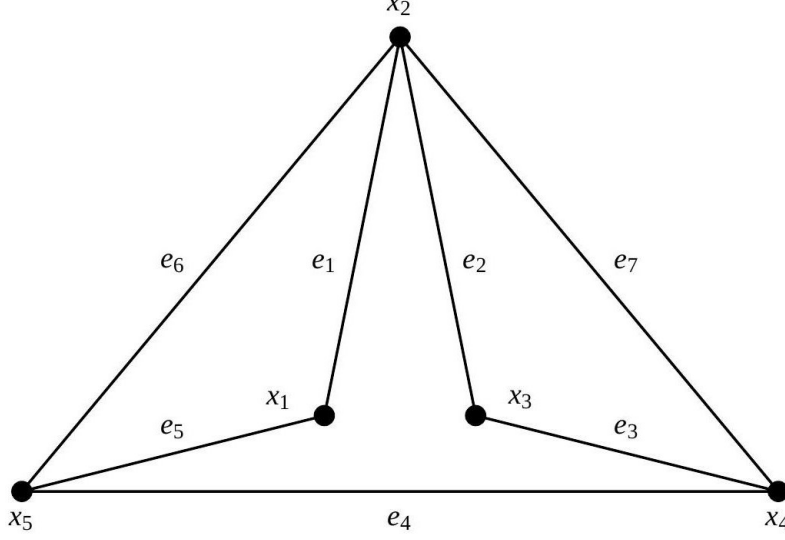
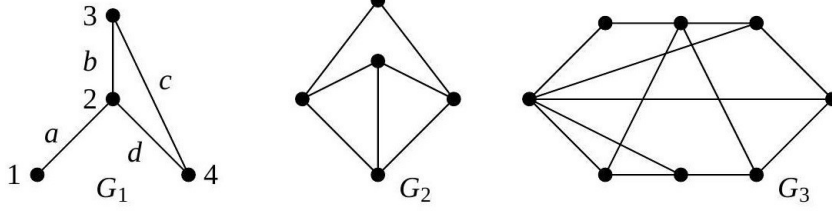
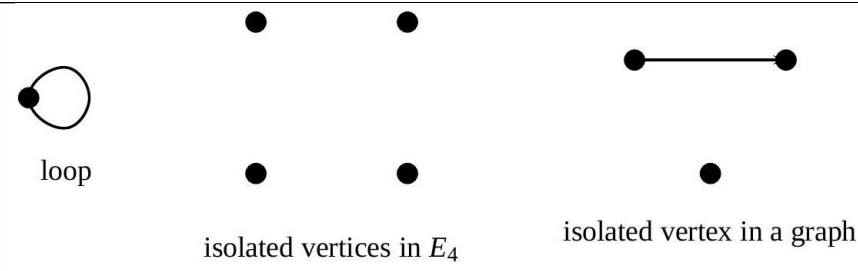
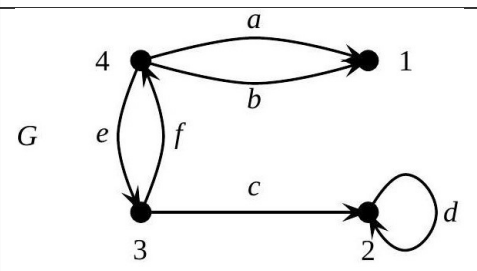

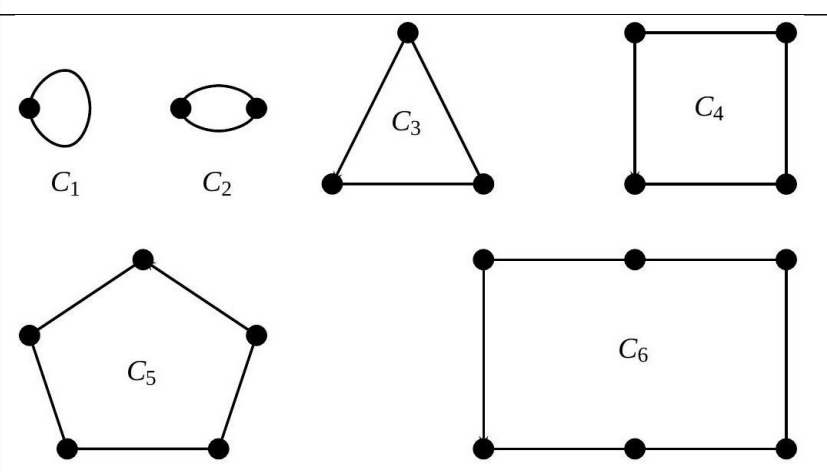
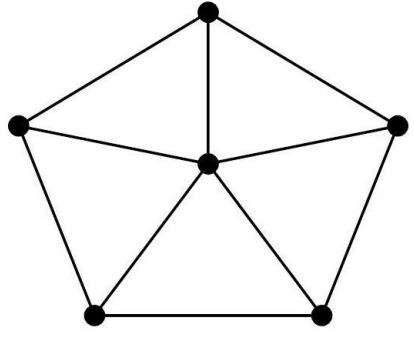
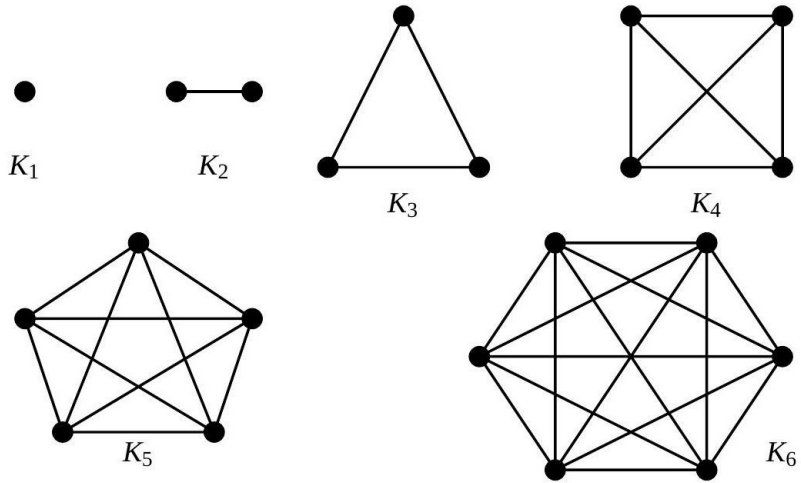

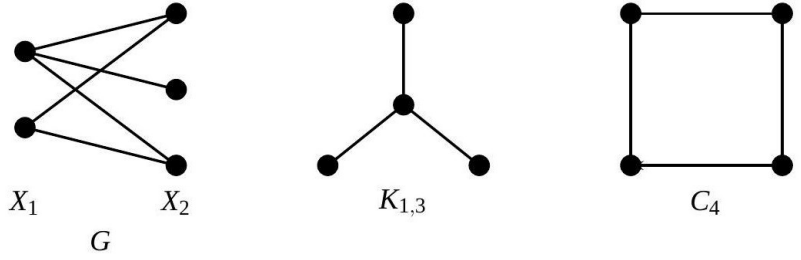
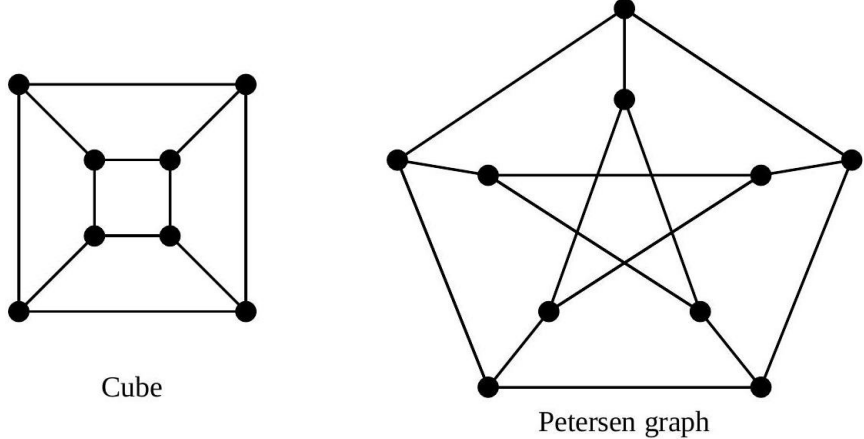







Image regions

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0001	1	—	—	—	
voloshin-hypergraph_ DIA_0002	21	—	—	—	
voloshin-hypergraph_ DIA_0003	22	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0004	24	—	—	—	
voloshin-hypergraph_ DIA_0005	25	—	—	—	
voloshin-hypergraph_ DIA_0006	29	—	—	—	
voloshin-hypergraph_ DIA_0007	31	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0008	32	—	—	—	 loop isolated vertices in E_4 isolated vertex in a graph multiple edges arcs
voloshin-hypergraph_ DIA_0009	32	—	—	—	
voloshin-hypergraph_ DIA_0010	33	—	—	—	 G
voloshin-hypergraph_ DIA_0011	34	—	—	—	 P_5
voloshin-hypergraph_ DIA_0012	34	—	—	—	 G_1 G_2
voloshin-hypergraph_ DIA_0013	35	—	—	—	 C_1 C_2 C_3 C_4 C_5 C_6

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0014	35	—	—	—	
voloshin-hypergraph_ DIA_0015	36	—	—	—	
voloshin-hypergraph_ DIA_0016	36	—	—	—	
voloshin-hypergraph_ DIA_0017	37	—	—	—	
voloshin-hypergraph_ DIA_0018	38	—	—	—	

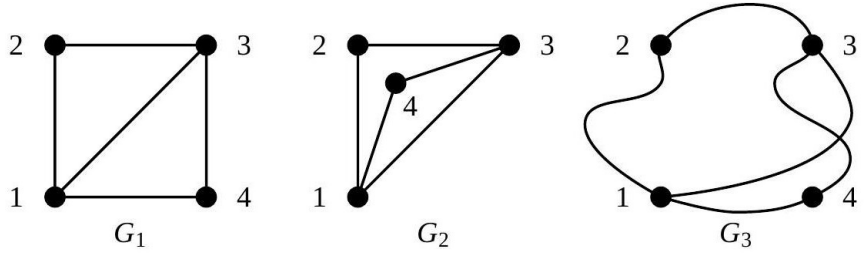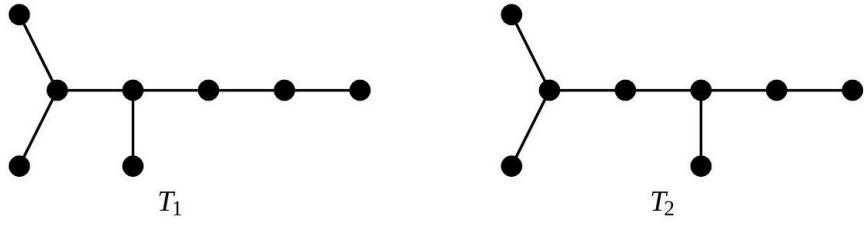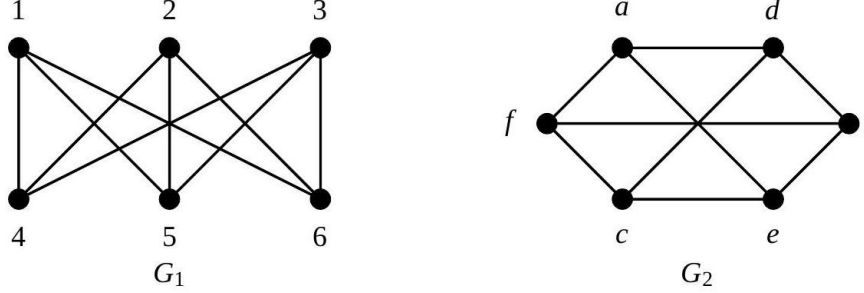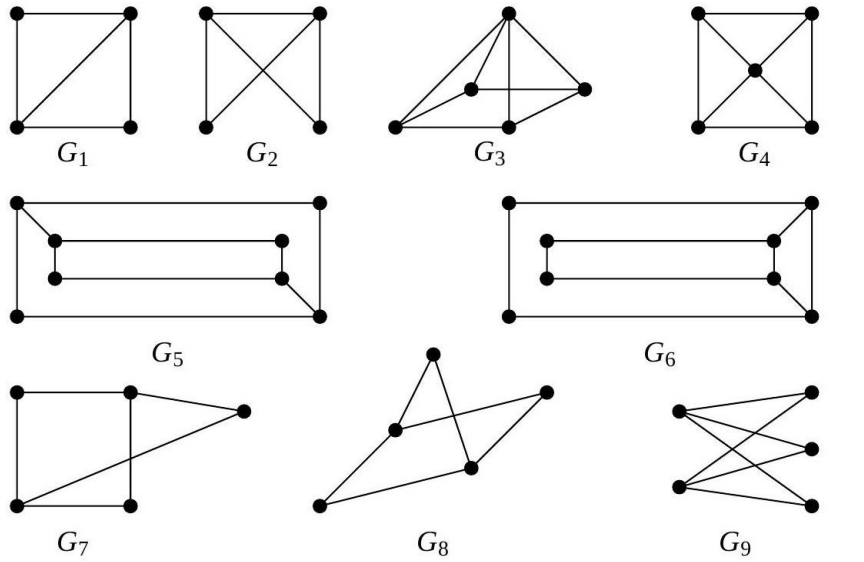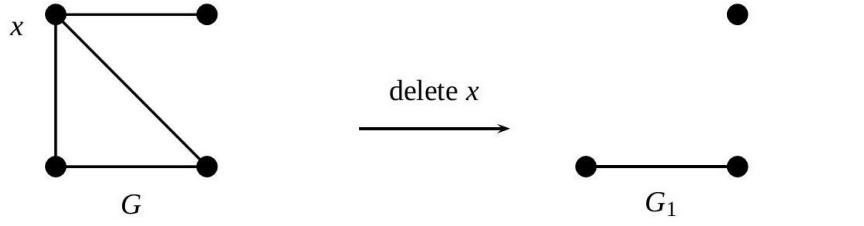Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0019	38	—	—	—	
voloshin-hypergraph_ DIA_0020	39	—	—	—	
voloshin-hypergraph_ DIA_0021	40	—	—	—	
voloshin-hypergraph_ DIA_0022	41	—	—	—	
voloshin-hypergraph_ DIA_0023	42	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0024	42	—	—	—	
voloshin-hypergraph_ DIA_0025	43	—	—	—	
voloshin-hypergraph_ DIA_0026	43	—	—	—	
voloshin-hypergraph_ DIA_0027	44	—	—	—	
voloshin-hypergraph_ DIA_0028	44	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0029	46	—	—	—	
voloshin-hypergraph_ DIA_0030	47	—	—	—	
voloshin-hypergraph_ DIA_0031	48	—	—	—	
voloshin-hypergraph_ DIA_0032	49	—	—	—	
voloshin-hypergraph_ DIA_0033	51	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0034	51	—	—	—	
voloshin-hypergraph_ DIA_0035	52	—	—	—	
voloshin-hypergraph_ DIA_0036	52	—	—	—	
voloshin-hypergraph_ DIA_0037	53	—	—	—	
voloshin-hypergraph_ DIA_0038	56	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0039	58	—	—	—	
voloshin-hypergraph_ DIA_0040	59	—	—	—	
voloshin-hypergraph_ DIA_0041	60	—	—	—	
voloshin-hypergraph_ DIA_0042	61	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0043	64	—	—	—	The diagram illustrates a relationship between two sets, X and Y. Set X is on the left and contains two subsets: S and $X - S_0$. Set Y is on the right and contains two subsets: $N_G(S)$ and $N_G(S_0)$. Two edges, G_A and G_B, are shown. Edge G_A connects S to $N_G(S_0)$. Edge G_B connects $X - S_0$ to $N_G(S)$.
voloshin-hypergraph_ DIA_0044	65	—	—	—	The diagram shows two sets, X and Y. Set X contains subsets S and A. Set Y contains subsets $N_{G_1}(S)$ and B. A horizontal dashed line divides the diagram into two regions: G_1 above and G_2 below. Two edges are shown: one connecting S to $N_{G_1}(S)$ and another connecting A to B.
voloshin-hypergraph_ DIA_0045	66	—	—	—	The diagram depicts a grid of points arranged in four rows and six columns. Horizontal and vertical lines connect the points, forming a series of adjacent rectangles. This structure represents a hypergraph or a specific graph configuration.

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0046	68	—	—	—	
voloshin-hypergraph_ DIA_0047	68	—	—	—	
voloshin-hypergraph_ DIA_0048	70	—	—	—	
voloshin-hypergraph_ DIA_0049	72	—	—	—	
voloshin-hypergraph_ DIA_0050	74	—	—	—	
voloshin-hypergraph_ DIA_0051	75	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0052	75	—	—	—	
voloshin-hypergraph_ DIA_0053	76	—	—	—	
voloshin-hypergraph_ DIA_0054	76	—	—	—	
voloshin-hypergraph_ DIA_0055	77	—	—	—	
voloshin-hypergraph_ DIA_0056	78	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0057	79	—	—	—	
voloshin-hypergraph_ DIA_0058	80	—	—	—	
voloshin-hypergraph_ DIA_0059	81	—	—	—	
voloshin-hypergraph_ DIA_0060	81	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0061	84	—	—	—	
voloshin-hypergraph_ DIA_0062	84	—	—	—	
voloshin-hypergraph_ DIA_0063	86	—	—	—	
voloshin-hypergraph_ DIA_0064	87	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0065	88	—	—	—	The diagram illustrates the construction of a hypergraph from two base graphs, K_5 and $K_{3,3}$. Top section (K_5): A complete graph K_5 with vertices 1, 2, 3, 4, 5 is shown. It is transformed into a triangle with vertices 1, 2, 3. Vertex 4 is placed either 'inside' or 'outside' the triangle. In both cases, the resulting graph has 'no face for 5'. Bottom section ($K_{3,3}$): A complete bipartite graph $K_{3,3}$ with vertices 1, 2, 3, 4, 5, 6 is shown. It is transformed into a square with vertices 1, 2, 3, 4. Vertex 5 is placed either 'inside' or 'outside' the square. In both cases, the resulting graph has 'no face for 6'.
voloshin-hypergraph_ DIA_0066	91	—	—	—	Two graphs, G_1 and G_2, are shown. G_1 is a complex graph with 10 vertices and many edges. G_2 is a graph with 10 vertices and 12 edges, including a cycle of length 6.
voloshin-hypergraph_ DIA_0067	92	—	—	—	A graph with 10 vertices and 12 edges, including a cycle of length 6.

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0068	93	—	—	—	
voloshin-hypergraph_ DIA_0069	97	—	—	—	
voloshin-hypergraph_ DIA_0070	99	—	—	—	
voloshin-hypergraph_ DIA_0071	100	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0072	101	—	—	—	Diagram illustrating the decomposition of a hypergraph G into two hypergraphs G_1 and G_2. G has two vertices x and y and a hyperedge containing both. G_1 has a dashed edge between x and y. G_2 has a single vertex xy.
voloshin-hypergraph_ DIA_0073	102	—	—	—	Diagram illustrating the decomposition of a graph G into two graphs G_1 and G_2. G is a V-shaped graph with vertices x, y, and z. $G_1 = K_3$ is a triangle with vertices x, y, and z. $G_2 = K_2$ is a single edge with vertices x and z.
voloshin-hypergraph_ DIA_0074	103	—	—	—	Diagram illustrating a tree structure G with root G and children G_1 and G_2. G_1 has children G_3 and G_4. G_2 has children G_5 and G_6. Below the tree is a sequence of labels K_{i_1}, K_{i_2}, ..., K_{i_s}.

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0075	104	—	—	—	
voloshin-hypergraph_ DIA_0076	105	—	—	—	
voloshin-hypergraph_ DIA_0077	107	—	—	—	$E_3 - 2E_2 + E_1 \Rightarrow P(G, \lambda) = \lambda^3 - 2\lambda^2 + \lambda = \lambda(\lambda - 1)^2$




Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0078	108	—	—	—	
voloshin-hypergraph_ DIA_0079	109	—	—	—	
voloshin-hypergraph_ DIA_0080	111	—	—	—	
voloshin-hypergraph_ DIA_0081	112	—	—	—	
voloshin-hypergraph_ DIA_0082	113	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0083	115	—	—	—	
voloshin-hypergraph_ DIA_0084	117	—	—	—	
voloshin-hypergraph_ DIA_0085	119	—	—	—	
voloshin-hypergraph_ DIA_0086	120	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0087	121	—	—	—	
voloshin-hypergraph_ DIA_0088	122	—	—	—	
voloshin-hypergraph_ DIA_0089	124	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0090	125	—	—	—	The diagram shows a transformation from a single edge (two vertices connected by a line) to a more complex graph structure. The transformation is indicated by an arrow pointing to the right. The resulting graph has five vertices and several edges, with one edge highlighted by a dashed circle.
voloshin-hypergraph_ DIA_0091	125	—	—	—	The diagram shows a complex graph structure with many vertices and edges, forming a dense, interconnected network.
voloshin-hypergraph_ DIA_0092	126	—	—	—	The diagram shows two graph structures, G and $\bar{G}$, with vertices labeled 1, 2, 3. The vertices are arranged in a cycle, and the edges connect them in a specific pattern. The graph G is on the left, and $\bar{G}$ is on the right.
voloshin-hypergraph_ DIA_0093	129	—	—	—	The diagram shows two graph structures, G and $L(G)$, with vertices labeled a, b, c, d, e. The vertices are arranged in a cycle, and the edges connect them in a specific pattern. The graph G is on the left, and $L(G)$ is on the right. edge coloring vertex coloring

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0094	130	—	—	—	
voloshin-hypergraph_ DIA_0095	131	—	—	—	
voloshin-hypergraph_ DIA_0096	133	—	—	—	
voloshin-hypergraph_ DIA_0097	134	—	—	—	

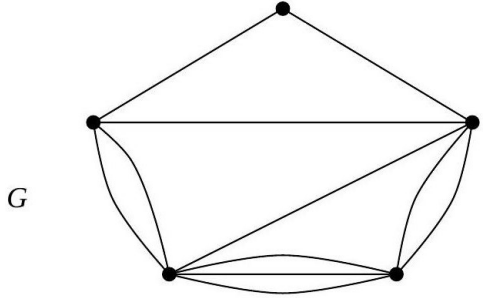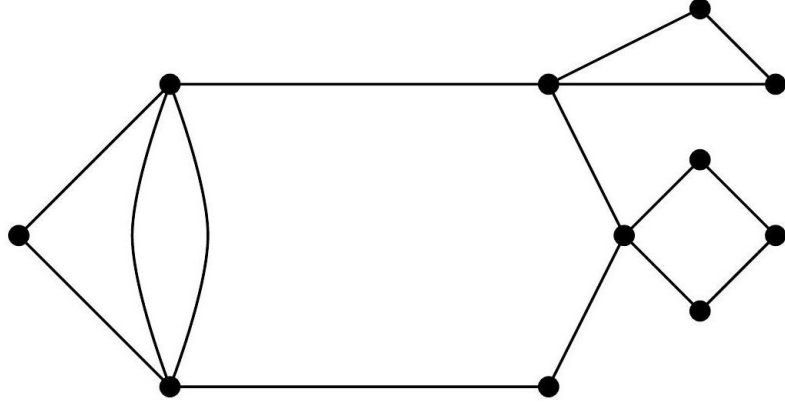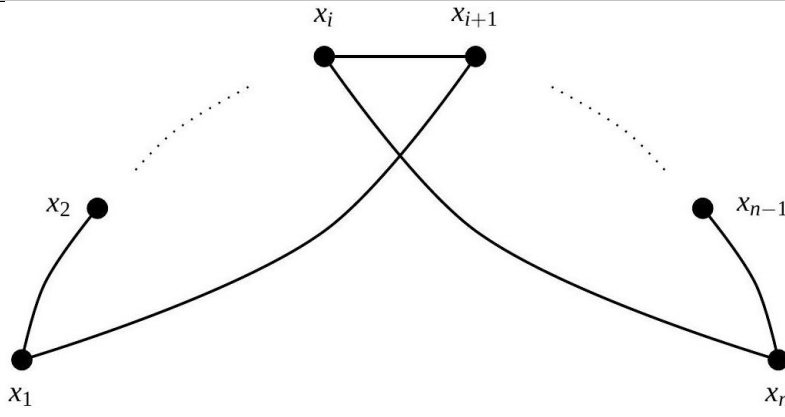Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0098	136	—	—	—	
voloshin-hypergraph_ DIA_0099	140	—	—	—	
voloshin-hypergraph_ DIA_0100	141	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0101	145	—	—	—	The image displays three network flow diagrams arranged vertically, connected by downward arrows, illustrating the progression of a flow augmentation algorithm. Each diagram features a source node u and a sink node v, with intermediate nodes x_1, x_2, x_3, x_4. Initial flow F_0: - Edges and flows: $u \rightarrow x_1$ (0,3), $u \rightarrow x_4$ (1,5), $x_1 \rightarrow x_2$ (1,7), $x_1 \rightarrow x_3$ (1,1), $x_2 \rightarrow v$ (1,6), $x_3 \rightarrow v$ (0,2), $x_4 \rightarrow x_3$ (1,4). Flow F_1: - Edges and flows: $u \rightarrow x_1$ (1,3), $u \rightarrow x_4$ (1,5), $x_1 \rightarrow x_2$ (1,7), $x_1 \rightarrow x_3$ (0,1), $x_2 \rightarrow v$ (1,6), $x_3 \rightarrow v$ (1,2), $x_4 \rightarrow x_3$ (1,4). Flow F_2: - Edges and flows: $u \rightarrow x_1$ (3,3), $u \rightarrow x_4$ (1,5), $x_1 \rightarrow x_2$ (3,7), $x_1 \rightarrow x_3$ (0,1), $x_2 \rightarrow v$ (3,6), $x_3 \rightarrow v$ (1,2), $x_4 \rightarrow x_3$ (1,4).

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0102	146	—	—	—	The top diagram shows a flow network with source u and sink v. Intermediate nodes are x_1, x_2, x_3, x_4. The flow F_3 is indicated. The bottom diagram shows the same network with a maximum flow F_4.
voloshin-hypergraph_ DIA_0103	151	—	—	—	A hypergraph diagram with 6 nodes and 4 hyperedges. The nodes are arranged in a hexagonal pattern, and the hyperedges are represented by closed curves connecting different subsets of nodes.
voloshin-hypergraph_ DIA_0104	155	—	—	—	Two hypergraph diagrams labeled $\mathcal{H}_1$ and $\mathcal{H}_2$. $\mathcal{H}_1$ is a smaller hypergraph with 6 nodes and 4 hyperedges. $\mathcal{H}_2$ is a larger hypergraph with 8 nodes and 6 hyperedges.

Identifier	Page	Conf.	LaTeX source	Rendered	Image																																										
voloshin-hypergraph_ DIA_0105	157	—	—	—	The diagram illustrates the relationship between a hypergraph $\mathcal{H} = (X, \mathcal{D})$, its incidence matrix $I(\mathcal{H})$, and its bipartite graph $B(\mathcal{H})$. Hypergraph $\mathcal{H}$: A set of 6 vertices $\{1, 2, 3, 4, 5, 6\}$ and 5 hyperedges D_1, D_2, D_3, D_4, D_5. Vertex 1 is in D_1, vertex 2 is in D_2, vertex 3 is in D_4, vertex 4 is in D_5, and vertex 5 is in D_3. Vertex 6 is not in any hyperedge. Incidence Matrix $I(\mathcal{H})$: <table border="1"> <thead> <tr> <th></th><th>D_1</th><th>D_2</th><th>D_3</th><th>D_4</th><th>D_5</th></tr> </thead> <tbody> <tr> <th>1</th><td>1</td><td>1</td><td>1</td><td>0</td><td>0</td></tr> <tr> <th>2</th><td>0</td><td>1</td><td>1</td><td>1</td><td>0</td></tr> <tr> <th>3</th><td>0</td><td>0</td><td>0</td><td>1</td><td>1</td></tr> <tr> <th>4</th><td>0</td><td>0</td><td>1</td><td>0</td><td>1</td></tr> <tr> <th>5</th><td>0</td><td>0</td><td>0</td><td>1</td><td>1</td></tr> <tr> <th>6</th><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> </tbody> </table> Bipartite Graph $B(\mathcal{H})$: A bipartite graph with vertices $\{1, 2, 3, 4, 5, 6\}$ on the left and $\{D_1, D_2, D_3, D_4, D_5\}$ on the right. Edges connect vertices to the hyperedges they belong to: $(1, D_1), (2, D_2), (3, D_4), (4, D_5), (5, D_3)$. Hypergraph $\mathcal{H}^*$: A set of 6 vertices $\{1, 2, 3, 4, 5, 6\}$ and 5 hyperedges d_1, d_2, d_3, d_4, d_5. Vertex 1 is in d_1, vertex 2 is in d_2, vertex 3 is in d_3, vertex 4 is in d_4, and vertex 5 is in d_5. Vertex 6 is not in any hyperedge.		D_1	D_2	D_3	D_4	D_5	1	1	1	1	0	0	2	0	1	1	1	0	3	0	0	0	1	1	4	0	0	1	0	1	5	0	0	0	1	1	6	0	0	0	0	0
	D_1	D_2	D_3	D_4	D_5																																										
1	1	1	1	0	0																																										
2	0	1	1	1	0																																										
3	0	0	0	1	1																																										
4	0	0	1	0	1																																										
5	0	0	0	1	1																																										
6	0	0	0	0	0																																										
voloshin-hypergraph_ DIA_0106	158	—	—	—	The diagram illustrates the relationship between a graph G and its dual graph G^*. Graph G: A graph with 5 vertices $\{1, 2, 3, 4, 5\}$ and 5 edges a, b, c, d, e. Edges a, b, c, d, e form a cycle $1-2-3-4-5-1$. Vertex 3 is connected to vertex 2 by edge c. Dual Graph G^*: A graph with 5 vertices $\{a, b, c, d, e\}$ and 5 edges $1, 2, 3, 4, 5$. Edges $1, 2, 3, 4, 5$ form a cycle $a-b-c-d-e-a$. Vertex c is connected to vertex b by edge 3.																																										

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0107	161	—	—	—	K_4^0 K_4^1 K_4^2 K_4^3 K_4^4
voloshin-hypergraph_ DIA_0108	163	—	—	—	$\mathcal{H}$ $\mathcal{H}_1 = \mathcal{H} - x$
voloshin-hypergraph_ DIA_0109	163	—	—	—	$\mathcal{H}$ $\mathcal{H}_1 = \mathcal{H} - x$
voloshin-hypergraph_ DIA_0110	164	—	—	—	$\mathcal{H}$ $\mathcal{H}_1 = \mathcal{H} - D$

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0111	164	—	—	—	
voloshin-hypergraph_ DIA_0112	165	—	—	—	
voloshin-hypergraph_ DIA_0113	166	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0114	168	—	—	—	
voloshin-hypergraph_ DIA_0115	171	—	—	—	
voloshin-hypergraph_ DIA_0116	172	—	—	—	



Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0117	174	—	—	—	$\mathcal{H} = K_3$ not conformal, not Helly $\mathcal{H}_1$ - conformal, not Helly $\mathcal{H}_2 \cong \mathcal{H}_1^*$ - Helly, not conformal $\mathcal{H}_3 \cong \mathcal{H}_3^*$ - Helly, conformal
voloshin-hypergraph_ DIA_0118	178	—	—	—	T C_4 T C_4

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0119	179	—	—	—	
voloshin-hypergraph_ DIA_0120	180	—	—	—	
voloshin-hypergraph_ DIA_0121	181	—	—	—	
voloshin-hypergraph_ DIA_0122	181	—	—	—	
voloshin-hypergraph_ DIA_0123	182	—	—	—	



Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0124	183	—	—	—	
voloshin-hypergraph_ DIA_0125	186	—	—	—	
voloshin-hypergraph_ DIA_0126	187	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0127	188	—	—	—	
voloshin-hypergraph_ DIA_0128	189	—	—	—	
voloshin-hypergraph_ DIA_0129	191	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0130	194	—	—	—	Diagram illustrating a hypergraph $\mathcal{H}$ and its relationship to a tree $T \subseteq [\mathcal{H}]_2$. The top part shows $\mathcal{H}$ with a vertex x and an arrow pointing to $T \subseteq [\mathcal{H}]_2$. The bottom part shows $\mathcal{H} - x$ and an arrow pointing to $T - x$.
voloshin-hypergraph_ DIA_0131	196	—	—	—	Diagram illustrating two hypergraphs $\mathcal{H}_1$ and $\mathcal{H}_2$.
voloshin-hypergraph_ DIA_0132	198	—	—	—	Diagram illustrating a hypergraph structure with multiple vertices and hyperedges.
voloshin-hypergraph_ DIA_0133	199	—	—	—	Diagram illustrating two hypergraph structures.

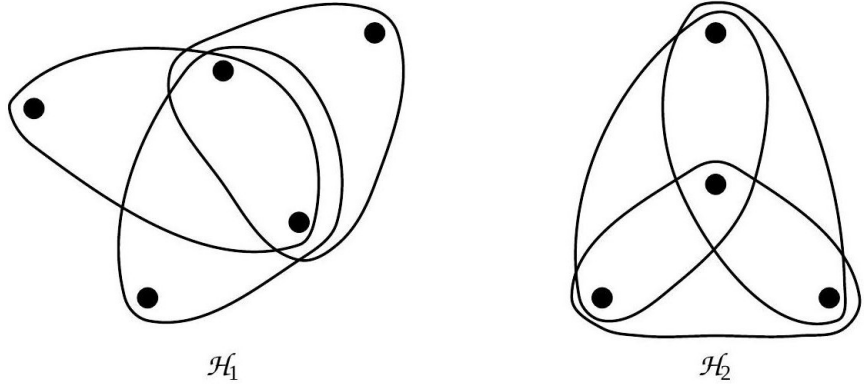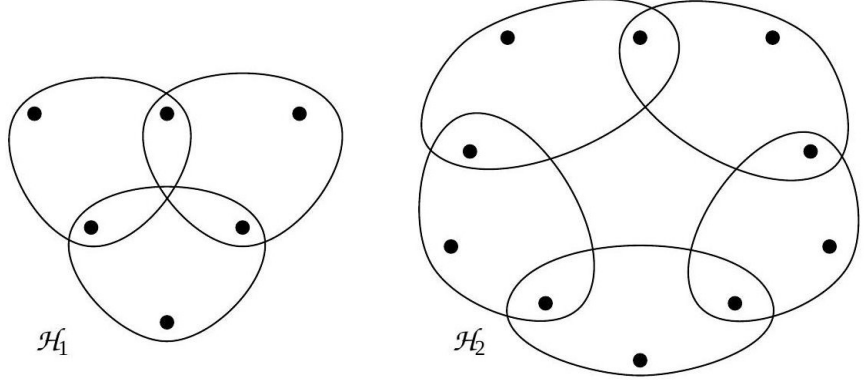Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0134	200	—	—	—	 Diagram $\mathcal{H}_1$ (left) shows three overlapping ellipses with five points: one in the top-left region, one in the top-middle region, one in the top-right region, one in the bottom-left region, and one in the bottom-middle region. Diagram $\mathcal{H}_2$ (right) shows three overlapping ellipses with four points: one in the top-middle region, one in the bottom-left region, one in the bottom-middle region, and one in the bottom-right region.
voloshin-hypergraph_ DIA_0135	202	—	—	—	 Diagram $\mathcal{H}_1$ (left) shows three overlapping ellipses with five points: one in the top-left region, one in the top-middle region, one in the top-right region, one in the bottom-left region, and one in the bottom-middle region. Diagram $\mathcal{H}_2$ (right) shows three overlapping ellipses with eight points: one in the top-left region, one in the top-middle region, one in the top-right region, one in the bottom-left region, one in the bottom-middle region, one in the bottom-right region, one in the middle-left region, and one in the middle-right region.

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0136	203	—	—	—	

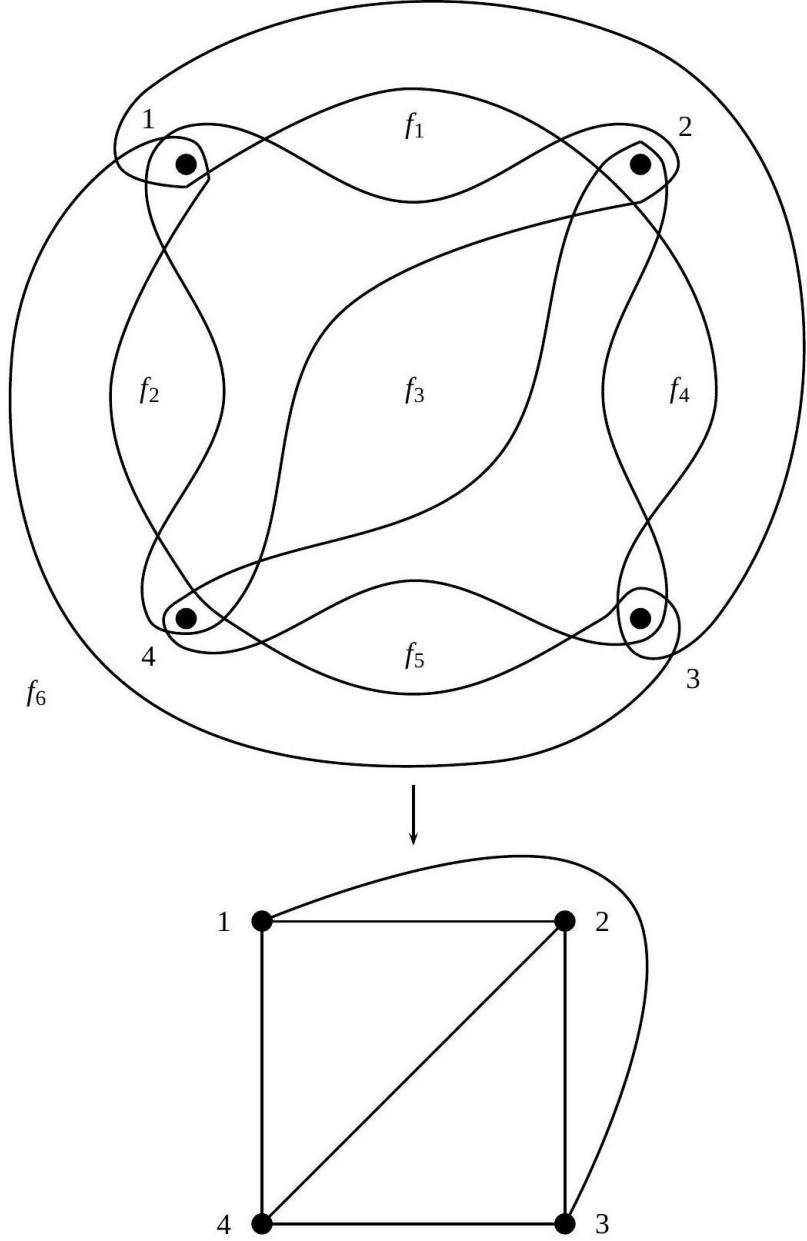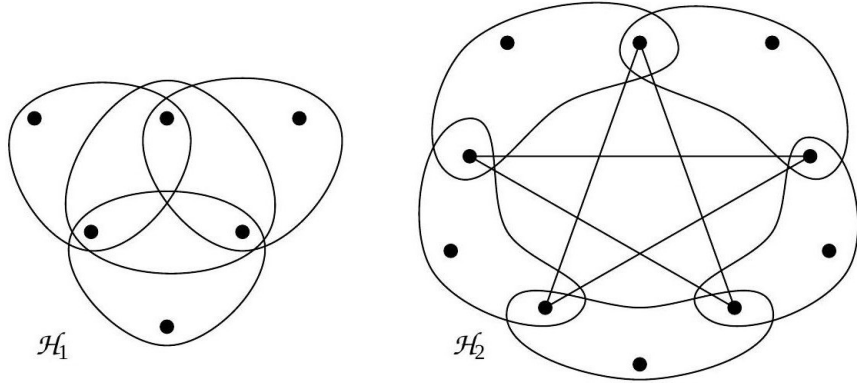Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0137	206	—	—	—	
voloshin-hypergraph_ DIA_0138	207	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0139	210	—	—	—	
voloshin-hypergraph_ DIA_0140	213	—	—	—	
voloshin-hypergraph_ DIA_0141	216	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0142	217	—	—	—	
voloshin-hypergraph_ DIA_0143	218	—	—	—	
voloshin-hypergraph_ DIA_0144	221	—	—	—	
voloshin-hypergraph_ DIA_0145	222	—	—	—	
voloshin-hypergraph_ DIA_0146	223	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0147	226	—	—	—	
voloshin-hypergraph_ DIA_0148	229	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0149	232	—	—	—	The diagram illustrates a sequence of operations on a hypergraph C. It begins with a diamond-shaped hypergraph C with nodes 1, 2, 3, 4 and edges D_1, D_2, D_3, D_4. The process involves splitting node 13, followed by C-clearing and contraction of node 13, leading to a new structure. This is followed by splitting node 24, C-clearing and contraction of node 24, and finally elimination, resulting in a sum of three smaller hypergraphs: a triangle with nodes 1, 2, 3 and edge 24, a triangle with nodes 13, 4, 2, and a single edge 24.

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0150	234	—	—	—	
voloshin-hypergraph_ DIA_0151	235	—	—	—	
voloshin-hypergraph_ DIA_0152	237	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0153	238	—	—	—	
voloshin-hypergraph_ DIA_0154	239	—	—	—	
voloshin-hypergraph_ DIA_0155	242	—	—	—	
voloshin-hypergraph_ DIA_0156	242	—	—	—	$\mathcal{H}$

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0157	244	—	—	—	
voloshin-hypergraph_ DIA_0158	250	—	—	—	
voloshin-hypergraph_ DIA_0159	251	—	—	—	
voloshin-hypergraph_ DIA_0160	253	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0161	257	—	—	—	
voloshin-hypergraph_ DIA_0162	258	—	—	—	
voloshin-hypergraph_ DIA_0163	259	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0164	261	—	—	—	
voloshin-hypergraph_ DIA_0165	262	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0166	265	—	—	—	
voloshin-hypergraph_ DIA_0167	267	—	—	—	
voloshin-hypergraph_ DIA_0168	269	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0169	271	—	—	—	
voloshin-hypergraph_ DIA_0170	275	—	—	—	1st coloring: $ABBA$ 2nd coloring: $ABAB$ 3rd coloring: $AABB$ $\Rightarrow R(\mathcal{H}) = (0, 3, 0, 0), P(\mathcal{H}, \lambda) = 3\lambda(\lambda - 1)$ $\chi(\mathcal{H}) = \bar{\chi}(\mathcal{H}) = 2$

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0171	276	—	—	—	
voloshin-hypergraph_ DIA_0172	277	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0173	280	—	—	—	The diagram illustrates a mapping G from a simple graph to a hypergraph. The top graph has nodes Z_1, Z_2, Z_3 and edges $\{a, c\}, \{a, b\}, \{b, c\}$. The bottom hypergraph $\mathcal{H} = (X, \mathcal{C}, \mathcal{D})$ has nodes a, b, c and hyperedges Z_1, Z_2, Z_3. A double-headed arrow labeled G connects the two graphs.
voloshin-hypergraph_ DIA_0174	281	—	—	—	The diagram illustrates a mapping G from a bipartite graph to a hypergraph. The top graph has nodes x_1, x_2, x_3, x_4 (jobs) and y_1, y_2, y_3, y_4, y_5 (resources) with various edges. The bottom hypergraph $\mathcal{H} = (X, \mathcal{C}, \mathcal{D})$ has nodes x_1, x_2, x_3, x_4 and hyperedges Z_1, Z_2, Z_3. A double-headed arrow labeled G connects the two graphs.

Identifier	Page	Conf.	LaTeX source	Rendered	Image
voloshin-hypergraph_ DIA_0175	284	—	—	—	Induction basis Induction hypothesis Induction step 1. P_1 2. $P_k \rightarrow P_{k+1}$ $\longrightarrow P_n$ is true for all $n = 1, 2, \dots$
voloshin-hypergraph_ DIA_0176	284	—	—	—	Induction basis Induction hypothesis Induction step 1. P_1 2. $P_1, P_2, \dots, P_k \rightarrow P_{k+1}$ $\longrightarrow P_n$ is true for all $n = 1, 2, \dots$