

bradley_spring22 — formula report

182 inline formulas (section omitted; all rendered), 16 display equations, 0 tables, 10 unrecovered image regions.





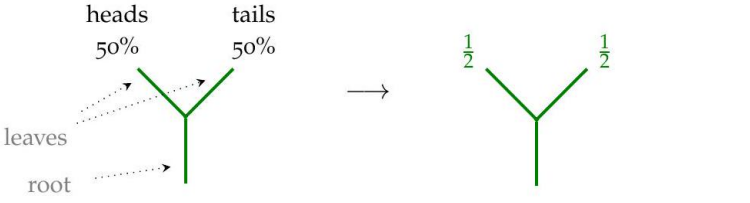
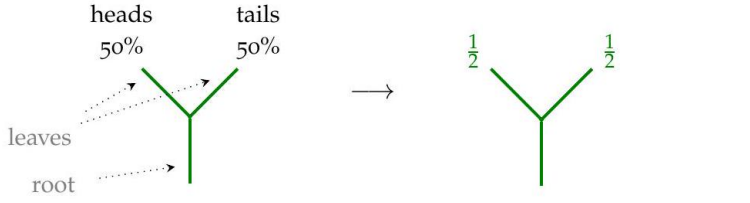

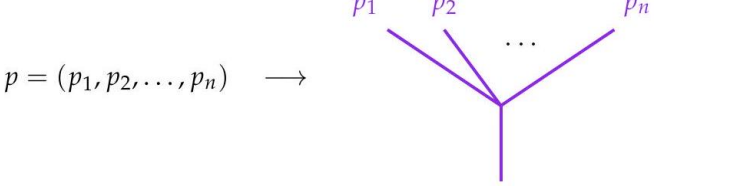
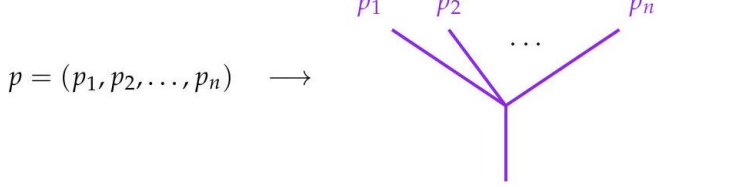

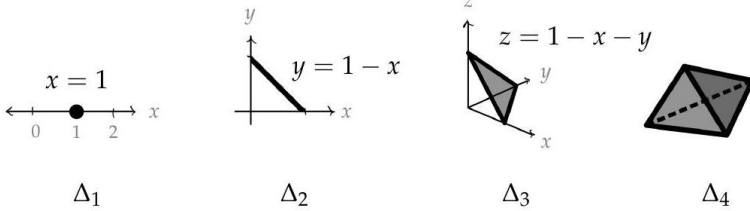
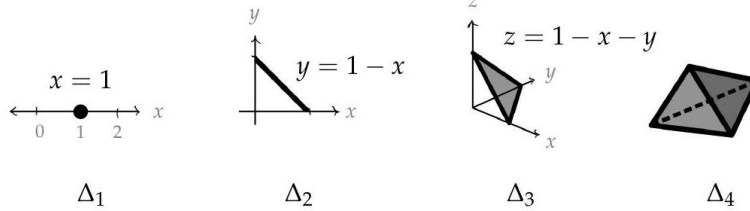

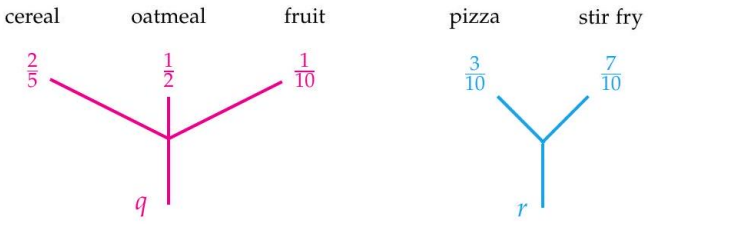
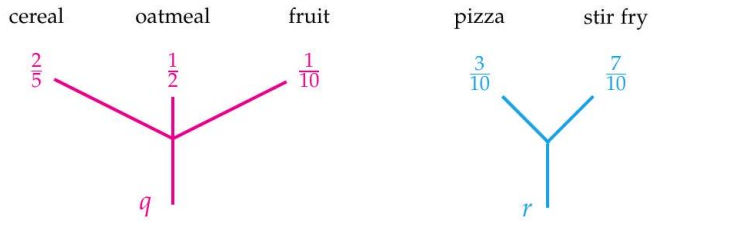
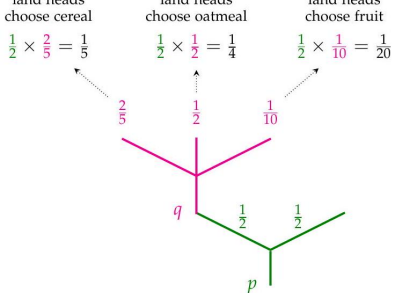
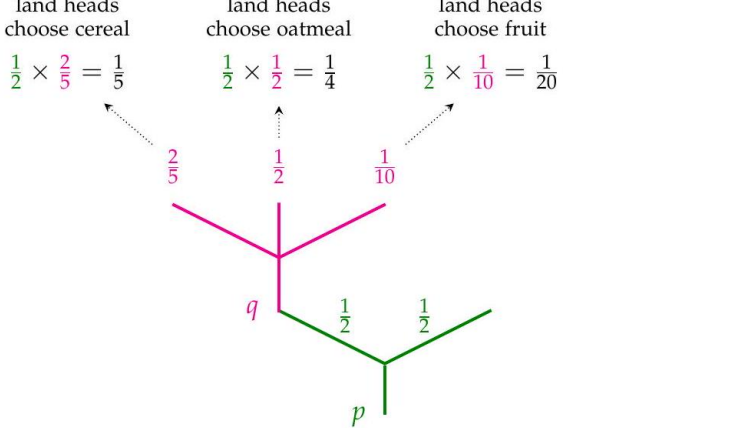
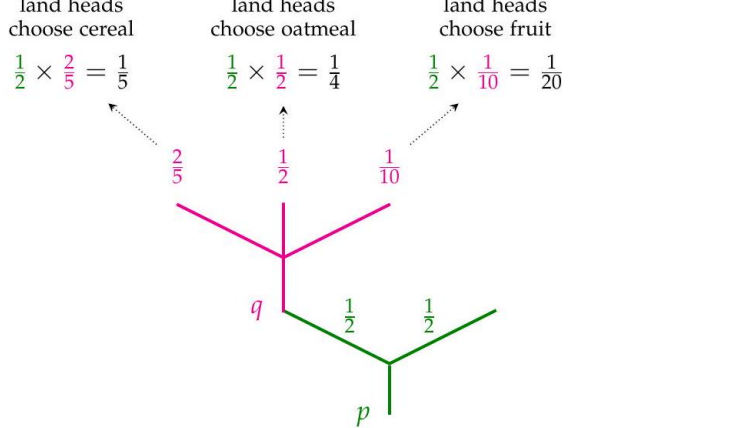
Display equations

Identifier	Page	Conf.	LaTeX source	Rendered	Scan image
bradley_spring22_ EQ0005	013	■ 0.965 ● W -2	$\begin{array}{l} \left(\frac{1}{2}, \frac{1}{2}\right) \text{ and } (1,0) \text{ are elements of the set } \Delta_2, \\ \left(\frac{4}{10}, \frac{5}{10}, \frac{1}{10}\right) \text{ and } \left(\frac{1}{5}, \frac{3}{5}, \frac{1}{5}\right) \text{ are elements of the set } \Delta_3, \\ \left(\frac{2}{7}, \frac{1}{7}, 0, \frac{4}{7}\right) \text{ and } \left(\frac{1}{4}, \frac{1}{4}, \frac{1}{4}, \frac{1}{4}\right) \text{ are elements of the set } \Delta_4, \end{array}$		
bradley_spring22_ EQ0016	028	■ 0.999 ● W +2	$d\left(p \circ (q^1, q^2, \dots, q^n)\right) \stackrel{\text{sort}}{=} d(p) + p_1 d(q^1) + p_2 d(q^2) + \dots + p_n d(q^n),$		
bradley_spring22_ EQ0006 (3)	014	■ 0.999 ● N +0	$\text{Entropy defines a collection of functions } \{H_n: \Delta_n \rightarrow \mathbb{R}\}.$		
bradley_spring22_ EQ0001 (1)	012	■ 1.000 ● N +0	$H(p) = -p_1 \log(p_1) - p_2 \log(p_2) - \dots - p_n \log(p_n).$		
bradley_spring22_ EQ0002	012	■ 1.000 ● N +0	$H(p) = -1 \log(1) - 0 \log(0) = -\log(1) = 0.$		
bradley_spring22_ EQ0003	012	■ 1.000 ● N +0	$H(p) = -\frac{1}{2} \log\left(\frac{1}{2}\right) - \frac{1}{2} \log\left(\frac{1}{2}\right) = -\log\left(\frac{1}{2}\right) = -\log(1) - (-\log(2)) = \log(2).$		
bradley_spring22_ EQ0004 (2)	013	■ 1.000 ● W -2	$\text{For each natural number } n, \text{ there is a function } H: \Delta_n \rightarrow \mathbb{R}.$		
bradley_spring22_ EQ0007	018	■ 1.000 ● N +0	$p \circ (q, r) = \left(\frac{1}{5}, \frac{1}{4}, \frac{1}{20}, \frac{3}{20}, \frac{7}{20}\right).$		
bradley_spring22_ EQ0008 (4)	021	■ 1.000 ● N +0	$H(p \circ (q, r)) = H(p) + \frac{1}{2} H(q) + \frac{1}{2} H(r).$		
bradley_spring22_ EQ0009 (5)	022	■ 1.000 ● N +0	$H(p \circ (q^1, q^2, \dots, q^n)) = H(p) + p_1 H(q^1) + p_2 H(q^2) + \dots + p_n H(q^n).$		
bradley_spring22_ EQ0010 (6)	024	■ 1.000 ● N +0	$H(p \circ (q^1, q^2)) = H(p) + p_1 H(q^1) + p_2 H(q^2).$		
Conf. MathPix confidence: ■ ≥0.9 ■ 0.5-0.9 ■ <0.5 — no value Residual render vs scan (inkdrill): ● C component ● W weak ● S stable ● N noise ● K clean ● not measured					

Identifier	Page	Conf.	LaTeX source	Rendered	Scan image
bradley_spring22_ EQ0011 (7)	024	■ 1.000 ● K +0	$H(\bullet \bullet)=H(\bullet)+\bullet H(\bullet) \text{ .}$	$H(\bullet\bullet) = H(\bullet) + \bullet H(\bullet).$	$H(\bullet\bullet) = H(\bullet) + \bullet H(\bullet).$
bradley_spring22_ EQ0012 (8)	024	■ 1.000 ● K +0	$H(\bullet \bullet)=H(\bullet) \bullet+\bullet H(\bullet) \text{ .}$	$H(\bullet\bullet) = H(\bullet) \bullet + \bullet H(\bullet).$	$H(\bullet\bullet) = H(\bullet) \bullet + \bullet H(\bullet).$
bradley_spring22_ EQ0013 (9)	026	■ 1.000 ● N -1	entropy:	<i>entropy</i> :	entropy:
bradley_spring22_ EQ0014	026	■ 1.000 ● N +0	$d(\bullet \bullet)=d(\bullet) \bullet+\bullet d(\bullet)$	$d(\bullet\bullet) = d(\bullet) \bullet + \bullet d(\bullet)$	$d(\bullet\bullet) = d(\bullet) \bullet + \bullet d(\bullet)$
bradley_spring22_ EQ0015	026	■ 1.000 ● K +0	$H(\bullet \bullet)=H(\bullet)+\bullet H(\bullet)$	$H(\bullet\bullet) = H(\bullet) + \bullet H(\bullet)$	$H(\bullet\bullet) = H(\bullet) + \bullet H(\bullet)$
Conf. MathPix confidence: ■ ≥0.9 ■ 0.5-0.9 ■ <0.5 — no value Residual render vs scan (inkdrill): ● C component ● W weak ● S stable ● N noise ● K clean ● not measured					

Image regions — rendered against scan

Two comparable cells per row. **Rendered**: the region’s own LaTeX compiled as its OWN document, or — where no LaTeX exists — the scan again, so every row has two cells and the ink difference reads as a floor rather than as missing-versus-present. A duplicated row is marked *(dup)* and its distance is a SELF-comparison, not agreement between two sources. **Scan**: the tex.zip image whose filename region 5-tuple matches this row, else the CDN crop. The Class column carries the residual class beside MathPix’s confidence, as the equation rows do. Setting a region’s LaTeX does NOT say it renders to what is on the page — that is what the two columns are for, and 281 is the open question they exist to let a reader answer. A region with no LaTeX can be reconstructed with pdfdrill vision; verify any LLM result against the real ink with inkdrill.

Identifier	Page	Class	Source	Author source	Rendered	Scan
bradley_spring22_DIA_000009	009	— (dup)	cd8cd643-8e7d-4277-ba97-57c0cfa7d909-09_192_986_973_135.jpg			
bradley_spring22_DIA_000011	011	— (dup)	cd8cd643-8e7d-4277-ba97-57c0cfa7d909-11_260_802_1031_246.jpg			
bradley_spring22_DIA_000011	011	— (dup)	cd8cd643-8e7d-4277-ba97-57c0cfa7d909-11_254_854_1692_215.jpg			
bradley_spring22_DIA_000015	015	— (dup)	cd8cd643-8e7d-4277-ba97-57c0cfa7d909-15_300_1017_1161_148.jpg			
bradley_spring22_DIA_000017	017	— (dup)	cd8cd643-8e7d-4277-ba97-57c0cfa7d909-17_292_846_777_225.jpg			
bradley_spring22_DIA_000018	018	— (dup)	cd8cd643-8e7d-4277-ba97-57c0cfa7d909-18_581_736_340_279.jpg			

bradley_spring22_DIA_00019	019	— (dup)	cd8cd643-8e7d-4277-ba97-57c0cfa7d909-19_550_448_342_423.jpg			
bradley_spring22_DIA_00020	020	— (dup)	cd8cd643-8e7d-4277-ba97-57c0cfa7d909-20_356_267_821_515.jpg			
bradley_spring22_DIA_00022	022	— (dup)	cd8cd643-8e7d-4277-ba97-57c0cfa7d909-22_327_592_1284_354.jpg			
bradley_spring22_DIA_00028	028	— (dup)	cd8cd643-8e7d-4277-ba97-57c0cfa7d909-28_135_1373_1242_179.jpg			