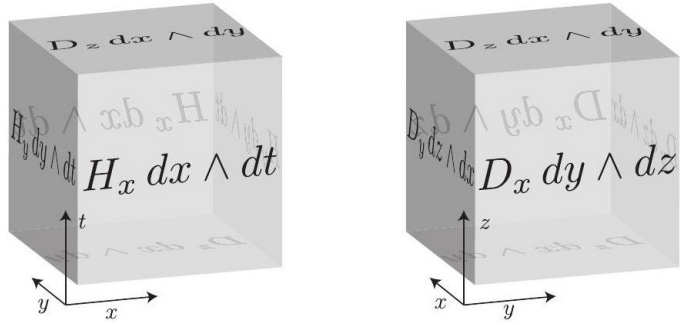
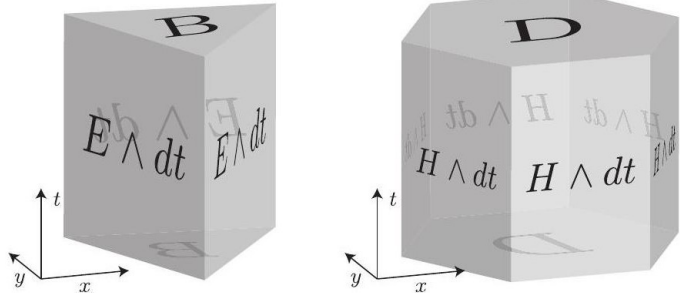
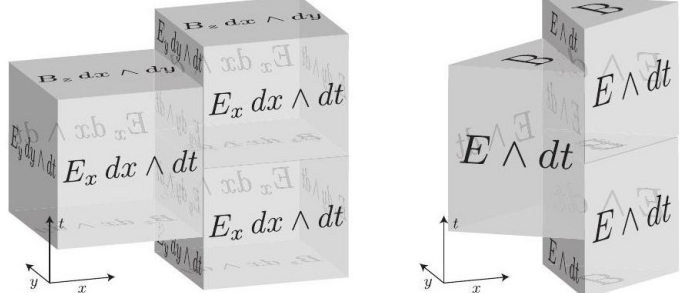


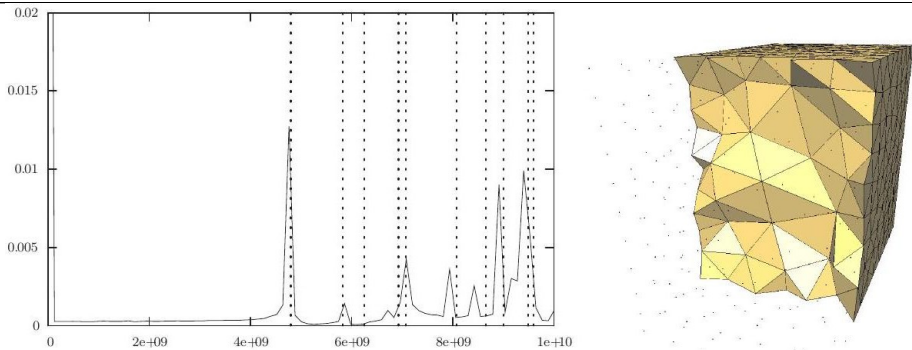
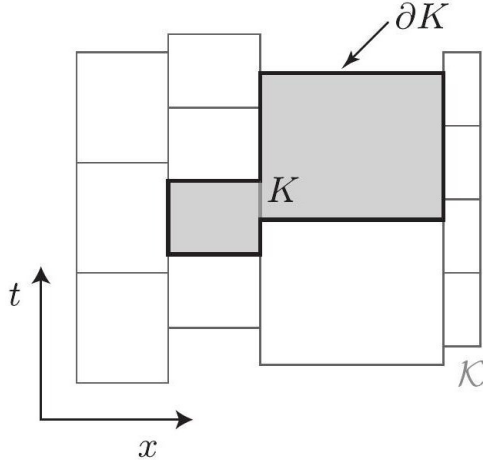
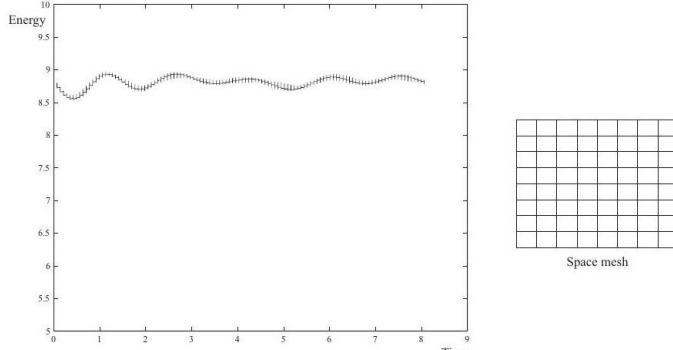
0707.4470: image evidence

Image regions

Identifier	Page	Conf.	LaTeX source	Rendered	Image
0707.4470_DIA_0001	12	—	—	—	
0707.4470_DIA_0002	14	—	—	—	
0707.4470_DIA_0003	15	—	—	—	
0707.4470_DIA_0004	17	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
0707.4470_DIA_0005	21	—	—	—	
0707.4470_DIA_0006	22	—	—	—	
0707.4470_DIA_0007	23	—	—	—	

Identifier	Page	Conf.	LaTeX source	Rendered	Image
0707.4470_DIA_0008	25	—	<pre> \begin{lstlisting}[mathescape=true] // Initialize fields and priority queue for each spatial edge \(\e\) do \(\A_{\e} \leftarrow A_{\e}^{\wedge\{0\}}, E_{\e} \leftarrow E_{\e}^{\wedge\{1} / 2\}, \tau_{\e} \leftarrow t_{\{0\}} / /\) Store initial field values and times for each spatial face \(\sigma\) do \(\tau_{\sigma} \leftarrow t_{\{0\}}\) Compute the next update time \(\tau_{\sigma}^{\wedge\{1\}}\) \(\Q . \mathrm{push}\left(\tau_{\sigma}^{\wedge\{1\}}, \sigma\right) / /\) Push element onto queue with its next update time // Iterate forward in time until the priority queue is empty repeat \(\left(t, \sigma\right) \leftarrow \Q . \operatorname{pop}\left() / /\) Pop next element \(\sigma\) and time \(t\) from queue for each edge \(\e\) of element \(\sigma\) do \(\A_{\e} \leftarrow A_{\e}-E_{\e}\left(t-\tau_{\e}\right) / / \) Update neighboring values of \(\A\) at time \(t\) if \(\left(t<\right)\) final-time then \(\B_{\sigma} \leftarrow \mathrm{d}_{\{1\}} A_{\e}\) \(\H_{\sigma} \leftarrow *_{\{\mu\}} B_{\sigma}\) \(\D_{\e} \leftarrow *_{\{\epsilon\}} E_{\e}\) \(\D_{\e} \leftarrow D_{\e}+\mathrm{d}_{\{1\}}\left(e, \sigma\right) H_{\{ \sigma\}}\left(t-\tau_{\sigma}\right)\) \(\E_{\e} \leftarrow *_{\{\epsilon\}} D_{\e}\) \(\tau_{\sigma} \leftarrow t / /\) Update element's time Compute the next update time \(\tau_{\sigma}^{\text {next }}\) \) \(\Q . \mathrm{push}\left(\tau_{\sigma}^{\text {next }}, \sigma\right) / /\) Schedule \(\sigma\) for next update until \(\Q . \operatorname{isEmpty}\left()\right)\) \end{lstlisting} </pre>	(not rendered)	<pre> // INITIALIZE FIELDS AND PRIORITY QUEUE for each spatial edge e do $A_e \leftarrow A_e^0, E_e \leftarrow E_e^{1/2}, \tau_e \leftarrow t_0$ // Store initial field values and times for each spatial face σ do $\tau_{\sigma} \leftarrow t_0$ Compute the next update time τ_{σ}^1 $Q.\text{push}(\tau_{\sigma}^1, \sigma)$ // Push element onto queue with its next update time // ITERATE FORWARD IN TIME UNTIL THE PRIORITY QUEUE IS EMPTY repeat $(t, \sigma) \leftarrow Q.\text{pop}()$ // Pop next element σ and time t from queue for each edge e of element σ do $A_e \leftarrow A_e - E_e(t - \tau_e)$ // Update neighboring values of A at time t if $t < \text{final-time}$ then $B_{\sigma} \leftarrow d_1 A_e$ $H_{\sigma} \leftarrow *_{\mu} B_{\sigma}$ $D_e \leftarrow *_{\epsilon} E_e$ $D_e \leftarrow D_e + d_1(e, \sigma) H_{\sigma}(t - \tau_{\sigma})$ $E_e \leftarrow *_{\epsilon} D_e$ $\tau_{\sigma} \leftarrow t$ // Update element's time Compute the next update time $\tau_{\sigma}^{\text{next}}$ $Q.\text{push}(\tau_{\sigma}^{\text{next}}, \sigma)$ // Schedule σ for next update until $(Q.\text{isEmpty}())$ </pre>

Identifier	Page	Conf.	LaTeX source	Rendered	Image
0707.4470_DIA_0009	27	—	—	—	
0707.4470_DIA_0010	31	—	—	—	
0707.4470_PIC_0001	26	—	—	—	
0707.4470_PIC_0002	26	—	—	—	