


Ingegneria del Software


Selenium

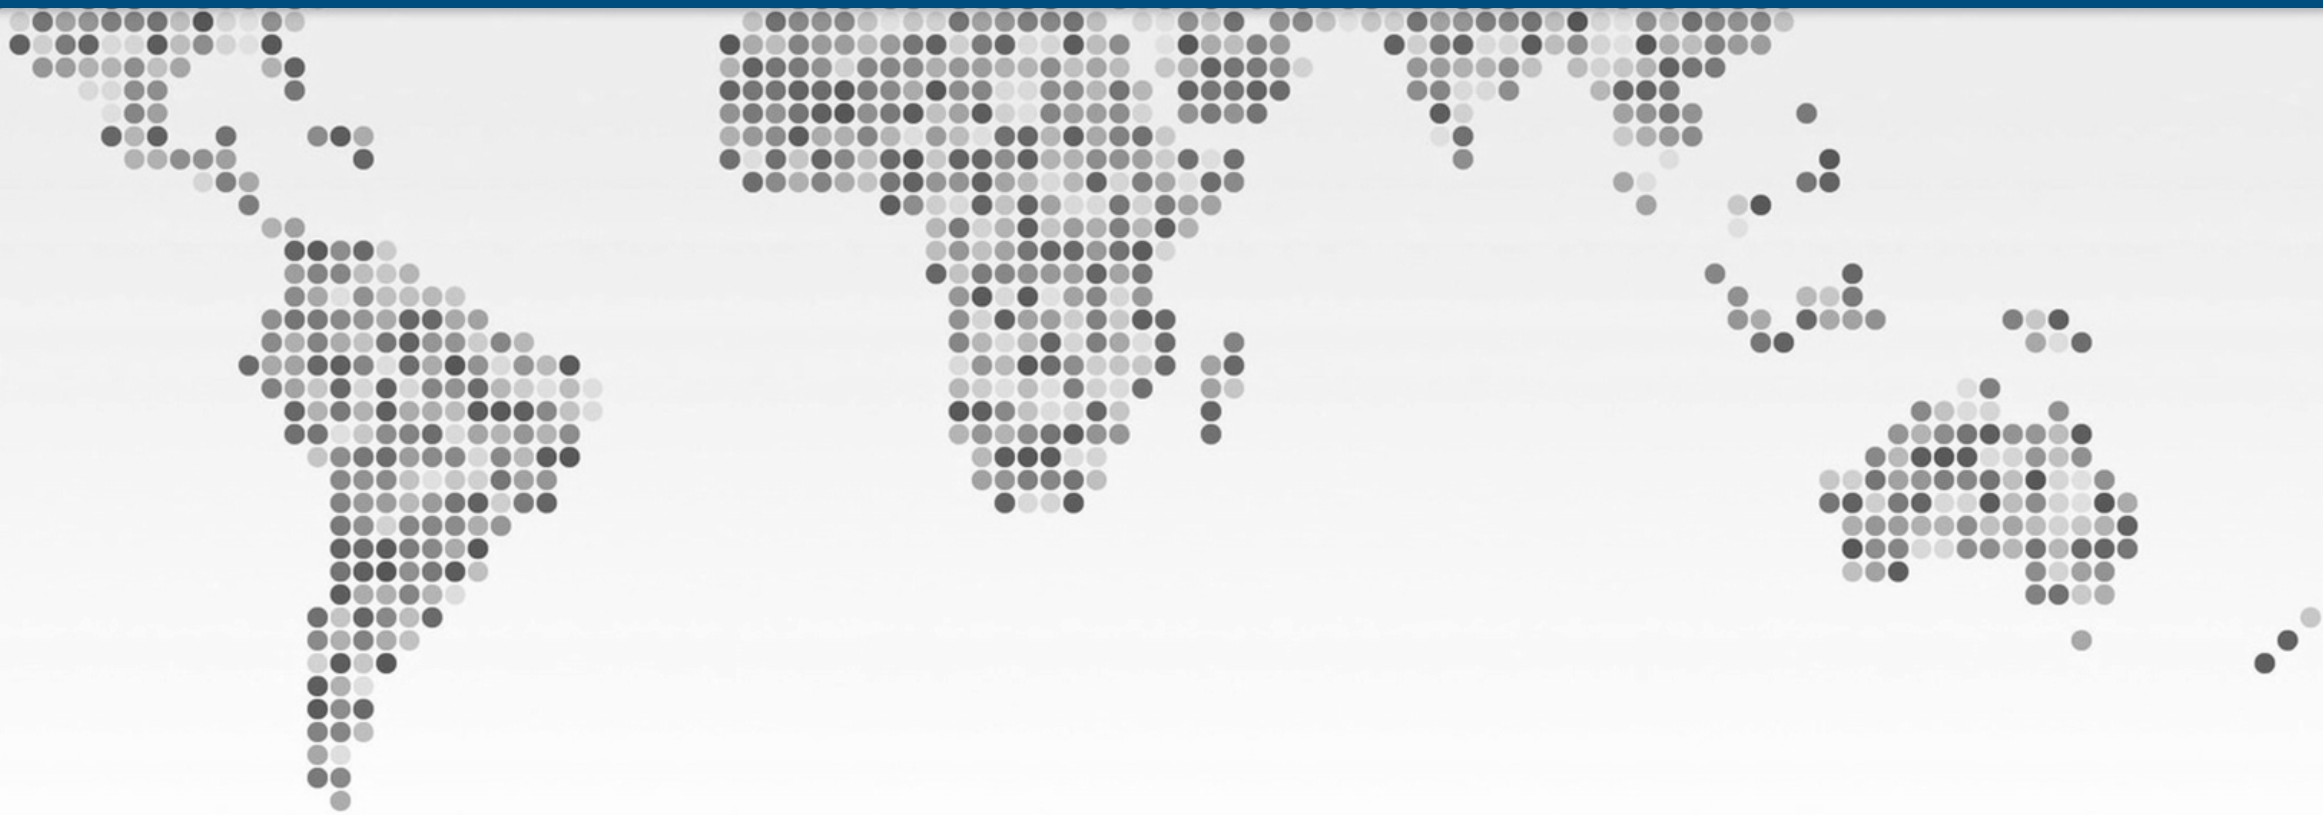

Selenium IDE

Test di Automazione

Perchè è importante il test di sistema?

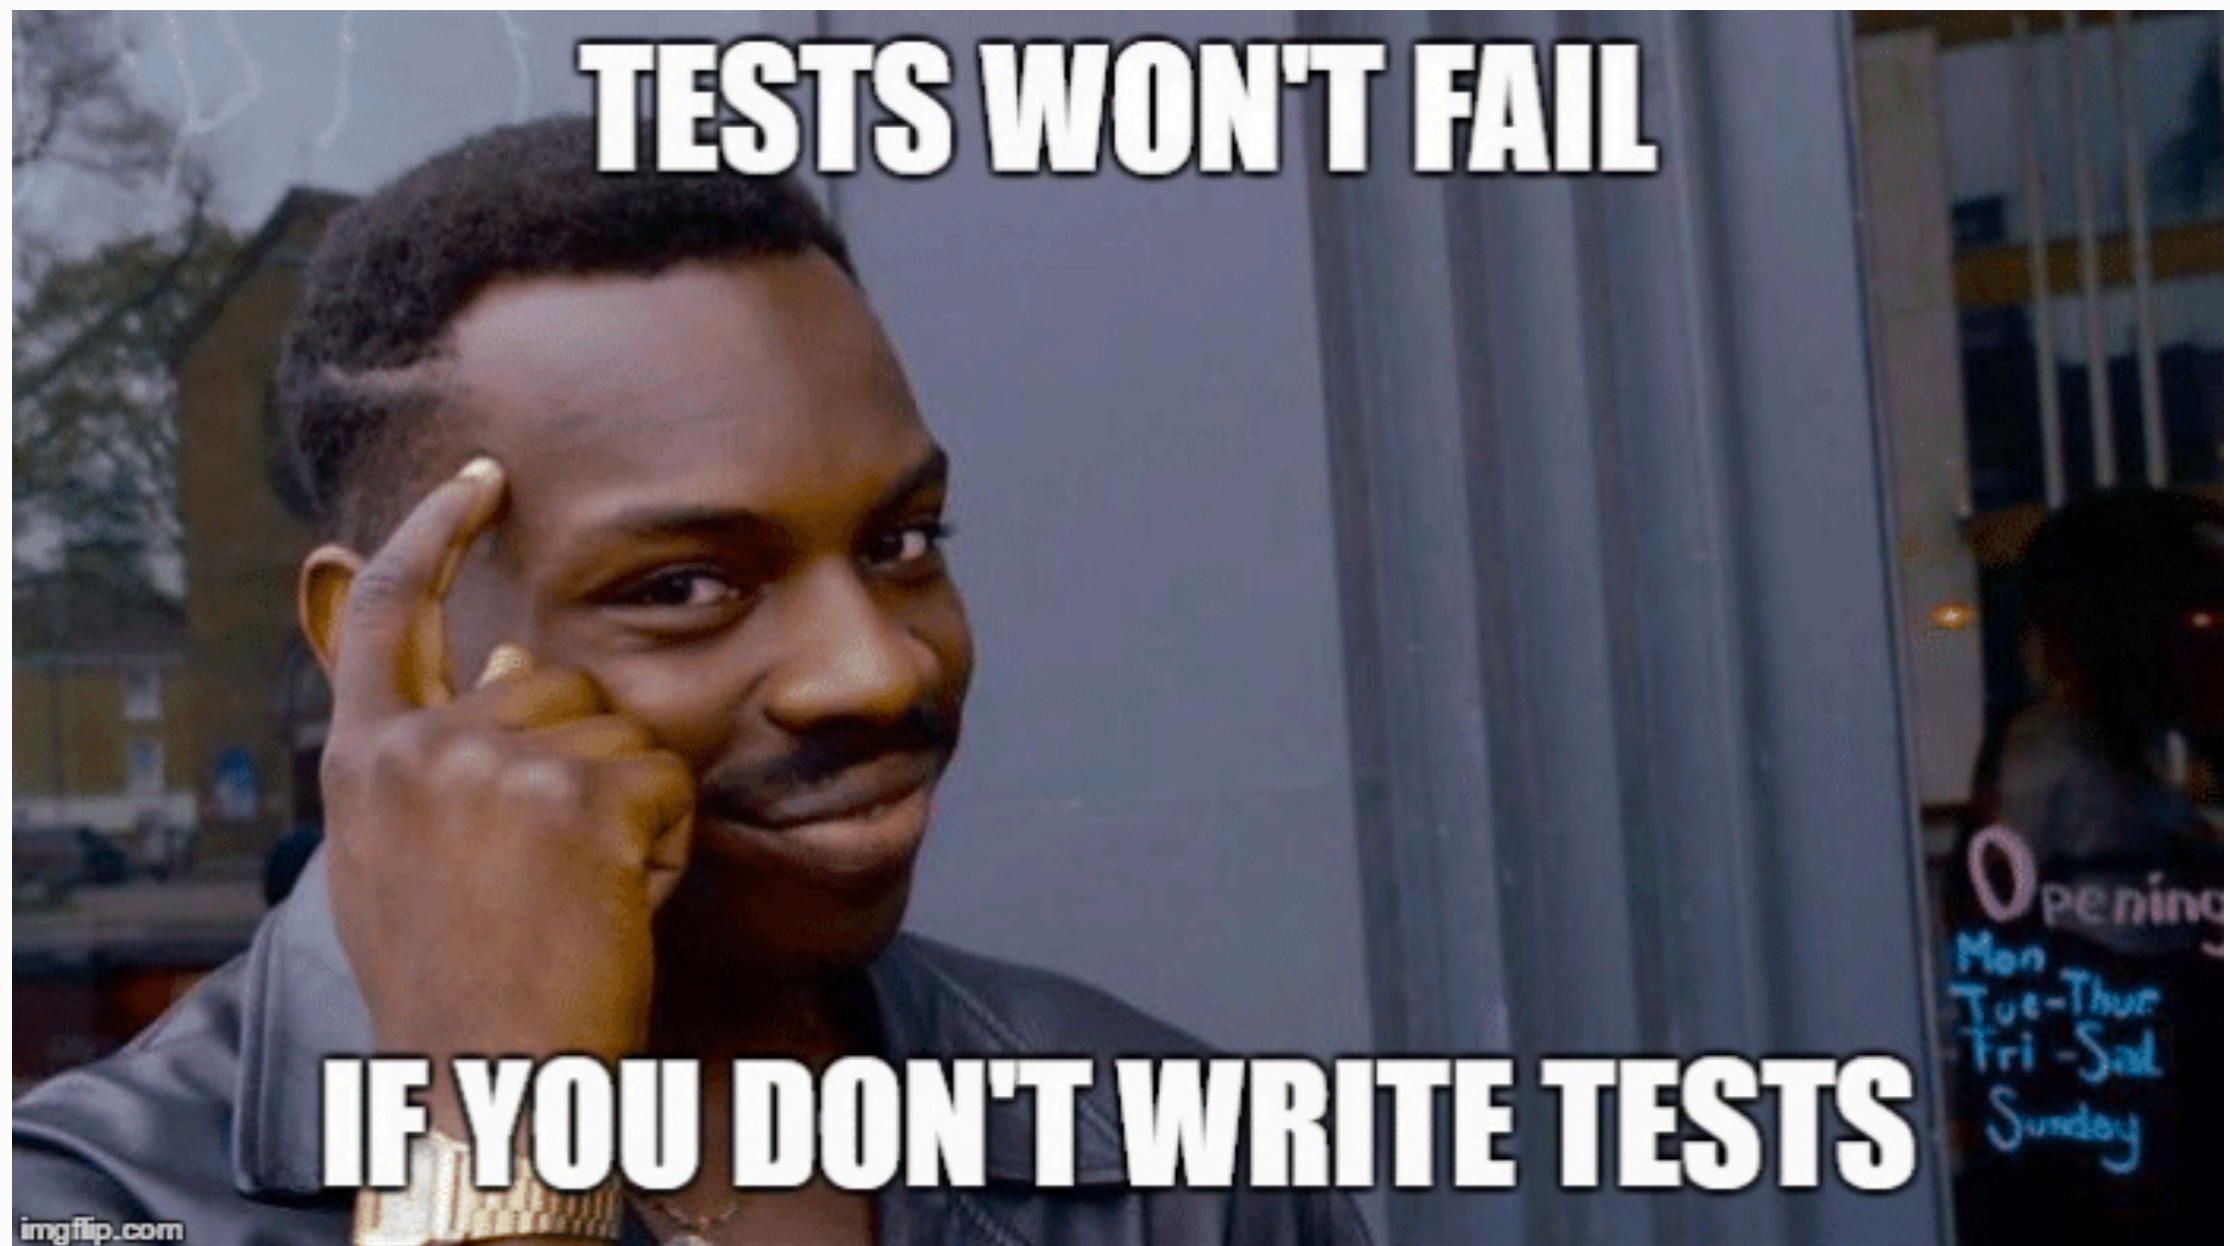

Selenium IDE

Test di Automazione

Selenium IDE

Open source record and playback test automation for the web

 CHROME DOWNLOAD

 FIREFOX DOWNLOAD

 LATEST ZIP

☆ Star 2,203



Web Ready

Simple, turn-key solution to quickly author reliable end-to-end tests. Works out of the box for any web app.



Easy Debugging

Enjoy easier test debugging with rich IDE features like setting breakpoints and pausing on exceptions.




Cross-browser Execution

Run your tests on any browser/OS combination in parallel using the [Command-line Runner for Selenium IDE](#).

Download Selenium: <https://www.selenium.dev/downloads/>
Download Selenium IDE: <https://www.selenium.dev/selenium-ide/>


Selenium IDE

Test di Automazione per il web

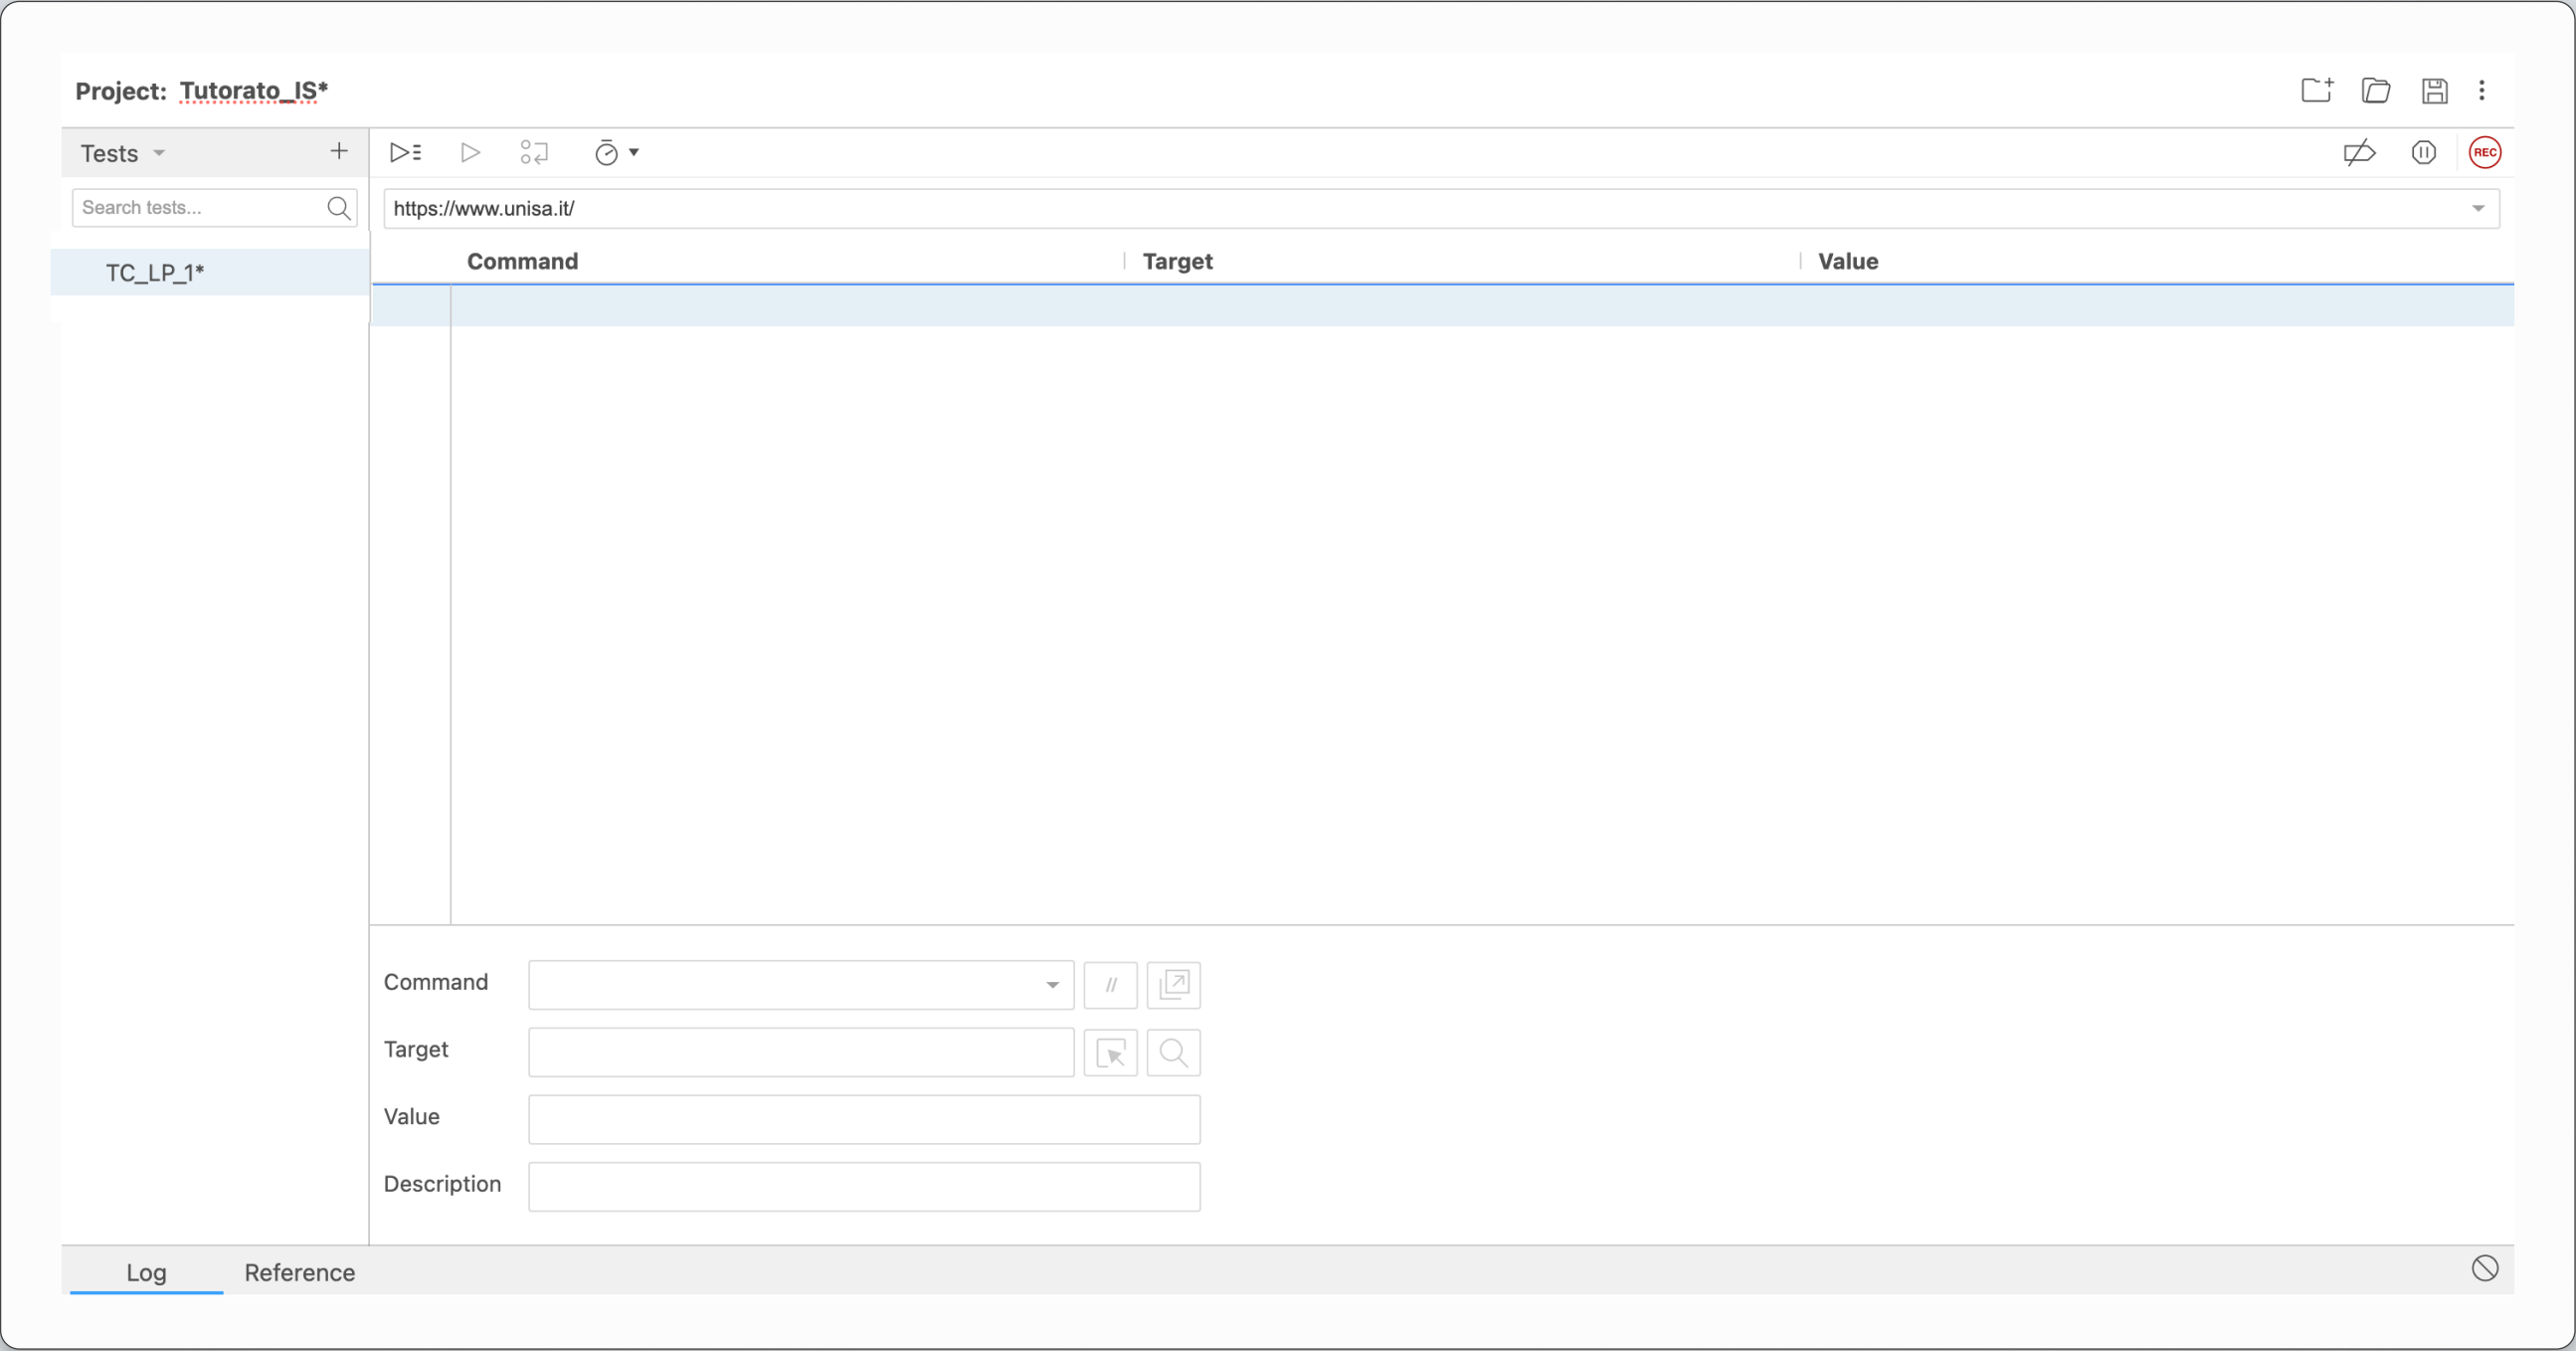


Selenium IDE

Test di Automazione per il web

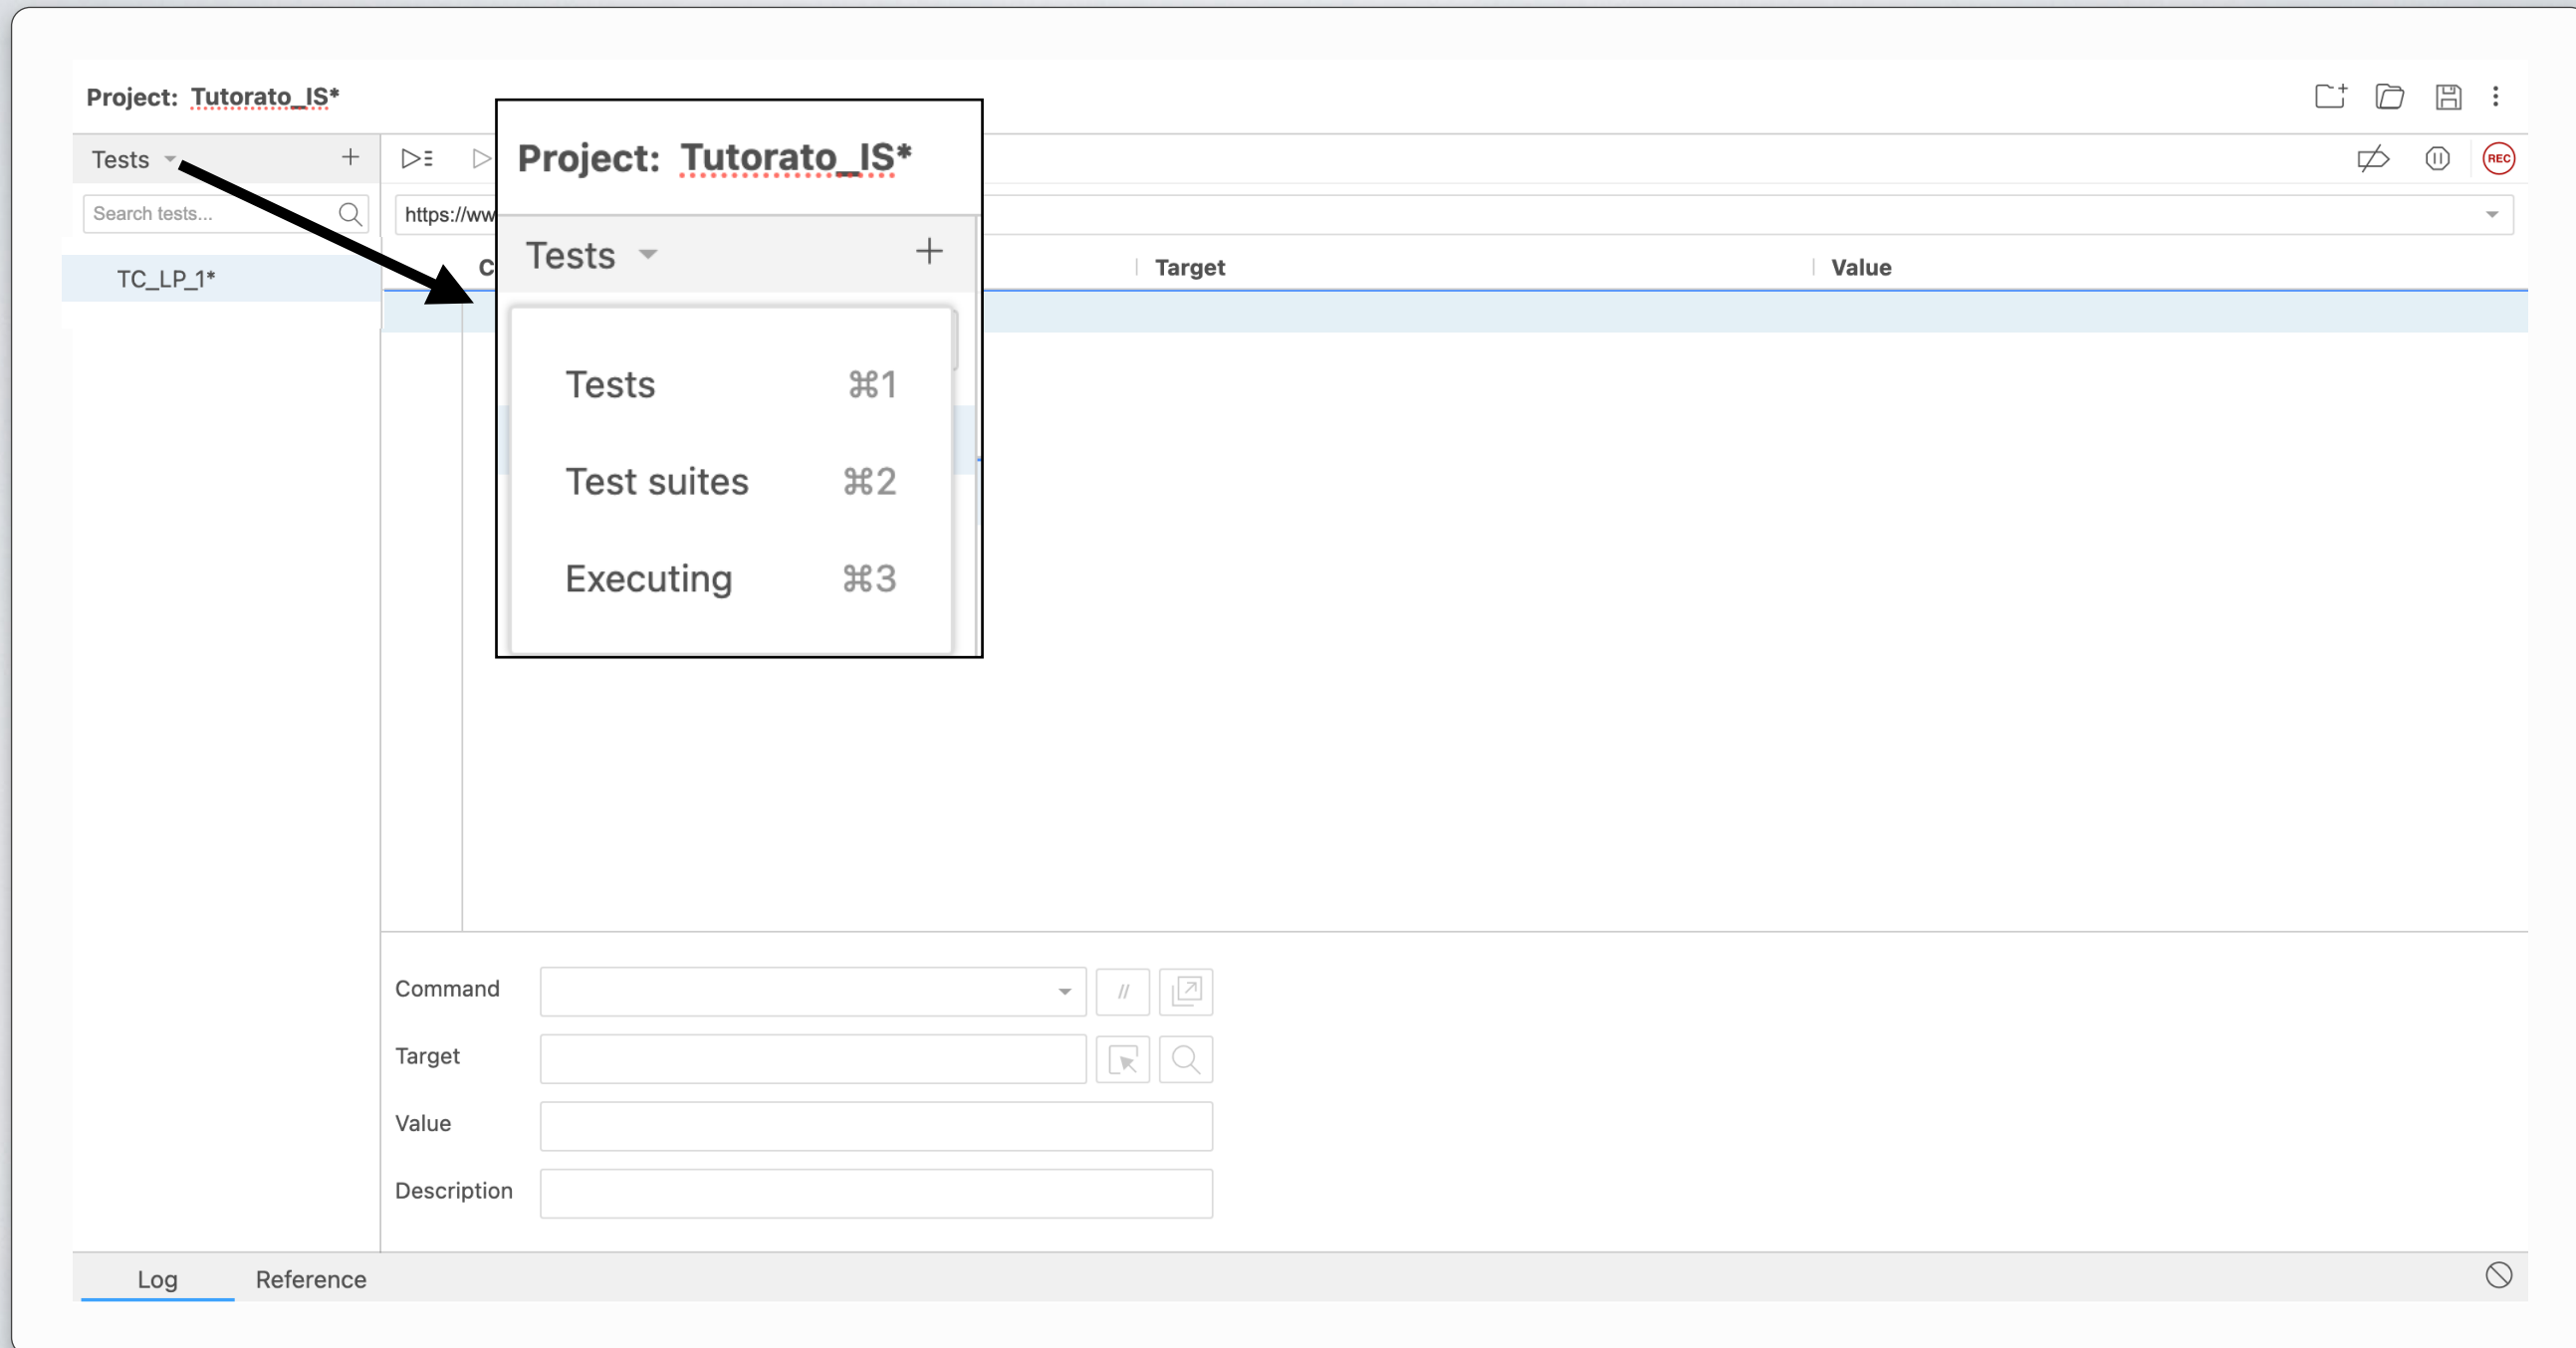

Selenium IDE

Test di Automazione per il web

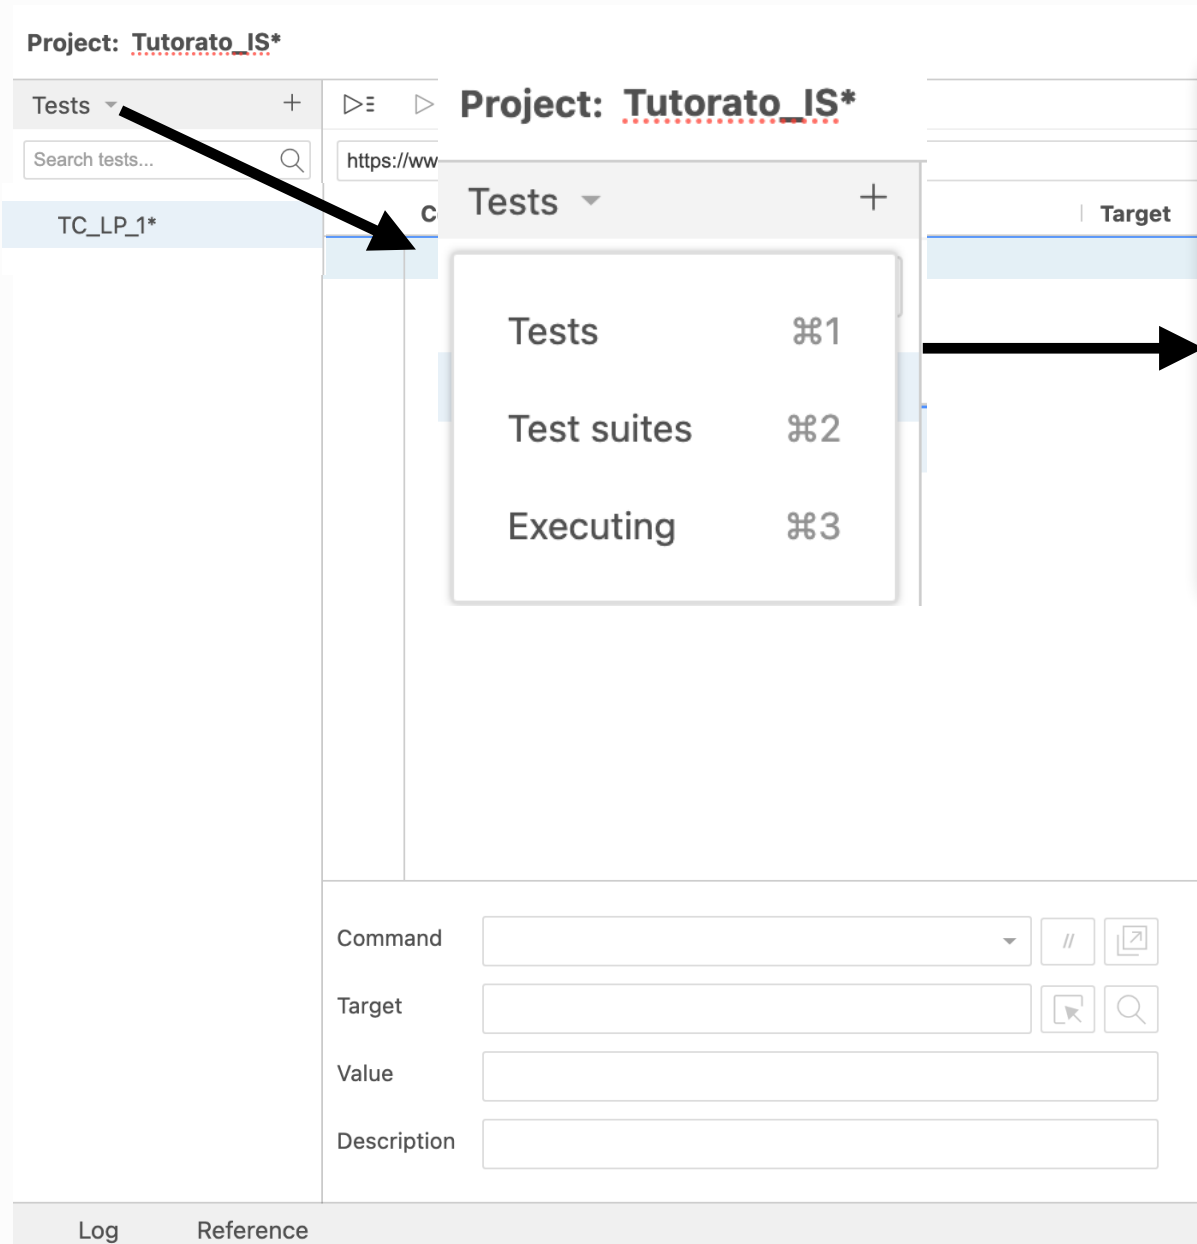

- **Tests** - Raccolta di tutti i test creati
- **Test suites** - Raccolta di TS, dove ognuna è un lista di test
- **Executing** - Test eseguiti fin ora

Selenium IDE

Test di Automazione per il web

Per ogni test case dobbiamo inserire command e target

The screenshot displays the Selenium IDE interface for a project named 'Tutorato_IS*'. The browser address bar shows 'https://www.unisa.it/'. A test case 'TC_LP_1*' is selected, and a table with columns 'Command' and 'Target' is visible. A dropdown menu is open, showing a list of commands: 'add selection', 'answer on next prompt', 'assert', 'assert alert', 'assert checked', 'assert confirmation', 'assert editable', 'assert element present', and 'assert element not present'. A black arrow points from the 'Command' column of the table to the dropdown menu. Below the table, there are input fields for 'Command', 'Target', 'Value', and 'Description'. The 'Log' and 'Reference' tabs are at the bottom.

Command	Target

- add selection
- answer on next prompt
- assert
- assert alert
- assert checked
- assert confirmation
- assert editable
- assert element present
- assert element not present


Command: [] // []
Target: [] [] []
Value: []
Description: []

Log Reference

Selenium IDE

Test di Automazione per il web

Registrazione schermo

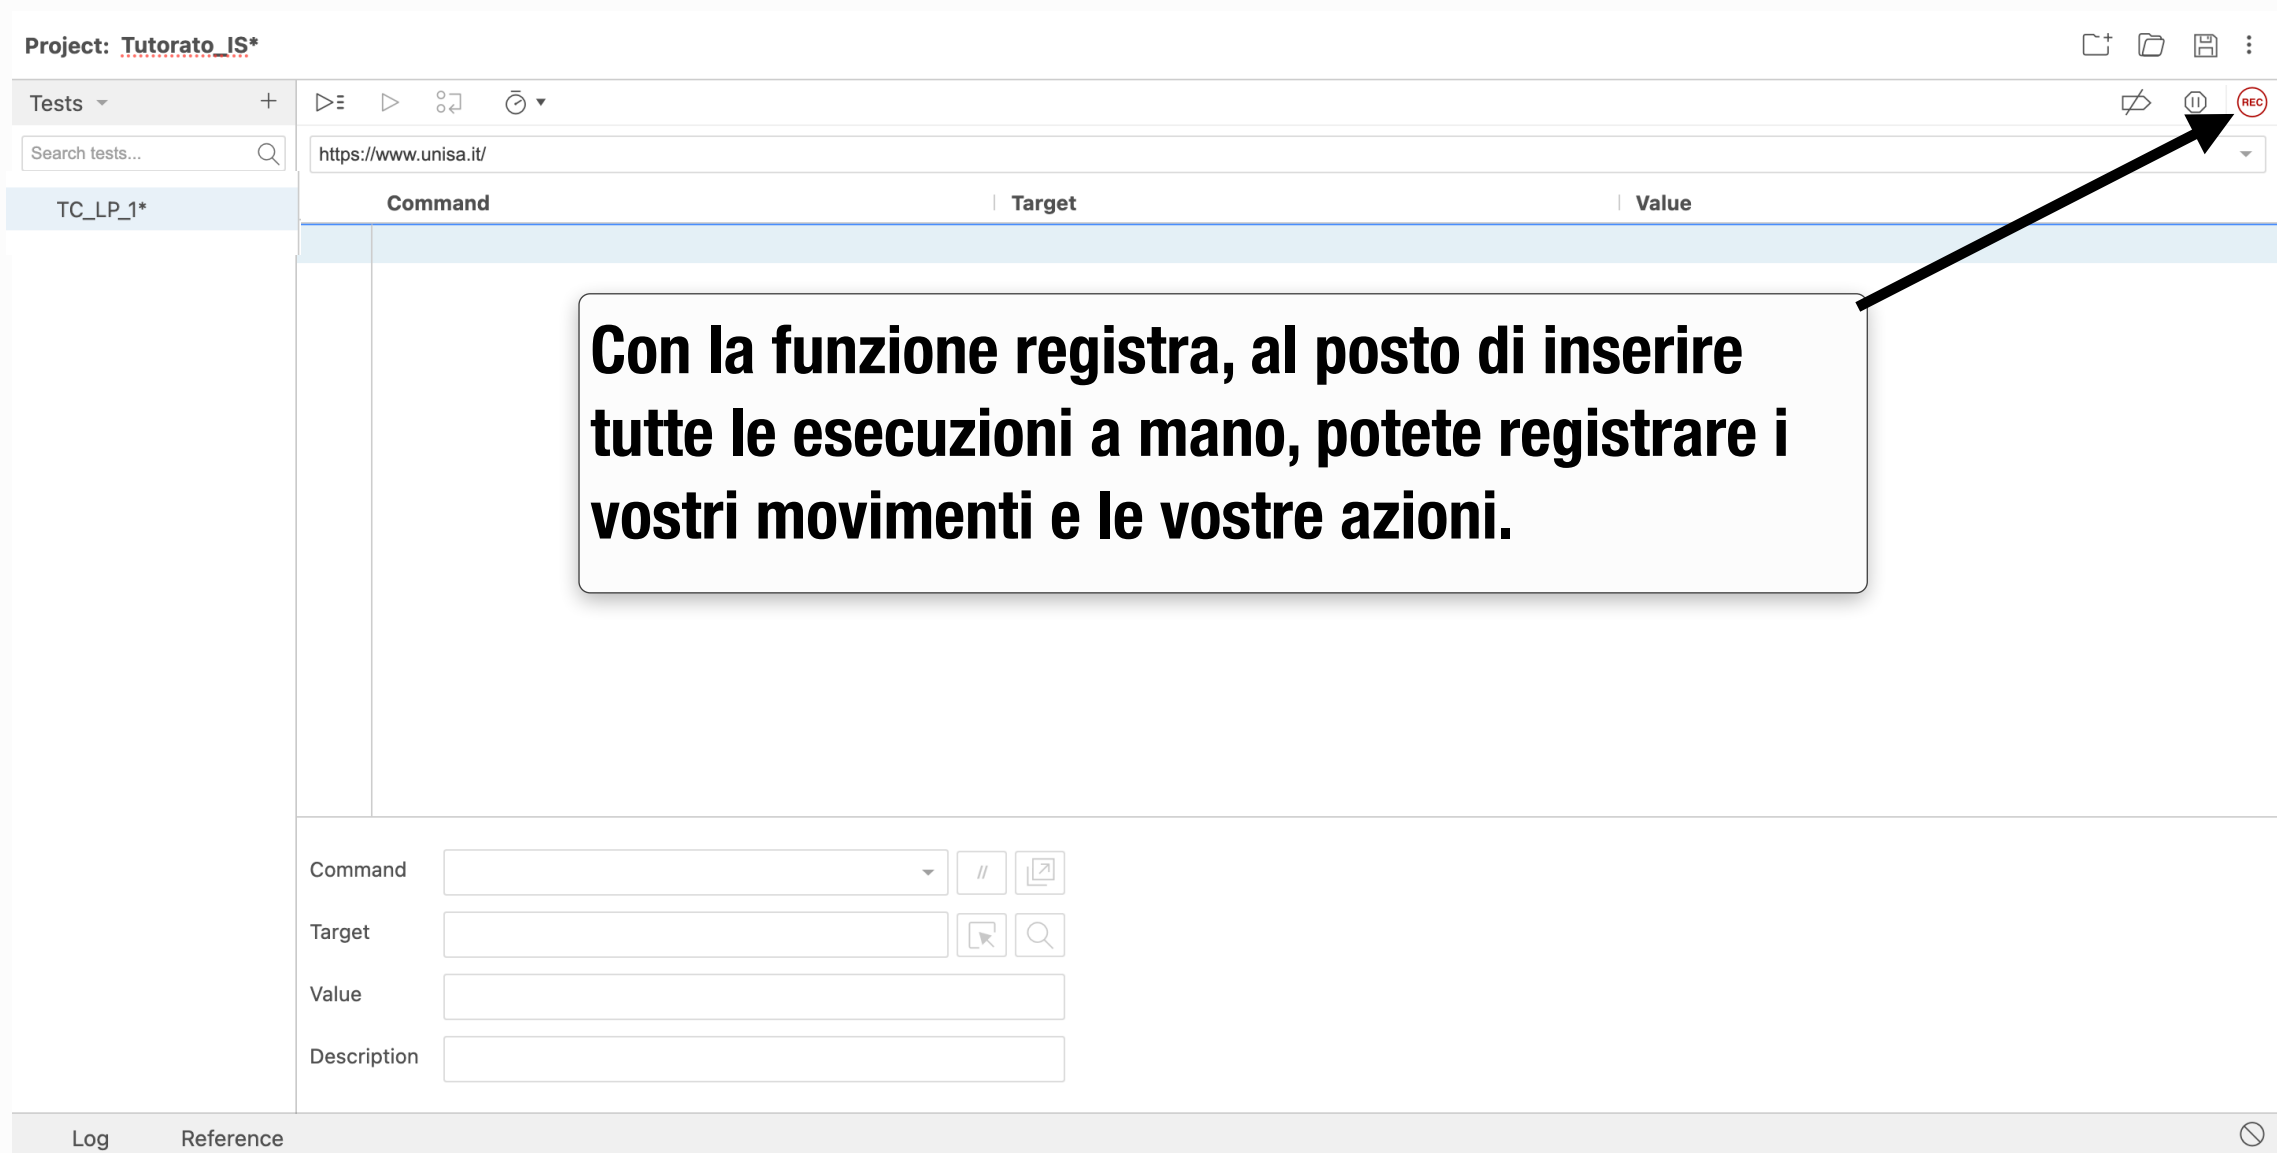

The screenshot shows the Selenium IDE interface. At the top, the project name is "Tutorato_IS*". Below it, there's a toolbar with various icons. The "REC" button, which is a red circle with "REC" inside, is highlighted with a black arrow. Below the toolbar, there's a table with columns "Command", "Target", and "Value". The table is currently empty. Below the table, there are input fields for "Command", "Target", "Value", and "Description". At the bottom, there are tabs for "Log" and "Reference".

Project: Tutorato_IS*

Tests +

Search tests...

TC_LP_1*

Command Target Value

Command //

Target

Value

Description

Log Reference

Con la funzione registra, al posto di inserire tutte le esecuzioni a mano, potete registrare i vostri movimenti e le vostre azioni.

Selenium IDE

Test di Automazione per il web

Un Test Case comprende insieme di istruzioni eseguite in sequenza

Project: Tutorato_IS*

Tests +

Search tests...

TC_LP_1*

https://www.unisa.it/

	Command	Target	Value
1	open	https://www.unisa.it/	
2	set window size	1440x900	
3	click	css=.hidden-xs > .fa-search	
4	type	id=search-query	ingegneria del software
5	type	id=search-query	ingegneria del software
6	send keys	id=search-query	\${KEY_ENTER}

Command

click

//

Target

css=.hidden-xs > .fa-search

Value

Description

Una volta completato, cliccate semplicemente “play”

Log

Reference

Selenium IDE

Test di Automazione per il web

Non tutti i test finiscono con casi di successo, cosa fare in questo caso?

Project: Tutorato_IS*

Test suites +

Search tests...

Default Suite*

Test Check*

TC_LP_1*

TC_LP_2*

TC_LP_3*

https://www.unisa.it/

	Command	Target	Value
1	open	https://www.unisa.it/	
2	set window size	1440x900	
3	click	css=.hidden-xs > .fa-search	
4	type	id=search-query	ingegneria del software
5	type	id=search-query	ingegneria del software
6	send keys	id=search-query	\$(KEY_ENTER)

Command

open

//

Target

https://www.unisa.it/

Value

Description

LogReference

2. setWindowSize on 1440x900 OK14:36:11

3. click on css=.hidden-xs > .fa-search OK14:36:11

4. type on id=search-query with value ingegneria del software OK14:36:12

5. type on id=search-query with value ingegneria del software OK14:36:12

6. sendKeys on id=search-query with value \$(KEY_ENTER) OK14:36:12

7. assert on id=search-query with value IS Failed: Actual value 'null' did not match 'IS'14:36:13

'TC_LP_3' ended with 1 error(s)14:36:13

Selenium IDE

Test di Automazione per il web

Il test di esecuzione va svolto confrontando il comportamento atteso con il comportamento osservato

Selenium non inserisce in automatico gli “assert”, questi vanno messi a mano!

Test Case	Data e Ora Esecuzione	Pass/Fail
TC_LP_1	16/07/2021 - 15:40	Pass
TC_LP_2	16/07/2021 - 15:40	Pass
TC_LP_3	16/07/2021 - 15:40	Pass
TC_LP_4	16/07/2021 - 15:40	Pass

Running 'TC_LP_1'

1. open on http://localhost:8080/ OK
2. setWindowSize on 1413x904 OK
3. click on linkText=Login OK
4. click on id=inputEmail OK
5. click on id=inputPassword OK
6. type on id=inputPassword with value Password1 OK
7. click on id=reg OK
8. assertText on css=.myError with value Email non valida OK

'TC_LP_1' completed successfully

Running 'TC_LP_2'

1. open on http://localhost:8080/ OK
2. setWindowSize on 1413x904 OK
3. click on linkText=Login OK
4. click on id=inputEmail OK
5. type on id=inputEmail with value p.verdi@unisa.it OK
6. click on id=inputPassword OK
7. type on id=inputPassword with value Password1 OK
8. click on id=reg OK
9. assertText on css=.myError with value Email non presente nel sistema OK

'TC_LP_2' completed successfully

Ingegneria del Software

Selenium

