
Web 표준 Project 1



[blogtest.html]



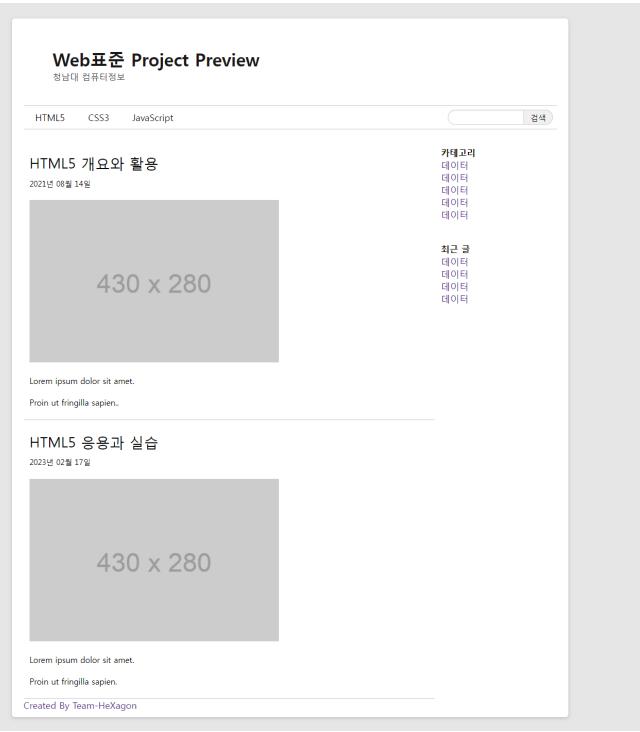

HTML5	CSS3	JavaScript	
		데이터	
UTN41 5 711 O		데이터	
HTML5	개요.	데이터	

```
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<title>HTML5 Basic Page</title>
<!-- 1. 초기화 -----
<style>
* {
}
a {
}
li {
</style>
<!-- 기본 클래스 ----->
<style>
.pull-left {
```

```
}
.pull-right {
     }
</style>
<!-- 2. 페이지 구성하기 -----
<style>
body {
}
#page-wrapper {
</style>
<!-- 3. 헤더 구성하기 ----->
<style>
#main-header {
}
.master-title {
}
.master-description {
</style>
<!-- 4. 내비게이션 및 풀다운 메뉴 구성하기 ----->
<style>
#main-navigation {
}
.outer-menu-item {
}
.outer-menu-item:hover {
```

```
.menu-title {
}
.inner-menu {
}
.inner-menu-item>a {
}
.inner-menu-item>a:hover {
      background: black;
      color: white;
</style>
<!-- 5. 검색 양식 추가하기(내비게이션 내부의 검색) ----->
<style>
.search-bar {
}
.input-search {
}
.input-search:focus {
      border-color: rgba(82, 168, 236, 0.8);
      outline: 0;
      box-shadow: inset 0 1px 1px rgba(0, 0, 0, 0.05);
}
.input-search-submit {
```

```
</style>
<!-- 6. 본문 추가하기(중앙 내용) ------
<style>
/* body 태그의 너비: 960px */
/* #page-wrapper 태그의 padding 속성으로 내용물 너비는 920px */
#content {
       }
#main-section {
}
#main-aside {
</style>
<!--6. 본문 추가하기(좌측 내용) -->
<style>
article {
}
.article-header {
       padding: 20px 0;
}
.article-title {
      font-size: 25px;
       font-weight: 500;
       padding-bottom: 10px;
}
.article-date {
      font-size: 13px;
}
.article-body {
      font-size: 14px;
</style>
<!-- 6. 본문 추가하기(우측 내용) -->
<style>
.aside-list {
       padding: 10px 0 30px 0;
.aside-list>h3 {
```

```
font-size: 15px;
      font-weight: 600;
}
style>.search-bar {
     height: 26px;
      padding: 7px;
}
.input-search {
}
.input-search:focus {
}
.input-search-submit {
</style>
<!-- 중앙 내용 ----->
<style>
/* body 태그의 너비: 960px */
/* #page-wrapper 태그의 padding 속성으로 내용물 너비는 920px */
#content {
     overflow: hidden;
#main-section {
#main-aside {
</style>
```

```
<script
     src="http://ajax.googleapis.com/ajax/libs/jquery/1.9.1/jquery.min.js">
</script>
<script>
     $(document).ready(function() {
           $('.outer-menu-item').hover(function() {
                 $(this).find('.inner-menu').show();
           }, function() {
                 $(this).find('.inner-menu').hide();
           });
     });
</script>
</head>
<body>
<div id="page-wrapper">
     <header id="main-header">
           <hgroup>
                 <h1 class="master-title"> </h1>
                 <h2 class="master-description"> </h2>
           </hgroup>
     </header>
     <nav id="main-navigation">
           <div class="pull-left">
                 <span class="menu-title"> </span>
                             <a href="#"> </a>
                             <a href="#"> </a>
                             <div class="pull-right">
```

```
<div class="search-bar">
             </div>
       </div>
</nav>
<div id="content">
       <section id="main-section">
              <article>
                     <div class="article-header">
                     </div>
                     <div class="article-body">
                     </div>
              </article>
              <article>
              </article>
       </section>
       <aside id="main-aside">
              <div class="aside-list">
              </div>
              <div class="aside-list">
```

<td> </td> <td></td> <td></td>			