

A Safety Enhancing Source Translation for C

Peter E. Conn
Trinity Hall



**UNIVERSITY OF
CAMBRIDGE**

*A dissertation submitted to the University of Cambridge
in partial fulfilment of the requirements for the degree of
Master of Engineering in Advanced Computer Science*

University of Cambridge
Computer Laboratory
William Gates Building
15 JJ Thomson Avenue
Cambridge CB3 0FD
UNITED KINGDOM

Email: pc424@cl.cam.ac.uk

June 1, 2014

Declaration

I Peter E. Conn of Trinity Hall, being a candidate for the M.Phil in Advanced Computer Science, hereby declare that this report and the work described in it are my own work, unaided except as may be specified below, and that the report does not contain material that has already been used to any substantial extent for a comparable purpose.

Total word count: 11,853

Signed:

Date:

This dissertation is copyright ©2014 Peter E. Conn.

All trademarks used in this dissertation are hereby acknowledged.

Abstract

C is one of the most widely used languages, favoured for its low cost abstractions and the control it gives programmers over memory. This control frequently leads to bugs, especially while using pointers, causing unpredictable errors and security vulnerabilities. Therefore much research has been done to providing pointer safety to C programs, however current work suffers from a few systematic flaws. First, the analysis performed by such systems is inextricably linked to the transformation required to provide pointer safety. Second, they are studied in isolation and not in combination with commonly used compiler optimizations or as part of a widespread compiler tool chain. Finally, the majority of these approaches sacrifice binary compatibility, requiring the entire libraries a program uses to be recompiled as well or even the program to be rewritten.

This dissertation aims to provide solutions to these problems. I use an approach where the analysis and transformation are kept separate, with a single analysis able to support two drastically different transformations (fat pointers and lookup tables), giving performance overheads comparable to current work. I investigate the effects of these two prevailing methods of ensuring pointer safety on commonly used optimizations passes. Finally, I provide methods for maintaining very high binary compatibility with programs that use already compiled libraries, and evaluates the costs of doing so.

Additionally, I create a taxonomy for classifying and evaluating current methods for providing pointer safety. It goes beyond the currently quantitative measure of performance overhead imposed by a pointer safety system and includes qualitative measures such as the types of safety provided, completeness and compatibility. Finally an argument is made that such techniques fall on a scale between providing 100% safety and 100% compatibility and places current work on that spectrum.

Contents

1	Introduction	1
1.0.1	Outline	3
2	Background	5
2.1	Pointer Safety	5
2.1.1	Example: Buffer Overflow Attack	5
2.1.2	Example: Heartbleed	7
2.1.3	Example: Returning a Pointer to the Stack	9
2.1.4	Spatial and Temporal Pointer Safety	9
2.2	Allowances in the C standard	10
2.3	Working with Pointers in LLVM IR	12
3	Related Work	15
3.1	Systems requiring code rewrite	15
3.2	Systems requiring library recompilation	16
3.3	Systems requiring program recompilation	17
3.4	Systems requiring no recompilation	19
3.5	To Do	20
3.6	Systems implemented in this Dissertation	20
3.7	Design Space	21
4	Design and Implementation	23
4.1	Overview	23
4.2	Fat Pointers	24
4.2.1	Types of Fat Pointer	25
4.2.2	Pointers	25
4.2.3	Functions	28
4.2.4	Structs	30
4.3	Softbound-like Lookup Table	32
4.3.1	Pointers on the Stack	32

4.3.2	Pointers on the Heap	33
4.3.3	Functions	38
4.4	The Bounds Check Function	39
4.5	Setting pointer bounds	41
4.5.1	Setting to constant string	41
4.5.2	Setting to the address	41
4.5.3	Setting to another pointer	42
4.5.4	Setting to pointer arithmetic	42
4.5.5	Setting to NULL	42
4.6	Binary Compatibility	43
4.7	CCured Analysis	44
4.7.1	Constraint Collection	44
4.7.2	Constraint Solving	45
4.8	Arrays	46
5	Evaluation	47
5.1	Transformed Code Performance	47
5.1.1	Microbenchmarks	47
5.1.2	Olden Benchmarks	51
5.1.3	No Checks	52
5.2	Transformation Performance	54
5.3	Interactions with Optimizations passes	54
5.4	Security	55
5.4.1	Buffer Overflow Attack	55
5.4.2	Heartbleed	57
5.4.3	Returning a Local Variable	57
5.5	Pointer Safety System Evaluation Framework	58
5.5.1	The completeness vs compatibility tradeoff	61
6	Summary and Conclusions	63
6.1	Software Engineering Practices	63

List of Figures

1.1	Overview of Components of Bandage	2
3.1	The Completeness vs Compatibility Tradeoff in Pointer Safety Systems	21
4.1	Graphical Comparison of Fat Pointer and Lookup Table Methods	23
5.1	Increase in runtime following a Linked List as size increases . .	49
5.2	Graphical representation of relative runtime for Olden bench- marks	52
5.3	Compilation Time for Olden Benchmarks	54
5.4	Binary Size of Olden Benchmarks	55
5.5	The Completeness vs Compatibility Tradeoff in Pointer Safety Systems	62

List of Tables

5.1	Fat pointer and lookup table overheads compared to uninstrumented runtime for the Olden benchmarks	51
5.2	Runtime overhead on olden benchmarks when no bounds or null checks are inserted	53
5.3	Speedup relative to O0 optimization for raw and bandage transformed Tsp benchmark.	53
5.4	Performance Differences on the Tsp benchmark with selection optimizations disabled	56
5.5	Safety guarantees for evaluated pointer safety systems. A cross indicates the guarantee is not provided.	59
5.6	Compatibilty requirements for evaluated pointer safety systems.	60
5.7	Runtime and extra requirements of evaluated pointer safety systems	61

Chapter 1

Introduction

Pointer errors account for many bugs in C, ranging from simple off-by-one errors where the programmer writes one past the end of the array to malicious buffer overflow attacks, where an attacker inputs data designed to manipulate the code into writing past the end of the array and over some other important data. C allows many practices that make such errors easy to make, for example a pointer can legally point one past the end of an array (although dereferencing it is undefined). A pointer frequently starts pointing to its valid area of memory and then is modified (through pointer arithmetic) to point to an invalid area of memory. This pointer is modified again, bringing it back to point to the valid area and used though used in practice, this is not allowed in the standard. For example, Ghostscript, an open source PostScript implementation violates the standard by issuing pointers to the `-1` element of stacks [8].

One method of dealing with such bugs is to keep track of data about the valid area of memory that a pointer has access to, and consult this data on pointer dereference. In this dissertation, the data used to determine the validity of a pointer is the address of the start of the area of allocated memory (the base) and the address one past its end (the bound). Furthermore, the base and bound data must be associated with the pointer in some way.

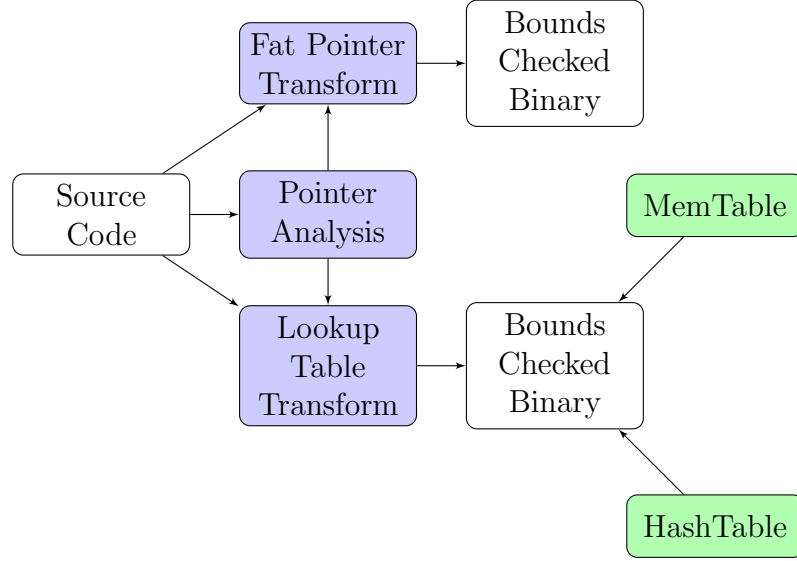


Figure 1.1: Overview of Components of Bandage

I implemented the Bandage system, consisting of the multiple parts shown in Figure 1.1. Implemented for the purposes of this dissertation was the Bandage system, consisting of multiple parts as shown in Figure 1.1. Bandage contains one LLVM analysis pass, two LLVM transformation passes and two C libraries.

The pointer analysis pass uses a CCured-inspired analysis to identify the many pointers not modified using pointer arithmetic during the life of the program. The two transformation LLVM passes implement different methods of associating data about pointers with the pointers themselves. With fat pointers, pointers themselves are replaced by structures that contain the pointer value and their bounds information. With a lookup table approach, the address of the pointer is used as the key to a lookup table containing the bounds information. Finally, the two C libraries contain different implementations of the lookup table.

By differentiating the pointer analysis pass from the transformation pass, it can be combined with different transformations to achieve different trade-offs in terms of safety, runtime and binary compatibility, allowing a much larger range of potential solutions to a specific need. Additionally, it allow support

for further backends that were not considered during its design, such as MPX or CHERI.

I use the two different transformation passes to investigate the interplay with common optimisation passes - to determine which optimization passes do the most to mitigate the overhead generated by them and which passes they impede.

The entire Bandage system is designed to provide high binary compatibility by drawing a boundary around the source files it can transform and ensuring that the instrumentation is stripped when it passes through this boundary. This allows programs using Bandage to also use libraries that haven't been modified, but also restricts the safety completeness it can offer, as pointers that come in through this boundary do not contain sufficient information for full safety. This is in contrast to work such as CCured which requires a full recompilation of all included libraries.

Finally, Bandage will be used as the primary example in the classification of pointer-safety systems, providing a reference point to compare other systems with and a in depth study to highlight some subtleties in the taxonomy.

1.0.1 Outline

This dissertation proceeds as follows, with a brief coverage of the background information required: the types of pointer safety, examples of vulnerabilities caused by lack of it and an overview of how pointers are dealt with in LLVM IR. A related work section follows, enumerating previous efforts to provide pointer safety, drawing together common themes between them and highlighting the position of this work.

The design and implementation section contains details of the two transformation passes (the fat pointer and the metadata) and the one analysis pass (the CCured-like analysis). The evaluation section covers the runtime penalties, tested on handcrafted microbenchmarks and the olden benchmark suite, the compilation overhead incurred by the analysis and transformations, the

effects of the transformation on other optimization passes and the framework for evaluating future pointer-safety systems. Everything is wrapped up in the conclusion and a few example source programs are annotated in the appendices to give a concrete view of the transformations performed.

Chapter 2

Background

2.1 Pointer Safety

One of the primary advantages of C is that it gives the programmer a model that is very close to hardware, allowing access to essentially arbitrary areas of memory. Although this is very powerful, it can also be very dangerous and numerous bugs have arisen from programmers not putting careful checks on their memory operations. These bugs can lead to corrupted data, or potentially a security vulnerability.

2.1.1 Example: Buffer Overflow Attack

This first example displays a pointer checking bug that a malicious user can turn into a security vulnerability, by allowing user input to overwrite a variable it should not be able to [21]. In a buffer overflow attack, the attacker makes use of the memory layout of the program to overwrite a variable that they should not have access to [21].

```
#include <stdio.h>
#include <string.h>
```

```

int main(void){
    char user[16];
    char pass[16];
    int userid = 0;

    printf("Username: ");
    gets(user);
    printf("Password: ");
    gets(pass);

    if(PasswordCorrect(user, pass))
        userid = GetUserId(user);

    if(userid == 0){
        printf("Invalid username or password.");
        return;
    }

    ...
}

```

```

// In stdio
char *gets(char *buf)
{
    int c;
    char *s;

    for (s = buf; (c = getchar()) != '\n';)
        if (c == EOF)
            if (s == buf)
                return (NULL);
            else
                break;
        else
            *s++ = c;
    *s = 0;
    return (buf);
}

```

In this example, the main function simulates a login, the user is asked to enter a username and password, these are checked against each other, the user id is fetched and if `userid` is still 0, they are kicked out as they have failed to log in. The problem arises from the implementation of `gets` (a simplified version taken from Apple's `libc` - the original version printed a warning notifying the user that `gets` is unsafe).

The variable `s` is set to point to the first byte of `buf`, and for each character read in through `getchar` that isn't a newline or end-of-file, the memory location pointed to by `s` is set to that character and `s` is incremented. The problem here is that there is no bounds checking performed on `s`.

The attack occurs as follows:

- The attacker provides a password that is longer than 16 characters.
- `gets` is called, with `pass` being passed in as the argument.
- The for loop continues until a newline is countered, in this case continuing to write past the memory allocated for `pass`.
- `userid` is positioned in memory after the end of `pass`, so when `gets` writes past the end of `pass`, it overwrites the value of `userid`.
- `userid`, which was originally set to zero, and assumed by the programmer to be unchanged unless the password and username match, has been checked to a non-zero value.
- The attacker is given a valid `userid`, and can even set the `userid` to be whatever they want to be by varying the 17th character of the input password.

2.1.2 Example: Heartbleed

A more topical example is the Heartbleed vulnerability found in the OpenSSL library - an open source implementation of the SSL and TLS protocols [13]. The vulnerability, found in April 2014 is the opposite of a buffer overflow.

Where, in a buffer overflow the attacker can write past the allocated memory to overwrite other values, the heartbleed bug allows the attacker to read past the memory allocated for the legitimate information and read values stored in RAM (such as passwords and private keys).

The bug is contained in the following code [7]:

```
/* Read type and payload length first */
hbtype = *p++;
n2s(p, payload);
p1 = p;
...
unsigned char *buffer, *bp;
int r;

buffer = OPENSSL_malloc(1 + 2 + payload + padding);
bp = buffer;
...
/* Enter response type, length and copy payload */
*bp++ = TLS1_HB_RESPONSE;
s2n(payload, bp);
memcpy(bp, p1, payload);
```

The variable `p` points to a `ssl3_record_st`, the incoming message. The first byte of the message is read (the type of the record) and is stored in `hbtype`, and then the `n2s` macro takes two bytes from `p` and stores them in the variable `payload`, which is designed to contain the length of the message. Finally, `p1` is set to contain the rest of the received message. Note that the received message is received from a potentially untrusted source.

A buffer is created and has `1 + 2 + payload + padding` allocated for it.

The response message is created in `bp` and its first byte (its record type) being set to `TLS1_HB_RESPONSE`, and with the macro `s2n` copying two bytes from `payload` into `bp`. Finally, `memcpy` is called, which copies `payload` bytes of `p1` into `bp`. This was originally intended to copy the rest of the heartbeat message back into the response but is the line that introduces the vulnerability.

The bug comes into play when the variable `payload`, originally extracted from the adversary originating message specifies a size bigger than the rest of the package. `memcpy` will copy past the end of the legitimate data stored in `p1` and start copying bytes into `bp` of other variables and essentially whatever happens to be sitting in RAM nearby `p1` at the time. Finally `bp` is sent back to the adversary.

2.1.3 Example: Returning a Pointer to the Stack

This final example shows a nasty bug, one that potentially could be used for a security vulnerability, but since the code normally does not function correctly it hasn't been a major exploit [16]. This bug stems from the programmers misunderstanding of the lifetime of variables on the stack.

```
Triangle *CreateTriangle(Point *a, Point *b, Point *c){
    Triangle T;
    T.a = a;
    T.b = b;
    T.c = c;
    return &T;
}
```

The triangle `T` is created as a local variable, on the stack and modified. A reference to it is then returned from the function. However, when the function exits, the local variables lifespan ends, resulting in the returned pointer pointing to deallocated space that will probably be overwritten on the next function call.

2.1.4 Spatial and Temporal Pointer Safety

There are two types of safety that can be provided when dealing with pointers - temporal and spatial. Temporal safety ensures that the pointer points to a valid area of memory at the time that it is dereferenced, while spatial safety just ensures that the pointer points to a valid area of memory at a certain

time. In the examples provided above, the first two were violations of spatial pointer safety - in the first data was written beyond the end of the object it was meant to write to and in the second, data was read beyond the end of the object it was meant to write to. The last example was a violation of temporal pointer safety - a pointer is returned an object that is past the end of its lifetime.

The methods explored in this dissertation provide spatial safety, but not complete temporal safety. Consider the following code:

```
int *a=malloc(sizeof(int));
int *b=a;

free(a);

printf("%d\n", *a);
printf("%d\n", *b);
```

The methods implemented in this dissertation will catch the memory access error introduced by the first `printf` statement, but not by the second. This is because the information about pointer validity is associated with the pointer, and so when `a` is freed the information associated with it indicates that it does not point to valid memory, but the information associated with `b` is not likewise updated.’

Therefore the techniques implemented in this dissertation do not provide complete pointer safety, but provide an additional layer of robustness.

2.2 Allowances in the C standard

The C99 standard defines loose rules for pointer related operations, which allow the transformations performed by Bandage to result in a program that adheres to it [9].

By omission in section 6.2.6.1 of the standard, the representation of the

pointer type in unspecified. This allows pointers to be represented by more informative data structures than just the address they point to, for example a fat pointer representation.

The C standard places the following notable restrictions on pointer types (unless otherwise stated, these are contained in section 6.3.2.3).

- A pointer to any object type may be converted to a pointer to void and back again; the result shall compare equal to the original pointer.
- An integer constant expression with the value 0, or such an expression cast to type `void *`, is called a null pointer constant. If a null pointer constant is converted to a pointer type, the resulting pointer, called a null pointer, is guaranteed to compare unequal to a pointer to any object or function. Conversion of a null pointer to another pointer type yields a null pointer of that type. Any two null pointers shall compare equal.
- An integer may be converted to any pointer type. Except as previously specified, the result is implementation-defined, might not be correctly aligned, might not point to an entity of the referenced type, and might be a trap representation.

These restrictions place `void` pointers as the lowest common denominator, and state that `NULL` must be equivalent for all pointer types.

However, it also provides a number of allowances that pointer safety schemes can use:

- The value of a pointer becomes indeterminate when the object it points to (or just past) reaches the end of its lifetime (6.2.4.2).
- When an expression that has integer type is added to or subtracted from a pointer, the result has the type of the pointer operand. ... If both the pointer operand and the result point to elements of the same array object, or one past the last element of the array object, the evaluation shall not produce an overflow; otherwise, the behavior is undefined. If the result points one past the last element of the array

object, it shall not be used as the operand of a unary `*` operator that is evaluated. (6.5.6)

- If an invalid value has been assigned to a pointer, the behaviour of the `*` pointer is undefined. Among the invalid values for dereferencing a pointer by the unary `*` operator are a null pointer, an address inappropriately aligned for the type of object pointed to, and the address of an object after the end of its lifetime. (6.5.3.2).

The first point would allow creation of a simple temporal pointer safety scheme where the pointer parameter passed to the `free` function is set to null after the function returns, while adhering to the C standard.

Bandage makes use of the latter points, allowing undefined behaviour in the case of pointers pointing past the ends of arrays (or objects) being dereferenced. However in practice, it is common for programmers to manipulate pointers such that they point out of the bounds of arrays (2 past the end, or before the start), and this is expected to be defined behaviour. Bandage is conservative and only causes undefined behaviour for dereferences to these pointers.

2.3 Working with Pointers in LLVM IR

During this chapter, types will be referred to in LLVM notation. An `i32` stands for a 32-bit integer, a `i8` stands for an 8 bit integer (or char) and a pointer to a type is denoted by the type followed by an asterisk.

In LLVM IR, space on the stack is set aside with the `alloca` instruction, which returns a pointer to the allocated memory `??`. Therefore the line `int a` in C is converted into `%a = alloca i32` in LLVM IR. It should be noted that the variable `%a` is actually the type of `i32*`. This means that in the declaration `int *a` will create in LLVM IR the variable `%a` of type `i32**`.

The `store` instruction takes a piece of data and a pointer and stores the data in the area pointed to. The following C code turns into the following LLVM

code:

<pre>int a; int b; a = b;</pre>	<pre>%a = alloca i32 %b = alloca i32 %1 = load i32* %b store i32 %1, i32 %a</pre>
--	---

Here, spaces on the stack for the variables `a` and `b` are created, and pointers to these spaces are stored in the variables `%a` and `%b` respectively. The value stored in the area pointed to by `%b` is loaded, and then stored in the area pointed to by the variable `%a`.

<pre>int *c; int d; ... *c = d;</pre>	<pre>%c = alloca i32* %d = alloca i32 ... %1 = load i32** %c %2 = load i32* %d store i32 %2, i32* %c</pre>
--	--

Here, in the C code we are assigning the value held in `d` to the memory location pointed to by `c` (assume that `c` is set to a valid memory address during the `...` otherwise the code results in undefined behaviour).

In LLVM IR, the variable `%c` is created with type `i32**` and the variable `%d` is created with type `i32*`. The value stored in the memory pointed to by `%c` is loaded into `%1`, so `%1` now contains the address pointed to by `c` in the C code. The value stored in the memory pointed to by `%d` is loaded into `%2` (the value contained within `d` in the C code). Finally the memory pointed to by `%1` is set to the value contained in `%2`.

The last interesting instruction for working with pointers is the GEP instruction. GEP stands for 'Get Element Pointer', and is used for performing pointer arithmetic (it itself does not perform a memory access) ??.

<code>int *a;</code>	<code>%a = alloca i32*</code>
<code>int *b;</code>	<code>%b = alloca i32*</code>
<code>int c;</code>	<code>%c = alloca i32</code>
<code>int *d;</code>	<code>%d = alloca i32*</code>
	<code>%1 = load i32** %b</code>
	<code>%2 = getelementptr %1, i32 0, i32 3</code>
<code>a = b + 3;</code>	<code>store i32* %2, %a</code>
	<code>%3 = load i32** %d</code>
	<code>%4 = getelementptr %3, i32 0, i32 3</code>
	<code>%5 = load i32* %4</code>
<code>c = d[3];</code>	<code>store i32 %5, %c</code>

`%1` contains the value of `b` and the `getelementptr` is used for the pointer arithmetic. The variable `%1` is of type `i32*`. The second parameter of the GEP specifies how many of the size of the type of the first parameter we want to add. In this case, and in most cases it is zero, saying that we don't want to add any of `sizeof(i32*)` to the first parameter. The third parameter specifies how many of the size of the type of the value contained within the first parameter we want to add, and in this case, we want to add `3 * sizeof(i32)`. Therefore the GEP returns:

`%2 = %1 + 0 * sizeof(i32*) + 3 * sizeof(i32)`

This address is then stored in the memory pointed to by `%a`.

The second operation can be rewritten as `c = *(d + 3)`, so starts the same as the previous operation, except once the address of `d+3` has been calculated, it is dereferenced to get the value contained there.

Chapter 3

Related Work

In this section I will review current work in the area and place it in a spectrum with highly compatible on one side and highly complete on the other. This culminates with Figure 5.5 at the end of this chapter that maps out the design space.

Most pointer-safety systems fall into one of three categories, based on how they track valid areas of memory. In fat pointer systems, information about valid areas of memory is carried alongside the pointer, whereas in lookup table systems it is held separate and associated with the pointer in some other method. Finally, some systems use a poison based approach, where they signify areas of memory as being invalid and throw an error when an invalid area of memory is accessed.

3.1 Systems requiring code rewrite

Starting on the highly complete but poorly compatible end of the spectrum is Cyclone [10], which is in fact a separate dialect of C. Cyclone allows the programmer to write in a C-like language that is designed to prevent buffer overflows. It does this by imposing restrictions, such as limiting pointer arithmetic and providing extensions, such as a never-null pointer type. While

some of these extensions are automatic, the programmer must make use of most of them explicitly which required between 0% and 46% of lines of code to be changed in the corpus tested.

Arguably other languages can be included in at this end of the spectrum. **A bit more**

3.2 Systems requiring library recompilation

The next step towards greater compatibility are systems that require the included libraries used by the program to be recompiled. The library recompilation allows such systems to annotate or instrument the libraries, and deal intelligently with pointers returned from and sent to them.

CCured [15] is primarily an analysis that annotates pointers with one of three types: **SAFE** pointers which are only ever assigned to and dereferenced; **SEQ** pointers that have pointer arithmetic performed on them and **DYN** pointers which may have anything done to them including being cast from an integer. Using this analysis, CCured can reduce the number of bounds checks that must be performed, however the analysis must be performed on the entire program, including libraries. Coupled tightly with this analysis is a lookup table implementation of tracking bounds.

The Hardbound [6] proposes hardware pointer checks and introduces the hardware bounded pointer. This is essentially a fat pointer, but the other fields are dealt with transparently by hardware. All registers are upgraded to triples containing a value, base and bound, though the base and bound are set to zero for non-pointers. It is suggested in the paper that Hardbound could be combined with CCured, where hardware bounded pointers are used to keep track of data about **SEQ** and **DYN** pointers.

The Intel Memory Protection Extensions [17, 1] are a set of extensions to the x86 instruction set designed to check pointer references that may be exploited for security exploits. They require compiler, runtime library and operating

system support.

3.3 Systems requiring program recompilation

The Jones and Kelly bounds checker [11] uses a table based approach, keeping a list of all objects in memory by tracking the uses of `malloc` and `free`. This system holds a unique place in the compatibility to completeness scale, since it works with all programs written in standard compliant C, however an element of its transformation can break a non-standard but commonly used practice.

In standard C, pointers cannot point to an invalid memory address - they may only point to allocated memory addresses or one past the end of an array. However, most implementations allow pointers to do this, and to maintain their (invalid) value, which may then be transformed to be valid again. For example, the Ghostscript implementation of stacks uses pointers to the `-1` element of an array. The Jones and Kelly system however irrevocably invalidates such pointers. Therefore, the Jones and Kelly bound checker requires the program to be rewritten if it does not adhere to the C standard.

In *A Practical Dynamic Buffer Overflow Detector* [18] it was found that 60% of programs tested did not adhere to the C-standard assumed in the Jones and Kelly approach and were therefore broken by the tactic of signifying illegal pointers by setting them to `-2`.

To combat this, they created a new approach, where the creation of an out of bounds pointer would result in the creation of an Out Of Bounds object created on the heap which contains the address of the pointer and the referent object originally pointed to. These Out Of Bounds objects are stored in a hash table. Therefore on dereference, both the object list and the out of bounds hash table may be consulted to determine the validity of the pointer. In order to reduce the overhead from these two lookups, only strings are bounds checked on the rationale that they are the tool used in buffer overflow attacks.

Baggy Bounds Checking [4] is an alternate optimization of the Jones and Kelly system, based on reducing the lookup time. On a memory allocation, the size of the object is padded to the next power of two, enabling the size of the allocated memory to be stored more compactly as $\lg_2(\text{size})$ taking the size of a single byte. Due to the lower memory overhead of an entry, a constant sized array is used instead of an object list. This allows a quick and constant time address calculation to be performed. Alternate methods are used for dealing with pointers pointing past the end of arrays as adding one element to an array could double the size it could take up.

This approach does not prevent out of bounds accesses as the size associated with the pointer (the allocated bounds) is larger than the size of the object (the object bounds), so it is still possible to exceed the bounds of the object. However it prevents dangerous overflows, since a pointer cannot access memory of an object that it was not created for.

LLVM's address sanitizer [2, 3] can be considered state of the art and is capable of detecting out-of-bounds accesses on the heap, stack and for globals, use-after-free, and some use-after return bugs.

It does this by creating a copy of memory, called shadow memory, where 1 byte of shadow memory maps to 8 bytes of real memory. This takes advantage of the fact that `malloc` is guaranteed to return an 8-byte aligned segment of memory, therefore a value of 0 in shadow memory means the corresponding main memory is valid, a negative value means the corresponding main memory is invalid and a positive value of n means the first n bytes are valid and the rest are invalid.

The `malloc` and `free` functions are modified so as to mark the shadowed areas of memory as valid and poisoned respectively. Additionally, `malloc` is modified so that the memory surrounding that allocated to the program is poisoned to prevent overflows.

However, address sanitizer provides no mapping between the valid areas of memory and variables. It would be possible for pointer arithmetic to be used to still cause a buffer overflow into another variables' valid area of memory,

though it must jump over the poisoned area.

One of the two main systems implemented in this dissertation is SoftBound [14]. It is a compile-time transformation that stores information about the valid area of memory associated with a pointer separately from the pointer.

By storing information separately from the pointer, memory layout doesn't change, enabling binary compatibility and reducing implementation effort, however it does require a search for suitable bounds information on pointer dereference. Additionally the paper contains a proof that spatial integrity is provided by checking the bounds of pointers on a store or load.

3.4 Systems requiring no recompilation

Heapmon [19] deploys a helper thread that stores two bits for every word on the heap to keep track of whether or not the area is allocated and whether or not the area is initialized. Memory leaks are therefore detected by looking for areas of allocated memory left over after the program exits.

To detect overflows, memory allocation is modified to leave unallocated areas between objects, so writing to that area will trigger an error. Heapmon can only deal with memory on the heap (not the stack or globals) and works at a word granularity, so errors of less than 3 bytes may not be detected.

Body Armour for Binaries [20] targets a very specific type of attack - buffer overflows into non-control data, without requiring the source code or symbol table of the program. It essentially does this by reverse engineering the binary to extract information about the data structures that need protecting and rewriting it to contain checks on pointer dereference.

3.5 To Do

Efficient Detection of all pointer and array access errors [5] uses a more complex fat pointer representation than just {value, base, bound} to extend their coverage beyond just spatial safety to include temporal safety.

The first additional field is the storage class enumeration, ranging over the values of Heap, Global and Local. This allows detection of erroneous deallocations (such as attempting to free a local variable). The second field, a capability is more interesting. On memory allocation, a unique capability is created and stored in a capability table. The capability is deallocated once the memory is freed (either through free or returning from a function). The presence of the capability referenced by a fat pointer is checked on pointer dereference. This was found to produce an overhead of between 130-450%.

MPX

Lo-Pointers

CHERI

3.6 Systems implemented in this Dissertation

The fat pointer transformation implemented as part of Bandage is not a straight implementation from any research paper, but rather an implementation of the common themes spanning those that take the fat pointer approach. The lookup table approach was more directly inspired by Softbound, using its lookup table structure (though with interchangeable implementations) and optimizations for dealing with local pointers. Both of these transformations were designed with compatibility in mind, requiring a change only in the code for the program, not its libraries.

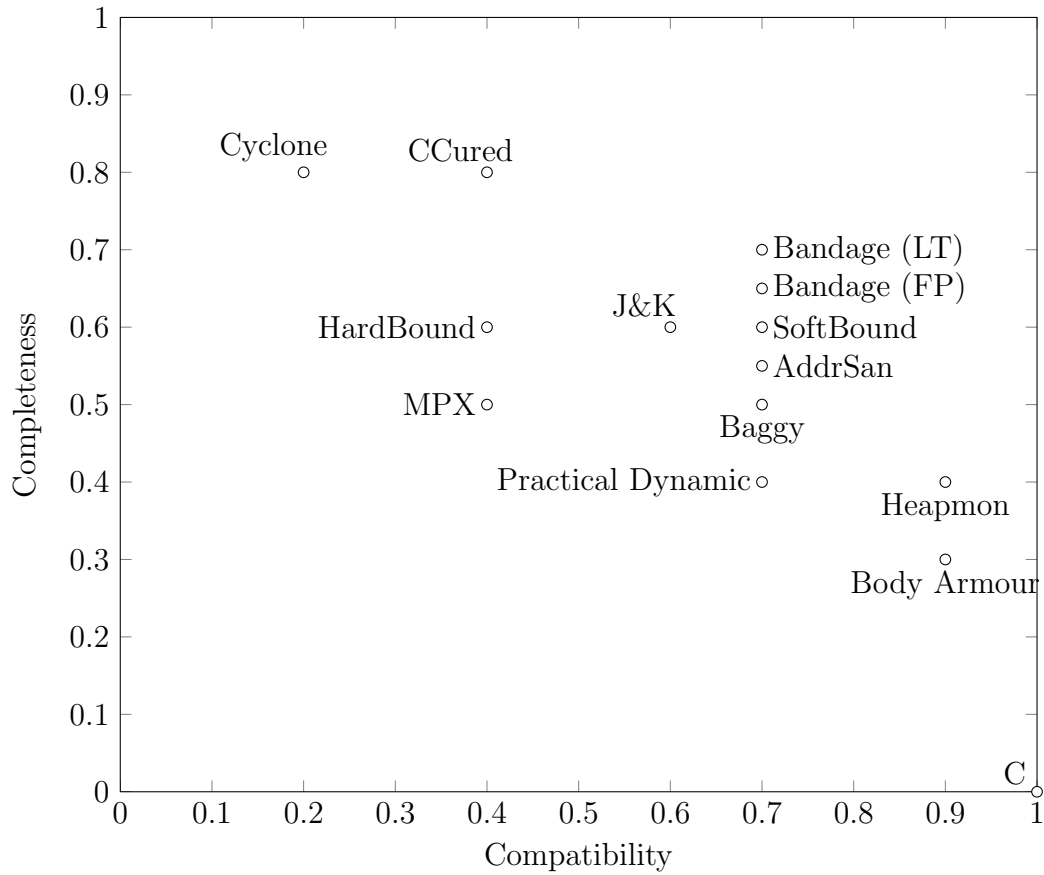


Figure 3.1: The Completeness vs Compatibility Tradeoff in Pointer Safety Systems

3.7 Design Space

A summary of the design space is presented in Figure 5.5. At the very bottom end of completeness is the untransformed C language, which offers the highest compatibility but no pointer safety guarantees. Offering the next step up in completeness are systems such as Heapmon and Body Armour for binaries which provide some protection without the need to recompile anything..

The completeness of a system is further increased by giving the system access to the programs source code and the ability to automatically instrument it,

giving the myriad of tools forming the central region of the spectrum. As the system becomes more integrated with the developer's toolchain, completeness increases, but the libraries need to be recompiled to work. Finally, with Cyclone, the programmer assists the system in providing the most complete protection.

Chapter 4

Design and Implementation

4.1 Overview

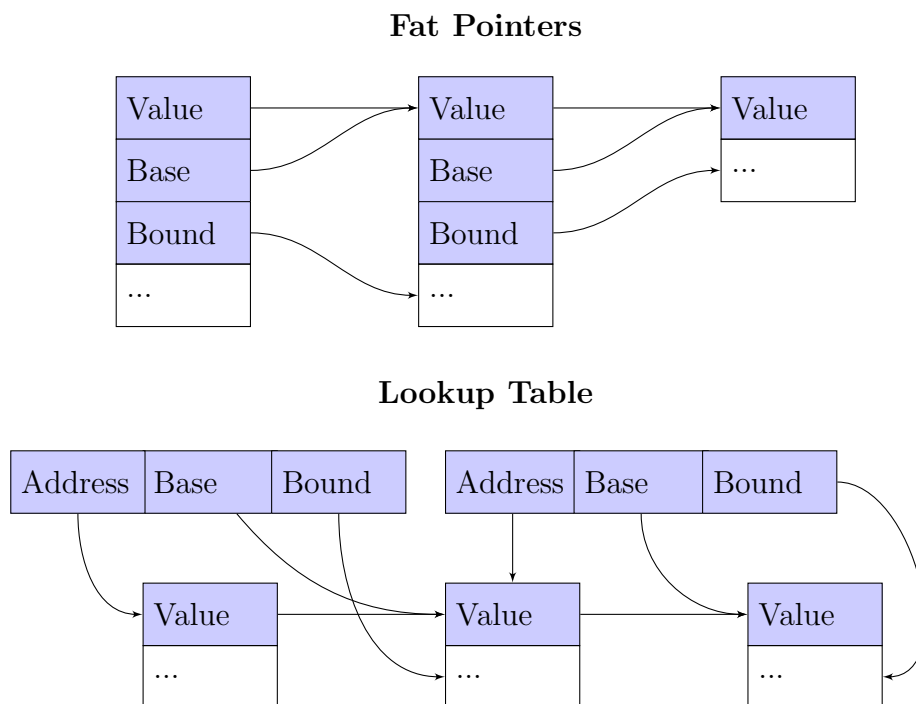


Figure 4.1: Graphical Comparison of Fat Pointer and Lookup Table Methods

This section cover the implementation of the three core sections of Bandage:

the fat pointer implementation, the SoftBound-like implementation and the CCured-like analysis. The two different implementation methods for tracking pointer bounds are contrasted in Figure 4.1. With fat pointers the bounds information associated with a pointer is stored alongside it in memory, while with the lookup table, the bounds information is stored separately and indexed by the address of the pointer.

4.2 Fat Pointers

While a pointer contains an address to an area in memory, a fat pointer contains an address and additional information. As implemented in Bandage, fat pointers contain three pointers, a value, a base and a bound.

```
int *x = malloc(5*sizeof(int));  
x += 3;
```

In bandage, the variable `x`, of type `i32*` would be turned into a structure of type `{i32*, i32*, i32*}`. Assuming that `malloc` returned the address `0x1000`, the variable `x` would contain `{0x1000, 0x1000, 0x1020}` because it contains a pointer that currently points to `0x1000` and whose valid addresses start at `0x1000` inclusive and end at `0x1020` not inclusive. After the `x += 3` instruction, the variable `x` would contain `{0x1012, 0x1000, 0x1020}`.

In order to keep type safety in the LLVM IR, different types of pointers create different types of fat pointers, eg a `i32*` creates an `{i32*, i32*, i32*}` whereas a `i8*` creates a `{i8*, i8*, i8*}`. This will result in a fat pointer class for every pointer type in the program, but because class information does not propagate to the final binary, this shouldn't create any space overhead.

However, this adds some complexity when pointers are cast to different types. Previously, casting from a pointer to a pointer (for example casting from the `i8*` returned from `malloc` to the `i32*` for the integer pointer in the above example would take one bitcast instruction with raw pointers. With fat

pointers, a new fat pointer would need to be created, the address of each field would need to be calculated, each field would have to be loaded, bitcast and then stored in the new fat pointer, adding a fair amount of overhead. The current implementation is optimized for this case (detecting whether the result of a `malloc` is going to be bitcast, and if so doesn't create the intermediate fat pointer). **It may be worthwhile seeing how well this optimization does.**

4.2.1 Types of Fat Pointer

During the running of the program, each fat pointer can be classified as one of three types: *HasBounds*, *NoBounds* and *Null*.

The *Null* fat pointers have their value set to `NULL`, and no restrictions on their base or bound. They represent null pointers and throw an error whenever they are dereferenced.

The *NoBounds* fat pointers have their base set to `NULL` and not-`NULL` in their value. They represent fat pointers whose bounds we do not know, for example the result of a external function call. These pointers cannot be bounds checked on dereference, so do not throw an error.

Finally, *textitHasBounds* pointers have not-`NULL` in all of their fields and represent a pointer whose bounds we know. These pointers are bounds checked on dereference and throw an error if the value is out of bounds.

4.2.2 Pointers

Allocation

The first step in the pointer transformation is to find all `alloca` instructions that create a pointer, and replace them with a fat pointer. Even at this early stage we can add some safety to the program by initialising the fat pointer value to be null.

In terms of performance, we are swapping one allocation instruction allocating a pointer's worth of memory with another, allocating three pointers worth of memory. On testing this was found to produce no performance difference, though could increase cache pressure (as the number of pointers that can fit on the cache are divided by three).

When the value was set to NULL, an overhead of 1.7% was added.

Instruction-based vs Chain-based

The original implementation of bandage moved through the program and transformed it on an instruction-by-instruction basis, gathering all information from the transformation from the instruction being transformed (eg the opcode, its arguments, the types of the arguments and the instruction type).

It was found that this approach, though originally simple, rapidly gained complexity as more sophisticated transformations were needed. Upon integration with the CCured-like pointer analysis, the implementation was switched to a different, more holistic approach, that of instruction-chains.


An instruction chain is a sequence of instructions, where every instruction is used by the subsequent instruction. Under this implementation, the source is searched for allocation instructions and call instructions - the two instructions that start instruction chains, and their usage was followed.

These instruction chains tend to terminate in one of a few common instructions:

- **Store** - A store instruction usually terminates two instruction chains, that of the pointer and that of the value.
- **Call** - A call instruction terminates the instruction chains of all of the parameters that are used in it. Additionally it creates a new instruction chain of its return value (if that return value is used).
- **Return** - Terminates the instruction chain of the return value.

- **Compare** - Similar to a store instruction, this terminates the two instruction chains of its operands.

The following diagram shows the two use chains generated by the following code:

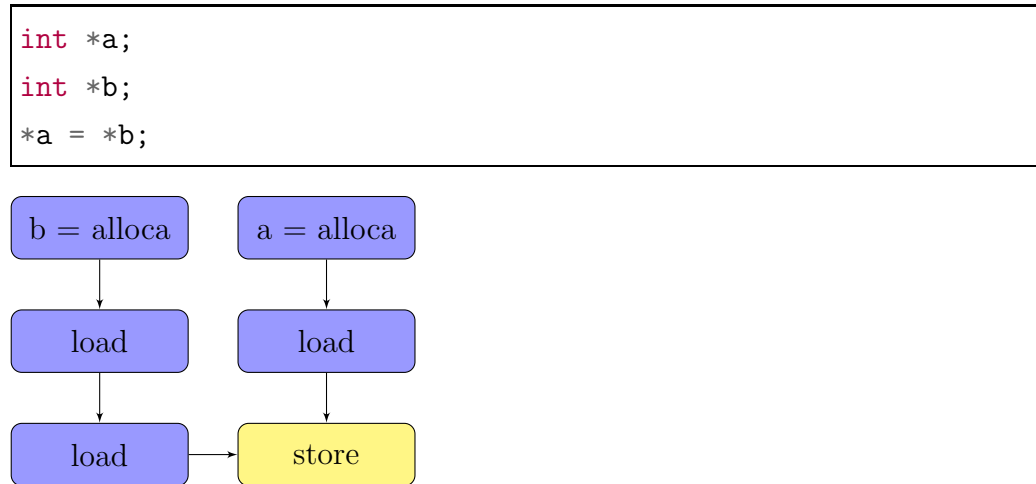

Loads

Loads are where most of the work occurs with fat pointers.

First it must be determined whether the load needs be transformed to return the value contained within the fat pointer, or whether the load needs to return the fat pointer. The latter case may arise when the load is to be used as the value in a store (where we store the fat pointer in another fat pointer) or when the load is loading the parameter for a function call. Checking for these cases is an example where the chain-based view of the data allows simpler checks than the instruction-based view.

If it is determined that the value of the fat pointer must be loaded instead of the fat pointer itself, bounds checking can occur. The value, base and bounds values are loaded out of the fat pointer and have arithmetic performed on them. If the value is less than the base, or greater than or equal to the base, a user defined function is called.

The transformation for the code dereferencing the variable `a` is shown below, with the raw pointer code being:

```
%1 = load i32** %a
```

Which will be transformed into:

```
%value_addr = getelementptr %FatPointer* %FP.a, i32 0, i32 0
%value = load i32** %base_addr
%base_addr = getelementptr %FatPointer* %FP.a, i32 0, i32 1
%base = load i32** %base_addr
%bound_addr = getelementptr %FatPointer* %FP.a, i32 0, i32 2
%bound = load i32** %base_addr
call void @BoundsCheck(i32* %value, i32* %base, i32* %bound)
%1 = load %value
```

The `getelementptr` instructions get the addresses of the fields of the fat pointer. Though the Bandage implementation creates three new `getelementptr` instructions on every dereference, these offsets are constant, and so repeated calls should be removed further down the compilation pipeline.

The cost of fat pointer dereference comes from the additional loads, and the bounds checking.

If bounds checking were ignored, overhead would be introduced because on dereference there are now two loads instead of just one - there is one to get the pointer out of the fat pointer, and one to dereference the pointer. **This would be a nice place for a microbenchmark on the raspberry pi**

Geps

4.2.3 Functions

Functions are duplicated into a function with a modified signature, such that every parameter is replaced by the fat pointer version of that parameter (so

a pointer is replaced by a fat pointer, a struct is replaced by a version of the struct that uses fat pointers).

A map from original functions to fat pointer capable functions is kept, and when a call instruction is encountered, the call target is updated to the fat pointer version of the function if it exists.

If no such fat pointer version exists, there may need to be some conversion code around the call. This code will strip any fat pointers that are passed as parameters into raw pointers and, if the function returns a raw pointer, will wrap this into a fat pointer. This, newly created fat pointer will have its base set to `NULL`, making it a *NoBounds* pointer described above.

Multiple Source File Projects

Since LLVM module passes run on a single *.c source file, issues arise when using functions declared in other source files that the user has still written. When Bandage encounters a function definition but no declaration, it assumes that the function is external to the project, and is not to be modified. This works well for cases where the included function is part of a library that the programmer cannot modify, such as `malloc` or `printf`, however also is triggered when the function declaration is in another *.c file that the programmer can modify.

Therefore, an additional pass was created, the **Function List** pass. This pass, takes a single llvm IR file and a filename and outputs all of the functions declared in that IR file.

Now, the process for using Bandage is as follows:

- Run the **Function List** pass over all source files, appending to the same function list file.
- Run the **Bandage** pass over all source files, with the function list file as a parameter.

This gives the Module pass information about other modules that it would

not normally have access to, and allows it to distinguish between function definitions for functions the programmer has no control over (so they can be ignored) and function definitions the programmer has control over.

On finding a function definition that matches a function in the function list file, Bandage transforms the function definition. This function definition will be identically transformed to the function declaration in the file it is declared in, and so the linker will be able to merge them together after the Bandage transformation is complete.

malloc

When a **malloc** instruction is encountered, the fat pointer being assigned to has its value and base set to the return value, and its bound set to the base plus the argument to the malloc instruction (the size of the area of memory to be allocated).

free

When a **free** instruction is encountered, the argument is followed backwards to find the fat pointer it came from. The value of the fat pointer is set to NULL.

Evaluate String Function

4.2.4 Structs

First, it is necessary to isolate the structs that can be modified - those that are defined and used only in the code that Bandage can modify. For example, Bandage should be able to recognise that **FILE** struct, included from **stdio.h** should not be modified.

To accomplish this, Bandage collects all of the structs used in the input file, and subtracts from this set those structs that are used in functions (as a

parameter or return type) that are declared, but not defined. So for example, `FILE` would originally be flagged for modification, but upon discovery of the function declaration for `fopen`, it would be removed from the list. In order to play nicely with projects that consist of multiple source files, the function file used to determine which functions can be modified is used again.

Once the safe to modify structs are isolated, two modifications must be carried out on them:

- Pointers within the struct must be modified to fat pointers of the same object.
- Structs within the struct must be changed to structs that themselves are modified. This includes correctly modifying self-referential structs, such as a linked list.

The latter point is made simple due to an upgrade to the LLVM type system introduced in LLVM 3.0, type completion. This allows a type to be specified with no body, be used and have its body filled in later.

Therefore the algorithm to create the fat pointer types consists of:

- Collect a set of all struct.
- Subtract those structs that are used in functions that are defined externally.
- Create an empty type, for each struct in the set.
- For each struct in the set:
 - For each element in the struct construct a new element with a type such that:
 - * For every layer of pointer indirection, there is now a fat pointer.
 - * For every nesting of static arrays, there is a static array of the same dimension, but potentially of a new type.
 - * If the base type is a struct which is in the set, change it to

the (potentially empty) fat pointer capable struct.

- Fill the previously empty type.

In this way, all structs can be modified in any plain linear order without having to worry about which structs reference other structs.

Sizeof Woes

The Bandage pass works on LLVM IR an intermediate stage created by the clang compiler. Unfortunately the clang compiler replaces instances of the `sizeof` operator with constant integers in this process.

The fat pointer versions of structs will always be equal to or larger in size than their raw counter parts, as pointers take up three times their previous size. This leads to the undesirable situation where the source program allocates an area of memory for a struct using the common `MyStruct *S = malloc(sizeof(MyStruct))` idiom. The LLVM IR will contain a constant integer (indistinguishable from other all other constant integers) representing the size of the original struct, though the actual struct used will be the fat pointer version, which requires more memory. This can lead to memory access violations.

4.3 Softbound-like Lookup Table

For comparison between a fat pointer and meta-data approaches, the Soft-Bound system was implemented. SoftBound was chosen because, apart from differences in where the bounds information is stored, it is very similar to the fat pointer approach as it associates each pointer with a base and bound.

4.3.1 Pointers on the Stack

The SoftBound approach for local pointers with only one layer of indirection is very simple, two additional pointers are created alongside the original one

to hold the base and the bound.

```
// Before
int *ptr;
// After
int *ptr;
int *ptr_base;
int *ptr_bound;
```


This is essentially the same as the fat pointer approach, except the data is stored as multiple variables instead of all in one structure. However, whereas replacing all uses of the pointer with a fat pointer then requires modifications in its further uses, this approach breaks nothing further down the line.

This is implemented by iterating through all instructions in the program and acting on `allocas` of pointer types. On finding such an `alloca`, two new pointers of the same type are created, and references of them are stored in a map, indexed by the reference of the original, such that further uses of the original pointer can be used to find its associated variables.

4.3.2 Pointers on the Heap

With the fat pointer approach, when a pointer is allocated on the heap its base and bounds are allocated alongside it, in the fat pointer structure. SoftBound uses a table data structure to map the address of a pointer in memory to the base and bound for that pointer.

The base and bound are retrieved from the lookup table, indexed by the address of the pointer on every load. For example, consider the case shown below, where each box contains the name of a variable, if it is local or its address if it is not, and its value below it.

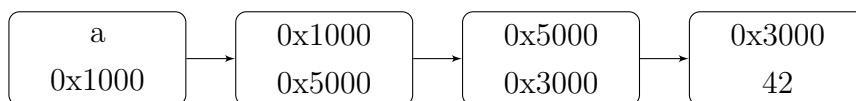

The local variable **a** points to the address **0x1000**, which points to the address **0x5000** which points to the address **0x3000** which contains **42**. This would be accompanied by the following lookup table:

Address	Base	Bound
0x1000	0x5000	0x5008
0x5000	0x3000	0x3004

Consider the following code:

```
***a=12;
```

The first dereference is simple and requires no lookup as **a** is a local variable and therefore has other local variables associated with it containing its base and bound. The second dereference, loading the value from the pointer stored at **0x1000**, is accompanied by a table lookup using the address of the pointer. This lookup finds the base and bounds and performs the bounds check.

The third and final dereference follows the same pattern, loading the value at **0x3000** from the pointer which it itself stored at **0x5000**, using the address of the pointer (**0x5000**) as a key to the lookup table and getting the correct bounds.

Table lookup

This table lookup is performed whenever a pointer stored on the heap is dereferenced, and this is what introduces the major disadvantage of the lookup table approach. Such a table must map from the address of the pointer to the base and bounds of that pointer.

Bandage was created with an exchangable backend, to allow multiple table implementations. The source program can load one of multiple provided headers to implement different types of lookup table, and the correct functions are called for table setup, teardown, lookup and storage.

Three different implementations of lookup table were implemented to com-

pare the trade-off between size and lookup cost.

Toy lookup table

The first implementation is a toy example, consisting of a constant sized array that stores bounds that it is given and is linearly searched for lookup. If an attempt is made to add an entry to a filled table, the 'not-most-recently-used' entry is overwritten.

This table was partially created for debugging purposes, but also to examine the idea of imperfect bounds storing. Since most programs will have incomplete bounds information from calls to external functions (such as `gets`), the ideal of 100% bounds coverage is practically not achievable. Therefore it is interesting to investigate the performance advantage gained from relaxing the constraint that all internally that all internally declared pointers must have their bounds fully tracked.

Hash Table

The lookup table was implemented using `uthash`, a hash table implementation written in C and released under the BSD revised license.

A hash table uses a hashing function to split its contents into a series of buckets, each of which contains a list of elements. On access, the index is hashed to find the correct bucket and the contents of the bucket are scanned linearly to find the correct item. In order for this scan to run in constant time, the number of items in the bucket must be bounded.

In `uthash`, the limit of items in each bucket is set to 10, and once this is exceeded, the number of buckets is doubled and items are redistributed into new buckets. This means that lookup time has a constant bound (though it still a linear lookup, which would take longer than an array access), though adding items to the hash table can either be constant time, or can cause the buckets to be resized, an operation linear in the size of the hash table.

The advantage of a hash table is that it is quite small, with its size depending on the number of entries it contains.

Memtable

In contrast to the hash table is **memtable**, which maps from areas of memory. It essentially creates a linear array of entries, with each entry covering a range of addresses. Since we are mapping from a single pointer to a pair of pointers, each area of memory mapped from is 8 bytes to 16 bytes. The size of the table is very large, as it consumes space for every field that it could contain, however value lookup consists only of pointer arithmetic and dereference so is constant time, as is value insertion. However, the size of the table means it cannot be entirely contained within the cache, so variable access times may arise due to cache effects.

Current implementations of x86-64 do not allow programs to use the full range of addresses available to them, so for a pointer of 8 bytes/ 64 bits, only the least significant 48 bits will be used in address translation. Additionally, the last 16 bits are a sign extension of the 62nd bit, resulting in addresses falling into two categories, those that begin with 16 '1's and those that begin with 16 '0's.

The upper set of these addresses (those starting with '1') are used by the kernel on most operating systems, with the lower half being used by the application. Therefore, the memory table only needs to be able to deal with the lower set - a range of addresses extending from 0 to 2^{47} .

However, the memtable needs to be contained within this address space as well, with a ratio of 2 bytes of storage required for every 1 byte the table is capable of mapping. To keep the arithmetic tidy, the available memory was partitioned into 4, with 3 quarters being devoted to the table and 1 quarter being used for application memory.

Finally, this application memory needs to have available space at both the top and the bottom. This is because the text and initialized data read from

the program file are stored at the bottom of the available address space, and the stack and the heap are store at the top end of the address space.

This will have a diagram with it. Therefore, of the 2^{47} available addresses the program can have, 2^{45} is still used for the program, whereas 3×2^{45} are used for the memtable. The 3×2^{45} area allocated for the table is positioned at offset 2^{44} , effectively bisecting the application memory into that used for text and that used for the stack and heap.

Therefore, to find the bounds information associated with the pointer x :

- If x is greater than 2^{44} (it is in the heap and stack region), subtract 3×2^{45} .
- Divide the address by 8 (the entry coverage).
- Multiply the address by 16 (the entry size).
- Add the table start offset 2^{44} .

One of the primary aims of this scheme was to keep implementation simple, and its purpose was to provide a comparison for runtimes. Multiple improvements could be made. Firstly, the table could be shrunk to 2/3 of the available space, not 3/4. Secondly, a split of 50:50 between the text and stack and heap segments of memory may not be ideal.

The idea of some sort of compression for the bounds information was considered, for example storing the base and bound as 32-bit offsets from the value of the pointer instead of 64-bit absolute offsets, however this would require a table update on each piece of pointer arithmetic and would go against the design of SoftBound.

Memtable for 32 bit architectures

The above implementation assumes a 64-bit architecture. In the evaluation section, benchmarks are run on a Raspberry Pi (to examine how well parallelism masks bounds checking). For this purpose, the memtable was modi-

fied to run on 32-bit architectures, which modified the arithmetic behind the memtable, but not the core concept.

The top 2^{30} addresses are reserved for use by the kernel, leaving 3×2^{30} addresses for use by the application, again with the stack and heap on the top, and text and data at the bottom. This time, 2^{31} bytes are consumed by the memtable, with 2^{29} bytes left above for the stack and heap, and 2^{29} bytes left below for the text and data.

4.3.3 Functions

Since pointers are copied in function calls, the address of the pointer cannot be used to carry information about the pointer's base and bound across the function boundary. Therefore, locally defined functions are modified so that their base and bound are passed in explicitly as additional parameters.

As with the fat pointer approach, this required duplicating all provided functions to those with modified signatures. Special care must be taken because there is no longer a one-to-one mapping between the parameters in the original function and those in the modified function.

```
// Before  
int Func(int *x);  
// After  
int Func(int *x, int *x_base, int *x_bound);
```

Additionally, the base and bounds of the return value must be transferred across the function call boundary. This involves creating a structure that contains the pointer value, base and bound and returning this instead.

There are two key differences between this returned structure and a fat pointer. The first is in the purpose, a fat pointer will be returned from a function and then used as a fat pointer. The return structure will be returned from the function and immediately have its information stripped from it into local variables, it is purely a vehicle for returning multiple values.

The second is in how these structures deal with nested pointers. A multi-level pointer, when transformed into a fat pointer, has each layer of indirection turned into a structure, eg:

```
// Before
int **a;
// After
struct FatPointer.1{int *value, *base, *bound;};
struct FatPointer.2{struct FatPointer.2 *value, *base, *bound;};
struct FatPointer.2 a;
```

This is because a multi-level fat pointer must contain all of the bounds information with it. On the other hand, with SoftBound we only care about the pointer we are passing, so:

```
// Before
int **a;
// After
struct ReturnPointer{int **value, **base, **bound};
struct ReturnPointer a;
```

We only need the bounds of the immediate pointer since the bounds of anything that it points to will be stored in the lookup table.

In terms of implementation, the duplicated functions returned the 'pointer return' object and code was added at each call site to extract the value, base and bound and to associate the value with the base and bound.

4.4 The Bounds Check Function

Two bounds check functions can be used, one in practice and one for debugging to allow greater analysis of the program.

The first bounds check function is equivalent to the following code:

```

void BoundsCheck(void *value, void *base, void *bound){
    if(value == NULL){
        printf("Null Pointer Dereference");
        return;
    } else if(base == NULL){
        printf("No Bounds Set");
        return;
    } else if(value < base || value >= bound){
        printf("Out of Bounds Pointer Dereference");
        return;
    }
}

```

This bounds check function allows differentiation between the cases of a null pointer dereference and an out of bounds dereference and additionally allows the programmer to analyse their program at runtime to determine how many pointer dereferences cannot be checked due to lack of bounds information - for example for pointers that are returned from externally defined functions.

The optimized bounds and non-debug bounds check function is as follows:

```

void BoundsCheck(void *value, void *base, void *bound){
    if((base != NULL) & ((value < base) | (value >= bound)))
        OnError();
}

```

OnError is a function provided by the programmer. This optimized version is designed to be inlined and to provide as few jumps as possible (to prevent pipeline stalls).

4.5 Setting pointer bounds

The two most common actions that cause a change in pointer bounds are detailed in the functions section above - `malloc` and `free`. For the former, the base and bound of the set pointer are set to the return value and the return value plus the parameter respectively. For the latter, the value is set to null.

The following sections cover the other common situations in which bounds information for a pointer is changed.

4.5.1 Setting to constant string

LLVM IR displays a distinct pattern for the following code:

```
char *username="george";
```

The constant string is stored in the file text section as a `private unnamed_addr constant [Y x i8]` (where Y is the length of the string, including null terminator). The assignment is a `store` instruction with the value being a GEP operator (which is different from a GEP instruction) to the start of the memory allocated to the string.

Since setting to a constant string is a static operation - the string and its length are known at compile time, setting the bounds is also a static operation. Bandage detects the type of the string (the constant-sized character array) and sets the bound equal to the base plus the size.

4.5.2 Setting to the address

```
int b;  
int *a=&b;
```

For this situation a more general, run-time method is used to determine the size of the r-value. A GEP is created to the type of the r-value, with its first operand being a null pointer (so the address calculation starts at the offset zero), and with its other operand specifying the second object of that type.

This causes a calculation, starting from offset zero, calculating the address of the second object of that type in a non-existent array. This will return the size of the r-value. As before, on non-ARM processors the GEP will be reduced to a constant in further stages of compilation.

4.5.3 Setting to another pointer

Setting a pointer equal to another pointer is simple, the bounds information of the r-value is set to that of the l-value, as is the value of the pointer. Occasionally, pointer casts may be needed to be inserted for typing (as the bounds are typed equal to the pointer, so if the pointer is cast, so must the bounds).

4.5.4 Setting to pointer arithmetic

The bounds information is modified as above, though this time the value of the r-value fat pointer has arithmetic performed on it (in the form of GEP instructions) before being stored in the value of the l-value fat pointer.

At this point, no bounds checks are performed, it is perfectly legal for a pointer to have arithmetic performed on it that leads it to go out of bounds and later to have further arithmetic that brings it back into bounds.

4.5.5 Setting to NULL

Finally, pointers are frequently set to be equal to the null constant. In this case, the bounds information is not changed, only the value. The reason for this being that a null pointer is flagged by bounds checking before the bounds

information is touched and therefore two additional assignments would add unnessecary overhead.

4.6 Binary Compatibility

There are three different entities that Bandage must pay attention to in regards of binary compatibility. These are functions, structs and external variables.

For functions, Bandage follows a rule of “if I can see its definition, I am allowed to modify it”. For any function definition it creates a transformed duplicate while retaining the original. This allows a transformed library to be used with untransformed code as the original functions remain. It would be a useful extra step to modify the untransformed version of the function to be a wrapper to the transformed version, inserting null bounds and allowing it to be internally bounds checked, however the current method means that the performance overheads of bounds checking are not imposed on programs that were not created with bounds checking in mind.

For any functions that Bandage cannot see the definition of, it leaves untouched, unless that function is named in the function file explained earlier.

Structs are a bit different, since they are fully defined in every source file they are used in. To determine which structs it is allowed to modify, Bandage looks at the functions again. If a struct is used in a function that is defined, but not declared (taking into account the functions in the function file), it is counted as external and not transformed.

This can lead to a case where the same struct is used internally to a project and also in the libraries included in that project but the struct never crosses the internal/ external boundary. In this case, two versions of the struct will exist in the final binary, the transformed one used internally and the raw one used externally.

Finally, extern variables must be taken into account. External variables are

transformed in a deterministic manner, allowing the linker to link the transformed versions. Bandage’s fat pointer implementation does not allow the mixing of transformed and untransformed external variables, but its lookup table implementation does, however such a mix is probably indicative of bad coding practices.

4.7 CCured Analysis

In the CCured paper, pointers are classified into three qualifiers: *SAFE*, *SEQ* and *DYN*. Pointers are represented by a tuple, containing the original allocation of the pointer (the `alloca` instruction) and the number of dereferences applied, this way in the analysis, a multi-level pointer is split up so that each level can be classified differently.

4.7.1 Constraint Collection

The CCured-like analysis implemented contains four different constraints:

- *PointerArithmetic*, which applies to one pointer.
- *SetToPointer*, which contains the l-value and r-value pointer.
- *SetToFunction*, which contains the l-value pointer and the function.
- *IsDynamic*, which applies to one pointer.

The instructions are iterated through, collecting all pointer allocations. Each function is examined and if the return value is a pointer, the pointer returned is associated with the function. Similarly the function’s parameters are associated with the function and their position in the parameter list.

Every store to a pointer is then examined, with the following actions:

- If the r-value is a pointer, a *SetToPointer* constraint is created.
- If the r-value is a function, a *SetToFunction* constraint is created.

- If the r-value is a cast from an integer, a *IsDynamic* constraint is created.
- If the r-value is a constant that isn't null, a *IsDynamic* constraint is created.

Every pointer that has a **GEP** performed on it (that isn't a struct type) has the *PointerArithmetic* constrain created.

4.7.2 Constraint Solving

The constraints used in the CCured-like analysis are quite simple and can be solved with a linear process. A map of pointers (the allocation and dereference level pair) to types is created and the following sequence is followed:

1. All pointers that have the *IsDynamic* constraint are set to the *DYN* qualifier.
2. All *SetToFunction* constraints are transformed to *SetToPointer* constraints with the r-value being set to the pointer associated with that function.
3. All *SetToPointer* constraints where the r-value and the l-value are of different types have both l-value and r-value set to *DYN* qualifier (this constraint is specified in the CCured-paper, though it seems a bit strong to my, surely only the l-value need be set to *DYN*).
4. All pointers with the *IsArithmetic* constraint are set to the *SEQ* qualifier.
5. The following is repeated until no further changes are made:
 - (a) For each *SetToPointer* constraint:
 - If either l-value or r-value are *DYN*, set both to *DYN*.
 - If the l-value is *SEQ* and the r-value is *SAFE*, set the r-value to *SEQ*

- (b) For each pointer (allocation and level pair) that is *DYN*, set all pointers from the same allocation with a greater level to also be *DYN*.

I should go over the CCured-analysis part in the Literature Review section and clearly state the constraints. Then when detailing this, I can refer to which constraints which part of the algorithm are fulfilling

4.8 Arrays

C provides no safety for constant size arrays. For completeness, both the Bandage and SoftBound passes implement bounds checking on array access.

This is made almost trivial because the type system carries the bounds of arrays, and therefore in the transformation pass the array access can be modified by looking at the type of the pointer operand to the GEP instruction (used to calculate the address of the requested array entry).

Chapter 5

Evaluation

5.1 Transformed Code Performance

5.1.1 Microbenchmarks

A selection of tailored micro-benchmarks were created to investigate the effects of the transformation on individual parts of code.

Safe Pointer Dereference

```
// Setup  
int x;  
int y=malloc(sizeof(int));  
// Benchmarked Code  
x=*y;
```

As `y` is recognised as a safe pointer, no bounds checking will be carried out, however at the moment the variable is not marked as `not-NULL`, therefore a null check is performed. This null check incurs an overhead of 4.6%.

If there null check were omitted, the only overhead of the fat pointer approach would be the load required to retrieve the fat pointer value. This benchmark

was run without the null check, and the load was found to incur an overhead of 0.9%.

Unsafe Pointer Dereference

```
// Setup
int x;
int y=malloc(sizeof(int));
x=y[0];
// Benchmark Code
x=*y;
```

By using array addressing on the pointer, the CCured analysis detects *y* as a pointer that has arithmetic done on it, and is therefore not *SAFE*. Therefore the pointer dereference will contain the full bounds check, which was found to incur an overhead of 52%.

The bounds check function used was complex, first it checked if the value was null, then if the base was null (signifying a pointer of type *NoBounds*), and finally if the value were within the base and bound. This could be simplified.

Pointer Allocation

```
// Setup
void Fun1(){}
void Fun2(){int *a,*b,...,*j;}
```

Many calls were made to *Fun1* and to *Fun2* and the difference in execution time was measured. This benchmark needed to be done this way because memory used by an allocation is not free until the scope it is allocated in is left, therefore if the allocation were performed in a loop, the stack would run out of space.

This was found to produce no measurable difference.

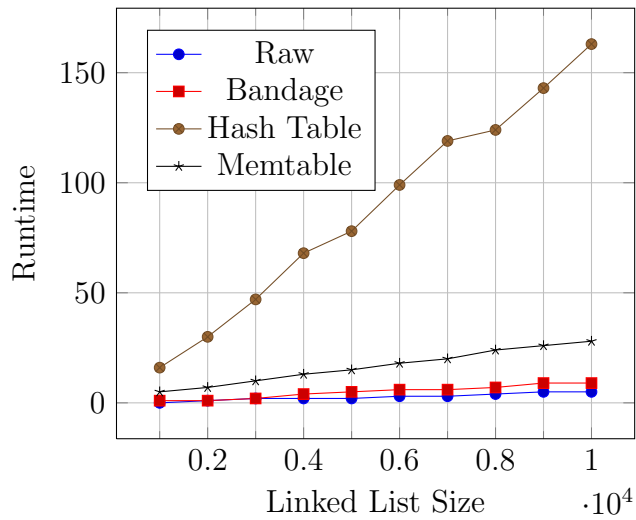


Figure 5.1: Increase in runtime following a Linked List as size increases

Pointer Assignment

```
// Setup
int *a,*b;
// Benchmark Code
a=b;
```

There is no bounds checking on this code as no pointers are dereferenced, its purpose is to observe the overhead of copying three pointers instead of one.

This was found to produce no measurable difference.

Following a Linked List

This benchmark was created to highlight the difference between the fat pointer and the lookup table approach, since with SoftBound no table lookup occurs for local variables. A linked chain is created and then followed. These tests were repeated with a linked lists of different lengths to investigate how each approach scales with the number of pointers that it needs to keep track of.

Figure 5.1 shows the results. The first and most obvious result is that, now that the pointers are stored on the heap and therefore table lookups are required for pointer bounds the table lookup approaches are slower than the fat pointer approach.

The hash table performs the worst with a **32x** runtime increase at the largest list size. This is not surprising considering that each lookup requires a look through each bucket for the matching element. The interesting result is that the runtime seems to increase linearly with the list size, implying a close to $O(1)$ overhead for hashtable lookup.

With the longest linked list length, the MemTable takes five times as long as with no bounds checking and three times longer than bandage. The MemTable lookup consists of pointer arithmetic and an access to the `mmaped` area, whereas a fat pointer lookup consists of a `GEP` to the object. A potential reason the MemTable approach takes longer than fat pointers is that an iteration for the fat pointer contains a load which fetches both the next pointer value and its bound at the same time, and they are store contiguously in memory. An iteration with MemTables consists of a lookup to find the next pointer, and then a lookup in the table to find the bounds for that pointer, requiring two lookups to two areas of memory that are likely very far apart.

However, since the linked list was allocated in order, each element is likely arranged sequentially in memory. Therefore, since the MemTable uses the pointer's address in memory as the index to that pointer's information, the bounds information associated with each linked list item will also be arranged sequentially in memory, and quite close together, giving very good spatial locality for the caches to take advantage of.

A final cause of the slowdown could be that since the table lookup functions are compiled separately and linked with the code that uses them it prevents them from being inlined, resulting in more jumping around. linear

Benchmark	Fat Pointer Overhead	Lookup Table Overhead
Bisort	71% +/- 1%	164% +/- 1%
Perimeter	35% +/- 7%	294% +/- 11%
Power	46% +/- 1%	101% +/- 1%
Treeadd	49% +/- 4%	253% +/- 6%
Tsp	95% +/- 2%	211% +/- 3%

Table 5.1: Fat pointer and lookup table overheads compared to uninstrumented runtime for the Olden benchmarks

5.1.2 Olden Benchmarks

The olden suite of benchmarks are designed to be very pointer operation heavy [12].

Other Benchmarks

Due to the complex nature of the transformation (especially the fat pointer transformation), some of the olden benchmarks are not transformed correctly.

One of reasons that the benchmarks fail to run is Type Coercion. In some circumstances, the LLVM IR produced by clang coerces the types of parameters to functions. For example, the `em3d` benchmark contains the following function:

```
typedef struct node_t{
    double value;
} node_t;

typedef struct graph_t{
    node_t *e;
    node_t *h;
} graph_t;

void print_graph(graph_t graph){...}
```

Instead of the struct being passed to the function as a whole struct, it is split into its two members and the function in IR actually takes two

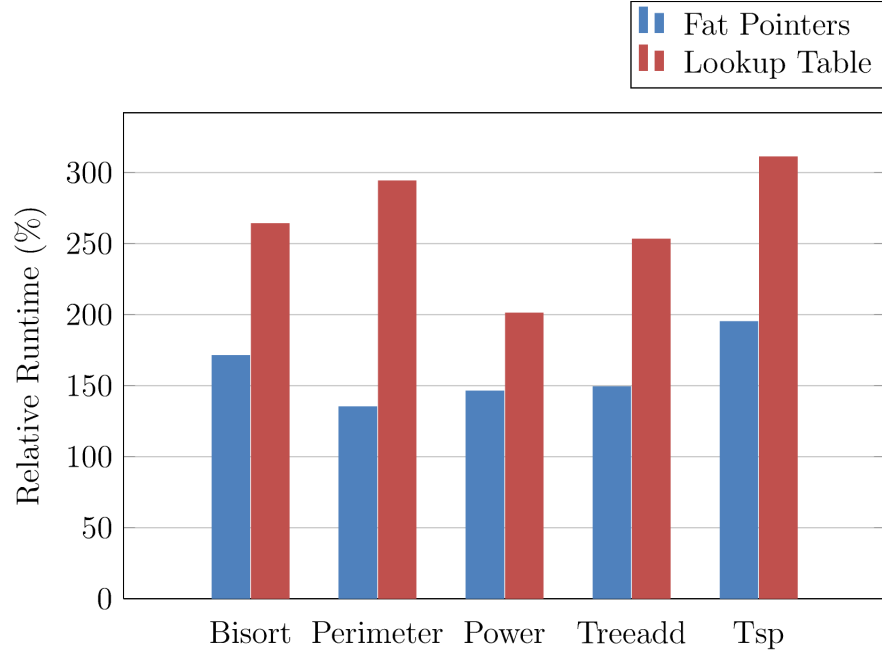


Figure 5.2: Graphical representation of relative runtime for Olden benchmarks

`node_t *s` as its parameters, which are then put into an anonymous type of `{node_t *, node_t *}` which is finally bitcast into a `graph_t`.

5.1.3 No Checks

Bandage was modified to not insert bounds or null checks on pointer dereference, and the benchmarks were run again. This provided a measurement of the overhead introduced by using fat pointers (and therefore dealing with the extra loads, pointer wrapping and stripping and cache overhead) and by propagating the bounds information. The overheads introduced here allow evaluation of the bounds checking strategy separate from those overheads and also provides a theoretical lower bound on what an optimization to the checking strategy can achieve.

The runtime overheads are shown in Table 5.2, for comparison when the code was run without optimization and when the code was run with O3. It

Olden Benchmark	O0 Overhead	O3 Overhead
Bisort	7.50%	3.44%
Mst	xxxxxx%	xxxxxx%
Perimeter	-18.62%	-43.49%
Power	xxxxxx%	xxxxxx%
Treeadd	28.75%	17.11%
Tsp	7.29%	28.57%

Table 5.2: Runtime overhead on olden benchmarks when no bounds or null checks are inserted

Optimization Level	Raw	Bandage
O1	20.51%	-2.33%
O2	26.92%	13.95%
O3	26.92%	13.95%

Table 5.3: Speedup relative to O0 optimization for raw and bandage transformed Tsp benchmark.

is gratifying to see that in most of the cases, O3 optimization reduces the gap between uninstrumented and instrumented code.

Tsp interfering with Optimization

Looking at the runtime breakdown of the Tsp benchmark gives us the timings in Table 5.3. It can be seen that large discrepancy in optimization speedups arises during the set of O1 optimizations.

In order to investigate this further, O1 optimization was repeated multiple times on the uninstrumented code, each time with a specific optimization disabled, to determine which was responsible for the 20% speedup. Each of the resulting binaries displayed speedups of 17% or more, suggesting that no single optimization was responsible for the speedup. It was found however, when the `instcombine` optimization was omitted, the speedup for the unoptimized binary was 25%, indicating that it actually slows the resulting program.

The same process was repeated on the instrumented IR. It was found that with each optimization pass specified manually, a speedup of 25\% is achieved

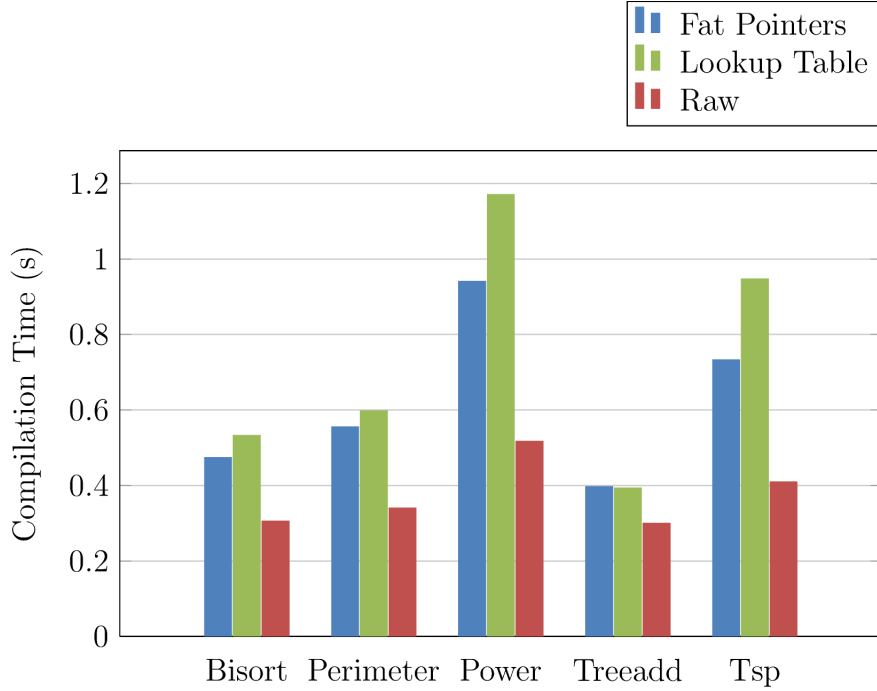


Figure 5.3: Compilation Time for Olden Benchmarks

- similar to that of the raw binary, but when specified through the O1 flag, the speedup is negligible.

However, this process also identified the O1 optimizations that were the most responsible for was responsible for the speedup. Without the `instcombine` or the `sroa` optimizations, the speedup dropped to 1%. Additionally, the absence of the `early-cse` optimization caused the speedup to drop to 17%.

5.2 Transformation Performance

5.3 Interactions with Optimizations passes

Since many optimizations rely on each other and inter-react, instead of individually enabling optimizations, I individually disabled them. Table 5.4 shows the performance difference when the `tsp` benchmark (picked as it pro-

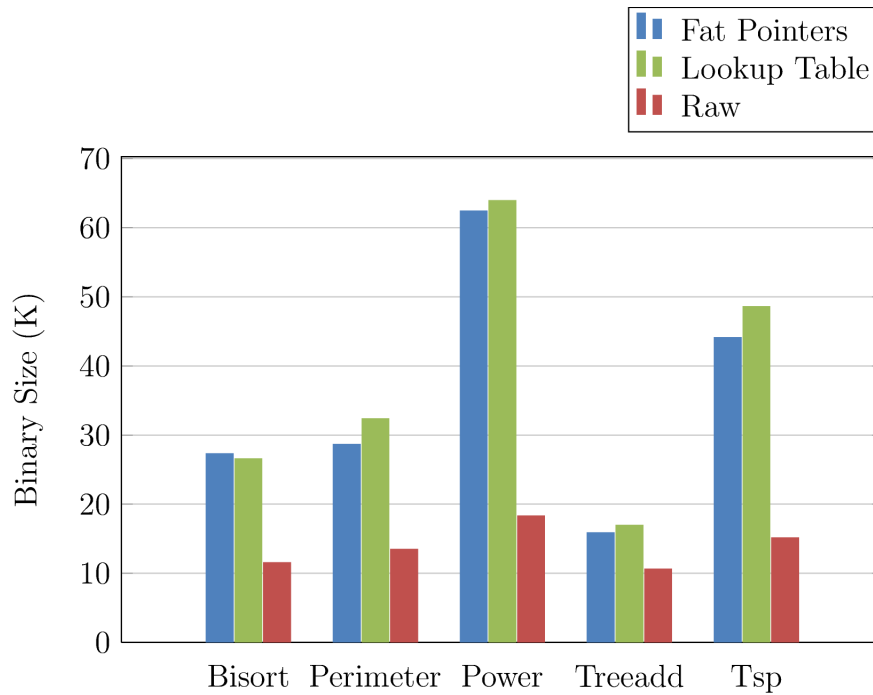


Figure 5.4: Binary Size of Olden Benchmarks

duced the highest runtime increase itself) was run with the stated optimizations disabled. All of the optimizations used in O1 optimization were run 10 times and only those that produced a difference of greater than 5% are shown in the table.

Since the stated optimizations were omitted, a beneficial optimization would give a negative value in the table - showing that its omission caused the resulting binary to take longer to execute. The table shows that most optimizations give a negative result when applied to the fat pointer code.

5.4 Security

5.4.1 Buffer Overflow Attack

```
int main(void){
    char pass[16];
```

Omitted Optimization	Raw Speedup	Fat Pointer Speedup
early-cse	-3.30%	22.29%
instcombine	5.48%	7.56%
loop-rotate	-1.28%	9.94%
simplifycfg	-2.47%	-5.75%
sroa	0.23%	7.45%

Table 5.4: Performance Differences on the Tsp benchmark with selection optimizations disabled

```

    int userid = 0;

    gets(pass);
    ...
}

```

```

// In stdio
char *gets(char *buf)
{
    int c;
    char *s;
    for (s = buf; (c = getchar()) != '\n';)
        if (c == EOF)
            if (s == buf)
                return (NULL);
            else
                break;
        else
            *s++ = c;
    *s = 0;
    return (buf);
}

```

Bandage is capable of stopping the buffer overflow described in the Background section. The `pass` array has its bounds information contained in its type in LLVM IR (as `[16xi8]`). As it is passed into `gets` as a parameter it is converted into a function whose value is set to the address of the array. During the assignment, the bounds of the fat pointer are set correctly. Then as `s` is set to `buf`, the bounds information is transferred to `s` and consulted

on every dereference of `s`. Therefore once the value of `s` exceeds its base and bounds (that of the original variable `pass`) an error is triggered.

5.4.2 Heartbleed

```
/* Read type and payload length first */
hbtype = *p++;
n2s(p, payload);
pl = p;
...
unsigned char *buffer, *bp;
int r;

buffer = OPENSSL_malloc(1 + 2 + payload + padding);
bp = buffer;
...
/* Enter response type, length and copy payload */
*bp++ = TLS1_HB_RESPONSE;
s2n(payload, bp);
memcpy(bp, pl, payload);
```

5.4.3 Returning a Local Variable

```
int *ReturnLocalVariable(){
    int x = 5;
    return &x;
}

int main(){
    int *a = ReturnLocalVariable();
    *a = 12;
    return 0;
}
```

Bandage, a system for enforcing spatial pointer safety cannot detect what is wrong with this example of a temporal pointer violation. The expression `&x` is turned into a fat pointer, with value and base pointing to the address of

x and the bound pointing past its end. After return, it is still a perfectly valid fat pointer as the value is within the base and bound. Therefore on dereference, no error is triggered.

5.5 Pointer Safety System Evaluation Framework

The following factors are taken into account when assessing a pointer safety system:

- **Spatial Safety Offered**
 - Prevents access to unallocated memory.
 - Prevents access to incorrect referent object.
 - Prevents most access to unallocated memory or incorrect referent object.
 - Is able to check all memory accesses that require checking.
 - Checks most memory accesses that require checking.
- **Temporal Safety Offered**
 - Prevents access to free'd memory.
 - Prevents access to deallocated stack memory.
- **Binary Compatibility**, the extent to which a program must be modified to run with the system. This is split into the following categories:
 - The code must be recompiled.
 - All libraries must be recompiled.
 - Code must be written exactly to standard.
 - Code must be rewritten.

Safety Guarantee	Bandage	CCured	SoftBound	HardBound	Jones & Kelly	Cyclone	Heapmon	Address San.	Baggy Bounds	MPX
Access to invalid memory							✗		✗	
Access to incorrect object							✗	✗		✗
Dangerous accesses										
Checks all variables	✗		✗	✗	✗				✗	✗
Access to free'd memory	*	✗	✗	✗						✗
Access to dead stack memory	✗	✗	✗	✗			✗	✗		✗

Table 5.5: Safety guarantees for evaluated pointer safety systems. A cross indicates the guarantee is **not** provided.

- **Runtime Overhead**

- **Extra requirements**

- Hardware primitives.
- Additional threads.
- Garbage collector.

The evaluation of the systems with regards to safety offered is shown in Table 5.5.

Bandage fails to provide complete spatial safety as it takes pointers without bounds information from external code and cannot bounds check for them. Simply setting pointers to null after being passed to **free** provides protected against a very small set of temporal safety bugs, though Bandage is not granted a full check in that section because copies of that **free**'d pointer are not also updated.

The ability to check all variables is present in two groups of systems. The first group, containing CCured and Cyclone require the entire program, including libraries to be recompiled (mentioned in the next section of the evaluation) in order to gain bounds information on all variables. The second group, containing Heapmon and Address Sanitizer do this by instrumenting **malloc** and

Compatibility requirements	Bandage	CCured	SoftBound	HardBound	Jones & Kelly	Cyclone	Heapmon	Address San.	Baggy Bounds	MPX
Code recompilation	X	X	X	X	X	X		X	X	X
Library recompilation		X		X		X				X
Code must be standardized					X					
Code rewrite						X				

Table 5.6: Compatibilty requirements for evaluated pointer safety systems.

free, which will be used by external code but without the object granularity - neither of these systems can detect a pointer access to the wrong referent.

It is quite obvious from the table that spatial safety is often the primary concern, probably due to its wider application in vulnerabilities than temporal safety which more frequently causes benign bugs.

Table ?? covers the compatibility requirements for the evaluated systems. The presence of a requirement is marked by a cross in this table instead of a tick as in the last table as requirements are negative. It can be seen that the systems with the most ticks in Table 5.5 are also likely to have the most crosses in Table 5.6, a trend explored in the next section.

Finally, extra considerations and the runtime overheads imposed by each tool are listed in Table 5.7 for completeness. Together these three graphs provide a full picture of the relative strengths and weaknesses of these tools, allowing programmers to make an informed decision over which is the best for the task at hand. A programmer with a non-real time legacy system could start by choosing Heapmon and accept the runtime overhead as an acceptable price for the lack of compilation time overhead. Alternatively a programmer looking to write a secure system from scratch would be well advised to use Cyclone (provided the garbage collector isn't an issue).

System	Runtime Overhead	Extra Requirements
Bandage	Up to 250%	Hardware
CCured	Up to 250%	
SoftBound	Up to 350%	
HardBound	Up to 25%	
Jones & Kelly	-	
Cyclone	Up to 250%	Garbage Collector Extra Thread
HeapMon	Up to 450%	
Address Sanitizer	Typically 200%	Hardware
Baggy Bounds	Up to 230%	
MPX		

Table 5.7: Runtime and extra requirements of evaluated pointer safety systems

5.5.1 The completeness vs compatibility tradeoff

It can be seen in the previous section that the system providing the greatest completeness, Cyclone is also the one with the lowest compatibility as the entire program must be rewritten in Cyclone’s dialect of C. Similarly, the system presenting the greatest compatibility, Heapmon has the most incomplete system, being unable to detect accesses to the wrong referent or even accesses just past the end of a valid area.

To this end, Figure 5.5 was created to display the design space of current systems. Based on the evaluation criteria enumerated above, each system was given a numerical score between zero and one as a quantitative measure of its compatibility and its completeness. The numerical values aren’t meant to be definitive, they were assigned to allow comparison between the systems.

In the bottom right is the raw, untransformed C language without any pointer safety system applied to it. Following to the left there is a large jump in completeness with the Heapmon system, which adds basic but still useful pointer safety checks. Further to the left are systems that require recompilation of the source code but not of included libraries. The Jones & Kelly system comes next, with slightly less compatibility due to its strick adherence to the C standard. CCured, HardBound and MPX require the full system to be

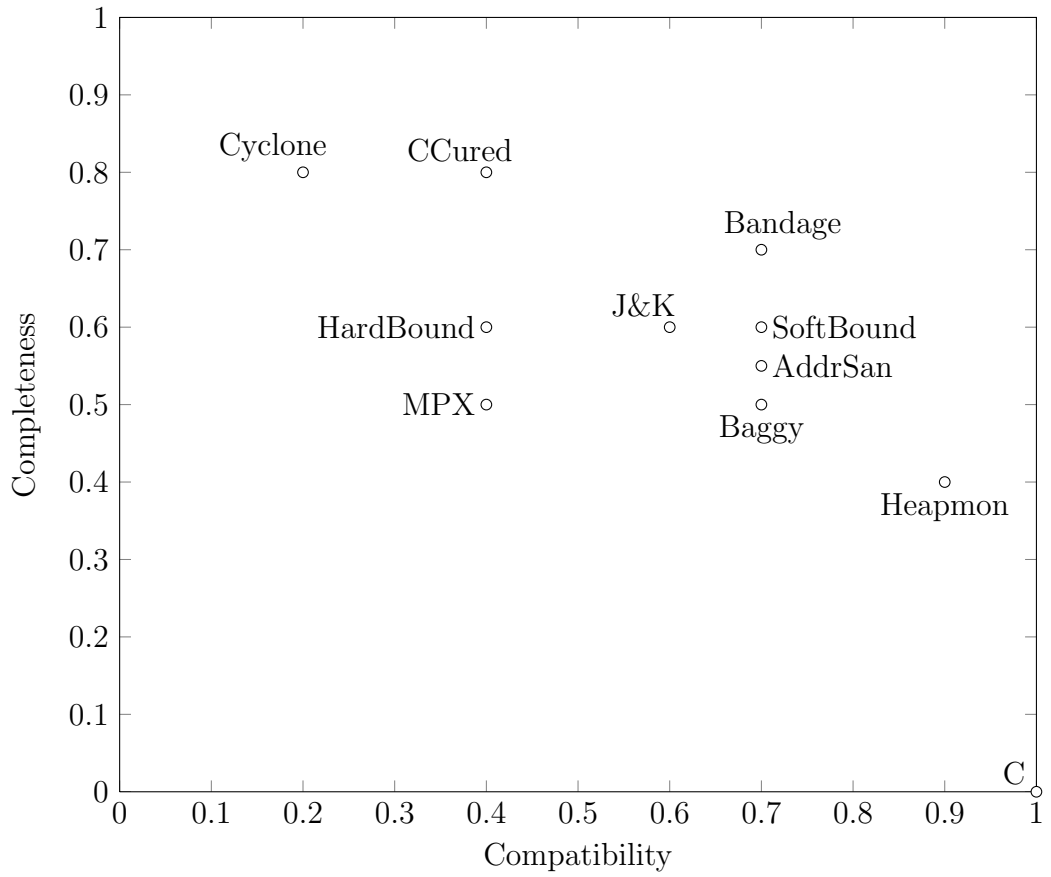


Figure 5.5: The Completeness vs Compatibility Tradeoff in Pointer Safety Systems

recompiled with binaries, and finally Cyclone provides the strongest pointer safety at the cost of rewriting the source code.

It should be noted that this graph disregards the runtime overhead of the systems.

Chapter 6

Summary and Conclusions

The novel idea of separation of analysis and implementation was developed and implemented paving the way for a reusable ecosystem of components to enforce pointer safety and to identify where it needs to be enforced.

The two prevalent methods of carrying spatial pointer information and tracking its safety were implemented and their effects on commonly used compiler optimizations was investigated. **It was found that...**

By placing the existing pointer safety systems in a common evaluation framework they can be compared and contrasted, allowing the users to make a choice of which system to use or allowing researchers to identify gaps in the design space for future work. This evaluation also identified a core trade-off in this area, that of compatibility vs completeness, with Cyclone taking its place at the completeness end of the spectrum and Heapmon taking its place at the compatibility end.

6.1 Software Engineering Practices

The use of a strong test suite was invaluable during the implementation, and the only thing I would change if I did this again would be making it even stronger.

In terms of implementation costs, implementing Bandage took considerably more effort and was far more bug prone than implementing SoftBound. This is in large part due to Bandage changing the representation of pointers - making the change from raw pointers to fat pointers required a considerable amount of code to be written in one piece - if the entire change did not work, the source programs would break. In the SoftBound implementation however, the implementation could be broken down into small pieces (eg providing bounds for local variables, then passing them through functions), and at each stage the source programs would compile, though the checking may not be complete.

Although this does provide a nice guarantee with Bandage that if the program compiles, bounds checking is more likely to be thorough, it creates an all-or-nothing situation in the presence of cases that haven't been implemented where Bandage either breaks the code or performs well, while Softbound can provide bounds checking for that that has been implemented.

Unexpected setbacks were discovered in trying to run the Softbound transformation on the Raspberry Pi, as both uthash and memtables required modification to run on 32-bit systems.

Bibliography

- [1] Intel architecture instruction set extensions programming reference. <http://download-software.intel.com/sites/default/files/319433-015.pdf>.
- [2] Llvm address sanitization doc. <http://clang.llvm.org/docs/AddressSanitizer.html>.
- [3] Llvm address sanitizer algorithm. <https://code.google.com/p/address-sanitizer/wiki/AddressSanitizerAlgorithm>.
- [4] Periklis Akritidis, Manuel Costa, Miguel Castro, and Steven Hand. Baggy bounds checking: An efficient and backwards-compatible defense against out-of-bounds errors. In *USENIX Security Symposium*, pages 51–66, 2009.
- [5] Todd M Austin, Scott E Breach, and Gurindar S Sohi. Efficient detection of all pointer and array access errors. *ACM SIGPLAN Notices*, 29(6):290–301, 1994.
- [6] Joe Devietti, Colin Blundell, Milo MK Martin, and Steve Zdancewic. Hardbound: architectural support for spatial safety of the c programming language. *ACM Sigplan Notices*, 43(3):103–114, 2008.
- [7] Eric A. Young, Tim J. Hudson. OpenSSL: Source, Tarballs, 2014. <https://www.openssl.org/source/>.
- [8] GNU Project. Ghostscript Source Code, 2012. <ftp://ftp.gnu.org/pub/gnu/ghostscript/>.
- [9] ISO. INTERNATIONAL STANDARD, Programming Languages - C, 2011. <http://www.open-std.org/jtc1/sc22/wg14/www/docs/n1570.pdf>.
- [10] Trevor Jim, J Gregory Morrisett, Dan Grossman, Michael W Hicks, James Cheney, and Yanling Wang. Cyclone: A safe dialect of C. In

- USENIX Annual Technical Conference, General Track*, pages 275–288, 2002.
- [11] Richard WM Jones and Paul HJ Kelly. Backwards-compatible bounds checking for arrays and pointers in c programs. In *AADEBUG*, pages 13–26, 1997.
 - [12] Martin C. Carlisle. Olden benchmark, 1996. <http://www.martincarlisle.com/olden.html>.
 - [13] Matthew Green. Attack of the week: OpenSSL Heartbleed, 2014. <http://blog.cryptographyengineering.com/2014/04/attack-of-week-openssl-heartbleed.html>.
 - [14] Santosh Nagarakatte, Jianzhou Zhao, Milo MK Martin, and Steve Zdancewic. Softbound: highly compatible and complete spatial memory safety for c. In *ACM Sigplan Notices*, volume 44, pages 245–258. ACM, 2009.
 - [15] George C Necula, Scott McPeak, and Westley Weimer. Ccured: type-safe retrofitting of legacy code. In *ACM SIGPLAN Notices*, volume 37, pages 128–139. ACM, 2002.
 - [16] Nick Parlante. Pointers and Memory, 2000. <http://cslibrary.stanford.edu/102/PointersAndMemory.pdf>.
 - [17] RB (Intel). Introduction to Intel Memory Protection Extensions, 2013. <https://software.intel.com/en-us/articles/introduction-to-intel-memory-protection-extensions>.
 - [18] Olatunji Ruwase and Monica S Lam. A practical dynamic buffer overflow detector. In *NDSS*, 2004.
 - [19] Rithin Kumar Shetty. Heapmon: a low overhead, automatic, and programmable memory bug detector. 2005.
 - [20] Asia Slowinska, Traian Stancescu, and Herbert Bos. Body armor for binaries: preventing buffer overflows without recompilation. In *Proceedings of the USENIX Security Symposium*, 2012.
 - [21] T. Schwarz. Buffer Overflow Attack, 2004. http://www.cse.scu.edu/~tschwarz/coen152_05/Lectures/BufferOverflow.html.