# M10 Problem Set: Factorial ANOVA for TAs

## Pablo E. Gutierrez-Fonseca

#### 2024-05-08 17:37:46

Consider an example in which a researcher is investigating the impact of metal contamination on the diversity of species found in sessile marine invertebrates such as sponges, bryozoans, and sea squirts. The researcher aims to determine whether copper reduces species richness, while also considering the potential influence of substrate orientation, whether vertical or horizontal, on invertebrate richness.

To address this, they conducted an experiment where species richness was assessed in replicate samples under each of the six combinations of copper enrichment levels ("None," "Low," "High") and substrate orientations ("Vertical," "Horizontal"). This experimental design is referred to as factorial, as it encompasses all levels of one treatment within all levels of the other treatment, also known as orthogonal.

## The factorial ANOVA will test the following hypotheses:

- 1. Whether there are differences in richness among the three levels of copper enrichment.
- 2. Whether there are differences in richness among the two levels of substrate orientation.
- 3. Whether there is an interaction effect between copper enrichment and substrate orientation, indicating whether the effect of copper on richness depends on the orientation of the substrate.


Summarize: Write a concise one paragraph summary of this analysis. Remember that any summary should include the following:

- 1. Statement of the research hypothesis or study objectives.
- 2. Brief summary of methods (one sentence or less).
- 3. Statement of the statistical results (including type of test and shorthand: F(df)= obtained value, p = 0.xxx). Include results of the possible interaction between copper enrichment and substrate orientation.
- 4. Description of any differences, if meaningful, along with an interpretation of why these results make sense (or don't make sense).
- #1. Import libraries and load packages

#### library(tidyverse)

```
## Warning: package 'tidyverse' was built under R version 4.3.2
## Warning: package 'ggplot2' was built under R version 4.3.3
## Warning: package 'tibble' was built under R version 4.3.1
## Warning: package 'tidyr' was built under R version 4.3.2
## Warning: package 'readr' was built under R version 4.3.2
## Warning: package 'purrr' was built under R version 4.3.1
```

```
## Warning: package 'dplyr' was built under R version 4.3.2
## Warning: package 'stringr' was built under R version 4.3.2
## Warning: package 'forcats' was built under R version 4.3.2
## Warning: package 'lubridate' was built under R version 4.3.2
library(lessR)
## Warning: package 'lessR' was built under R version 4.3.2
library(readxl)
library(dplyr)
# tinytex::install_tinytex()
Sessile <- read.csv(file = "Sessile.csv", header = TRUE)</pre>
Sessile.aov <- aov(Richness ~ Copper * Orientation, data = Sessile)</pre>
summary(Sessile.aov)
##
                    Df Sum Sq Mean Sq F value
                                                          Pr(>F)
                     ## Copper
## Orientation
                     1
                          240
                                240.0 27.75
                                                   0.000002463599 ***
## Copper:Orientation 2
                          571
                                285.3
                                       33.00
                                                   0.00000000434 ***
## Residuals
                    54
                          467
                                  8.6
## ---
## Signif. codes: 0 '*** 0.001 '** 0.01 '* 0.05 '.' 0.1 ' 1
interaction.plot(Sessile$Copper, Sessile$Orientation, Sessile$Richness)
```

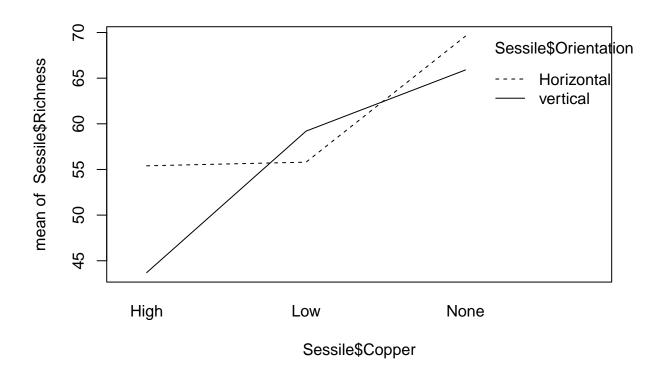

# Rank

```
Sessile$rank <- rank(Sessile$Richness)
mod2 <- aov(rank ~ Copper * Orientation, data = Sessile)
summary(mod2)</pre>
```

```
##
                      Df Sum Sq Mean Sq F value
                                                               Pr(>F)
## Copper
                          14668
                                   7334 306.395 < 0.0000000000000000 ***
## Orientation
                             47
                                     47
                                          1.956
                                                                0.168
                                                        0.00000000003 ***
## Copper:Orientation
                      2
                                    939
                                         39.236
                           1878
## Residuals
                           1293
                                     24
## Signif. codes: 0 '*** 0.001 '** 0.01 '* 0.05 '.' 0.1 ' ' 1
```

References: https://environmentalcomputing.net/statistics/linear-models/anova/anova-factorial/