Assignment 3
Name- Shruti Patil
Roll no- 220950320090

Exercise 1

A university DB contains information about professors (identified by SIN) and courses (identified by course ID). Professors teach courses; each of the following situations concerns the Teaches relationship set.

List all candidate keys of the Teaches relationship set. a. Professors can teach the same course in several semesters, and each offering must be recorded. b. Professors can teach the same course in several semesters, but only the most recent such offering needs to be records. Assume the above Situation (b) applies in all subsequent situations.
List all the keys possible in each of the following situations.

1 professors table

create table professors(ssn int(4) primary key,pname varchar(30),dept varchar(15));

```
mysql> create table professors(ssn int(4) primary key,pname varchar(30),dept varchar(15));
Query OK, 0 rows affected, 1 warning (0.03 sec)

mysql> desc professors;
+-------+-------------+------+-----+---------+-------+
| Field | Type        | Null | Key | Default | Extra |
+-------+-------------+------+-----+---------+-------+
| ssn   | int         | NO   | PRI | NULL    |       |
| pname | varchar(30) | YES  |     | NULL    |       |
| dept  | varchar(15) | YES  |     | NULL    |       |
+-------+-------------+------+-----+---------+-------+
3 rows in set (0.00 sec)

mysql>
```

2 course table.

create table course(CourseId int(4) primary key, Cname varchar(50), duration varchar(20));

```
mysql> create table course(CourseId int(4) primary key, Cname varchar(50), duration varchar(20));
Query OK, 0 rows affected, 1 warning (0.03 sec)

mysql> desc course;
+----------+-------------+------+-----+---------+-------+
| Field    | Type        | Null | Key | Default | Extra |
+----------+-------------+------+-----+---------+-------+
| CourseId | int         | NO   | PRI | NULL    |       |
| Cname    | varchar(50) | YES  |     | NULL    |       |
| duration | varchar(20) | YES  |     | NULL    |       |
+----------+-------------+------+-----+---------+-------+
3 rows in set (0.00 sec)

mysql>
```
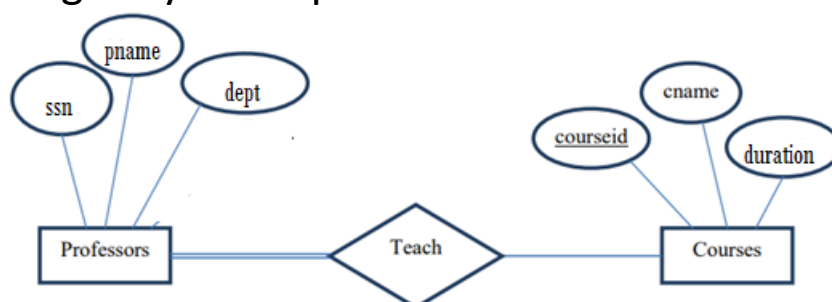
3 table teach

create table teach(
    ssn int,
    CourseId int,
    foreign key(ssn) references professors(ssn),
    foreign key(CourseId) references course(CourseId));

```
mysql> create table teach(
    -> ssn int,
    -> CourseId int,
    -> foreign key(ssn) references professors(ssn),
    -> foreign key(CourseId) references course(CourseId));
Query OK, 0 rows affected (0.09 sec)

mysql> desc table;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MySQL server version for the right syntax to use near '' at line 1
mysql> desc teach;
+----------+------+------+-----+---------+-------+
| Field    | Type | Null | Key | Default | Extra |
+----------+------+------+-----+---------+-------+
| ssn      | int  | YES  | MUL | NULL    |       |
| CourseId | int  | YES  | MUL | NULL    |       |
+----------+------+------+-----+---------+-------+
2 rows in set (0.00 sec)

mysql>
```

a. Every professor teaches a course, and every course is taught by some professor.

b. Every professor teaches exactly one course, and every course is taught by exactly one professor.

ssn · pname · dept — Professors → Teach — Courses · courseid · cname · duration