

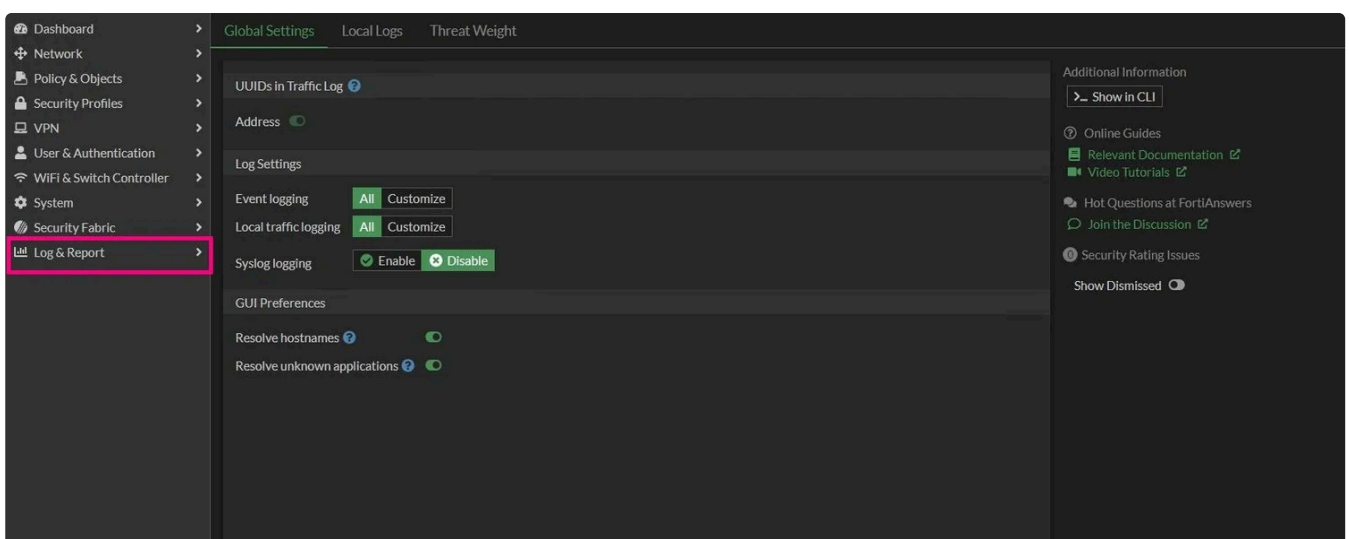


ELASTIC SEARCH INTIGRATION WITH FORTIGATE FIREWALL


To achieve this integration, we will follow the following steps:

1. To enable data collection from FortiGate and its transmission to Elasticsearch, it's essential to ensure that the collector you plan to use has Elastic Agent installed. If you don't have it installed yet, this [article](#) will guide you through the installation process.
2. Next, we head to the FortiGate firewall to perform the necessary configuration. Once you have logged in to the device, go to the **"Log & Report"** section, and then select **"log setting"** In this section, we will proceed to configure the events that we want to send to Elasticsearch.

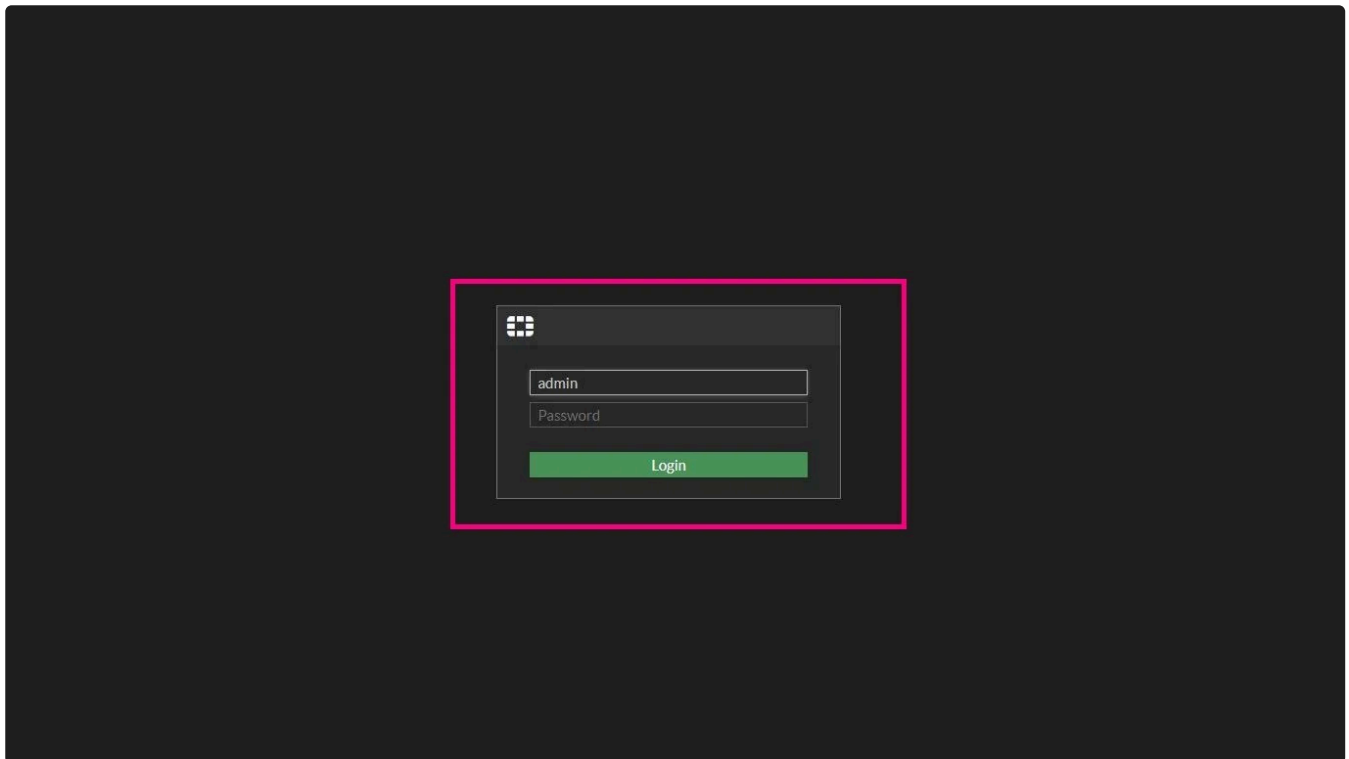

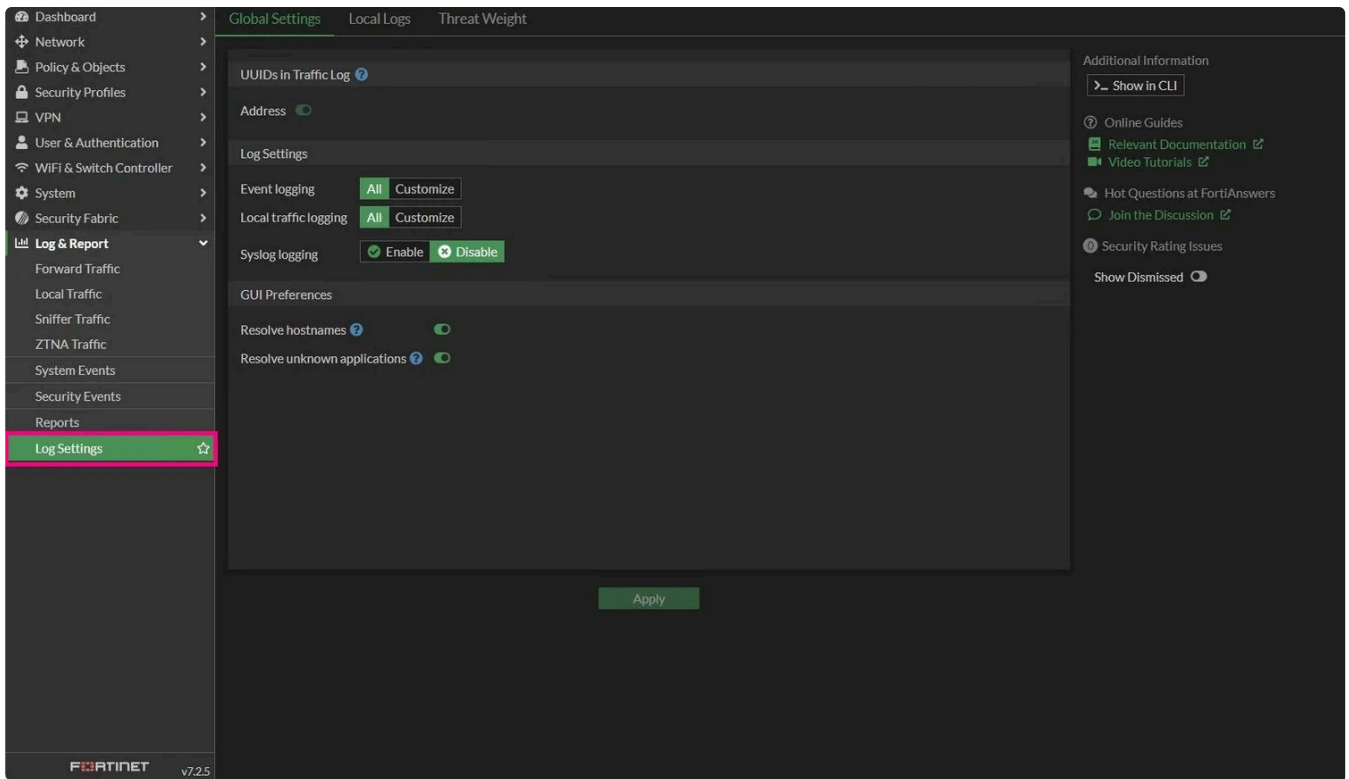


3. Within the **“Log setting”** section, we will specify which specific events we need to send to Elasticsearch. In this case, we will choose to enable all events.

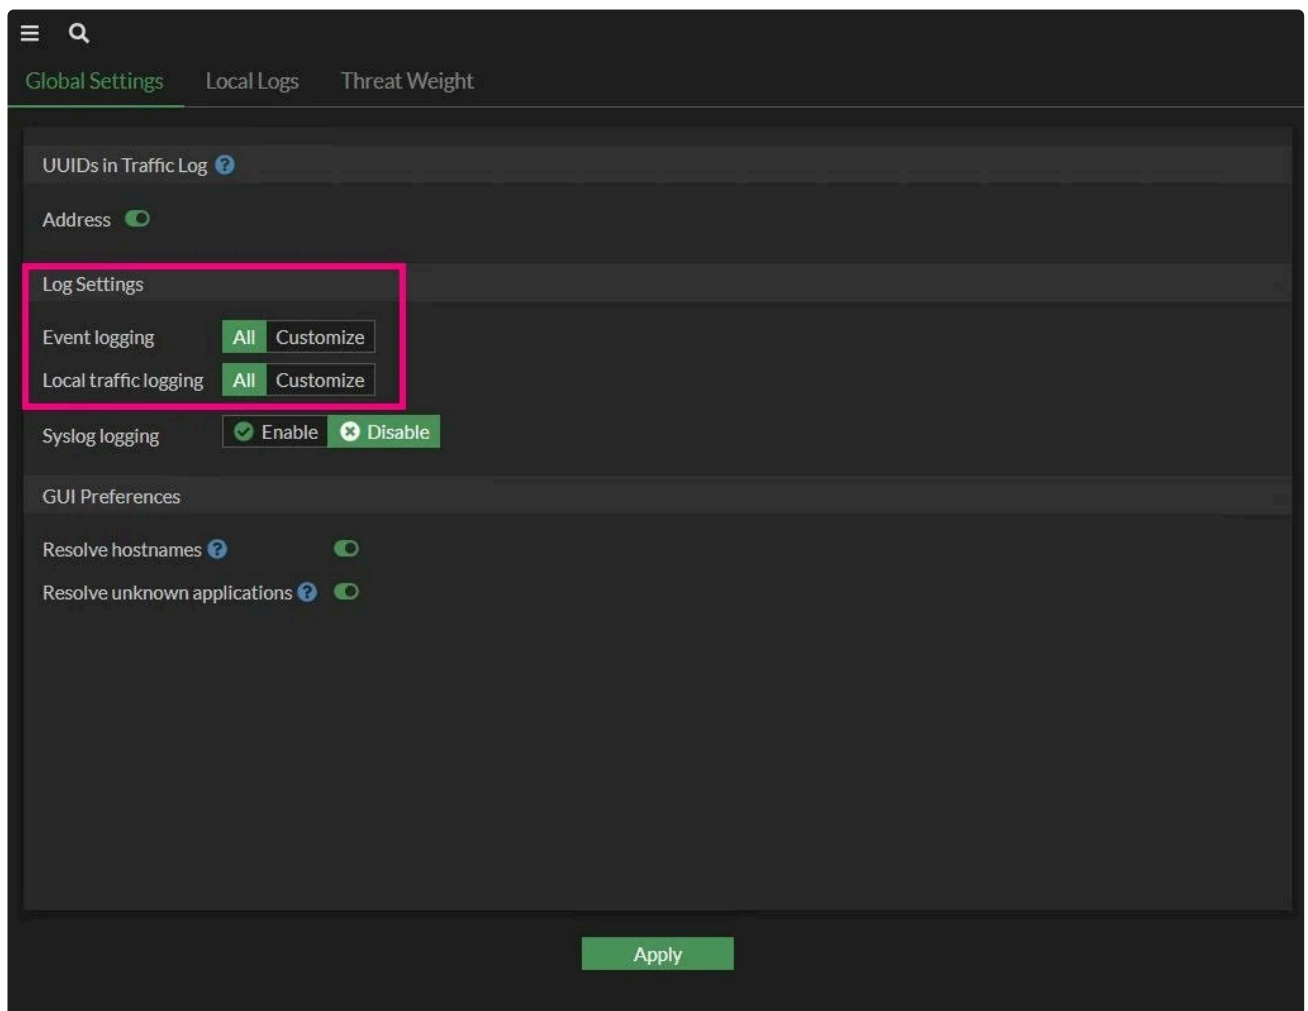

It's important to remember that enabling all events can generate a large volume of logs, so it should be carefully considered whether it's necessary and whether there is enough capacity to manage and analyze all those logs.

4. Now, to set up syslog, we first enable the **“Syslog logging”** option. Here, you should enter the IP address of your collector.

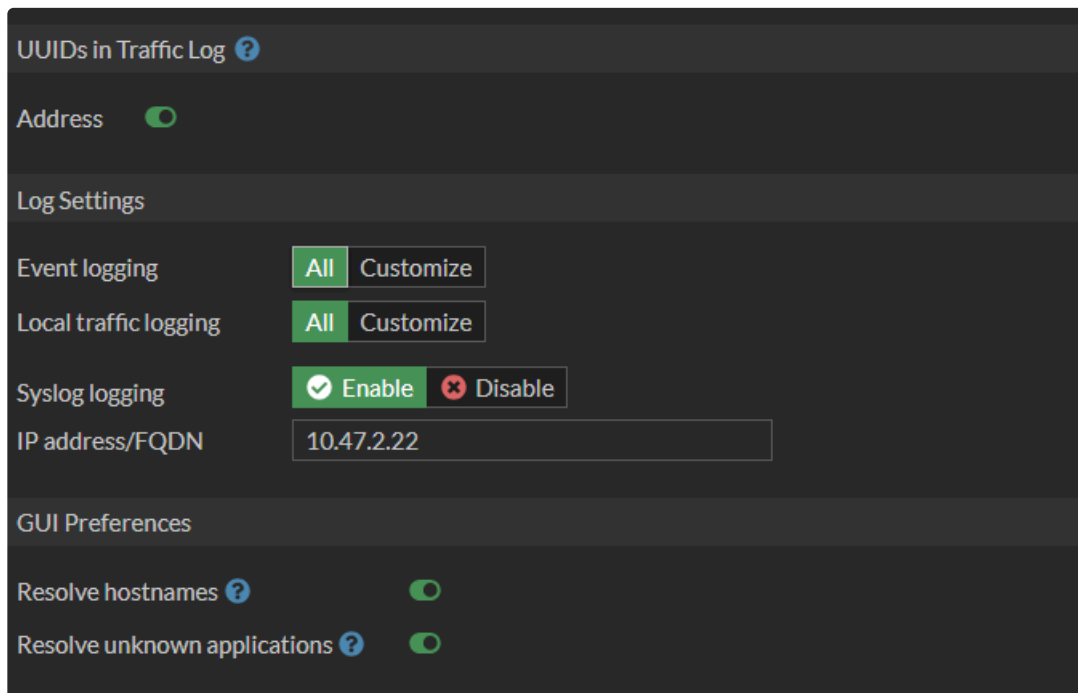

The screenshot shows a configuration window titled "UUIDs in Traffic Log" with a help icon. Below the title is a section for "Address" with a toggle switch that is turned on. The main section is "Log Settings". It contains three rows of settings: "Event logging" with "All" and "Customize" buttons; "Local traffic logging" with "All" and "Customize" buttons; and "Syslog logging" with "Enable" (checked) and "Disable" buttons. Below these is a text input field for "IP address/FQDN" containing "10.47.2.22". The bottom section is "GUI Preferences" with two rows: "Resolve hostnames" and "Resolve unknown applications", both with toggle switches that are turned on.

Normally, the default port for syslog is 514, but in this case, we are going to use a different port: 3623.

Customizing the port is an excellent practice, especially when managing multiple integrations with Syslog. By using different ports, you can avoid conflicts and streamline log management. This enables greater control and organization of your log data, which is essential for effective monitoring.

5. To do this, you will need to use the command line, as the graphical interface does not display the option to configure the port. Once you enter the IP address and adjust the port, you are ready to proceed with the configuration.


```
XXXX-XXXX-Primary # config log syslogd setting

XXXX-XXXX-Primary (setting) # show
config log syslogd setting
    set status enable
    set server "10.47.2.22"
    set port 5514
    set source-ip "XXXX.XXXX.XXXX.XXXX"
end

XXXX-XXXX-Primary (setting) #
```

After setting up the port and saving the configuration, we have completed the setup on the equipment side.

6. Once we have completed this configuration, the next step is to navigate to Elasticsearch and proceed with the integration with Elastic Agent.

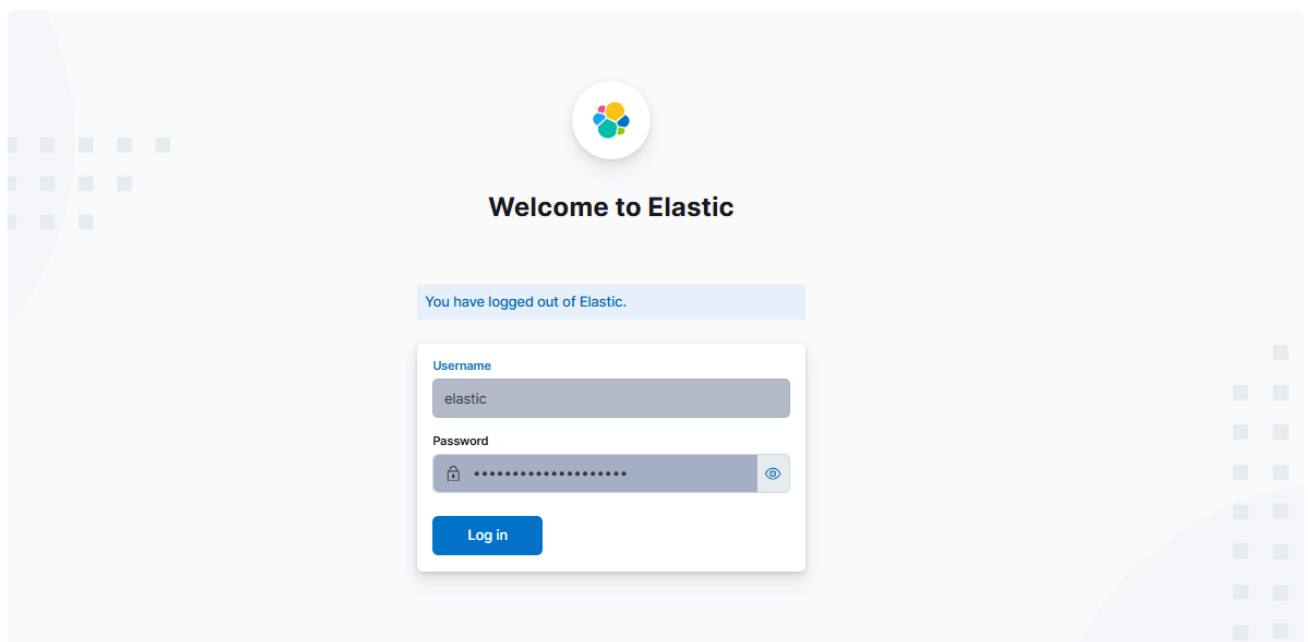

7. Now, we proceed to the **“Add Integrations”** section and search for the one we need, in this case, **“Fortinet FortiGate Firewall Logs”**.

< View all agent policies

MYLINUX

Revision 15 Integrations 2 Agents 1 agent Last updated on Nov 18, 2025 Actions

Integrations Settings

Search... Namespace + Add integration

Name ↑	Integration	Namespace	Actions
fortinet_fortigate-1	Fortinet FortiGate Firewall Logs	v1.36.2 default ⓘ	...
sysmon_linux-1	Sysmon for Linux	v1.9.0 default ⓘ	...

8. Next, we select the **“Add Fortinet Fortigate Firewall Logs”** option.

< Cancel

Edit Fortinet FortiGate Firewall Logs integration

Agent policy MYLINUX

Modify integration settings and deploy changes to the selected agent policy.

Integration settings

Choose a name and description to help identify how this integration will be used.

Integration name fortinet_fortigate-1

Description Optional

> Advanced options

☐ Collect Fortinet FortiGate logs (input: logfile) Change defaults

☐ Collect Fortinet FortiGate logs (input: tcp) Change defaults

☒ Collect Fortinet FortiGate logs (input: udp) Change defaults

☒ Fortinet firewall logs (udp) Listen Address 10.47.2.22

Collect Fortinet firewall logs using udp input

The bind address to listen for UDP connections. Set to 0.0.0.0 to bind to all available interfaces.

9. Next, we give the integration a name and proceed with the configuration. Here, we enter the collector's IP address, which in our case is 192.168.10.2, and the port we defined earlier as 3623 in the FortiGate firewall. Since our port is UDP, we select this option. Then, we add a tag named **“fortinet-MYLINUX”**.

Preserves a raw copy of the original event, added to the field event.original

Advanced options

Tags

fortinet-MYLINUX

fortinet-firewall

forwarded

Add row

Internal Interfaces

Optional

Add row

External Interfaces

Optional


Add row

Internal Networks

Optional

private

10. To complete this configuration, simply click on the **“Save and deploy changes”** option.

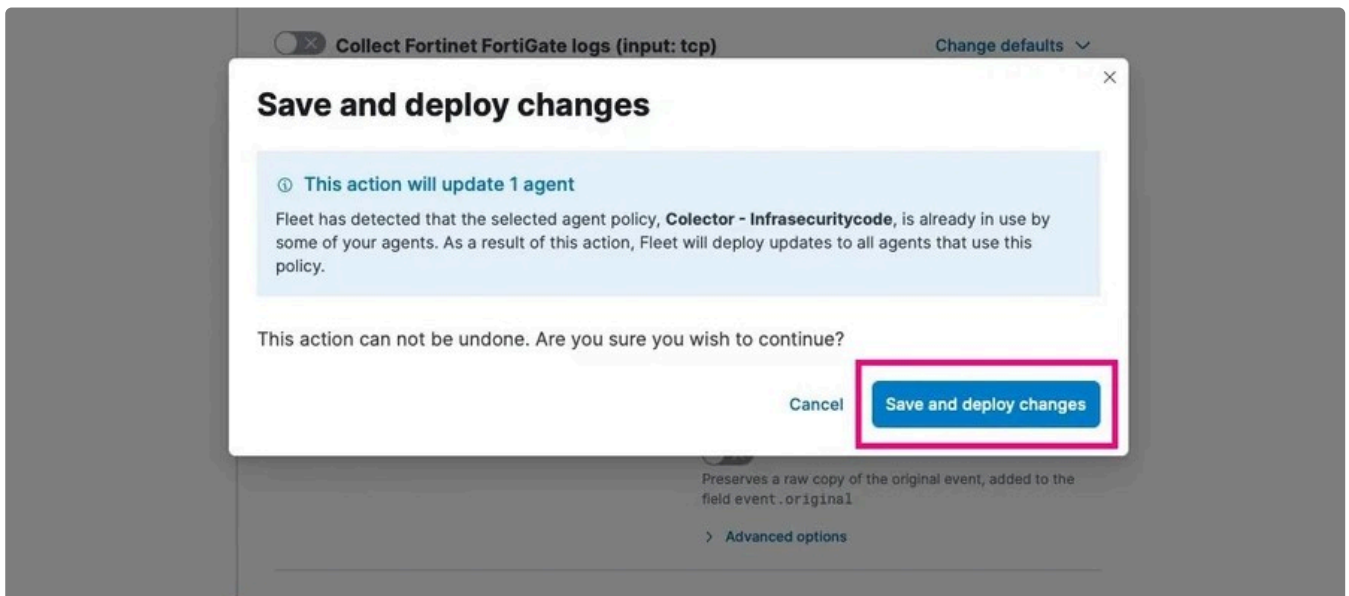

11. Now, let's go to the policy we created called **“Colector-Infrasecuritycode”**, where we added the integration. If you want to learn more about policies and integrations, I invite you to read this [article](#).

<

View all agent policies

MYLINUX

Integrations

Settings

Revision15

Integrations2

Agents1 agent

Last updated onNov 18, 2025

Actions


Search...

Namespace

Add integration

Name ↑	Integration	Namespace	Actions
fortinet_fortigate-1	Fortinet FortiGate Firewall Logs	v1.36.2 default ⓘ	⋮
sysmon_linux-1	Sysmon for Linux	v1.9.0 default ⓘ	⋮

12. To conclude, now we head to **“Discover”** and visualize the collected logs.

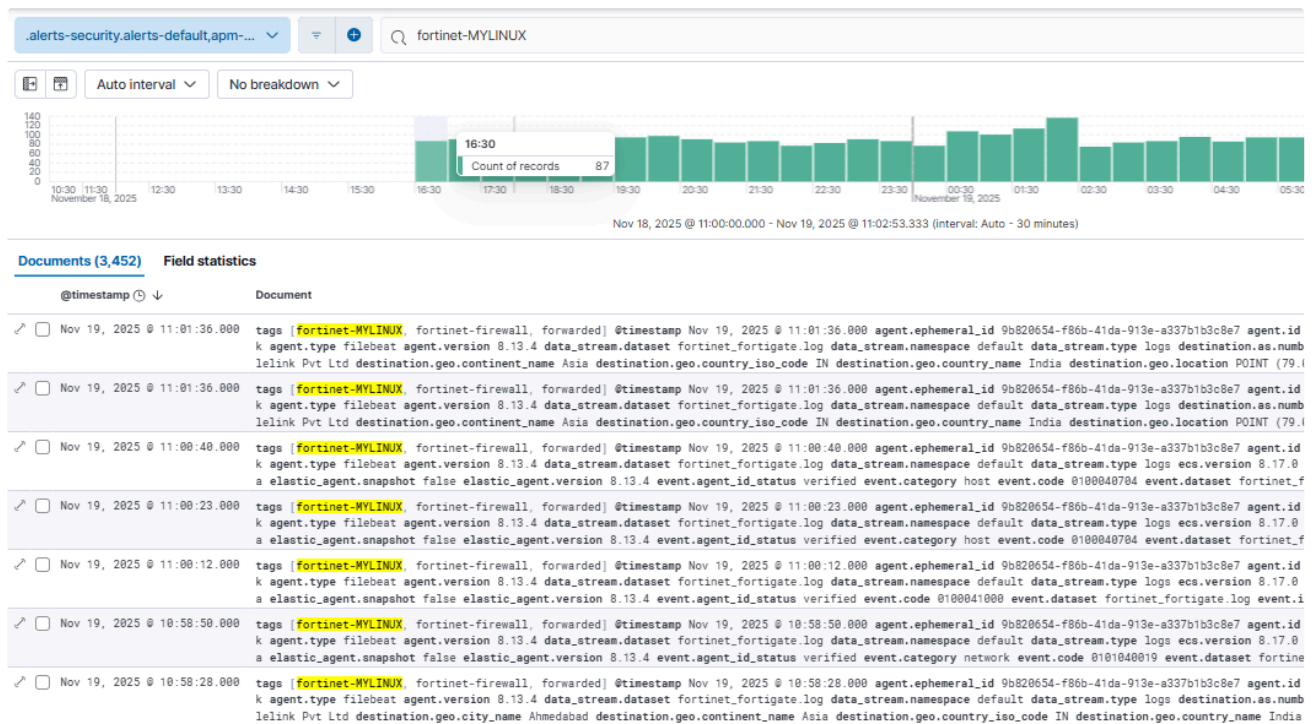

In this article, we have explored the importance of integrating the FortiGate Firewall with Elasticsearch to enhance our security and improve event management. We have also understood that this integration enables us to gain a comprehensive view of our security posture, take proactive measures, and streamline security incident investigation.