GitHub

Instalação

Passo 1 - acessar site:
https://git-scm.com/

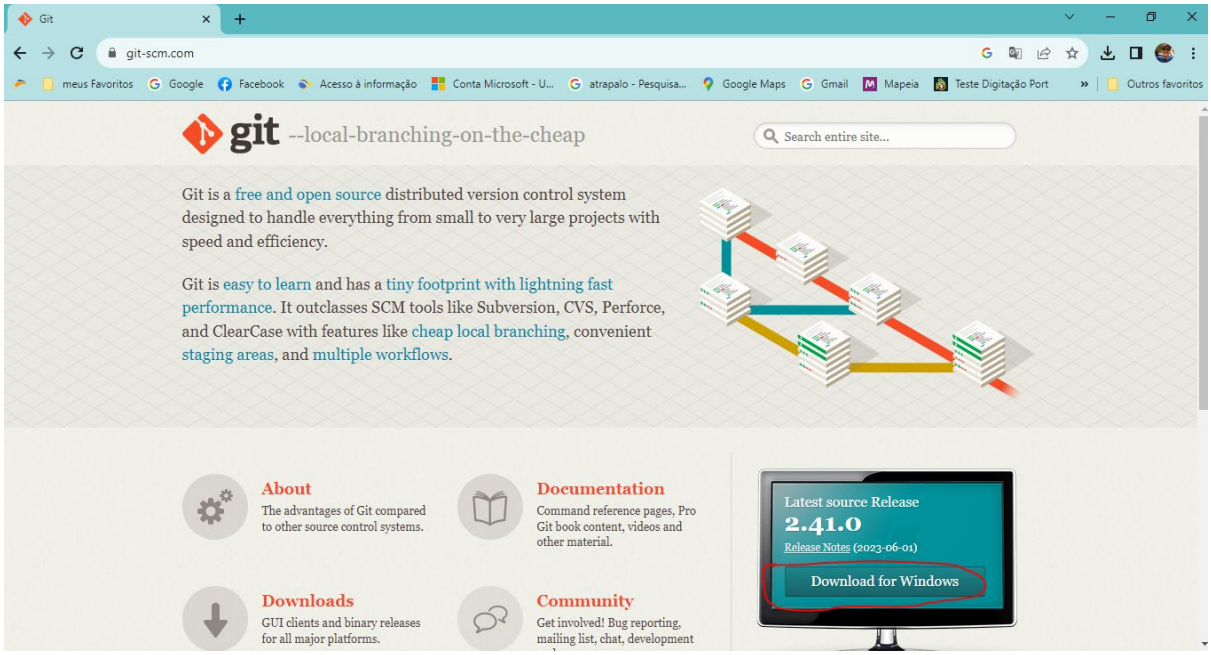

Passo 2 - Download

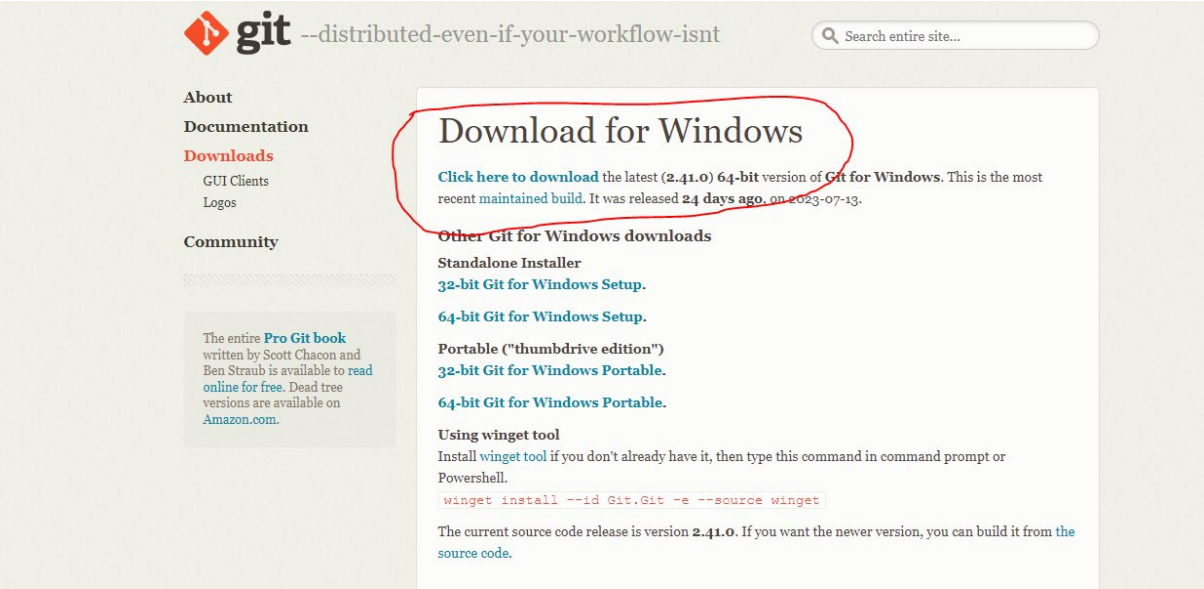

Passo 3) Inciar a instalação

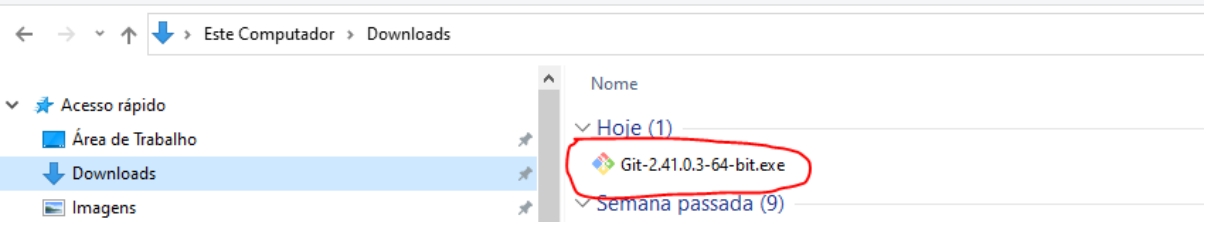

Passo 4… Next…next

A Configurar Git Bash

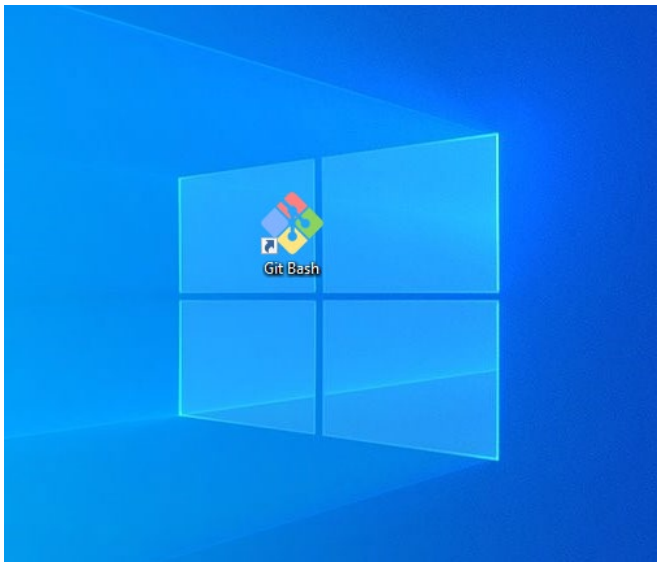

Passo 1) Configurar o usuário
git config --global user.name "Seu Nome"

MINGW64:/c/Users/Carlos

```
Carlos@DESKTOP-HOAGJIN MINGW64 ~
$ git config --global user.name "prof Veríssimo"
```

Passo 2) Configurar email (Conta Git)
git config --global user.email "email da conta github"

MINGW64:/c/Users/Carlos

```
Carlos@DESKTOP-HOAGJIN MINGW64 ~
$ git config --global user.name "prof Veríssimo"

Carlos@DESKTOP-HOAGJIN MINGW64 ~
$ git config --global user.email "carlos.hvpereira@sp.senac.br"
```

A verificar Configuração Git Bash

Verifique o nome usuário ativo:

MINGW64:/c/Users/Carlos

```
Carlos@DESKTOP-HOAGJIN MINGW64 ~
$ git config user.name
prof Veríssimo

Carlos@DESKTOP-HOAGJIN MINGW64 ~
$ |
```

Verifique o email ativo ativo:

MINGW64:/c/Users/Carlos

```
Carlos@DESKTOP-HOAGJIN MINGW64 ~
$ git config user.name
prof Veríssimo

Carlos@DESKTOP-HOAGJIN MINGW64 ~
$ git config user.email
carlos.hvpereira@sp.senac.br

Carlos@DESKTOP-HOAGJIN MINGW64 ~
$ |
```

Verifique o editor que está associado ao seu git

```
Carlos@DESKTOP-HOAGJIN MINGW64 ~
$ git config core.editor
"C:\Users\Carlos\AppData\Local\Programs\Microsoft VS Code\bin\code" --wait

Carlos@DESKTOP-HOAGJIN MINGW64 ~
$ |
```

Obs.:

Caso necessitar alterar o editor:

git config --global core.editor "caminho do .exe do editor"

Fase I - Repositório Local

Criar o diretório

Esta criação poderá ser feita no Windows

1) Vamos criar repositório LOCAL do projeto ()

2) Entrar no arquivo pelo Bash

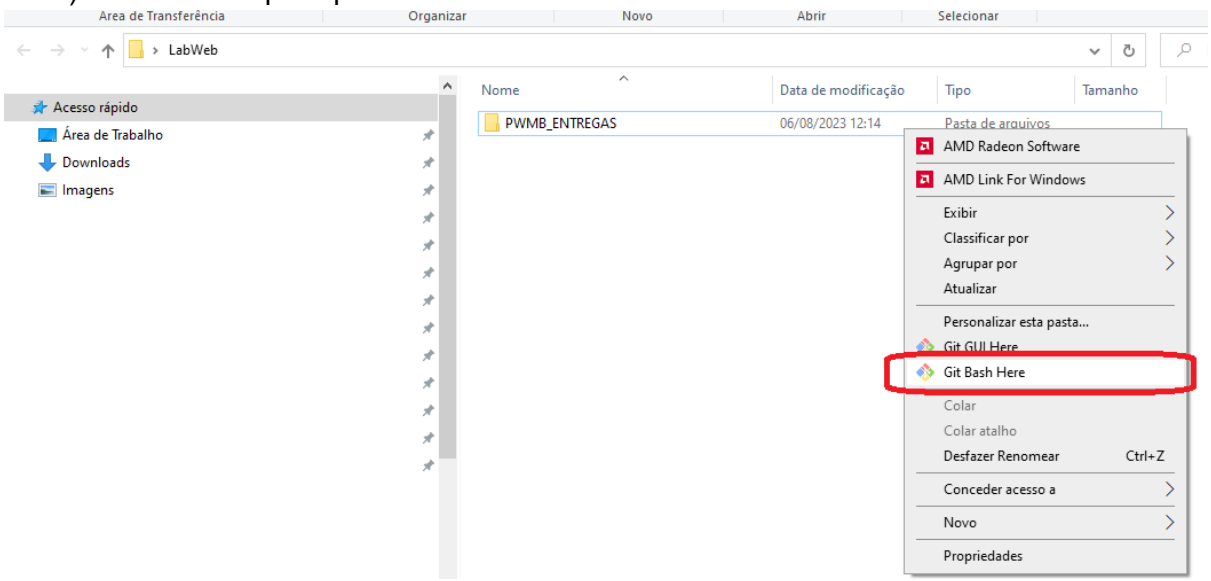

Fluxo de trabalho no Git

1 - Iniciar o diretório

Este procedimento indica para o Git que o **versionamento** deste diretório passa a ser "gerenciado" pelo Git

$ git init

MINGW64:/c/Users/Carlos/Desktop/LabWeb/PWMB_ENTREGAS

```
Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS
$ git init
Initialized empty Git repository in C:/Users/Carlos/Desktop/LabWeb/PWMB_ENTREGAS/.git/

Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (master)
$ |
```

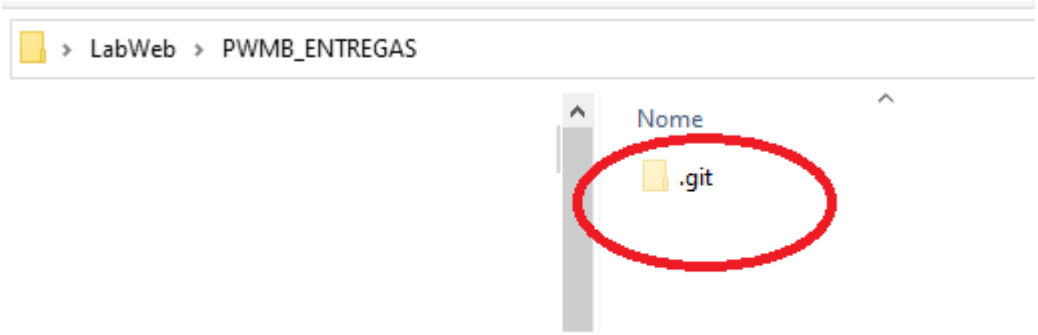

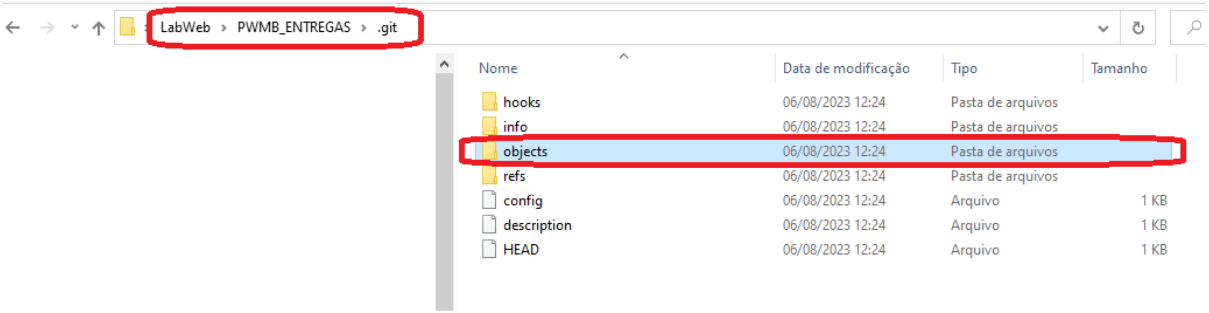

Na pasta "***objects***" será armazenado o Grafo de "Commits"

2 - Estrutura de versionamento do Git

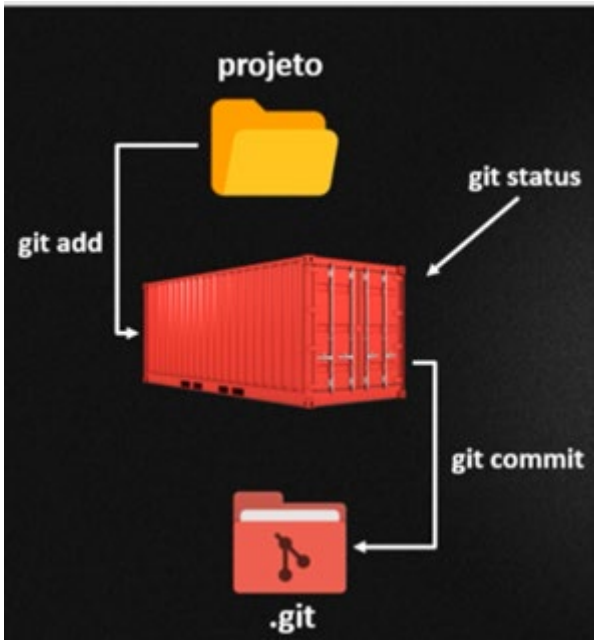

3 - Vamos incluir novos arquivos no diretório

Criar dois novos arquivos
$ touch index.html e style.html

MINGW64:/c/Users/Carlos/Desktop/LabWeb/PWMB_ENTREGAS

```
Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (master)
$ touch index.html style.css
```

listando arquivo; comando ***ls***

```
Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (master)
$ ls
index.html  style.css
```

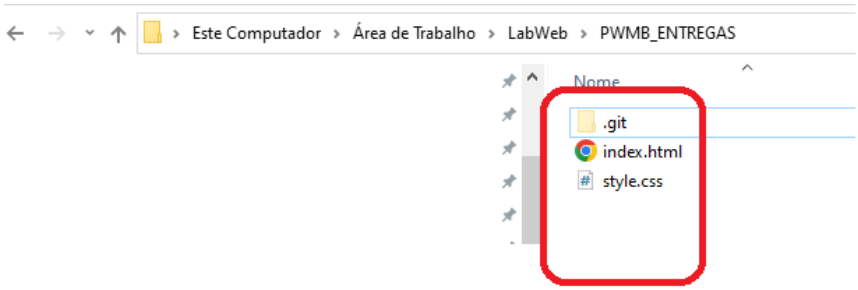

verificação do status

```
Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (master)
$ git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        index.html
        style.css

nothing added to commit but untracked files present (use "git add" to track)

Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (master)
$ |
```

Valor trabalhar nos arquivos criados (VS CODE)

MINGW64:/c/Users/Carlos/Desktop/LabWeb/PWMB_ENTREGAS

```
Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (master)
$ code .
```

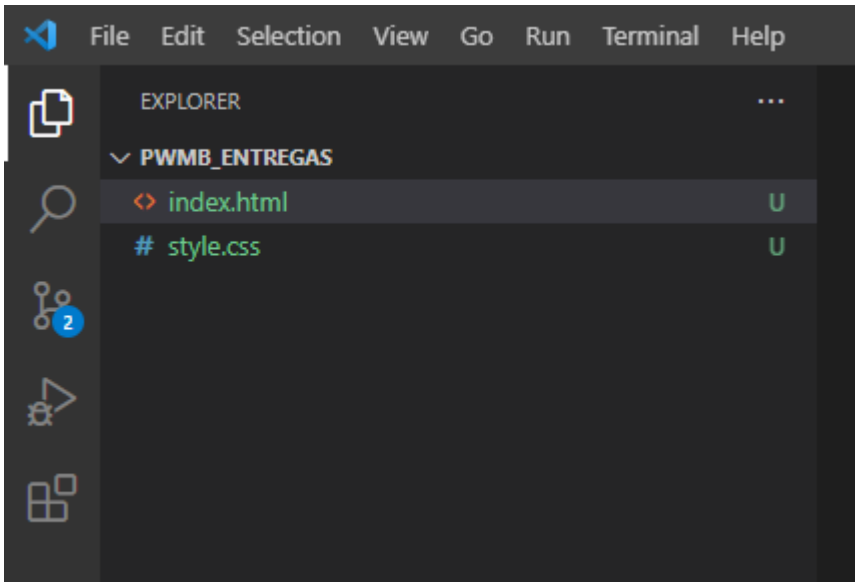
File Edit Selection View Go Run Terminal Help
EXPLORER
PWMB_ENTREGAS
index.html U
style.css U

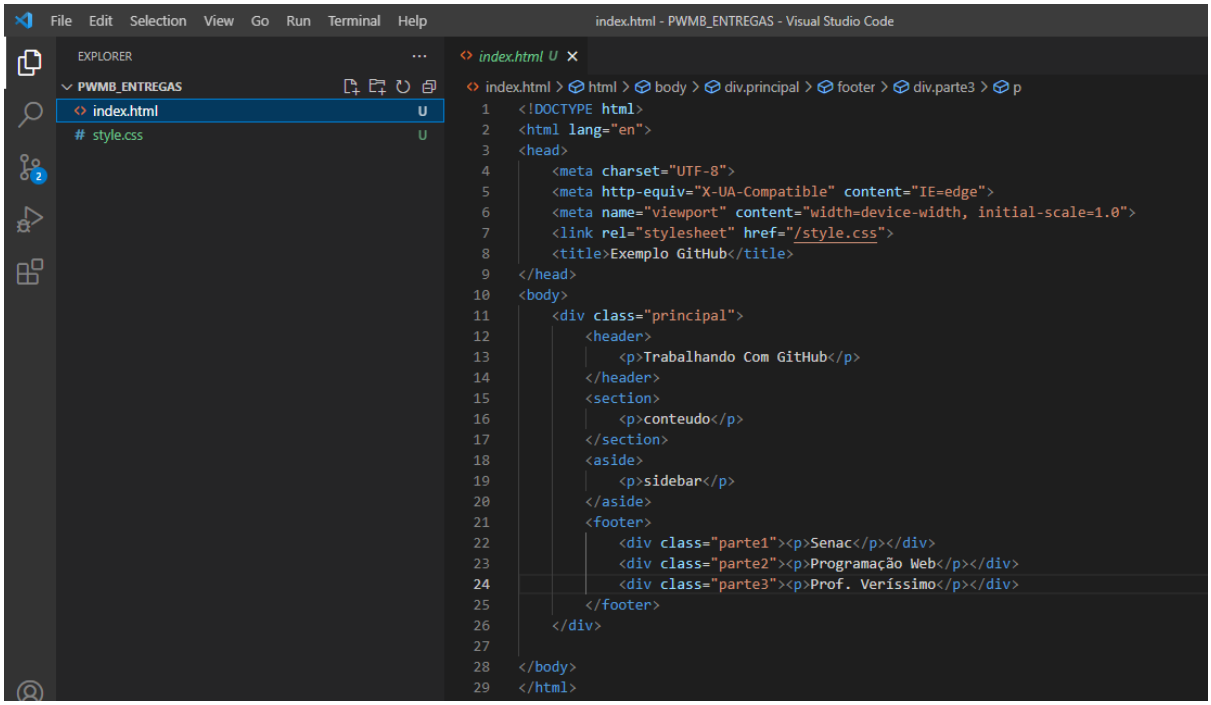
File Edit Selection View Go Run Terminal Help
index.html - PWMB_ENTREGAS - Visual Studio Code
EXPLORER
PWMB_ENTREGAS
index.html U
style.css U
index.html U
index.html > html > body > div.principal > footer > div.parte3 > p
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<link rel="stylesheet" href="/style.css">
<title>Exemplo GitHub</title>
</head>
<body>

<header>
Trabalhando Com GitHub
</header>
<section>
conteudo
</section>
<aside>
sidebar
</aside>
<footer>
Senac
Programação Web
Prof. Veríssimo
</footer>

</body>
</html>

127.0.0.1:5500/index.html
meus Favoritos
Google
Facebook
Acesso à informação
Conta Microsoft - U...
atrapalo - Pesquisa...
Google Maps
Gmail
Mapeia
Teste Digitação Port
Trabalhando Com GitHub
conteudo
sidebar
Senac
Programação Web
Prof. Veríssimo

Valor Adicionar os arquivos criados no *Container*

A verificar o status

```
Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (master)
$ git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        index.html
        style.css

nothing added to commit but untracked files present (use "git add" to track)

Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (master)
$ |
```

Comando add

Adicionar os arquivos ao ***"container"***
Pode ser por 3 formas:

1. ***git add <nomes dos arquivos>***
2. ***git add .*** (ponto)
3. ***git add **** (asterisco)

```
Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (master)
$ git add .

Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (master)
$ |
```

Verifiquei status novamente

```
Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (master)
$ git status
On branch master

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
        new file:   index.html
        new file:   style.css

Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (master)
$ |
```

isto significa que os dois arquivos estão dentro do “container”

A fazer o *Commit*

Vamos obter ester arquivos do container e armazená-los definitivamente no repositório por intermédio do comando **Commit**
Agora precisamos identificar este container e armazenar no repositório (Commit)

MINGW64:/c/Users/Carlos/Desktop/LabWeb/PWMB_ENTREGAS

```
Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (master)
$ git commit -m "Iniciando o projeto"
```

MINGW64:/c/Users/Carlos/Desktop/LabWeb/PWMB_ENTREGAS

```
Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (master)
$ git commit -m "Iniciando o projeto"
[master (root-commit) 1182338] Iniciando o projeto
 2 files changed, 128 insertions(+)
 create mode 100644 index.html
 create mode 100644 style.css

Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (master)
$ |
```

verificando (status)

```
Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (master)
$ git status
On branch master
nothing to commit, working tree clean

Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (master)
$ |
```

git log
Gerenciando os repositório:

```
Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (master)
$ git log
commit 118233865a0bae514b19095168082d1fd7230eef (HEAD -> master)
Author: prof Veríssimo <carlos.hvpereira@sp.senac.br>
Date:   Sun Aug 6 15:24:25 2023 -0300

    Iniciando o projeto

Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (master)
$ |
```

Fase II
Sincronizando com repositório Remoto

Criar repositório remoto

1 - Entre na sua conta conta GitHub: https://github.com/login

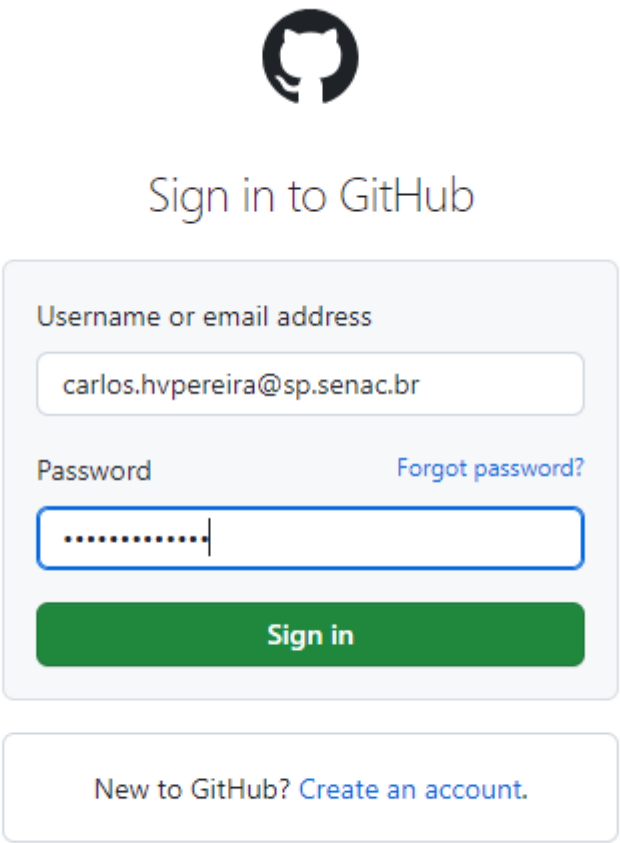

2 - Crie o repositório:

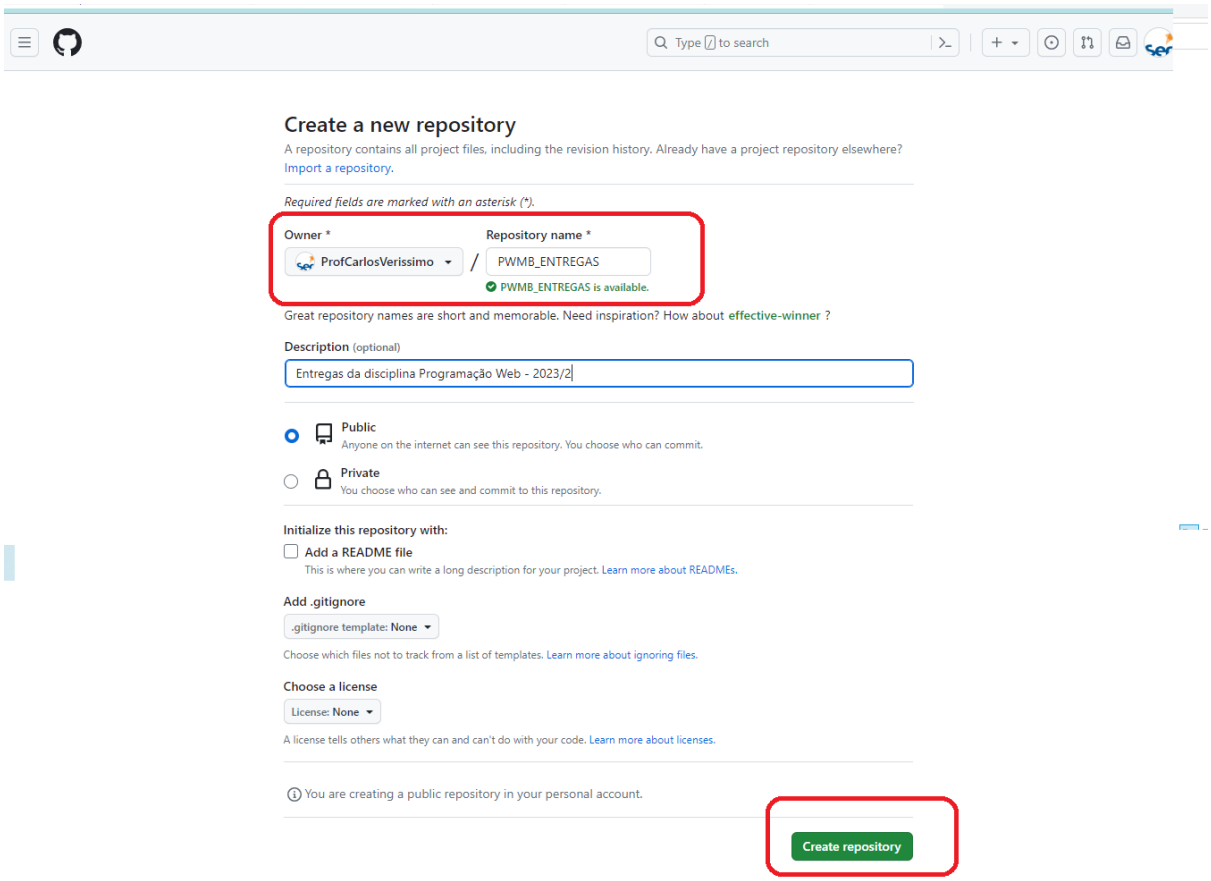
Type / to search
Create a new repository
A repository contains all project files, including the revision history. Already have a project repository elsewhere?
Import a repository.
Required fields are marked with an asterisk (*).
Owner *
Repository name *
ProfCarlosVerissimo
PWMB_ENTREGAS
PWMB_ENTREGAS is available.
Great repository names are short and memorable. Need inspiration? How about effective-winner ?
Description (optional)
Entregas da disciplina Programação Web - 2023/2
Public
Anyone on the internet can see this repository. You choose who can commit.
Private
You choose who can see and commit to this repository.
Initialize this repository with:
Add a README file
This is where you can write a long description for your project. Learn more about READMEs.
Add .gitignore
.gitignore template: None
Choose which files not to track from a list of templates. Learn more about ignoring files.
Choose a license
License: None
A license tells others what they can and can't do with your code. Learn more about licenses.
You are creating a public repository in your personal account.
Create repository

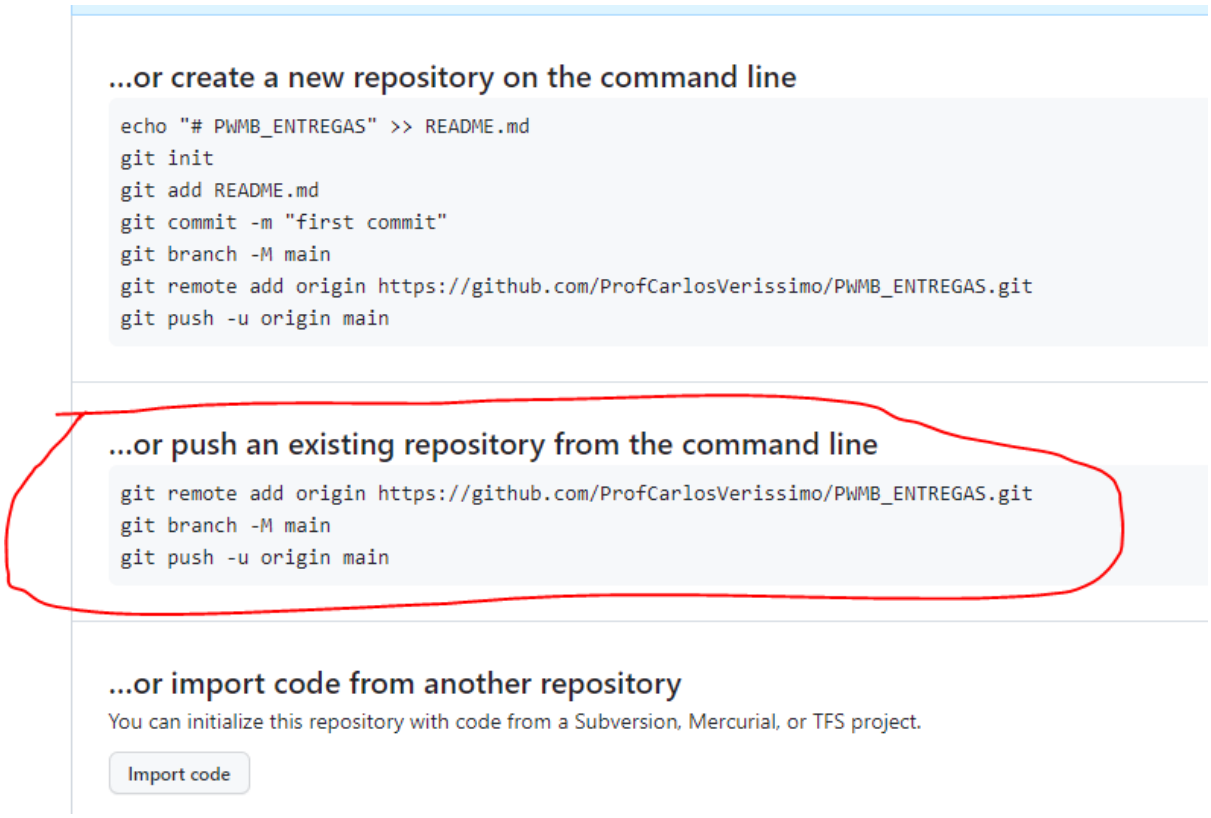
...or create a new repository on the command line
echo "# PWMB_ENTREGAS" >> README.md
git init
git add README.md
git commit -m "first commit"
git branch -M main
git remote add origin https://github.com/ProfCarlosVerissimo/PWMB_ENTREGAS.git
git push -u origin main
...or push an existing repository from the command line
git remote add origin https://github.com/ProfCarlosVerissimo/PWMB_ENTREGAS.git
git branch -M main
git push -u origin main
...or import code from another repository
You can initialize this repository with code from a Subversion, Mercurial, or TFS project.
Import code

Fazer o “link” entre Repositório Local e Repositório Remoto

1 - Adicionar uma origem remota ao repositório

MINGW64:/c/Users/Carlos/Desktop/LabWeb/PWMB_ENTREGAS

```
Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (master)
$ git remote add origin https://github.com/ProfCarlosVerissimo/PWMB_ENTREGAS.git

Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (master)
$ |
```

2-Renomear o Branch principal “main” - Parear as Braces (Remota/local)

```
Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (master)
$ git branch -M main

Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (main)
$ |
```

3 - Sincronizar as branches: Local/remota

Exceção: Se der o seguinte erro:

MINGW64:/c/Users/Carlos/Desktop/LabWeb/PWMB_ENTREGAS

```
Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (main)
$ git push -u origin main
remote: Permission to ProfCarlosVerissimo/PWMB_ENTREGAS.git denied to profchvp.
fatal: unable to access 'https://github.com/ProfCarlosVerissimo/PWMB_ENTREGAS.git/': The requested URL returned error: 403

Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (main)
$ |
```

Proceder:

Resolvendo problemas de autenticação (error 403)

1 - Deletar as credenciais, ja existentes, do windows

1-1 Abrir o gerenciador de credenciais

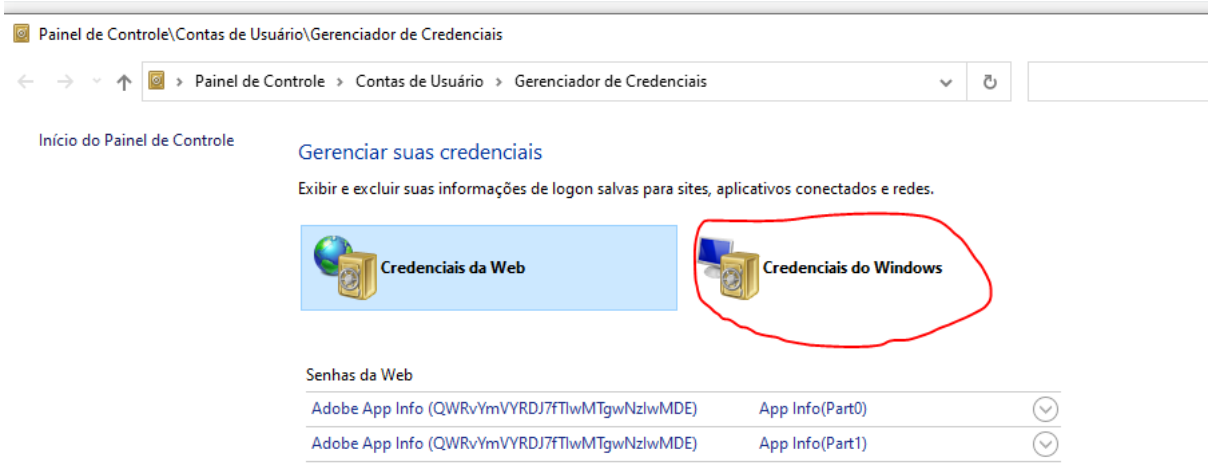

1-2 ***remover*** as credenciais existentes(Pode haver mais que 1)

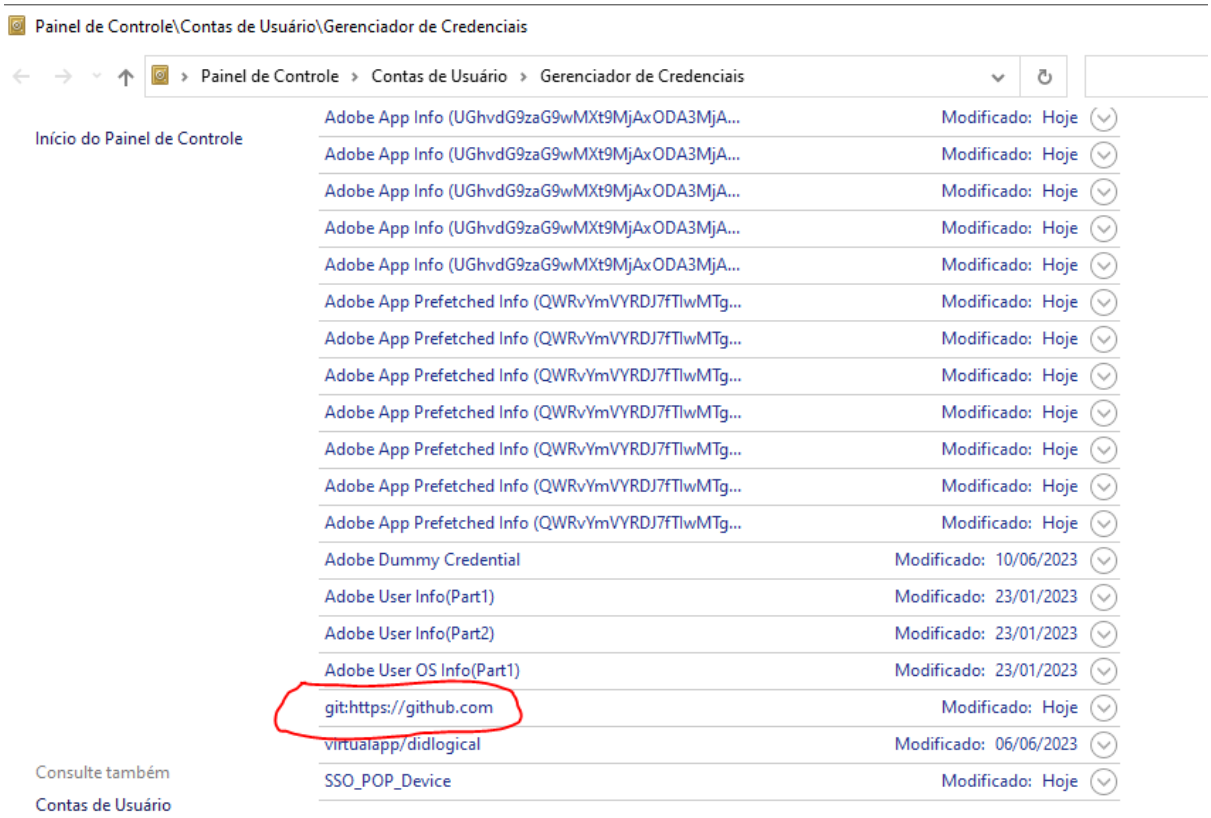

Repita o procedimento: ***`git push -u origin main`***

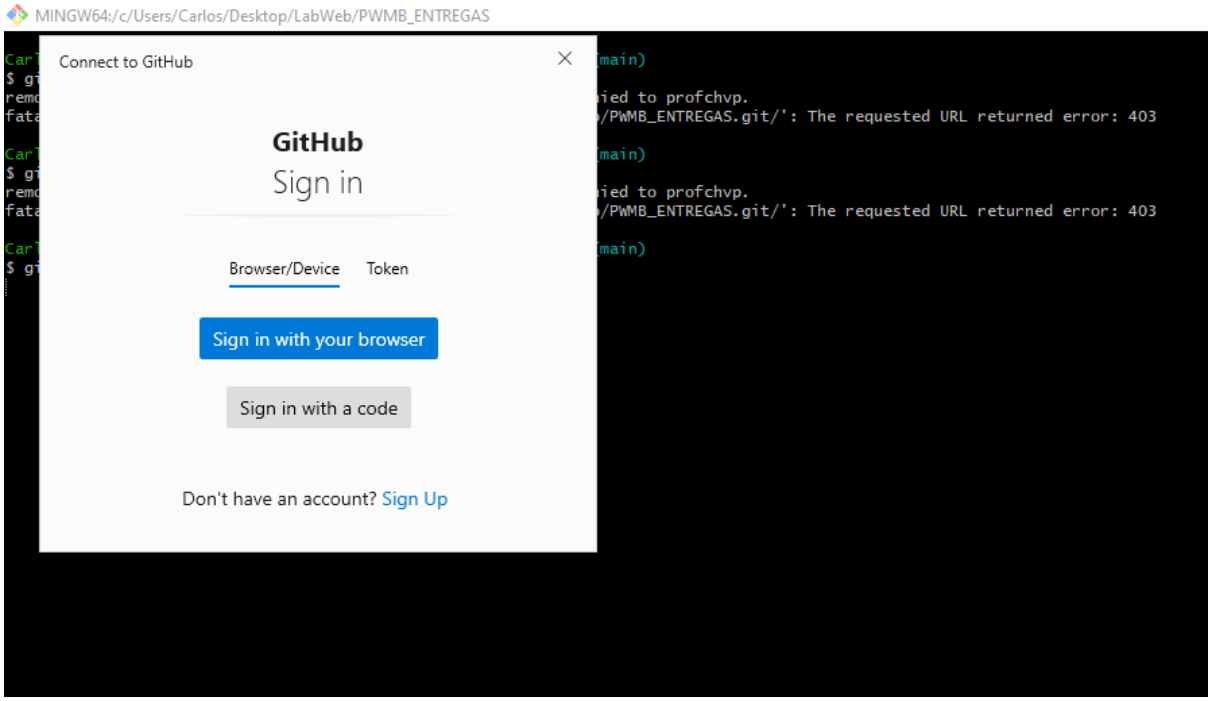
MINGW64:/c/Users/Carlos/Desktop/LabWeb/PWMB_ENTREGAS
Connect to GitHub
GitHub
Sign in
Browser/Device
Token
Sign in with your browser
Sign in with a code
Don't have an account? Sign Up
(main)
ied to profchvp.
/PWMB_ENTREGAS.git/': The requested URL returned error: 403

Pronto: Sincronia OK
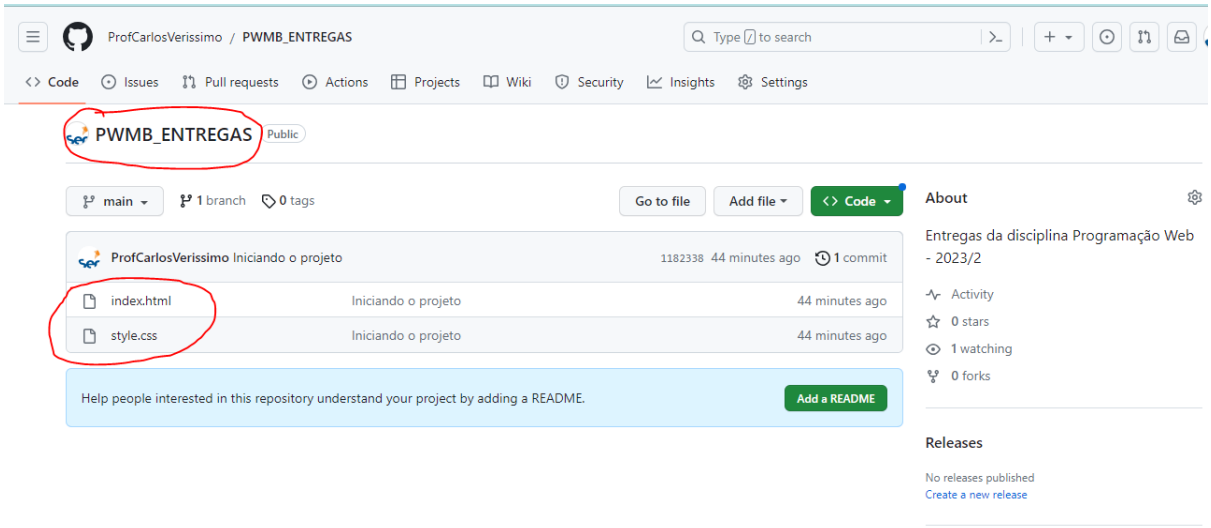
```
Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (main)
$ git push -u origin main
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 8 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (4/4), 1.19 KiB | 1.19 MiB/s, done.
Total 4 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/ProfCarlosVerissimo/PWMB_ENTREGAS.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.

Carlos@DESKTOP-HOAGJIN MINGW64 ~/Desktop/LabWeb/PWMB_ENTREGAS (main)
$ |
```